

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332794-830

Luminaire Tested: **S124DIW-S795D1340U830-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332794-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S795D1340U830-4F0-1E-UDD-A1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7728.4 lumens
Efficiency: N/A
Efficacy: 125.9 lumens/watt
Spacing Criteria (0/90/45): 1.31 / 1.23 / 1.41
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 61.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332794-830

CATALOG NUMBER: S124DIW-S795D1340U830-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

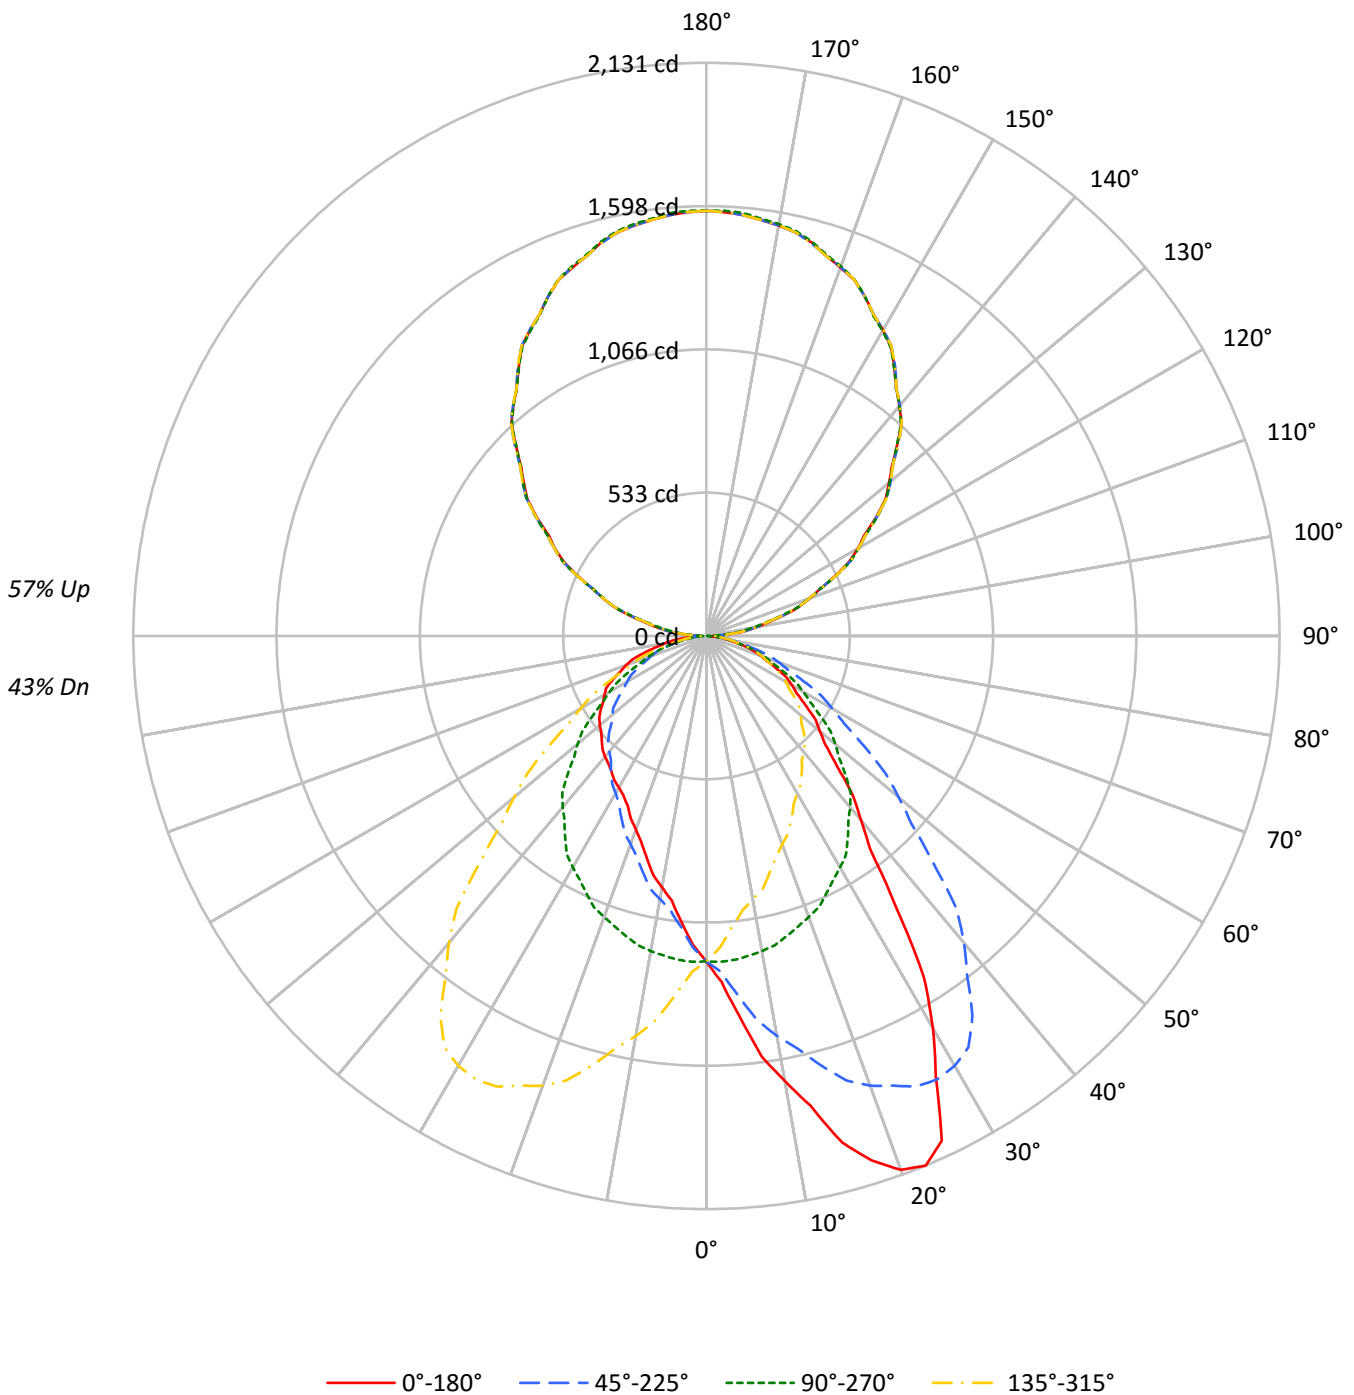



TEST NUMBER: P332794-830

CATALOG NUMBER: S124DIW-S795D1340U830-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	96	96	96	96	80	80	80	64	64	64	50	50	50	43
1	96	92	88	85	88	84	81	78	70	68	66	57	55	54	44	43	42	37
2	88	81	75	70	80	74	69	65	62	58	55	50	47	45	39	38	36	31
3	80	71	64	58	73	65	59	54	54	50	46	44	41	38	35	33	31	27
4	74	63	55	49	67	58	51	46	48	43	39	40	36	33	31	29	27	23
5	68	56	48	42	62	52	45	40	43	38	34	36	32	29	28	26	23	20
6	62	50	42	37	57	47	40	34	39	34	30	32	28	25	26	23	21	18
7	58	46	38	32	53	42	35	30	35	30	26	29	25	22	24	21	18	16
8	53	41	34	29	49	38	31	27	32	27	23	27	23	20	22	19	17	14
9	50	38	30	25	45	35	28	24	30	24	21	25	21	18	20	17	15	13
10	46	35	27	23	42	32	26	21	27	22	19	23	19	16	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	9769	9769	9769	9769
5°	11505	9794	8645	9794
10°	13774	9752	7783	9752
15°	16298	9653	7148	9653
20°	18148	9552	6580	9552
25°	18441	9404	6188	9404
30°	15691	9261	6065	9261
35°	12064	9030	6067	9030
40°	9403	8759	6181	8759
45°	7840	8350	6284	8350
50°	6900	7851	6498	7851
55°	6321	7253	6759	7253
60°	5924	6717	7074	6717
65°	5515	6118	7335	6118
70°	5042	5526	7501	5526
75°	4504	4863	7411	4863
80°	3775	3984	7178	3984
85°	2788	2881	6873	2881



TEST NUMBER: P332794-830

CATALOG NUMBER: S124DIW-S795D1340U830-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	117.9	1.5
10°-20°	363.4	4.7
20°-30°	576.2	7.5
30°-40°	641.2	8.3
40°-50°	583.7	7.6
50°-60°	477.0	6.2
60°-70°	340.5	4.4
70°-80°	187.5	2.4
80°-90°	55.9	0.7
90°-100°	104.3	1.3
100°-110°	308.8	4.0
110°-120°	524.1	6.8
120°-130°	691.1	8.9
130°-140°	776.2	10.0
140°-150°	762.7	9.9
150°-160°	641.5	8.3
160°-170°	426.8	5.5
170°-180°	149.5	1.9
0°-30°	1057.5	13.7
0°-40°	1698.7	22.0
0°-60°	2759.4	35.7
0°-90°	3343.4	43.3
90°-120°	937.2	12.1
90°-150°	3167.3	41.0
90°-180°	4385.0	56.7
0°-180°	7728.4	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1210	1210	1210	1210	1210	
5°	1420	1209	1067	1209	1420	144
15°	1950	1155	855	1155	1950	551
25°	2070	1056	695	1056	2070	913
35°	1224	916	616	916	1224	777
45°	687	731	550	731	687	541
55°	449	515	480	515	449	406
65°	289	320	384	320	289	286
75°	144	156	238	156	144	154
85°	30	31	74	31	30	38
90°	37	4	37	4	37	20
95°	97	73	97	73	97	101
105°	298	285	298	285	298	314
115°	528	533	528	533	528	522
125°	770	776	770	776	770	687
135°	1002	1001	1002	1001	1002	774
145°	1218	1216	1218	1216	1218	762
155°	1392	1394	1392	1394	1392	641
165°	1513	1517	1513	1517	1513	426
175°	1571	1578	1571	1578	1571	149
180°	1580	1580	1580	1580	1580	



TEST NUMBER: P332794-830

CATALOG NUMBER: S124DIW-S795D1340U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1
2.5°	1287.9	1287.5	1283.5	1282.7	1279.9	1276.3	1275.4	1269.0	1256.2	1250.2	1248.6
5°	1419.7	1429.6	1416.6	1414.1	1412.6	1396.1	1387.5	1377.5	1354.4	1341.0	1330.4
7.5°	1576.9	1578.0	1572.3	1567.7	1555.0	1540.5	1518.9	1495.8	1468.4	1439.7	1418.2
10°	1680.3	1684.3	1677.8	1676.8	1651.2	1635.2	1603.1	1576.0	1544.9	1510.3	1478.8
12.5°	1789.4	1783.8	1780.5	1759.0	1754.3	1725.0	1687.7	1659.8	1611.9	1572.2	1530.1
15°	1950.0	1939.0	1931.9	1902.3	1887.8	1847.2	1807.6	1777.1	1714.4	1654.7	1609.6
17.5°	2044.2	2055.2	2039.0	2026.8	1989.2	1960.8	1920.3	1856.1	1807.1	1733.1	1676.1
20°	2112.4	2113.4	2104.4	2091.9	2062.3	2026.2	1982.1	1911.9	1853.2	1779.5	1701.4
22.5°	2130.8	2131.1	2127.2	2115.5	2093.1	2063.9	2019.4	1960.8	1889.7	1809.6	1731.5
25°	2070.3	2068.3	2072.8	2085.8	2077.3	2068.3	2042.7	1999.1	1933.0	1848.2	1764.0
27.5°	1845.3	1859.2	1884.6	1916.7	1947.6	1971.1	1977.7	1968.8	1927.8	1858.1	1769.9
30°	1683.3	1700.3	1719.4	1751.4	1813.6	1849.3	1888.3	1917.9	1901.4	1845.7	1763.5
32.5°	1505.2	1509.5	1537.8	1574.2	1631.2	1699.7	1761.6	1821.7	1841.6	1812.4	1743.9
35°	1224.1	1231.1	1261.7	1297.8	1367.5	1451.2	1544.5	1627.7	1696.3	1723.9	1688.8
37.5°	998.9	1019.1	1040.7	1079.5	1140.9	1216.2	1313.1	1420.7	1523.1	1591.7	1603.3
40°	892.3	904.8	920.4	949.9	1002.0	1076.3	1159.4	1282.8	1391.6	1489.8	1521.9
42.5°	808.0	815.4	824.9	851.7	891.4	965.2	1041.1	1149.6	1258.9	1376.3	1430.0
45°	686.7	694.3	710.3	725.9	755.9	807.1	877.7	967.0	1076.8	1190.1	1289.3
47.5°	599.2	604.0	613.5	630.1	655.6	689.4	746.9	821.4	923.1	1033.1	1138.9
50°	549.4	553.4	560.9	576.0	595.5	625.6	672.7	742.4	822.1	932.9	1036.6
52.5°	510.1	511.7	517.3	527.4	543.0	568.3	606.9	664.6	738.7	837.4	940.8
55°	449.1	451.2	456.2	463.7	477.2	493.2	522.8	565.9	630.7	716.3	806.1
57.5°	399.0	400.4	404.6	407.6	418.7	431.7	454.5	485.2	534.2	606.9	687.0
60°	366.9	365.9	371.0	373.4	381.0	392.0	409.5	439.1	481.7	540.4	614.1
62.5°	335.6	334.2	338.5	341.8	346.1	355.5	369.9	393.0	427.6	480.6	544.3
65°	288.7	286.7	289.3	293.2	297.3	302.3	312.8	333.4	360.9	399.0	447.6
67.5°	241.6	243.7	244.1	246.1	248.5	255.2	262.5	277.0	296.4	327.0	368.2
70°	213.6	214.1	216.0	216.0	217.5	223.6	229.6	238.1	257.1	285.2	318.8
72.5°	185.5	187.6	186.8	188.4	189.5	193.5	197.9	206.0	222.3	243.1	271.5
75°	144.4	145.9	145.9	146.4	147.9	149.4	152.9	158.9	170.4	186.0	205.6
77.5°	105.3	105.5	106.1	108.0	108.0	110.4	113.0	117.8	123.5	134.1	146.1
80°	81.2	82.2	81.7	82.8	82.8	84.7	85.7	91.7	94.3	101.2	110.7
82.5°	59.6	60.5	60.4	61.8	62.7	63.1	64.5	66.8	69.4	75.6	79.5
85°	30.1	31.1	30.1	31.1	32.6	33.1	34.6	35.1	37.1	38.6	42.1
87.5°	16.1	17.2	17.2	17.4	18.1	18.3	18.4	17.6	18.9	19.0	20.2
90°	36.7	36.1	35.6	35.1	34.5	33.4	31.8	30.2	28.6	26.9	24.7
92.5°	54.3	53.9	53.6	53.3	53.0	52.3	51.4	50.3	49.4	48.4	46.8
95°	96.6	96.6	96.6	96.6	96.6	96.1	95.4	94.5	93.7	92.9	91.0
97.5°	151.4	151.4	151.4	151.4	151.4	150.8	149.9	148.9	147.9	146.9	144.7
100°	189.5	189.5	189.5	189.5	189.5	189.2	188.7	188.1	187.6	187.0	184.5
102.5°	232.5	232.2	232.1	231.9	231.6	231.1	230.4	229.6	228.8	228.1	225.8
105°	298.2	297.5	296.6	295.8	295.0	294.2	293.4	292.6	291.7	291.0	289.8
107.5°	362.3	362.4	362.4	362.5	362.5	362.2	361.4	360.6	359.9	359.1	359.0
110°	408.3	407.5	406.6	405.9	405.0	404.9	405.4	406.0	406.5	407.1	407.4



TEST NUMBER: P332794-830

CATALOG NUMBER: S124DIW-S795D1340U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	455.2	455.1	454.9	454.7	454.6	454.5	454.7	454.8	454.9	455.0	455.4
115°	528.1	528.3	528.6	528.9	529.1	529.4	529.7	530.0	530.3	530.5	531.0
117.5°	597.5	598.0	598.6	599.1	599.6	600.4	601.3	602.3	603.1	604.1	604.5
120°	650.3	649.8	649.2	648.7	648.1	648.6	649.9	651.3	652.6	653.9	654.8
122.5°	694.3	695.3	696.3	697.2	698.2	699.2	700.1	701.0	701.9	702.9	703.2
125°	770.1	770.6	771.2	771.8	772.2	772.8	773.4	773.9	774.4	775.0	775.2
127.5°	840.3	840.7	841.1	841.6	842.0	842.4	843.0	843.6	844.1	844.6	845.1
130°	886.2	887.3	888.3	889.5	890.6	891.4	891.9	892.5	893.0	893.5	893.5
132.5°	935.1	935.6	935.9	936.4	936.9	937.4	937.9	938.4	939.0	939.5	939.7
135°	1002.3	1003.1	1004.0	1004.8	1005.6	1006.3	1006.8	1007.4	1008.0	1008.4	1008.4
137.5°	1073.0	1072.8	1072.7	1072.5	1072.3	1072.6	1073.4	1074.0	1074.7	1075.4	1075.0
140°	1116.1	1116.3	1116.5	1116.8	1117.1	1117.4	1117.7	1117.9	1118.2	1118.4	1118.4
142.5°	1159.0	1159.1	1159.1	1159.2	1159.2	1159.3	1159.4	1159.4	1159.5	1159.5	1159.8
145°	1217.5	1218.3	1219.1	1219.9	1220.8	1221.3	1221.5	1221.8	1222.1	1222.4	1222.1
147.5°	1276.7	1277.0	1277.1	1277.4	1277.7	1278.0	1278.2	1278.4	1278.7	1278.8	1279.0
150°	1312.9	1313.1	1313.3	1313.6	1313.9	1314.0	1314.0	1314.0	1314.0	1314.0	1314.0
152.5°	1346.0	1346.8	1347.5	1348.2	1348.9	1349.0	1348.3	1347.6	1347.0	1346.3	1346.1
155°	1392.3	1393.4	1394.5	1395.5	1396.7	1396.7	1395.5	1394.5	1393.4	1392.3	1392.5
157.5°	1433.6	1434.5	1435.4	1436.3	1437.3	1437.4	1436.5	1435.7	1434.9	1434.1	1434.2
160°	1457.1	1458.4	1459.8	1461.1	1462.4	1462.7	1462.0	1461.1	1460.3	1459.5	1459.8
162.5°	1481.5	1482.9	1484.2	1485.5	1487.0	1486.9	1485.4	1483.9	1482.5	1481.0	1481.3
165°	1513.3	1514.4	1515.4	1516.6	1517.7	1517.4	1515.7	1514.1	1512.5	1510.8	1511.4
167.5°	1536.1	1537.8	1539.4	1541.1	1542.8	1542.8	1541.2	1539.5	1537.9	1536.3	1536.3
170°	1548.8	1550.7	1552.6	1554.4	1556.3	1556.5	1554.8	1553.2	1551.6	1549.9	1549.7
172.5°	1559.5	1561.4	1563.3	1565.2	1567.1	1567.2	1565.3	1563.4	1561.6	1559.7	1559.7
175°	1570.7	1572.6	1574.5	1576.4	1578.4	1578.4	1576.4	1574.5	1572.6	1570.7	1571.0
177.5°	1576.6	1578.4	1580.1	1581.9	1583.6	1583.7	1582.2	1580.6	1579.1	1577.6	1577.6
180°	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5



TEST NUMBER: P332794-830

CATALOG NUMBER: S124DIW-S795D1340U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1
2.5°	1249.0	1243.4	1239.3	1236.1	1227.4	1222.1	1218.1	1212.5	1206.1	1199.3	1190.8
5°	1319.8	1302.8	1290.3	1271.2	1253.2	1238.1	1222.7	1208.6	1191.6	1173.0	1159.4
7.5°	1394.4	1369.0	1336.5	1308.3	1276.7	1249.1	1224.5	1199.2	1172.9	1147.5	1124.1
10°	1441.7	1409.1	1373.0	1330.4	1290.3	1254.7	1221.6	1189.6	1158.5	1127.4	1100.8
12.5°	1492.6	1452.0	1398.6	1348.9	1303.9	1256.3	1216.4	1177.1	1139.6	1106.9	1075.9
15°	1560.9	1502.3	1440.7	1374.0	1314.8	1259.2	1204.6	1155.0	1112.9	1069.7	1039.6
17.5°	1603.0	1530.4	1459.9	1390.3	1318.7	1248.5	1189.6	1132.3	1079.6	1036.7	998.8
20°	1630.7	1558.5	1470.7	1401.1	1315.9	1243.7	1175.5	1111.8	1056.7	1011.1	971.9
22.5°	1654.7	1571.3	1483.6	1391.9	1307.0	1230.5	1155.8	1091.7	1035.5	987.4	949.9
25°	1667.7	1572.0	1476.8	1385.5	1289.3	1198.5	1130.9	1055.7	995.5	944.9	904.8
27.5°	1669.1	1566.8	1459.1	1357.6	1258.3	1173.8	1088.4	1021.2	958.8	905.2	866.7
30°	1664.7	1558.0	1442.2	1332.4	1232.7	1140.9	1066.8	993.5	929.9	876.8	836.6
32.5°	1650.7	1539.5	1420.5	1304.3	1201.0	1111.3	1034.6	965.1	903.1	850.6	808.6
35°	1610.1	1500.3	1373.5	1252.7	1146.9	1056.2	987.0	916.3	854.2	804.6	763.9
37.5°	1546.6	1447.4	1318.4	1193.4	1089.6	998.4	929.9	866.0	809.9	759.5	717.9
40°	1491.3	1404.1	1274.8	1152.9	1040.7	953.9	889.8	831.1	775.5	727.8	688.2
42.5°	1427.6	1351.5	1232.3	1103.2	994.9	907.9	845.3	792.6	740.2	696.2	656.6
45°	1313.8	1263.8	1151.4	1032.2	919.4	837.2	777.5	731.4	687.3	644.1	611.1
47.5°	1183.1	1158.3	1063.8	950.5	843.4	762.3	710.6	668.0	629.3	592.9	563.6
50°	1095.3	1083.3	1001.5	892.3	790.0	713.8	661.7	625.1	592.0	560.0	532.3
52.5°	1008.7	1008.2	934.6	834.5	739.9	666.5	614.7	580.6	552.0	525.8	501.1
55°	876.3	890.2	832.6	743.4	658.6	592.5	545.9	515.3	495.3	473.7	455.2
57.5°	754.6	777.9	730.4	651.8	581.1	520.1	479.6	456.6	435.2	422.2	408.7
60°	675.2	697.3	660.2	594.0	527.4	475.2	436.6	416.0	397.5	388.5	379.0
62.5°	604.6	624.3	596.8	535.5	477.6	427.5	394.9	375.1	362.6	352.8	346.5
65°	503.8	520.3	496.8	452.1	402.6	362.4	335.8	320.3	308.3	304.3	297.3
67.5°	407.3	422.3	409.5	371.6	331.9	301.4	280.7	265.8	258.6	255.1	250.2
70°	349.9	365.0	351.4	318.3	287.8	262.2	242.6	234.1	226.6	225.1	218.0
72.5°	301.3	311.6	298.0	272.2	246.0	224.5	209.3	200.4	196.5	193.8	190.0
75°	226.1	235.1	226.1	206.0	187.5	172.5	159.4	155.9	151.4	149.9	147.4
77.5°	160.0	167.9	160.9	148.4	134.5	122.9	115.9	111.4	110.4	107.7	109.0
80°	122.3	127.3	120.8	112.3	101.2	93.2	88.2	85.7	82.8	81.7	83.7
82.5°	87.8	90.0	86.7	81.0	72.8	67.6	64.2	61.3	60.7	60.9	60.9
85°	45.6	45.1	44.6	39.6	37.1	33.6	31.6	31.1	30.5	31.6	32.6
87.5°	19.8	19.7	18.9	16.8	15.0	13.2	12.2	11.1	12.2	13.2	14.1
90°	22.5	20.4	18.2	15.6	12.6	9.6	6.7	3.7	6.7	9.6	12.6
92.5°	45.3	43.8	42.3	39.9	36.4	33.0	29.6	26.2	29.6	33.0	36.4
95°	89.1	87.2	85.3	83.1	80.7	78.2	75.8	73.3	75.8	78.2	80.7
97.5°	142.5	140.3	138.0	135.9	133.9	132.1	130.1	128.1	130.1	132.1	133.9
100°	182.1	179.6	177.2	175.5	174.4	173.3	172.2	171.2	172.2	173.3	174.4
102.5°	223.7	221.4	219.1	217.8	217.4	217.0	216.6	216.1	216.6	217.0	217.4
105°	288.8	287.7	286.5	285.9	285.6	285.4	285.1	284.8	285.1	285.4	285.6
107.5°	358.8	358.6	358.4	358.3	357.9	357.6	357.2	356.9	357.2	357.6	357.9
110°	407.6	407.8	408.1	408.0	407.5	406.9	406.3	405.9	406.3	406.9	407.5



TEST NUMBER: P332794-830

CATALOG NUMBER: S124DIW-S795D1340U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	455.9	456.5	456.9	457.1	457.0	456.9	456.8	456.7	456.8	456.9	457.0
115°	531.6	532.2	532.7	532.9	532.9	532.9	532.9	532.9	532.9	532.9	532.9
117.5°	604.8	605.2	605.6	605.7	605.5	605.3	605.0	604.8	605.0	605.3	605.5
120°	655.6	656.4	657.2	657.0	656.0	654.9	653.8	652.7	653.8	654.9	656.0
122.5°	703.6	704.0	704.4	704.4	703.9	703.5	703.0	702.6	703.0	703.5	703.9
125°	775.5	775.8	776.1	776.2	776.2	776.2	776.2	776.2	776.2	776.2	776.2
127.5°	845.6	845.9	846.4	846.2	845.4	844.6	843.8	842.9	843.8	844.6	845.4
130°	893.5	893.5	893.5	893.2	892.3	891.6	890.7	889.9	890.7	891.6	892.3
132.5°	939.9	940.2	940.4	940.2	939.6	939.0	938.4	937.8	938.4	939.0	939.6
135°	1008.4	1008.4	1008.4	1007.7	1006.0	1004.4	1002.8	1001.1	1002.8	1004.4	1006.0
137.5°	1074.6	1074.1	1073.7	1073.1	1072.3	1071.6	1070.8	1070.1	1070.8	1071.6	1072.3
140°	1118.4	1118.4	1118.4	1118.2	1117.7	1117.1	1116.5	1116.1	1116.5	1117.1	1117.7
142.5°	1160.0	1160.2	1160.4	1160.3	1159.7	1159.1	1158.6	1158.1	1158.6	1159.1	1159.7
145°	1221.8	1221.5	1221.3	1220.6	1219.6	1218.4	1217.4	1216.3	1217.4	1218.4	1219.6
147.5°	1279.3	1279.5	1279.7	1279.1	1277.9	1276.6	1275.3	1273.9	1275.3	1276.6	1277.9
150°	1314.0	1314.0	1314.0	1313.5	1312.4	1311.4	1310.2	1309.2	1310.2	1311.4	1312.4
152.5°	1345.9	1345.7	1345.5	1345.0	1344.3	1343.7	1343.0	1342.4	1343.0	1343.7	1344.3
155°	1392.8	1393.1	1393.4	1393.5	1393.5	1393.5	1393.5	1393.5	1393.5	1393.5	1393.5
157.5°	1434.2	1434.3	1434.3	1434.5	1435.0	1435.6	1436.1	1436.5	1436.1	1435.6	1435.0
160°	1460.1	1460.3	1460.6	1460.8	1461.1	1461.4	1461.7	1462.0	1461.7	1461.4	1461.1
162.5°	1481.6	1481.9	1482.1	1482.6	1483.3	1484.0	1484.7	1485.4	1484.7	1484.0	1483.3
165°	1511.9	1512.5	1513.1	1513.7	1514.5	1515.3	1516.2	1516.9	1516.2	1515.3	1514.5
167.5°	1536.2	1536.2	1536.1	1536.6	1537.8	1538.9	1540.0	1541.2	1540.0	1538.9	1537.8
170°	1549.4	1549.2	1548.9	1549.4	1550.8	1552.2	1553.5	1554.8	1553.5	1552.2	1550.8
172.5°	1559.6	1559.6	1559.5	1560.1	1561.2	1562.4	1563.5	1564.6	1563.5	1562.4	1561.2
175°	1571.3	1571.6	1571.8	1572.6	1574.0	1575.4	1576.7	1578.1	1576.7	1575.4	1574.0
177.5°	1577.6	1577.6	1577.6	1578.1	1579.2	1580.3	1581.4	1582.4	1581.4	1580.3	1579.2
180°	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5



TEST NUMBER: P332794-830

CATALOG NUMBER: S124DIW-S795D1340U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1
2.5°	1186.8	1183.3	1178.0	1170.8	1164.8	1158.4	1156.8	1154.3	1159.1	1155.2	1154.0
5°	1147.9	1137.4	1123.9	1108.3	1099.3	1086.3	1083.7	1078.7	1073.7	1073.3	1068.2
7.5°	1106.7	1091.3	1073.6	1057.7	1043.0	1028.8	1019.5	1017.5	1010.1	1005.8	1000.8
10°	1080.2	1061.2	1040.7	1025.6	1008.6	993.5	983.0	977.0	971.9	966.5	961.5
12.5°	1049.0	1028.7	1011.8	995.5	975.2	963.8	946.5	936.1	935.1	935.2	922.2
15°	1012.6	992.5	966.5	943.4	932.4	910.3	900.8	888.7	881.3	873.7	867.7
17.5°	971.0	946.0	925.7	899.2	878.2	860.6	848.1	840.8	829.5	818.9	811.2
20°	944.9	918.3	896.8	868.7	845.6	824.1	813.6	803.5	795.0	786.0	777.5
22.5°	918.4	890.7	864.3	837.1	815.6	792.9	782.7	769.0	760.9	755.9	747.4
25°	876.8	846.7	816.6	790.5	768.5	748.4	734.9	724.3	715.3	711.3	705.8
27.5°	831.4	801.5	772.5	742.9	717.8	703.3	692.5	684.6	679.3	674.0	671.6
30°	802.6	771.5	740.4	712.8	689.8	675.2	665.2	659.7	655.6	653.2	650.6
32.5°	773.3	742.6	709.9	684.8	664.1	651.2	643.6	638.0	636.0	635.1	634.2
35°	726.3	695.3	665.2	642.6	623.1	618.1	611.5	608.6	607.6	611.1	612.6
37.5°	680.9	652.1	624.4	602.6	589.7	582.4	580.1	580.3	583.9	587.0	590.6
40°	651.7	623.6	597.6	578.4	566.5	561.9	560.9	563.5	567.4	571.0	575.0
42.5°	623.2	595.5	571.8	554.0	545.6	541.5	542.1	544.6	550.2	554.5	560.5
45°	579.0	555.9	532.8	518.3	511.3	512.3	512.3	516.8	522.4	528.9	535.4
47.5°	537.3	514.2	495.1	483.0	479.3	478.4	481.3	487.1	495.0	503.1	512.2
50°	509.3	487.2	470.7	459.7	455.6	457.1	461.2	466.7	476.2	486.3	495.8
52.5°	480.8	460.8	445.4	435.2	432.4	435.1	439.1	447.8	456.2	467.0	478.5
55°	436.6	419.5	407.6	400.0	399.0	400.5	405.0	414.5	426.6	440.2	451.2
57.5°	392.6	378.3	367.3	362.1	362.6	364.0	371.5	382.8	395.6	410.0	424.2
60°	363.0	349.9	340.9	336.9	337.3	340.4	349.4	360.0	376.0	390.0	405.0
62.5°	334.9	323.4	314.8	311.2	310.5	317.1	325.7	336.7	352.7	368.3	384.6
65°	289.7	280.7	273.7	271.7	273.2	278.2	289.3	303.8	317.4	333.8	350.9
67.5°	245.6	238.2	233.4	234.3	236.1	243.6	252.8	265.2	280.6	297.7	314.6
70°	217.5	210.6	206.5	207.0	210.0	219.0	227.1	239.6	256.2	273.7	287.8
72.5°	188.7	184.1	180.5	182.6	185.6	191.8	201.8	214.3	228.8	245.2	260.0
75°	144.9	144.9	142.9	144.4	148.9	154.9	162.4	175.4	190.0	203.0	215.1
77.5°	107.4	106.4	107.6	109.5	112.1	119.2	127.8	137.1	148.1	161.1	171.1
80°	82.2	82.8	85.2	88.2	89.3	94.7	103.8	112.3	120.8	131.9	141.4
82.5°	61.7	62.3	63.5	67.4	68.3	74.3	80.1	88.6	96.3	103.8	111.7
85°	33.6	33.6	36.1	37.6	40.1	44.1	47.6	52.6	59.7	64.7	72.2
87.5°	15.9	16.5	18.5	19.8	21.4	23.8	25.0	29.7	31.6	33.9	37.8
90°	15.6	18.2	20.4	22.5	24.7	26.9	28.6	30.2	31.8	33.4	34.5
92.5°	39.9	42.3	43.8	45.3	46.8	48.4	49.4	50.3	51.4	52.3	53.0
95°	83.1	85.3	87.2	89.1	91.0	92.9	93.7	94.5	95.4	96.1	96.6
97.5°	135.9	138.0	140.3	142.5	144.7	146.9	147.9	148.9	149.9	150.8	151.4
100°	175.5	177.2	179.6	182.1	184.5	187.0	187.6	188.1	188.7	189.2	189.5
102.5°	217.8	219.1	221.4	223.7	225.8	228.1	228.8	229.6	230.4	231.1	231.6
105°	285.9	286.5	287.7	288.8	289.8	291.0	291.7	292.6	293.4	294.2	295.0
107.5°	358.3	358.4	358.6	358.8	359.0	359.1	359.9	360.6	361.4	362.2	362.5
110°	408.0	408.1	407.8	407.6	407.4	407.1	406.5	406.0	405.4	404.9	405.0



TEST NUMBER: P332794-830

CATALOG NUMBER: S124DIW-S795D1340U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	457.1	456.9	456.5	455.9	455.4	455.0	454.9	454.8	454.7	454.5	454.6
115°	532.9	532.7	532.2	531.6	531.0	530.5	530.3	530.0	529.7	529.4	529.1
117.5°	605.7	605.6	605.2	604.8	604.5	604.1	603.1	602.3	601.3	600.4	599.6
120°	657.0	657.2	656.4	655.6	654.8	653.9	652.6	651.3	649.9	648.6	648.1
122.5°	704.4	704.4	704.0	703.6	703.2	702.9	701.9	701.0	700.1	699.2	698.2
125°	776.2	776.1	775.8	775.5	775.2	775.0	774.4	773.9	773.4	772.8	772.2
127.5°	846.2	846.4	845.9	845.6	845.1	844.6	844.1	843.6	843.0	842.4	842.0
130°	893.2	893.5	893.5	893.5	893.5	893.5	893.0	892.5	891.9	891.4	890.6
132.5°	940.2	940.4	940.2	939.9	939.7	939.5	939.0	938.4	937.9	937.4	936.9
135°	1007.7	1008.4	1008.4	1008.4	1008.4	1008.4	1008.0	1007.4	1006.8	1006.3	1005.6
137.5°	1073.1	1073.7	1074.1	1074.6	1075.0	1075.4	1074.7	1074.0	1073.4	1072.6	1072.3
140°	1118.2	1118.4	1118.4	1118.4	1118.4	1118.4	1118.2	1117.9	1117.7	1117.4	1117.1
142.5°	1160.3	1160.4	1160.2	1160.0	1159.8	1159.5	1159.5	1159.4	1159.4	1159.3	1159.2
145°	1220.6	1221.3	1221.5	1221.8	1222.1	1222.4	1222.1	1221.8	1221.5	1221.3	1220.8
147.5°	1279.1	1279.7	1279.5	1279.3	1279.0	1278.8	1278.7	1278.4	1278.2	1278.0	1277.7
150°	1313.5	1314.0	1314.0	1314.0	1314.0	1314.0	1314.0	1314.0	1314.0	1314.0	1313.9
152.5°	1345.0	1345.5	1345.7	1345.9	1346.1	1346.3	1347.0	1347.6	1348.3	1349.0	1348.9
155°	1393.5	1393.4	1393.1	1392.8	1392.5	1392.3	1393.4	1394.5	1395.5	1396.7	1396.7
157.5°	1434.5	1434.3	1434.3	1434.2	1434.2	1434.1	1434.9	1435.7	1436.5	1437.4	1437.3
160°	1460.8	1460.6	1460.3	1460.1	1459.8	1459.5	1460.3	1461.1	1462.0	1462.7	1462.4
162.5°	1482.6	1482.1	1481.9	1481.6	1481.3	1481.0	1482.5	1483.9	1485.4	1486.9	1487.0
165°	1513.7	1513.1	1512.5	1511.9	1511.4	1510.8	1512.5	1514.1	1515.7	1517.4	1517.7
167.5°	1536.6	1536.1	1536.2	1536.2	1536.3	1536.3	1537.9	1539.5	1541.2	1542.8	1542.8
170°	1549.4	1548.9	1549.2	1549.4	1549.7	1549.9	1551.6	1553.2	1554.8	1556.5	1556.3
172.5°	1560.1	1559.5	1559.6	1559.6	1559.7	1559.7	1561.6	1563.4	1565.3	1567.2	1567.1
175°	1572.6	1571.8	1571.6	1571.3	1571.0	1570.7	1572.6	1574.5	1576.4	1578.4	1578.4
177.5°	1578.1	1577.6	1577.6	1577.6	1577.6	1577.6	1579.1	1580.6	1582.2	1583.7	1583.6
180°	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5



TEST NUMBER: P332794-830

CATALOG NUMBER: S124DIW-S795D1340U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1
2.5°	1153.1	1152.4	1149.5	1149.1	1149.5	1152.4	1153.1	1154.0	1155.2	1159.1	1154.3
5°	1065.3	1062.7	1061.2	1066.8	1061.2	1062.7	1065.3	1068.2	1073.3	1073.7	1078.7
7.5°	998.9	996.9	992.5	991.2	992.5	996.9	998.9	1000.8	1005.8	1010.1	1017.5
10°	956.4	954.4	950.5	949.4	950.5	954.4	956.4	961.5	966.5	971.9	977.0
12.5°	915.5	911.5	910.7	911.7	910.7	911.5	915.5	922.2	935.2	935.1	936.1
15°	861.2	859.2	853.7	855.2	853.7	859.2	861.2	867.7	873.7	881.3	888.7
17.5°	807.7	805.2	798.5	804.5	798.5	805.2	807.7	811.2	818.9	829.5	840.8
20°	774.0	770.0	766.5	765.9	766.5	770.0	774.0	777.5	786.0	795.0	803.5
22.5°	741.9	738.3	738.0	734.7	738.0	738.3	741.9	747.4	755.9	760.9	769.0
25°	701.8	698.3	697.3	694.7	697.3	698.3	701.8	705.8	711.3	715.3	724.3
27.5°	671.0	669.3	667.5	668.3	667.5	669.3	671.0	671.6	674.0	679.3	684.6
30°	652.1	651.7	650.6	650.6	650.6	651.7	652.1	650.6	653.2	655.6	659.7
32.5°	636.5	636.4	637.1	637.1	637.1	636.4	636.5	634.2	635.1	636.0	638.0
35°	614.5	616.0	617.1	615.6	617.1	616.0	614.5	612.6	611.1	607.6	608.6
37.5°	594.7	596.3	597.7	599.4	597.7	596.3	594.7	590.6	587.0	583.9	580.3
40°	579.5	583.0	584.0	586.5	584.0	583.0	579.5	575.0	571.0	567.4	563.5
42.5°	565.1	568.9	571.6	572.0	571.6	568.9	565.1	560.5	554.5	550.2	544.6
45°	542.9	546.9	550.4	550.4	550.4	546.9	542.9	535.4	528.9	522.4	516.8
47.5°	519.9	525.8	529.2	530.2	529.2	525.8	519.9	512.2	503.1	495.0	487.1
50°	504.3	511.3	514.8	517.4	514.8	511.3	504.3	495.8	486.3	476.2	466.7
52.5°	489.1	496.1	500.8	502.1	500.8	496.1	489.1	478.5	467.0	456.2	447.8
55°	462.7	472.7	478.2	480.2	478.2	472.7	462.7	451.2	440.2	426.6	414.5
57.5°	437.8	447.0	453.5	455.0	453.5	447.0	437.8	424.2	410.0	395.6	382.8
60°	418.6	428.6	436.6	438.1	436.6	428.6	418.6	405.0	390.0	376.0	360.0
62.5°	398.9	409.3	416.6	420.5	416.6	409.3	398.9	384.6	368.3	352.7	336.7
65°	365.0	375.4	382.5	384.0	382.5	375.4	365.0	350.9	333.8	317.4	303.8
67.5°	327.8	338.4	343.0	345.9	343.0	338.4	327.8	314.6	297.7	280.6	265.2
70°	301.8	310.3	315.3	317.8	315.3	310.3	301.8	287.8	273.7	256.2	239.6
72.5°	272.1	281.0	286.8	287.3	286.8	281.0	272.1	260.0	245.2	228.8	214.3
75°	226.6	234.6	237.6	237.6	237.6	234.6	226.6	215.1	203.0	190.0	175.4
77.5°	179.4	183.5	187.3	188.0	187.3	183.5	179.4	171.1	161.1	148.1	137.1
80°	148.9	151.4	154.4	154.4	154.4	151.4	148.9	141.4	131.9	120.8	112.3
82.5°	117.6	119.7	122.7	122.3	122.7	119.7	117.6	111.7	103.8	96.3	88.6
85°	71.2	75.7	75.2	74.2	75.2	75.7	71.2	72.2	64.7	59.7	52.6
87.5°	39.1	39.6	40.9	41.8	40.9	39.6	39.1	37.8	33.9	31.6	29.7
90°	35.1	35.6	36.1	36.7	36.1	35.6	35.1	34.5	33.4	31.8	30.2
92.5°	53.3	53.6	53.9	54.3	53.9	53.6	53.3	53.0	52.3	51.4	50.3
95°	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.6	96.1	95.4	94.5
97.5°	151.4	151.4	151.4	151.4	151.4	151.4	151.4	151.4	150.8	149.9	148.9
100°	189.5	189.5	189.5	189.5	189.5	189.5	189.5	189.5	189.2	188.7	188.1
102.5°	231.9	232.1	232.2	232.5	232.2	232.1	231.9	231.6	231.1	230.4	229.6
105°	295.8	296.6	297.5	298.2	297.5	296.6	295.8	295.0	294.2	293.4	292.6
107.5°	362.5	362.4	362.4	362.3	362.4	362.4	362.5	362.5	362.2	361.4	360.6
110°	405.9	406.6	407.5	408.3	407.5	406.6	405.9	405.0	404.9	405.4	406.0



TEST NUMBER: P332794-830

CATALOG NUMBER: S124DIW-S795D1340U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	454.7	454.9	455.1	455.2	455.1	454.9	454.7	454.6	454.5	454.7	454.8
115°	528.9	528.6	528.3	528.1	528.3	528.6	528.9	529.1	529.4	529.7	530.0
117.5°	599.1	598.6	598.0	597.5	598.0	598.6	599.1	599.6	600.4	601.3	602.3
120°	648.7	649.2	649.8	650.3	649.8	649.2	648.7	648.1	648.6	649.9	651.3
122.5°	697.2	696.3	695.3	694.3	695.3	696.3	697.2	698.2	699.2	700.1	701.0
125°	771.8	771.2	770.6	770.1	770.6	771.2	771.8	772.2	772.8	773.4	773.9
127.5°	841.6	841.1	840.7	840.3	840.7	841.1	841.6	842.0	842.4	843.0	843.6
130°	889.5	888.3	887.3	886.2	887.3	888.3	889.5	890.6	891.4	891.9	892.5
132.5°	936.4	935.9	935.6	935.1	935.6	935.9	936.4	936.9	937.4	937.9	938.4
135°	1004.8	1004.0	1003.1	1002.3	1003.1	1004.0	1004.8	1005.6	1006.3	1006.8	1007.4
137.5°	1072.5	1072.7	1072.8	1073.0	1072.8	1072.7	1072.5	1072.3	1072.6	1073.4	1074.0
140°	1116.8	1116.5	1116.3	1116.1	1116.3	1116.5	1116.8	1117.1	1117.4	1117.7	1117.9
142.5°	1159.2	1159.1	1159.1	1159.0	1159.1	1159.1	1159.2	1159.2	1159.3	1159.4	1159.4
145°	1219.9	1219.1	1218.3	1217.5	1218.3	1219.1	1219.9	1220.8	1221.3	1221.5	1221.8
147.5°	1277.4	1277.1	1277.0	1276.7	1277.0	1277.1	1277.4	1277.7	1278.0	1278.2	1278.4
150°	1313.6	1313.3	1313.1	1312.9	1313.1	1313.3	1313.6	1313.9	1314.0	1314.0	1314.0
152.5°	1348.2	1347.5	1346.8	1346.0	1346.8	1347.5	1348.2	1348.9	1349.0	1348.3	1347.6
155°	1395.5	1394.5	1393.4	1392.3	1393.4	1394.5	1395.5	1396.7	1396.7	1395.5	1394.5
157.5°	1436.3	1435.4	1434.5	1433.6	1434.5	1435.4	1436.3	1437.3	1437.4	1436.5	1435.7
160°	1461.1	1459.8	1458.4	1457.1	1458.4	1459.8	1461.1	1462.4	1462.7	1462.0	1461.1
162.5°	1485.5	1484.2	1482.9	1481.5	1482.9	1484.2	1485.5	1487.0	1486.9	1485.4	1483.9
165°	1516.6	1515.4	1514.4	1513.3	1514.4	1515.4	1516.6	1517.7	1517.4	1515.7	1514.1
167.5°	1541.1	1539.4	1537.8	1536.1	1537.8	1539.4	1541.1	1542.8	1542.8	1541.2	1539.5
170°	1554.4	1552.6	1550.7	1548.8	1550.7	1552.6	1554.4	1556.3	1556.5	1554.8	1553.2
172.5°	1565.2	1563.3	1561.4	1559.5	1561.4	1563.3	1565.2	1567.1	1567.2	1565.3	1563.4
175°	1576.4	1574.5	1572.6	1570.7	1572.6	1574.5	1576.4	1578.4	1578.4	1576.4	1574.5
177.5°	1581.9	1580.1	1578.4	1576.6	1578.4	1580.1	1581.9	1583.6	1583.7	1582.2	1580.6
180°	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5



TEST NUMBER: P332794-830

CATALOG NUMBER: S124DIW-S795D1340U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1
2.5°	1156.8	1158.4	1164.8	1170.8	1178.0	1183.3	1186.8	1190.8	1199.3	1206.1	1212.5
5°	1083.7	1086.3	1099.3	1108.3	1123.9	1137.4	1147.9	1159.4	1173.0	1191.6	1208.6
7.5°	1019.5	1028.8	1043.0	1057.7	1073.6	1091.3	1106.7	1124.1	1147.5	1172.9	1199.2
10°	983.0	993.5	1008.6	1025.6	1040.7	1061.2	1080.2	1100.8	1127.4	1158.5	1189.6
12.5°	946.5	963.8	975.2	995.5	1011.8	1028.7	1049.0	1075.9	1106.9	1139.6	1177.1
15°	900.8	910.3	932.4	943.4	966.5	992.5	1012.6	1039.6	1069.7	1112.9	1155.0
17.5°	848.1	860.6	878.2	899.2	925.7	946.0	971.0	998.8	1036.7	1079.6	1132.3
20°	813.6	824.1	845.6	868.7	896.8	918.3	944.9	971.9	1011.1	1056.7	1111.8
22.5°	782.7	792.9	815.6	837.1	864.3	890.7	918.4	949.9	987.4	1035.5	1091.7
25°	734.9	748.4	768.5	790.5	816.6	846.7	876.8	904.8	944.9	995.5	1055.7
27.5°	692.5	703.3	717.8	742.9	772.5	801.5	831.4	866.7	905.2	958.8	1021.2
30°	665.2	675.2	689.8	712.8	740.4	771.5	802.6	836.6	876.8	929.9	993.5
32.5°	643.6	651.2	664.1	684.8	709.9	742.6	773.3	808.6	850.6	903.1	965.1
35°	611.5	618.1	623.1	642.6	665.2	695.3	726.3	763.9	804.6	854.2	916.3
37.5°	580.1	582.4	589.7	602.6	624.4	652.1	680.9	717.9	759.5	809.9	866.0
40°	560.9	561.9	566.5	578.4	597.6	623.6	651.7	688.2	727.8	775.5	831.1
42.5°	542.1	541.5	545.6	554.0	571.8	595.5	623.2	656.6	696.2	740.2	792.6
45°	512.3	512.3	511.3	518.3	532.8	555.9	579.0	611.1	644.1	687.3	731.4
47.5°	481.3	478.4	479.3	483.0	495.1	514.2	537.3	563.6	592.9	629.3	668.0
50°	461.2	457.1	455.6	459.7	470.7	487.2	509.3	532.3	560.0	592.0	625.1
52.5°	439.1	435.1	432.4	435.2	445.4	460.8	480.8	501.1	525.8	552.0	580.6
55°	405.0	400.5	399.0	400.0	407.6	419.5	436.6	455.2	473.7	495.3	515.3
57.5°	371.5	364.0	362.6	362.1	367.3	378.3	392.6	408.7	422.2	435.2	456.6
60°	349.4	340.4	337.3	336.9	340.9	349.9	363.0	379.0	388.5	397.5	416.0
62.5°	325.7	317.1	310.5	311.2	314.8	323.4	334.9	346.5	352.8	362.6	375.1
65°	289.3	278.2	273.2	271.7	273.7	280.7	289.7	297.3	304.3	308.3	320.3
67.5°	252.8	243.6	236.1	234.3	233.4	238.2	245.6	250.2	255.1	258.6	265.8
70°	227.1	219.0	210.0	207.0	206.5	210.6	217.5	218.0	225.1	226.6	234.1
72.5°	201.8	191.8	185.6	182.6	180.5	184.1	188.7	190.0	193.8	196.5	200.4
75°	162.4	154.9	148.9	144.4	142.9	144.9	144.9	147.4	149.9	151.4	155.9
77.5°	127.8	119.2	112.1	109.5	107.6	106.4	107.4	109.0	107.7	110.4	111.4
80°	103.8	94.7	89.3	88.2	85.2	82.8	82.2	83.7	81.7	82.8	85.7
82.5°	80.1	74.3	68.3	67.4	63.5	62.3	61.7	60.9	60.9	60.7	61.3
85°	47.6	44.1	40.1	37.6	36.1	33.6	33.6	32.6	31.6	30.5	31.1
87.5°	25.0	23.8	21.4	19.8	18.5	16.5	15.9	14.1	13.2	12.2	11.1
90°	28.6	26.9	24.7	22.5	20.4	18.2	15.6	12.6	9.6	6.7	3.7
92.5°	49.4	48.4	46.8	45.3	43.8	42.3	39.9	36.4	33.0	29.6	26.2
95°	93.7	92.9	91.0	89.1	87.2	85.3	83.1	80.7	78.2	75.8	73.3
97.5°	147.9	146.9	144.7	142.5	140.3	138.0	135.9	133.9	132.1	130.1	128.1
100°	187.6	187.0	184.5	182.1	179.6	177.2	175.5	174.4	173.3	172.2	171.2
102.5°	228.8	228.1	225.8	223.7	221.4	219.1	217.8	217.4	217.0	216.6	216.1
105°	291.7	291.0	289.8	288.8	287.7	286.5	285.9	285.6	285.4	285.1	284.8
107.5°	359.9	359.1	359.0	358.8	358.6	358.4	358.3	357.9	357.6	357.2	356.9
110°	406.5	407.1	407.4	407.6	407.8	408.1	408.0	407.5	406.9	406.3	405.9



TEST NUMBER: P332794-830

CATALOG NUMBER: S124DIW-S795D1340U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	454.9	455.0	455.4	455.9	456.5	456.9	457.1	457.0	456.9	456.8	456.7
115°	530.3	530.5	531.0	531.6	532.2	532.7	532.9	532.9	532.9	532.9	532.9
117.5°	603.1	604.1	604.5	604.8	605.2	605.6	605.7	605.5	605.3	605.0	604.8
120°	652.6	653.9	654.8	655.6	656.4	657.2	657.0	656.0	654.9	653.8	652.7
122.5°	701.9	702.9	703.2	703.6	704.0	704.4	704.4	703.9	703.5	703.0	702.6
125°	774.4	775.0	775.2	775.5	775.8	776.1	776.2	776.2	776.2	776.2	776.2
127.5°	844.1	844.6	845.1	845.6	845.9	846.4	846.2	845.4	844.6	843.8	842.9
130°	893.0	893.5	893.5	893.5	893.5	893.5	893.2	892.3	891.6	890.7	889.9
132.5°	939.0	939.5	939.7	939.9	940.2	940.4	940.2	939.6	939.0	938.4	937.8
135°	1008.0	1008.4	1008.4	1008.4	1008.4	1008.4	1007.7	1006.0	1004.4	1002.8	1001.1
137.5°	1074.7	1075.4	1075.0	1074.6	1074.1	1073.7	1073.1	1072.3	1071.6	1070.8	1070.1
140°	1118.2	1118.4	1118.4	1118.4	1118.4	1118.4	1118.2	1117.7	1117.1	1116.5	1116.1
142.5°	1159.5	1159.5	1159.8	1160.0	1160.2	1160.4	1160.3	1159.7	1159.1	1158.6	1158.1
145°	1222.1	1222.4	1222.1	1221.8	1221.5	1221.3	1220.6	1219.6	1218.4	1217.4	1216.3
147.5°	1278.7	1278.8	1279.0	1279.3	1279.5	1279.7	1279.1	1277.9	1276.6	1275.3	1273.9
150°	1314.0	1314.0	1314.0	1314.0	1314.0	1314.0	1313.5	1312.4	1311.4	1310.2	1309.2
152.5°	1347.0	1346.3	1346.1	1345.9	1345.7	1345.5	1345.0	1344.3	1343.7	1343.0	1342.4
155°	1393.4	1392.3	1392.5	1392.8	1393.1	1393.4	1393.5	1393.5	1393.5	1393.5	1393.5
157.5°	1434.9	1434.1	1434.2	1434.2	1434.3	1434.3	1434.5	1435.0	1435.6	1436.1	1436.5
160°	1460.3	1459.5	1459.8	1460.1	1460.3	1460.6	1460.8	1461.1	1461.4	1461.7	1462.0
162.5°	1482.5	1481.0	1481.3	1481.6	1481.9	1482.1	1482.6	1483.3	1484.0	1484.7	1485.4
165°	1512.5	1510.8	1511.4	1511.9	1512.5	1513.1	1513.7	1514.5	1515.3	1516.2	1516.9
167.5°	1537.9	1536.3	1536.3	1536.2	1536.2	1536.1	1536.6	1537.8	1538.9	1540.0	1541.2
170°	1551.6	1549.9	1549.7	1549.4	1549.2	1548.9	1549.4	1550.8	1552.2	1553.5	1554.8
172.5°	1561.6	1559.7	1559.7	1559.6	1559.6	1559.5	1560.1	1561.2	1562.4	1563.5	1564.6
175°	1572.6	1570.7	1571.0	1571.3	1571.6	1571.8	1572.6	1574.0	1575.4	1576.7	1578.1
177.5°	1579.1	1577.6	1577.6	1577.6	1577.6	1577.6	1578.1	1579.2	1580.3	1581.4	1582.4
180°	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5



TEST NUMBER: P332794-830

CATALOG NUMBER: S124DIW-S795D1340U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1
2.5°	1218.1	1222.1	1227.4	1236.1	1239.3	1243.4	1249.0	1248.6	1250.2	1256.2	1269.0
5°	1222.7	1238.1	1253.2	1271.2	1290.3	1302.8	1319.8	1330.4	1341.0	1354.4	1377.5
7.5°	1224.5	1249.1	1276.7	1308.3	1336.5	1369.0	1394.4	1418.2	1439.7	1468.4	1495.8
10°	1221.6	1254.7	1290.3	1330.4	1373.0	1409.1	1441.7	1478.8	1510.3	1544.9	1576.0
12.5°	1216.4	1256.3	1303.9	1348.9	1398.6	1452.0	1492.6	1530.1	1572.2	1611.9	1659.8
15°	1204.6	1259.2	1314.8	1374.0	1440.7	1502.3	1560.9	1609.6	1654.7	1714.4	1777.1
17.5°	1189.6	1248.5	1318.7	1390.3	1459.9	1530.4	1603.0	1676.1	1733.1	1807.1	1856.1
20°	1175.5	1243.7	1315.9	1401.1	1470.7	1558.5	1630.7	1701.4	1779.5	1853.2	1911.9
22.5°	1155.8	1230.5	1307.0	1391.9	1483.6	1571.3	1654.7	1731.5	1809.6	1889.7	1960.8
25°	1130.9	1198.5	1289.3	1385.5	1476.8	1572.0	1667.7	1764.0	1848.2	1933.0	1999.1
27.5°	1088.4	1173.8	1258.3	1357.6	1459.1	1566.8	1669.1	1769.9	1858.1	1927.8	1968.8
30°	1066.8	1140.9	1232.7	1332.4	1442.2	1558.0	1664.7	1763.5	1845.7	1901.4	1917.9
32.5°	1034.6	1111.3	1201.0	1304.3	1420.5	1539.5	1650.7	1743.9	1812.4	1841.6	1821.7
35°	987.0	1056.2	1146.9	1252.7	1373.5	1500.3	1610.1	1688.8	1723.9	1696.3	1627.7
37.5°	929.9	998.4	1089.6	1193.4	1318.4	1447.4	1546.6	1603.3	1591.7	1523.1	1420.7
40°	889.8	953.9	1040.7	1152.9	1274.8	1404.1	1491.3	1521.9	1489.8	1391.6	1282.8
42.5°	845.3	907.9	994.9	1103.2	1232.3	1351.5	1427.6	1430.0	1376.3	1258.9	1149.6
45°	777.5	837.2	919.4	1032.2	1151.4	1263.8	1313.8	1289.3	1190.1	1076.8	967.0
47.5°	710.6	762.3	843.4	950.5	1063.8	1158.3	1183.1	1138.9	1033.1	923.1	821.4
50°	661.7	713.8	790.0	892.3	1001.5	1083.3	1095.3	1036.6	932.9	822.1	742.4
52.5°	614.7	666.5	739.9	834.5	934.6	1008.2	1008.7	940.8	837.4	738.7	664.6
55°	545.9	592.5	658.6	743.4	832.6	890.2	876.3	806.1	716.3	630.7	565.9
57.5°	479.6	520.1	581.1	651.8	730.4	777.9	754.6	687.0	606.9	534.2	485.2
60°	436.6	475.2	527.4	594.0	660.2	697.3	675.2	614.1	540.4	481.7	439.1
62.5°	394.9	427.5	477.6	535.5	596.8	624.3	604.6	544.3	480.6	427.6	393.0
65°	335.8	362.4	402.6	452.1	496.8	520.3	503.8	447.6	399.0	360.9	333.4
67.5°	280.7	301.4	331.9	371.6	409.5	422.3	407.3	368.2	327.0	296.4	277.0
70°	242.6	262.2	287.8	318.3	351.4	365.0	349.9	318.8	285.2	257.1	238.1
72.5°	209.3	224.5	246.0	272.2	298.0	311.6	301.3	271.5	243.1	222.3	206.0
75°	159.4	172.5	187.5	206.0	226.1	235.1	226.1	205.6	186.0	170.4	158.9
77.5°	115.9	122.9	134.5	148.4	160.9	167.9	160.0	146.1	134.1	123.5	117.8
80°	88.2	93.2	101.2	112.3	120.8	127.3	122.3	110.7	101.2	94.3	91.7
82.5°	64.2	67.6	72.8	81.0	86.7	90.0	87.8	79.5	75.6	69.4	66.8
85°	31.6	33.6	37.1	39.6	44.6	45.1	45.6	42.1	38.6	37.1	35.1
87.5°	12.2	13.2	15.0	16.8	18.9	19.7	19.8	20.2	19.0	18.9	17.6
90°	6.7	9.6	12.6	15.6	18.2	20.4	22.5	24.7	26.9	28.6	30.2
92.5°	29.6	33.0	36.4	39.9	42.3	43.8	45.3	46.8	48.4	49.4	50.3
95°	75.8	78.2	80.7	83.1	85.3	87.2	89.1	91.0	92.9	93.7	94.5
97.5°	130.1	132.1	133.9	135.9	138.0	140.3	142.5	144.7	146.9	147.9	148.9
100°	172.2	173.3	174.4	175.5	177.2	179.6	182.1	184.5	187.0	187.6	188.1
102.5°	216.6	217.0	217.4	217.8	219.1	221.4	223.7	225.8	228.1	228.8	229.6
105°	285.1	285.4	285.6	285.9	286.5	287.7	288.8	289.8	291.0	291.7	292.6
107.5°	357.2	357.6	357.9	358.3	358.4	358.6	358.8	359.0	359.1	359.9	360.6
110°	406.3	406.9	407.5	408.0	408.1	407.8	407.6	407.4	407.1	406.5	406.0



TEST NUMBER: P332794-830

CATALOG NUMBER: S124DIW-S795D1340U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	456.8	456.9	457.0	457.1	456.9	456.5	455.9	455.4	455.0	454.9	454.8
115°	532.9	532.9	532.9	532.9	532.7	532.2	531.6	531.0	530.5	530.3	530.0
117.5°	605.0	605.3	605.5	605.7	605.6	605.2	604.8	604.5	604.1	603.1	602.3
120°	653.8	654.9	656.0	657.0	657.2	656.4	655.6	654.8	653.9	652.6	651.3
122.5°	703.0	703.5	703.9	704.4	704.4	704.0	703.6	703.2	702.9	701.9	701.0
125°	776.2	776.2	776.2	776.2	776.1	775.8	775.5	775.2	775.0	774.4	773.9
127.5°	843.8	844.6	845.4	846.2	846.4	845.9	845.6	845.1	844.6	844.1	843.6
130°	890.7	891.6	892.3	893.2	893.5	893.5	893.5	893.5	893.5	893.0	892.5
132.5°	938.4	939.0	939.6	940.2	940.4	940.2	939.9	939.7	939.5	939.0	938.4
135°	1002.8	1004.4	1006.0	1007.7	1008.4	1008.4	1008.4	1008.4	1008.4	1008.0	1007.4
137.5°	1070.8	1071.6	1072.3	1073.1	1073.7	1074.1	1074.6	1075.0	1075.4	1074.7	1074.0
140°	1116.5	1117.1	1117.7	1118.2	1118.4	1118.4	1118.4	1118.4	1118.4	1118.2	1117.9
142.5°	1158.6	1159.1	1159.7	1160.3	1160.4	1160.2	1160.0	1159.8	1159.5	1159.5	1159.4
145°	1217.4	1218.4	1219.6	1220.6	1221.3	1221.5	1221.8	1222.1	1222.4	1222.1	1221.8
147.5°	1275.3	1276.6	1277.9	1279.1	1279.7	1279.5	1279.3	1279.0	1278.8	1278.7	1278.4
150°	1310.2	1311.4	1312.4	1313.5	1314.0	1314.0	1314.0	1314.0	1314.0	1314.0	1314.0
152.5°	1343.0	1343.7	1344.3	1345.0	1345.5	1345.7	1345.9	1346.1	1346.3	1347.0	1347.6
155°	1393.5	1393.5	1393.5	1393.5	1393.4	1393.1	1392.8	1392.5	1392.3	1393.4	1394.5
157.5°	1436.1	1435.6	1435.0	1434.5	1434.3	1434.3	1434.2	1434.2	1434.1	1434.9	1435.7
160°	1461.7	1461.4	1461.1	1460.8	1460.6	1460.3	1460.1	1459.8	1459.5	1460.3	1461.1
162.5°	1484.7	1484.0	1483.3	1482.6	1482.1	1481.9	1481.6	1481.3	1481.0	1482.5	1483.9
165°	1516.2	1515.3	1514.5	1513.7	1513.1	1512.5	1511.9	1511.4	1510.8	1512.5	1514.1
167.5°	1540.0	1538.9	1537.8	1536.6	1536.1	1536.2	1536.2	1536.3	1536.3	1537.9	1539.5
170°	1553.5	1552.2	1550.8	1549.4	1548.9	1549.2	1549.4	1549.7	1549.9	1551.6	1553.2
172.5°	1563.5	1562.4	1561.2	1560.1	1559.5	1559.6	1559.6	1559.7	1559.7	1561.6	1563.4
175°	1576.7	1575.4	1574.0	1572.6	1571.8	1571.6	1571.3	1571.0	1570.7	1572.6	1574.5
177.5°	1581.4	1580.3	1579.2	1578.1	1577.6	1577.6	1577.6	1577.6	1577.6	1579.1	1580.6
180°	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5



TEST NUMBER: P332794-830

CATALOG NUMBER: S124DIW-S795D1340U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1	1210.1
2.5°	1275.4	1276.3	1279.9	1282.7	1283.5	1287.5	1287.9
5°	1387.5	1396.1	1412.6	1414.1	1416.6	1429.6	1419.7
7.5°	1518.9	1540.5	1555.0	1567.7	1572.3	1578.0	1576.9
10°	1603.1	1635.2	1651.2	1676.8	1677.8	1684.3	1680.3
12.5°	1687.7	1725.0	1754.3	1759.0	1780.5	1783.8	1789.4
15°	1807.6	1847.2	1887.8	1902.3	1931.9	1939.0	1950.0
17.5°	1920.3	1960.8	1989.2	2026.8	2039.0	2055.2	2044.2
20°	1982.1	2026.2	2062.3	2091.9	2104.4	2113.4	2112.4
22.5°	2019.4	2063.9	2093.1	2115.5	2127.2	2131.1	2130.8
25°	2042.7	2068.3	2077.3	2085.8	2072.8	2068.3	2070.3
27.5°	1977.7	1971.1	1947.6	1916.7	1884.6	1859.2	1845.3
30°	1888.3	1849.3	1813.6	1751.4	1719.4	1700.3	1683.3
32.5°	1761.6	1699.7	1631.2	1574.2	1537.8	1509.5	1505.2
35°	1544.5	1451.2	1367.5	1297.8	1261.7	1231.1	1224.1
37.5°	1313.1	1216.2	1140.9	1079.5	1040.7	1019.1	998.9
40°	1159.4	1076.3	1002.0	949.9	920.4	904.8	892.3
42.5°	1041.1	965.2	891.4	851.7	824.9	815.4	808.0
45°	877.7	807.1	755.9	725.9	710.3	694.3	686.7
47.5°	746.9	689.4	655.6	630.1	613.5	604.0	599.2
50°	672.7	625.6	595.5	576.0	560.9	553.4	549.4
52.5°	606.9	568.3	543.0	527.4	517.3	511.7	510.1
55°	522.8	493.2	477.2	463.7	456.2	451.2	449.1
57.5°	454.5	431.7	418.7	407.6	404.6	400.4	399.0
60°	409.5	392.0	381.0	373.4	371.0	365.9	366.9
62.5°	369.9	355.5	346.1	341.8	338.5	334.2	335.6
65°	312.8	302.3	297.3	293.2	289.3	286.7	288.7
67.5°	262.5	255.2	248.5	246.1	244.1	243.7	241.6
70°	229.6	223.6	217.5	216.0	216.0	214.1	213.6
72.5°	197.9	193.5	189.5	188.4	186.8	187.6	185.5
75°	152.9	149.4	147.9	146.4	145.9	145.9	144.4
77.5°	113.0	110.4	108.0	108.0	106.1	105.5	105.3
80°	85.7	84.7	82.8	82.8	81.7	82.2	81.2
82.5°	64.5	63.1	62.7	61.8	60.4	60.5	59.6
85°	34.6	33.1	32.6	31.1	30.1	31.1	30.1
87.5°	18.4	18.3	18.1	17.4	17.2	17.2	16.1
90°	31.8	33.4	34.5	35.1	35.6	36.1	36.7
92.5°	51.4	52.3	53.0	53.3	53.6	53.9	54.3
95°	95.4	96.1	96.6	96.6	96.6	96.6	96.6
97.5°	149.9	150.8	151.4	151.4	151.4	151.4	151.4
100°	188.7	189.2	189.5	189.5	189.5	189.5	189.5
102.5°	230.4	231.1	231.6	231.9	232.1	232.2	232.5
105°	293.4	294.2	295.0	295.8	296.6	297.5	298.2
107.5°	361.4	362.2	362.5	362.5	362.4	362.4	362.3
110°	405.4	404.9	405.0	405.9	406.6	407.5	408.3



TEST NUMBER: P332794-830

CATALOG NUMBER: S124DIW-S795D1340U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	454.7	454.5	454.6	454.7	454.9	455.1	455.2
115°	529.7	529.4	529.1	528.9	528.6	528.3	528.1
117.5°	601.3	600.4	599.6	599.1	598.6	598.0	597.5
120°	649.9	648.6	648.1	648.7	649.2	649.8	650.3
122.5°	700.1	699.2	698.2	697.2	696.3	695.3	694.3
125°	773.4	772.8	772.2	771.8	771.2	770.6	770.1
127.5°	843.0	842.4	842.0	841.6	841.1	840.7	840.3
130°	891.9	891.4	890.6	889.5	888.3	887.3	886.2
132.5°	937.9	937.4	936.9	936.4	935.9	935.6	935.1
135°	1006.8	1006.3	1005.6	1004.8	1004.0	1003.1	1002.3
137.5°	1073.4	1072.6	1072.3	1072.5	1072.7	1072.8	1073.0
140°	1117.7	1117.4	1117.1	1116.8	1116.5	1116.3	1116.1
142.5°	1159.4	1159.3	1159.2	1159.2	1159.1	1159.1	1159.0
145°	1221.5	1221.3	1220.8	1219.9	1219.1	1218.3	1217.5
147.5°	1278.2	1278.0	1277.7	1277.4	1277.1	1277.0	1276.7
150°	1314.0	1314.0	1313.9	1313.6	1313.3	1313.1	1312.9
152.5°	1348.3	1349.0	1348.9	1348.2	1347.5	1346.8	1346.0
155°	1395.5	1396.7	1396.7	1395.5	1394.5	1393.4	1392.3
157.5°	1436.5	1437.4	1437.3	1436.3	1435.4	1434.5	1433.6
160°	1462.0	1462.7	1462.4	1461.1	1459.8	1458.4	1457.1
162.5°	1485.4	1486.9	1487.0	1485.5	1484.2	1482.9	1481.5
165°	1515.7	1517.4	1517.7	1516.6	1515.4	1514.4	1513.3
167.5°	1541.2	1542.8	1542.8	1541.1	1539.4	1537.8	1536.1
170°	1554.8	1556.5	1556.3	1554.4	1552.6	1550.7	1548.8
172.5°	1565.3	1567.2	1567.1	1565.2	1563.3	1561.4	1559.5
175°	1576.4	1578.4	1578.4	1576.4	1574.5	1572.6	1570.7
177.5°	1582.2	1583.7	1583.6	1581.9	1580.1	1578.4	1576.6
180°	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5	1580.5

(END OF REPORT)