

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333078-830

Luminaire Tested: **S124RDIW-S1020D470U830-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333078-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIW-S1020D470U830-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 470 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5466.0 lumens
Efficiency: N/A
Efficacy: 118.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 46.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333078-830

CATALOG NUMBER: S124RDIW-S1020D470U830-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

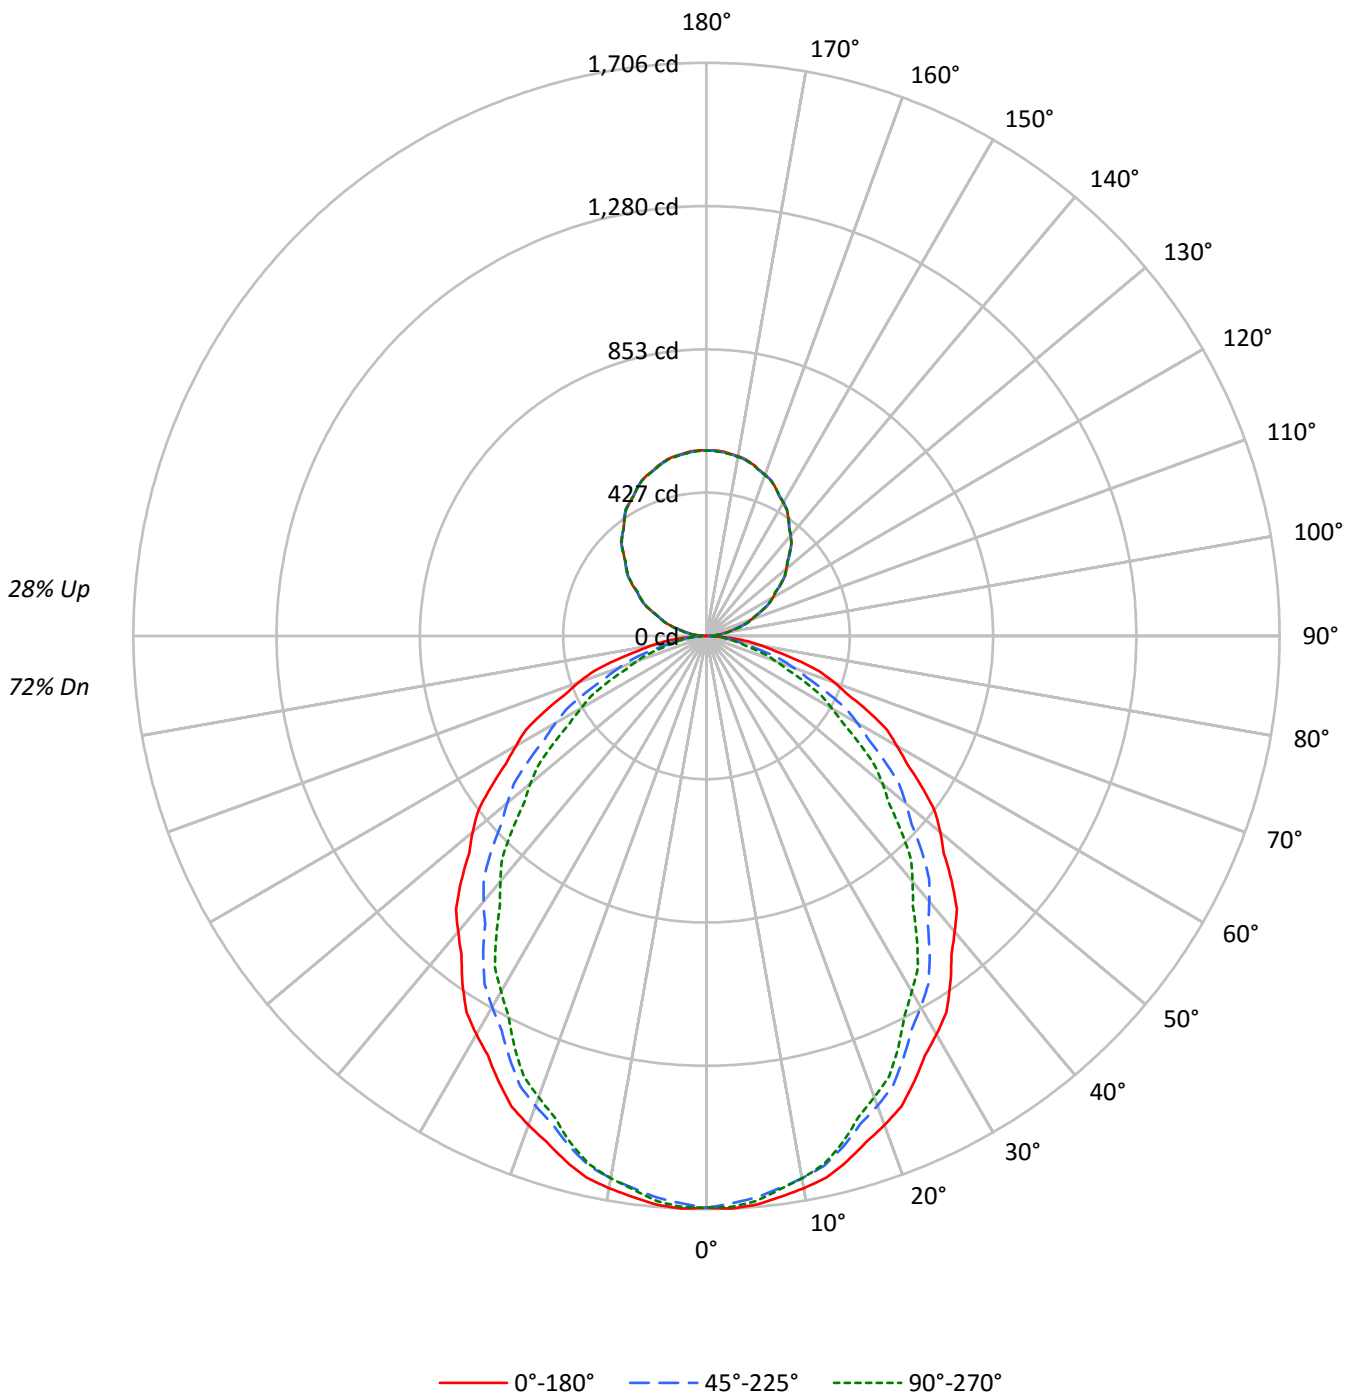



TEST NUMBER: P333078-830

CATALOG NUMBER: S124RDIW-S1020D470U830-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	112	112	112	112	107	107	107	107	96	96	96	86	86	86	76	76	76	76	76	76	76	76	76	72		
1	103	99	95	91	98	94	90	87	85	82	80	76	74	72	68	67	65	65	65	65	65	65	65	61		
2	94	87	81	75	89	83	77	72	75	70	66	67	64	61	60	58	56	56	56	56	56	56	56	52		
3	86	77	69	63	81	73	66	61	66	61	56	60	56	52	54	51	48	48	48	48	48	48	48	45		
4	79	68	60	54	75	65	58	52	59	53	48	54	49	45	48	45	41	41	41	41	41	41	41	38		
5	73	61	53	47	69	58	51	45	53	47	42	48	43	39	44	40	36	36	36	36	36	36	36	34		
6	67	55	47	41	64	53	45	40	48	42	37	44	39	35	40	36	32	32	32	32	32	32	32	30		
7	62	50	42	36	59	48	40	35	44	37	33	40	35	31	36	32	29	29	29	29	29	29	29	26		
8	58	46	38	32	55	44	36	31	40	34	29	37	31	28	34	29	26	26	26	26	26	26	26	24		
9	54	42	34	29	51	40	33	28	37	31	27	34	29	25	31	27	23	23	23	23	23	23	23	21		
10	51	38	31	26	48	37	30	25	34	28	24	31	26	23	29	25	21	21	21	21	21	21	21	20		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13739	13739	13739
5°	13771	13602	13686
10°	13684	13439	13439
15°	13527	13157	13059
20°	13311	12785	12550
25°	13036	12351	12038
30°	12767	11893	11395
35°	12471	11417	10749
40°	12113	10877	10053
45°	11783	10340	9344
50°	11408	9722	8593
55°	11005	9080	7776
60°	10563	8375	6944
65°	10157	7494	6124
70°	9567	6522	5200
75°	8821	5405	4226
80°	7694	4119	3877
85°	6521	3742	3501



TEST NUMBER: P333078-830

CATALOG NUMBER: S124RDIW-S1020D470U830-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	159.9	2.9
10°-20°	445.8	8.2
20°-30°	643.8	11.8
30°-40°	729.7	13.4
40°-50°	704.7	12.9
50°-60°	586.0	10.7
60°-70°	404.6	7.4
70°-80°	205.1	3.8
80°-90°	54.3	1.0
90°-100°	36.4	0.7
100°-110°	107.9	2.0
110°-120°	183.1	3.4
120°-130°	241.5	4.4
130°-140°	271.2	5.0
140°-150°	266.5	4.9
150°-160°	224.1	4.1
160°-170°	149.1	2.7
170°-180°	52.2	1.0
0°-30°	1249.5	22.9
0°-40°	1979.2	36.2
0°-60°	3269.8	59.8
0°-90°	3933.8	72.0
90°-120°	327.5	6.0
90°-150°	1106.7	20.2
90°-180°	1532.0	28.0
0°-180°	5466.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1702	1702	1702	1702	1702	
5°	1699	1694	1678	1691	1689	161
15°	1618	1606	1574	1571	1562	456
25°	1464	1438	1387	1365	1351	674
35°	1265	1222	1158	1115	1091	790
45°	1032	982	906	844	818	795
55°	782	728	645	580	552	699
65°	532	474	392	338	321	525
75°	283	234	173	145	136	299
85°	70	46	40	38	38	79
90°	1	6	9	12	13	5
95°	26	29	32	34	34	29
105°	100	100	102	103	104	106
115°	186	186	185	185	184	184
125°	271	271	271	270	269	242
135°	350	352	352	352	350	270
145°	425	427	427	427	425	266
155°	487	487	486	488	486	224
165°	530	529	528	530	529	149
175°	551	549	549	552	549	52
180°	552	552	552	552	552	



TEST NUMBER: P333078-830

CATALOG NUMBER: S124RDIW-S1020D470U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1701.9	1701.9	1701.9	1701.9	1701.9	1701.9	1701.9	1701.9	1701.9	1701.9	1701.9
2.5°	1706.1	1705.2	1704.2	1703.4	1702.4	1700.6	1698.1	1695.5	1693.0	1690.5	1693.0
5°	1699.3	1698.2	1697.0	1695.8	1694.7	1692.3	1688.9	1685.5	1682.0	1678.5	1681.4
7.5°	1683.9	1682.7	1681.5	1680.3	1679.0	1676.2	1671.7	1667.2	1662.6	1658.1	1660.0
10°	1669.3	1667.9	1666.4	1665.0	1663.6	1660.2	1655.0	1649.8	1644.5	1639.4	1640.5
12.5°	1650.6	1648.9	1647.2	1645.6	1643.9	1639.9	1633.8	1627.7	1621.6	1615.4	1616.1
15°	1618.5	1615.9	1613.4	1610.7	1608.1	1603.2	1595.9	1588.7	1581.5	1574.2	1573.7
17.5°	1579.7	1575.9	1572.2	1568.4	1564.6	1558.4	1549.7	1541.1	1532.4	1523.6	1522.0
20°	1549.4	1545.7	1541.9	1538.1	1534.4	1527.6	1517.8	1507.9	1498.1	1488.2	1485.9
22.5°	1516.1	1511.8	1507.6	1503.4	1499.2	1491.8	1481.3	1470.7	1460.2	1449.6	1446.1
25°	1463.5	1458.2	1453.0	1447.8	1442.6	1434.1	1422.2	1410.3	1398.5	1386.6	1381.7
27.5°	1408.2	1401.7	1395.2	1388.6	1382.1	1372.4	1359.7	1347.1	1334.4	1321.6	1315.6
30°	1369.6	1362.4	1355.2	1347.9	1340.7	1330.2	1316.6	1303.0	1289.4	1275.8	1268.6
32.5°	1329.0	1320.8	1312.6	1304.5	1296.3	1285.2	1271.1	1257.1	1242.9	1228.9	1220.5
35°	1265.4	1256.1	1246.8	1237.6	1228.3	1216.4	1201.9	1187.5	1173.0	1158.5	1148.7
37.5°	1197.3	1187.8	1178.3	1168.7	1159.1	1146.3	1130.3	1114.3	1098.2	1082.1	1071.1
40°	1149.4	1139.8	1130.3	1120.7	1111.2	1098.2	1081.7	1065.1	1048.6	1032.1	1019.9
42.5°	1103.5	1093.5	1083.5	1073.5	1063.5	1049.8	1032.6	1015.4	998.2	981.0	968.7
45°	1032.1	1021.4	1010.7	999.9	989.2	975.2	957.8	940.5	923.0	905.7	891.6
47.5°	958.4	947.3	936.2	925.2	914.1	899.6	881.5	863.4	845.3	827.3	812.6
50°	908.3	897.0	885.7	874.4	863.1	848.2	829.7	811.2	792.6	774.1	759.6
52.5°	857.2	846.1	835.1	824.1	812.9	798.0	778.9	760.0	740.9	722.0	707.3
55°	781.9	770.3	758.7	747.2	735.6	720.4	701.5	682.7	663.9	645.1	630.0
57.5°	707.4	695.3	683.2	671.2	659.2	643.9	625.4	606.8	588.2	569.8	554.5
60°	654.2	642.6	631.0	619.4	607.8	592.8	574.3	555.7	537.2	518.7	503.6
62.5°	606.2	594.2	582.1	570.0	558.1	542.5	523.5	504.5	485.5	466.6	452.6
65°	531.7	519.2	506.8	494.4	481.9	466.4	447.9	429.3	410.8	392.3	379.8
67.5°	454.3	442.3	430.5	418.5	406.5	392.0	374.8	357.6	340.4	323.2	312.5
70°	405.3	393.1	381.0	368.8	356.7	342.3	325.8	309.2	292.8	276.3	266.7
72.5°	353.2	342.1	331.1	320.2	309.2	295.9	280.3	264.7	249.1	233.6	225.4
75°	282.8	272.1	261.4	250.6	240.0	227.7	214.1	200.6	186.9	173.3	166.6
77.5°	211.4	202.3	193.2	184.1	175.0	164.9	153.9	143.0	132.0	120.9	117.1
80°	165.5	157.1	148.7	140.3	132.0	123.4	114.7	106.0	97.3	88.6	87.8
82.5°	125.9	118.2	110.5	102.7	95.1	88.7	83.8	78.8	73.8	68.8	68.1
85°	70.4	64.6	58.8	53.0	47.2	43.8	43.0	42.1	41.3	40.4	39.8
87.5°	24.2	22.6	20.9	19.3	17.6	16.8	16.7	16.6	16.6	16.5	16.4
90°	1.3	2.4	3.4	4.4	5.5	6.3	7.2	7.9	8.7	9.4	10.0
92.5°	9.1	10.4	11.5	12.7	13.9	14.8	15.4	15.8	16.4	16.9	17.2
95°	25.6	26.5	27.3	28.2	29.0	29.8	30.4	31.1	31.8	32.4	32.7
97.5°	44.8	45.4	46.1	46.8	47.5	48.3	49.0	49.8	50.5	51.4	51.7
100°	59.8	60.1	60.5	60.9	61.4	61.9	62.8	63.6	64.5	65.3	65.5
102.5°	75.5	75.7	75.8	76.0	76.2	76.6	77.4	78.1	78.9	79.7	79.9
105°	99.5	99.6	99.7	99.8	99.9	100.1	100.5	100.9	101.2	101.6	101.9
107.5°	124.7	124.8	125.0	125.1	125.2	125.3	125.4	125.4	125.5	125.5	125.7
110°	141.8	141.9	142.1	142.3	142.5	142.6	142.5	142.4	142.3	142.2	142.0



TEST NUMBER: P333078-830

CATALOG NUMBER: S124RDIW-S1020D470U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	159.6	159.6	159.7	159.7	159.8	159.7	159.5	159.3	159.1	159.0	158.9
115°	186.2	186.2	186.2	186.2	186.2	186.2	186.0	185.8	185.6	185.4	185.3
117.5°	211.3	211.4	211.5	211.6	211.6	211.6	211.5	211.3	211.2	211.0	210.8
120°	228.1	228.5	228.8	229.2	229.6	229.6	229.3	229.0	228.8	228.5	228.0
122.5°	245.5	245.6	245.8	245.9	246.1	246.1	246.0	245.8	245.7	245.6	245.2
125°	271.2	271.2	271.2	271.2	271.2	271.2	271.1	271.0	270.9	270.8	270.6
127.5°	294.5	294.8	295.1	295.4	295.7	295.8	295.6	295.4	295.3	295.1	294.9
130°	310.9	311.2	311.5	311.8	312.1	312.2	312.2	312.2	312.2	312.2	312.0
132.5°	327.6	327.9	328.1	328.3	328.5	328.6	328.5	328.4	328.4	328.3	328.1
135°	349.8	350.3	350.9	351.5	352.0	352.3	352.3	352.3	352.3	352.3	352.1
137.5°	373.9	374.2	374.4	374.7	374.9	375.1	375.3	375.5	375.6	375.8	375.5
140°	389.9	390.1	390.3	390.5	390.7	390.8	390.8	390.8	390.8	390.8	390.7
142.5°	404.6	404.8	405.0	405.2	405.4	405.5	405.4	405.3	405.2	405.1	405.1
145°	425.0	425.4	425.7	426.1	426.5	426.7	426.8	426.9	427.0	427.1	427.0
147.5°	445.2	445.5	446.0	446.5	447.0	447.1	447.0	447.0	447.0	446.9	446.8
150°	457.4	457.8	458.2	458.5	458.9	459.1	459.1	459.1	459.1	459.1	459.1
152.5°	469.0	469.3	469.5	469.8	470.0	470.1	470.1	470.2	470.3	470.4	470.6
155°	486.9	486.9	486.9	486.9	486.9	486.8	486.7	486.6	486.5	486.4	486.8
157.5°	501.9	501.7	501.6	501.4	501.2	501.1	501.1	501.1	501.1	501.1	501.3
160°	510.9	510.8	510.7	510.6	510.5	510.4	510.3	510.2	510.1	510.0	510.3
162.5°	519.1	518.8	518.5	518.3	518.0	517.8	517.7	517.6	517.6	517.5	518.0
165°	530.0	529.7	529.4	529.1	528.9	528.7	528.5	528.3	528.1	527.9	528.5
167.5°	538.5	538.1	537.7	537.3	536.9	536.7	536.7	536.8	536.8	536.8	537.3
170°	543.3	542.8	542.3	541.9	541.4	541.2	541.3	541.4	541.5	541.6	542.2
172.5°	546.7	546.3	545.9	545.5	545.1	544.9	544.9	545.0	545.0	545.0	545.6
175°	551.4	550.9	550.4	550.0	549.5	549.2	549.1	549.0	548.9	548.8	549.5
177.5°	552.9	552.5	552.1	551.8	551.4	551.2	551.2	551.2	551.2	551.2	551.8
180°	552.2	552.2	552.2	552.2	552.2	552.2	552.2	552.2	552.2	552.2	552.2



TEST NUMBER: P333078-830

CATALOG NUMBER: S124RDIW-S1020D470U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1701.9	1701.9	1701.9	1701.9	1701.9	1701.9	1701.9	1701.9
2.5°	1695.5	1698.1	1700.6	1701.9	1701.6	1701.4	1701.1	1700.9
5°	1684.2	1687.2	1690.1	1691.2	1690.6	1690.1	1689.5	1688.9
7.5°	1661.9	1663.7	1665.6	1666.0	1665.1	1664.2	1663.2	1662.3
10°	1641.7	1642.9	1644.0	1644.0	1642.9	1641.7	1640.5	1639.4
12.5°	1616.7	1617.5	1618.2	1617.7	1616.1	1614.5	1612.9	1611.3
15°	1573.1	1572.4	1571.9	1570.6	1568.6	1566.5	1564.5	1562.5
17.5°	1520.4	1518.8	1517.2	1514.9	1511.7	1508.7	1505.6	1502.5
20°	1483.6	1481.3	1478.9	1475.9	1472.2	1468.4	1464.6	1460.8
22.5°	1442.7	1439.2	1435.8	1432.5	1429.4	1426.3	1423.2	1420.2
25°	1376.7	1371.8	1366.9	1362.9	1360.1	1357.2	1354.2	1351.4
27.5°	1309.5	1303.4	1297.3	1292.2	1288.1	1283.8	1279.7	1275.5
30°	1261.3	1254.1	1246.8	1240.9	1236.2	1231.6	1227.0	1222.4
32.5°	1212.1	1203.7	1195.3	1188.9	1184.5	1180.1	1175.7	1171.3
35°	1138.8	1129.0	1119.1	1111.6	1106.4	1101.2	1096.0	1090.7
37.5°	1060.2	1049.1	1038.1	1030.0	1024.8	1019.5	1014.4	1009.2
40°	1007.8	995.6	983.4	974.8	969.6	964.3	959.1	953.9
42.5°	956.2	943.9	931.4	922.6	917.1	911.6	906.2	900.8
45°	877.3	863.1	848.9	839.2	834.1	828.8	823.6	818.4
47.5°	797.9	783.2	768.4	758.2	752.4	746.7	740.9	735.3
50°	745.1	730.7	716.1	706.2	700.7	695.1	689.7	684.2
52.5°	692.5	677.8	663.1	652.9	647.1	641.4	635.7	630.0
55°	614.9	599.9	584.8	574.6	569.0	563.5	558.1	552.5
57.5°	539.1	523.9	508.6	498.9	494.6	490.5	486.4	482.2
60°	488.5	473.4	458.5	448.6	443.9	439.3	434.7	430.1
62.5°	438.8	424.8	410.9	402.1	398.4	394.7	391.0	387.3
65°	367.3	354.9	342.4	334.5	331.0	327.5	324.0	320.6
67.5°	301.7	291.1	280.3	273.1	269.2	265.4	261.6	257.8
70°	257.1	247.6	238.1	231.8	228.9	226.0	223.1	220.3
72.5°	217.2	209.1	200.9	195.5	192.7	190.1	187.5	184.8
75°	160.0	153.4	146.7	142.5	140.7	139.0	137.2	135.5
77.5°	113.2	109.3	105.4	103.2	102.6	102.2	101.6	101.1
80°	86.9	86.1	85.1	84.5	84.3	84.0	83.7	83.4
82.5°	67.5	66.9	66.3	65.8	65.5	65.2	64.9	64.7
85°	39.2	38.6	38.1	37.8	37.8	37.8	37.8	37.8
87.5°	16.2	16.1	16.0	16.1	16.3	16.6	16.9	17.2
90°	10.6	11.1	11.7	12.1	12.3	12.4	12.6	12.8
92.5°	17.6	17.9	18.3	18.5	18.7	18.8	18.9	18.9
95°	33.0	33.3	33.6	33.7	33.7	33.7	33.7	33.7
97.5°	52.0	52.4	52.7	52.9	52.9	52.9	52.9	52.9
100°	65.7	65.9	66.1	66.2	66.2	66.2	66.2	66.2
102.5°	80.2	80.5	80.8	81.0	81.0	81.1	81.2	81.2
105°	102.3	102.5	102.8	103.1	103.4	103.7	104.0	104.2
107.5°	126.0	126.3	126.6	126.7	126.7	126.7	126.6	126.6
110°	141.9	141.7	141.5	141.5	141.8	142.0	142.3	142.6



TEST NUMBER: P333078-830

CATALOG NUMBER: S124RDIW-S1020D470U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	158.9	158.8	158.8	158.8	158.9	158.9	159.0	159.0
115°	185.2	185.1	185.0	184.9	184.8	184.7	184.6	184.5
117.5°	210.5	210.1	209.8	209.5	209.3	209.2	209.0	208.8
120°	227.5	227.1	226.6	226.5	226.7	226.9	227.1	227.2
122.5°	245.0	244.6	244.3	243.9	243.6	243.3	242.9	242.6
125°	270.4	270.2	270.0	269.8	269.7	269.5	269.3	269.1
127.5°	294.7	294.5	294.4	294.2	294.1	293.9	293.8	293.6
130°	311.8	311.6	311.4	311.1	310.8	310.4	310.0	309.6
132.5°	327.9	327.7	327.5	327.3	327.2	327.1	326.9	326.8
135°	351.9	351.8	351.6	351.4	351.1	350.8	350.5	350.2
137.5°	375.2	375.0	374.8	374.7	374.8	374.8	374.8	374.9
140°	390.6	390.5	390.4	390.3	390.2	390.1	390.0	389.9
142.5°	405.1	405.1	405.1	405.0	405.0	405.0	405.0	405.0
145°	426.9	426.8	426.7	426.5	426.2	425.9	425.7	425.4
147.5°	446.7	446.6	446.6	446.5	446.4	446.3	446.2	446.1
150°	459.1	459.1	459.1	459.1	459.0	458.9	458.8	458.7
152.5°	470.9	471.1	471.4	471.3	471.1	470.8	470.6	470.3
155°	487.2	487.6	488.0	488.0	487.6	487.2	486.8	486.4
157.5°	501.6	501.9	502.2	502.2	501.9	501.5	501.2	500.9
160°	510.6	510.9	511.1	511.0	510.6	510.1	509.5	509.1
162.5°	518.5	519.1	519.5	519.5	519.1	518.6	518.1	517.6
165°	529.0	529.6	530.2	530.3	529.9	529.5	529.1	528.8
167.5°	537.9	538.5	539.0	539.0	538.5	537.9	537.2	536.7
170°	542.7	543.3	543.8	543.8	543.1	542.4	541.8	541.1
172.5°	546.3	547.0	547.5	547.5	546.9	546.2	545.5	544.9
175°	550.2	550.8	551.5	551.5	550.8	550.2	549.5	548.8
177.5°	552.3	552.8	553.4	553.3	552.7	552.1	551.5	550.9
180°	552.2	552.2	552.2	552.2	552.2	552.2	552.2	552.2

(END OF REPORT)