

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333106-830

Luminaire Tested: **S124RDIW-S1195D1050U830-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333106-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIW-S1195D1050U830-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1050 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7970.4 lumens
Efficiency: N/A
Efficacy: 118.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 67.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333106-830

CATALOG NUMBER: S124RDIW-S1195D1050U830-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

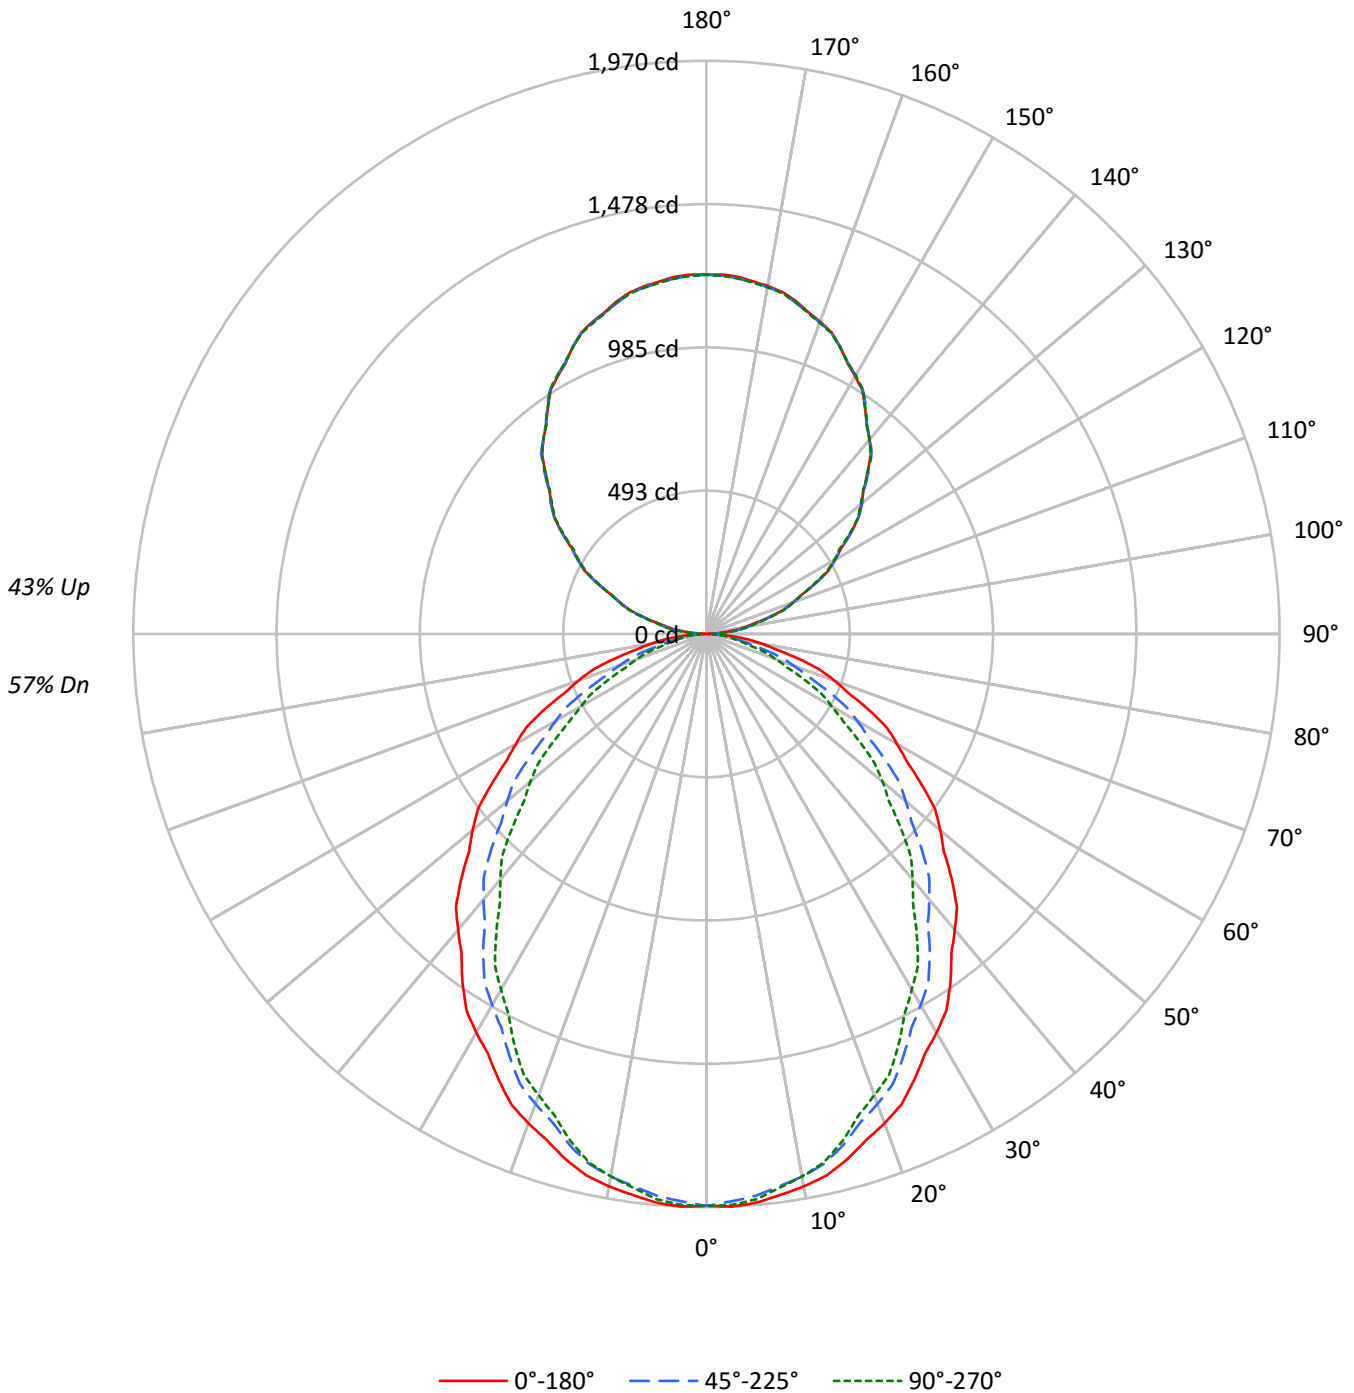



TEST NUMBER: P333106-830

CATALOG NUMBER: S124RDIW-S1195D1050U830-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	63	63	63	57
1	100	95	92	88	93	89	86	83	77	75	72	66	64	63	56	55	53	49
2	91	84	78	73	85	78	73	68	68	64	60	58	55	53	49	47	45	41
3	83	74	67	61	77	69	63	57	60	55	51	52	48	45	44	41	39	35
4	76	66	58	52	71	61	54	49	54	48	44	46	42	39	40	36	34	30
5	70	59	50	44	65	55	48	42	48	42	38	42	37	34	36	32	30	27
6	65	53	45	39	60	49	42	37	43	38	33	38	33	30	33	29	26	24
7	60	48	40	34	56	45	38	33	40	34	29	35	30	26	30	26	23	21
8	56	43	36	30	52	41	34	29	36	30	26	32	27	24	27	24	21	19
9	52	40	32	27	48	37	31	26	33	28	24	29	25	21	25	22	19	17
10	49	36	29	24	45	34	28	23	31	25	21	27	23	19	24	20	17	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	15868	15868	15868
5°	15904	15709	15807
10°	15805	15521	15521
15°	15623	15195	15082
20°	15374	14766	14495
25°	15055	14264	13903
30°	14746	13736	13160
35°	14402	13186	12415
40°	13990	12562	11610
45°	13609	11942	10791
50°	13175	11228	9923
55°	12711	10486	8981
60°	12198	9671	8018
65°	11731	8653	7072
70°	11049	7532	6005
75°	10187	6245	4885
80°	8884	4761	4477
85°	7521	4326	4039



TEST NUMBER: P333106-830

CATALOG NUMBER: S124RDIW-S1195D1050U830-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	184.6	2.3
10°-20°	514.9	6.5
20°-30°	743.5	9.3
30°-40°	842.8	10.6
40°-50°	813.8	10.2
50°-60°	676.7	8.5
60°-70°	467.3	5.9
70°-80°	236.9	3.0
80°-90°	64.5	0.8
90°-100°	81.4	1.0
100°-110°	241.2	3.0
110°-120°	409.4	5.1
120°-130°	539.9	6.8
130°-140°	606.3	7.6
140°-150°	595.8	7.5
150°-160°	501.1	6.3
160°-170°	333.4	4.2
170°-180°	116.7	1.5
0°-30°	1443.1	18.1
0°-40°	2285.8	28.7
0°-60°	3776.4	47.4
0°-90°	4545.1	57.0
90°-120°	732.1	9.2
90°-150°	2474.1	31.0
90°-180°	3425.0	43.0
0°-180°	7970.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1966	1966	1966	1966	1966	
5°	1963	1956	1938	1953	1951	186
15°	1869	1854	1818	1815	1805	526
25°	1690	1661	1601	1576	1561	778
35°	1461	1412	1338	1288	1260	913
45°	1192	1134	1046	975	945	919
55°	903	841	745	669	638	807
65°	614	548	453	391	370	606
75°	327	270	200	167	157	345
85°	81	53	47	44	44	91
90°	3	13	21	27	29	7
95°	57	66	73	75	75	64
105°	222	224	227	230	233	236
115°	416	416	414	413	412	410
125°	606	606	605	603	602	540
135°	782	787	788	786	783	605
145°	950	954	955	954	951	594
155°	1088	1088	1088	1091	1088	501
165°	1185	1182	1180	1185	1182	334
175°	1233	1228	1227	1233	1227	117
180°	1235	1235	1235	1235	1235	



TEST NUMBER: P333106-830

CATALOG NUMBER: S124RDIW-S1195D1050U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1965.6	1965.6	1965.6	1965.6	1965.6	1965.6	1965.6	1965.6	1965.6	1965.6	1965.6
2.5°	1970.4	1969.3	1968.3	1967.2	1966.1	1964.2	1961.2	1958.2	1955.3	1952.4	1955.3
5°	1962.6	1961.2	1959.9	1958.6	1957.3	1954.6	1950.6	1946.5	1942.6	1938.5	1941.8
7.5°	1944.8	1943.4	1942.0	1940.6	1939.2	1935.9	1930.7	1925.5	1920.2	1915.1	1917.2
10°	1928.0	1926.3	1924.7	1923.0	1921.3	1917.4	1911.5	1905.4	1899.4	1893.4	1894.7
12.5°	1906.3	1904.4	1902.4	1900.4	1898.6	1894.0	1887.0	1879.9	1872.7	1865.7	1866.5
15°	1869.3	1866.2	1863.3	1860.3	1857.3	1851.5	1843.2	1834.8	1826.5	1818.1	1817.4
17.5°	1824.5	1820.0	1815.7	1811.4	1807.0	1799.9	1789.8	1779.8	1769.7	1759.7	1757.8
20°	1789.5	1785.2	1780.8	1776.5	1772.2	1764.3	1752.9	1741.5	1730.1	1718.8	1716.1
22.5°	1751.0	1746.2	1741.3	1736.4	1731.5	1723.0	1710.7	1698.6	1686.4	1674.2	1670.2
25°	1690.2	1684.1	1678.1	1672.2	1666.1	1656.2	1642.6	1628.8	1615.1	1601.4	1595.7
27.5°	1626.4	1618.8	1611.3	1603.7	1596.1	1585.1	1570.4	1555.8	1541.1	1526.4	1519.4
30°	1581.9	1573.5	1565.1	1556.7	1548.4	1536.3	1520.6	1504.9	1489.2	1473.5	1465.1
32.5°	1534.8	1525.4	1516.0	1506.6	1497.1	1484.3	1468.0	1451.8	1435.5	1419.3	1409.6
35°	1461.4	1450.7	1440.0	1429.3	1418.6	1404.9	1388.2	1371.5	1354.7	1338.0	1326.6
37.5°	1382.9	1371.8	1360.7	1349.7	1338.7	1323.9	1305.4	1286.9	1268.4	1249.8	1237.1
40°	1327.5	1316.4	1305.4	1294.4	1283.3	1268.3	1249.2	1230.1	1211.1	1192.0	1178.0
42.5°	1274.5	1262.9	1251.3	1239.7	1228.2	1212.5	1192.6	1172.7	1152.9	1133.0	1118.7
45°	1192.0	1179.6	1167.2	1154.9	1142.6	1126.2	1106.3	1086.2	1066.1	1046.0	1029.6
47.5°	1106.8	1094.0	1081.3	1068.5	1055.7	1038.9	1018.0	997.1	976.3	955.5	938.4
50°	1049.0	1035.9	1022.9	1009.9	996.8	979.6	958.2	936.8	915.4	894.0	877.3
52.5°	990.0	977.2	964.5	951.7	939.0	921.5	899.7	877.7	855.7	833.8	816.8
55°	903.1	889.7	876.3	862.9	849.5	832.0	810.2	788.5	766.8	745.0	727.6
57.5°	816.9	803.0	789.1	775.2	761.3	743.7	722.3	700.8	679.4	658.0	640.4
60°	755.5	742.2	728.8	715.4	702.0	684.7	663.3	641.9	620.4	599.0	581.6
62.5°	700.1	686.3	672.3	658.5	644.5	626.6	604.6	582.7	560.7	538.9	522.7
65°	614.1	599.6	585.3	570.9	556.6	538.7	517.3	495.9	474.5	453.0	438.7
67.5°	524.6	510.9	497.1	483.3	469.6	452.7	432.8	413.0	393.1	373.2	360.9
70°	468.1	454.0	440.0	425.9	411.9	395.3	376.3	357.2	338.2	319.1	308.0
72.5°	407.8	395.2	382.5	369.8	357.0	341.7	323.7	305.7	287.7	269.7	260.2
75°	326.6	314.2	301.8	289.5	277.1	263.1	247.3	231.6	215.9	200.2	192.5
77.5°	244.1	233.7	223.1	212.6	202.1	190.5	177.8	165.1	152.4	139.7	135.2
80°	191.1	181.4	171.7	162.0	152.3	142.5	132.4	122.4	112.4	102.4	101.3
82.5°	145.4	136.5	127.6	118.7	109.8	102.5	96.7	91.0	85.2	79.5	78.7
85°	81.2	74.6	67.9	61.2	54.5	50.7	49.7	48.6	47.7	46.7	46.0
87.5°	28.3	26.6	24.9	23.3	21.6	20.7	20.8	20.9	21.0	21.0	21.0
90°	2.8	5.2	7.5	9.9	12.2	14.2	15.9	17.6	19.3	21.0	22.2
92.5°	20.5	23.1	25.8	28.5	31.1	33.1	34.2	35.4	36.7	37.8	38.5
95°	57.3	59.2	61.1	63.1	64.9	66.6	68.1	69.6	71.1	72.6	73.2
97.5°	100.1	101.6	103.1	104.6	106.2	107.8	109.5	111.3	113.0	114.8	115.6
100°	133.7	134.5	135.3	136.2	137.0	138.5	140.3	142.2	144.2	146.1	146.5
102.5°	168.8	169.2	169.5	169.8	170.1	171.2	173.0	174.7	176.4	178.1	178.8
105°	222.4	222.7	222.9	223.1	223.3	223.9	224.7	225.6	226.4	227.2	227.9
107.5°	278.8	279.1	279.3	279.6	279.8	280.0	280.1	280.3	280.4	280.5	281.2
110°	317.0	317.4	317.8	318.3	318.7	318.8	318.8	318.4	318.2	317.9	317.5



TEST NUMBER: P333106-830

CATALOG NUMBER: S124RDIW-S1195D1050U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	356.8	356.8	356.9	356.9	357.0	356.9	356.6	356.2	355.8	355.4	355.3
115°	416.3	416.3	416.3	416.3	416.3	416.1	415.7	415.3	414.8	414.4	414.2
117.5°	472.5	472.6	472.8	473.0	473.2	473.1	472.8	472.5	472.2	471.8	471.2
120°	509.9	510.8	511.6	512.5	513.3	513.4	512.7	512.1	511.5	510.9	509.8
122.5°	548.8	549.2	549.5	549.9	550.2	550.3	549.9	549.6	549.3	549.0	548.3
125°	606.3	606.3	606.3	606.3	606.3	606.2	606.0	605.8	605.6	605.4	604.9
127.5°	658.5	659.1	659.7	660.3	661.0	661.2	660.8	660.4	660.2	659.8	659.4
130°	695.1	695.8	696.4	697.0	697.7	698.0	698.0	698.0	698.0	698.0	697.6
132.5°	732.5	733.0	733.5	734.0	734.4	734.5	734.4	734.2	734.1	733.9	733.5
135°	782.0	783.3	784.6	785.8	787.1	787.8	787.8	787.8	787.8	787.8	787.3
137.5°	835.8	836.4	837.1	837.6	838.2	838.7	839.1	839.4	839.7	840.1	839.5
140°	871.8	872.2	872.6	873.1	873.5	873.6	873.6	873.6	873.6	873.6	873.5
142.5°	904.7	905.0	905.5	905.9	906.3	906.4	906.3	906.1	906.0	905.8	905.7
145°	950.1	950.9	951.8	952.6	953.5	953.9	954.2	954.4	954.6	954.8	954.6
147.5°	995.1	996.2	997.2	998.2	999.2	999.7	999.5	999.3	999.1	998.9	998.8
150°	1022.7	1023.5	1024.4	1025.2	1026.1	1026.4	1026.4	1026.4	1026.4	1026.4	1026.4
152.5°	1048.6	1049.1	1049.6	1050.1	1050.7	1050.9	1051.1	1051.3	1051.5	1051.7	1052.2
155°	1088.5	1088.5	1088.5	1088.5	1088.5	1088.4	1088.2	1088.0	1087.8	1087.6	1088.4
157.5°	1122.1	1121.7	1121.3	1121.0	1120.6	1120.4	1120.3	1120.3	1120.2	1120.2	1120.9
160°	1142.0	1141.8	1141.5	1141.3	1141.1	1140.9	1140.7	1140.5	1140.3	1140.1	1140.7
162.5°	1160.3	1159.8	1159.2	1158.7	1158.1	1157.7	1157.5	1157.3	1157.1	1156.9	1158.0
165°	1185.0	1184.3	1183.6	1183.1	1182.4	1181.9	1181.5	1181.0	1180.6	1180.2	1181.5
167.5°	1203.8	1203.0	1202.1	1201.2	1200.3	1199.9	1200.0	1200.0	1200.0	1200.0	1201.3
170°	1214.6	1213.5	1212.4	1211.4	1210.3	1209.8	1210.1	1210.3	1210.5	1210.7	1212.0
172.5°	1222.2	1221.3	1220.4	1219.6	1218.6	1218.2	1218.2	1218.3	1218.3	1218.3	1219.8
175°	1232.7	1231.6	1230.6	1229.5	1228.4	1227.9	1227.6	1227.4	1227.2	1227.0	1228.4
177.5°	1236.1	1235.3	1234.4	1233.6	1232.8	1232.3	1232.3	1232.3	1232.3	1232.3	1233.5
180°	1234.6	1234.6	1234.6	1234.6	1234.6	1234.6	1234.6	1234.6	1234.6	1234.6	1234.6



TEST NUMBER: P333106-830

CATALOG NUMBER: S124RDIW-S1195D1050U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1965.6	1965.6	1965.6	1965.6	1965.6	1965.6	1965.6	1965.6
2.5°	1958.2	1961.2	1964.2	1965.5	1965.2	1964.9	1964.6	1964.4
5°	1945.2	1948.5	1951.9	1953.2	1952.6	1951.9	1951.3	1950.6
7.5°	1919.3	1921.5	1923.6	1924.1	1923.1	1922.0	1920.9	1919.9
10°	1896.0	1897.3	1898.8	1898.8	1897.3	1896.0	1894.7	1893.4
12.5°	1867.3	1868.1	1868.9	1868.3	1866.5	1864.6	1862.7	1860.9
15°	1816.8	1816.1	1815.4	1813.9	1811.6	1809.2	1806.9	1804.6
17.5°	1756.0	1754.1	1752.2	1749.5	1746.0	1742.4	1738.9	1735.3
20°	1713.4	1710.7	1708.1	1704.6	1700.3	1695.9	1691.5	1687.2
22.5°	1666.2	1662.2	1658.2	1654.4	1650.9	1647.3	1643.8	1640.2
25°	1590.0	1584.3	1578.7	1574.1	1570.7	1567.4	1564.1	1560.8
27.5°	1512.4	1505.3	1498.4	1492.4	1487.6	1482.8	1478.0	1473.2
30°	1456.7	1448.4	1440.0	1433.1	1427.8	1422.5	1417.1	1411.7
32.5°	1399.9	1390.2	1380.4	1373.1	1368.0	1362.9	1357.8	1352.7
35°	1315.2	1303.9	1292.5	1283.8	1277.8	1271.8	1265.7	1259.7
37.5°	1224.4	1211.6	1199.0	1189.6	1183.6	1177.5	1171.6	1165.5
40°	1163.9	1149.9	1135.9	1125.8	1119.7	1113.7	1107.8	1101.7
42.5°	1104.4	1090.1	1075.7	1065.5	1059.1	1052.9	1046.6	1040.3
45°	1013.2	996.8	980.4	969.2	963.3	957.2	951.2	945.2
47.5°	921.4	904.5	887.5	875.6	869.0	862.4	855.7	849.1
50°	860.5	843.9	827.1	815.6	809.3	802.9	796.5	790.1
52.5°	799.8	782.9	765.8	754.0	747.4	740.8	734.1	727.5
55°	710.2	692.9	675.4	663.5	657.2	650.8	644.5	638.1
57.5°	622.7	605.0	587.4	576.2	571.4	566.5	561.7	556.9
60°	564.2	546.9	529.4	518.1	512.7	507.4	502.0	496.6
62.5°	506.7	490.7	474.6	464.4	460.1	455.9	451.6	447.3
65°	424.2	409.9	395.5	386.3	382.3	378.2	374.3	370.2
67.5°	348.6	336.1	323.8	315.4	310.9	306.5	302.1	297.7
70°	297.0	286.0	274.9	267.8	264.4	261.1	257.7	254.4
72.5°	250.8	241.4	232.0	225.7	222.6	219.6	216.5	213.4
75°	184.8	177.1	169.4	164.6	162.6	160.5	158.5	156.6
77.5°	130.7	126.2	121.8	119.2	118.6	118.0	117.4	116.8
80°	100.4	99.3	98.3	97.6	97.4	97.0	96.7	96.3
82.5°	78.0	77.3	76.5	76.0	75.7	75.3	75.0	74.6
85°	45.3	44.7	44.0	43.6	43.6	43.6	43.6	43.6
87.5°	21.0	21.0	21.0	21.2	21.5	21.9	22.2	22.6
90°	23.6	24.8	26.1	27.0	27.3	27.8	28.2	28.7
92.5°	39.3	40.1	40.9	41.4	41.7	41.8	42.1	42.4
95°	73.8	74.5	75.1	75.4	75.4	75.4	75.4	75.4
97.5°	116.3	117.1	117.8	118.2	118.2	118.2	118.2	118.2
100°	146.9	147.3	147.8	148.0	148.0	148.0	148.0	148.0
102.5°	179.4	179.9	180.6	181.0	181.1	181.3	181.4	181.6
105°	228.6	229.1	229.8	230.5	231.1	231.7	232.3	233.0
107.5°	281.7	282.3	283.0	283.1	283.1	283.1	283.0	283.0
110°	317.1	316.7	316.2	316.4	317.0	317.6	318.3	319.0



TEST NUMBER: P333106-830

CATALOG NUMBER: S124RDIW-S1195D1050U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	355.2	355.2	355.1	355.1	355.2	355.3	355.4	355.6
115°	414.0	413.8	413.6	413.3	413.1	412.9	412.7	412.5
117.5°	470.4	469.7	469.0	468.4	468.0	467.6	467.1	466.7
120°	508.7	507.7	506.6	506.2	506.7	507.1	507.6	507.9
122.5°	547.6	546.9	546.1	545.4	544.6	543.8	543.1	542.3
125°	604.5	604.1	603.7	603.2	602.9	602.4	602.0	601.5
127.5°	658.9	658.6	658.1	657.7	657.3	657.0	656.7	656.4
130°	697.1	696.7	696.3	695.7	694.8	694.0	693.1	692.3
132.5°	733.0	732.6	732.2	731.8	731.5	731.1	730.8	730.5
135°	786.9	786.5	786.1	785.5	784.9	784.2	783.6	783.0
137.5°	839.0	838.4	837.8	837.6	837.7	837.9	838.0	838.1
140°	873.3	873.1	872.8	872.6	872.4	872.2	871.9	871.8
142.5°	905.7	905.6	905.6	905.5	905.5	905.5	905.4	905.4
145°	954.4	954.2	953.9	953.6	952.9	952.3	951.7	951.0
147.5°	998.6	998.4	998.2	998.1	997.9	997.7	997.4	997.2
150°	1026.4	1026.4	1026.4	1026.3	1026.1	1026.0	1025.7	1025.5
152.5°	1052.6	1053.2	1053.7	1053.7	1053.1	1052.5	1052.0	1051.5
155°	1089.3	1090.1	1091.0	1091.0	1090.1	1089.3	1088.4	1087.6
157.5°	1121.5	1122.1	1122.8	1122.8	1122.0	1121.2	1120.6	1119.8
160°	1141.3	1142.0	1142.6	1142.4	1141.3	1140.3	1139.3	1138.1
162.5°	1159.1	1160.3	1161.5	1161.5	1160.5	1159.4	1158.3	1157.3
165°	1182.7	1184.0	1185.2	1185.4	1184.6	1183.7	1182.9	1182.0
167.5°	1202.6	1203.8	1205.1	1205.1	1203.8	1202.5	1201.2	1199.9
170°	1213.2	1214.6	1215.8	1215.7	1214.3	1212.8	1211.3	1209.8
172.5°	1221.3	1222.7	1224.2	1224.1	1222.7	1221.2	1219.7	1218.1
175°	1229.9	1231.4	1232.9	1232.9	1231.4	1229.9	1228.4	1227.0
177.5°	1234.7	1235.9	1237.1	1237.0	1235.6	1234.3	1232.9	1231.5
180°	1234.6	1234.6	1234.6	1234.6	1234.6	1234.6	1234.6	1234.6

(END OF REPORT)