

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333072-830

Luminaire Tested: **S124RDIW-S795D1560U830-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333072-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124RDIW-S795D1560U830-4F0-1E-UDD-A1  
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 795 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 1560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8248.8 lumens  
Efficiency: N/A  
Efficacy: 121.1 lumens/watt  
Spacing Criteria (0/90/45): 1.28 / 1.23 / 1.39  
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 68.1  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333072-830

CATALOG NUMBER: S124RDIW-S795D1560U830-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

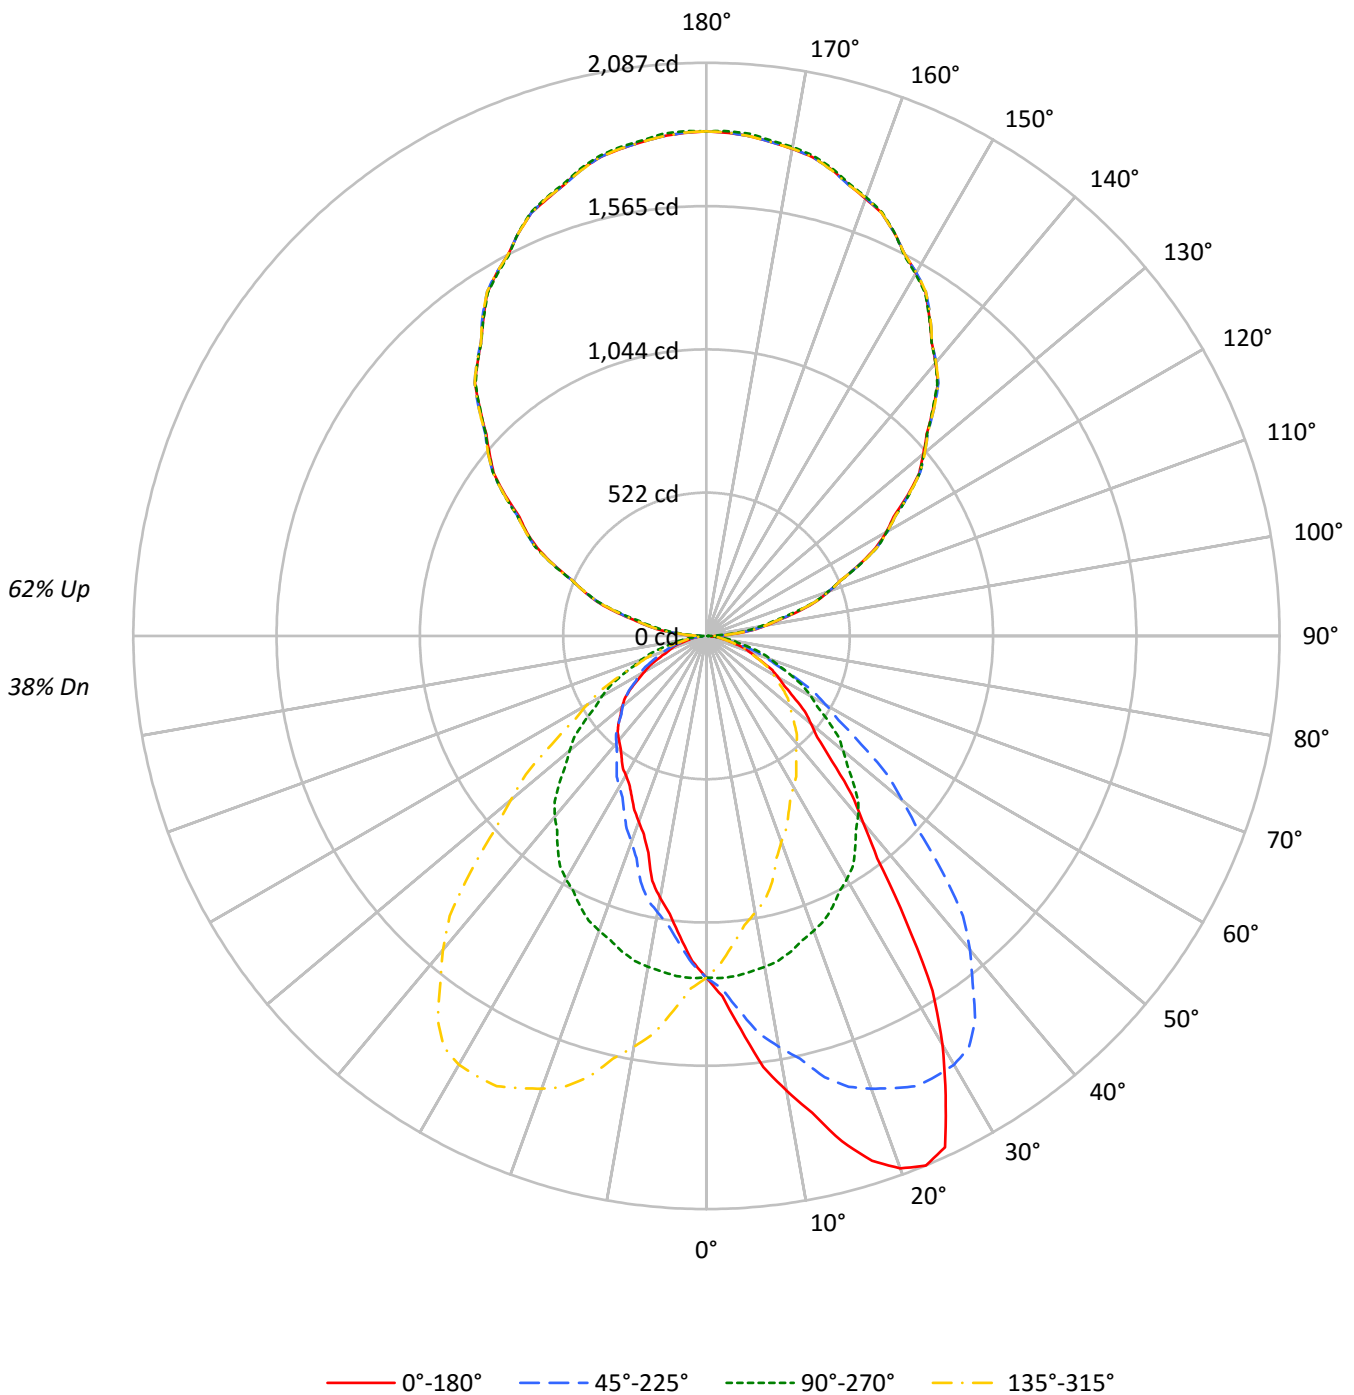



TEST NUMBER: P333072-830

CATALOG NUMBER: S124RDIW-S795D1560U830-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	95	95	95	95	77	77	77	60	60	60	45	45	45	38
1	95	91	88	84	87	83	80	77	68	66	64	54	52	51	41	40	39	33
2	87	80	74	69	79	73	68	64	60	56	53	47	45	43	36	35	33	28
3	80	71	64	58	72	65	59	54	53	49	45	42	39	37	32	30	29	24
4	73	63	55	49	66	57	51	46	47	42	39	38	34	32	29	27	25	21
5	67	56	48	42	61	51	44	39	42	37	33	34	30	28	26	24	22	18
6	62	50	42	37	56	46	39	34	38	33	29	31	27	24	24	21	19	16
7	57	45	38	32	52	42	35	30	35	29	26	28	24	21	22	19	17	15
8	53	41	34	28	48	38	31	27	32	26	23	26	22	19	20	17	16	13
9	49	37	30	25	45	35	28	24	29	24	20	24	20	17	19	16	14	12
10	46	34	27	23	42	32	25	21	27	22	18	22	18	16	17	15	13	11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	10044	10044	10044	10044
5°	11651	10075	8904	10075
10°	13782	10030	7947	10030
15°	15921	9937	6829	9937
20°	17725	9810	6176	9810
25°	18299	9685	5734	9685
30°	16018	9533	5466	9533
35°	12470	9307	5306	9307
40°	9351	9049	5220	9049
45°	7383	8636	5174	8636
50°	6232	8160	5024	8160
55°	5433	7633	4756	7633
60°	4887	7090	4209	7090
65°	4309	6502	3620	6502
70°	3880	5894	3267	5894
75°	3250	5221	2785	5221
80°	2752	4454	2613	4454
85°	2325	3483	2325	3483



TEST NUMBER: P333072-830

CATALOG NUMBER: S124RDIW-S795D1560U830-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	120.6	1.5
10°-20°	363.6	4.4
20°-30°	568.8	6.9
30°-40°	632.3	7.7
40°-50°	561.0	6.8
50°-60°	437.1	5.3
60°-70°	286.2	3.5
70°-80°	140.7	1.7
80°-90°	40.2	0.5
90°-100°	121.2	1.5
100°-110°	359.1	4.4
110°-120°	609.4	7.4
120°-130°	803.6	9.7
130°-140°	902.4	10.9
140°-150°	886.8	10.8
150°-160°	745.9	9.0
160°-170°	496.2	6.0
170°-180°	173.8	2.1
0°-30°	1052.9	12.8
0°-40°	1685.2	20.4
0°-60°	2683.3	32.5
0°-90°	3150.5	38.2
90°-120°	1089.7	13.2
90°-150°	3682.5	44.6
90°-180°	5098.0	61.8
0°-180°	8248.8	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1244	1244	1244	1244	1244	
5°	1438	1243	1099	1243	1438	145
15°	1905	1189	817	1189	1905	542
25°	2054	1087	644	1087	2054	911
35°	1265	944	538	944	1265	793
45°	647	756	453	756	647	512
55°	386	542	338	542	386	351
65°	226	340	190	340	226	227
75°	104	167	89	167	104	115
85°	25	38	25	38	25	29
90°	43	4	43	4	43	23
95°	112	85	112	85	112	117
105°	347	331	347	331	347	365
115°	614	620	614	620	614	607
125°	895	902	895	902	895	799
135°	1165	1164	1165	1164	1165	900
145°	1416	1414	1416	1414	1416	886
155°	1619	1620	1619	1620	1619	745
165°	1759	1764	1759	1764	1759	495
175°	1826	1835	1826	1835	1826	173
180°	1838	1838	1838	1838	1838	



TEST NUMBER: P333072-830

CATALOG NUMBER: S124RDIW-S795D1560U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2
2.5°	1312.3	1316.0	1312.3	1311.9	1308.0	1306.7	1305.1	1300.0	1290.2	1284.7	1285.9
5°	1437.7	1450.2	1443.2	1442.2	1431.2	1420.1	1413.1	1397.0	1380.0	1368.5	1359.0
7.5°	1582.6	1589.9	1585.5	1578.4	1560.6	1550.5	1534.2	1513.1	1482.5	1459.2	1437.8
10°	1681.3	1687.3	1685.3	1672.3	1659.3	1632.7	1617.6	1588.1	1549.4	1518.9	1490.3
12.5°	1778.3	1784.8	1767.1	1767.7	1743.0	1722.1	1698.3	1661.0	1616.5	1577.1	1541.2
15°	1904.9	1896.9	1896.9	1886.8	1859.3	1830.1	1805.6	1766.5	1710.3	1663.2	1613.6
17.5°	2003.9	2006.7	2002.6	1979.0	1957.3	1927.2	1882.2	1836.5	1784.4	1721.2	1670.5
20°	2063.2	2063.2	2058.8	2042.7	2014.7	1982.5	1933.9	1884.3	1818.2	1754.4	1697.3
22.5°	2087.4	2089.0	2083.6	2070.4	2045.1	2013.8	1972.5	1922.0	1853.8	1782.2	1711.4
25°	2054.3	2063.8	2064.7	2061.2	2053.7	2034.7	1999.1	1947.5	1886.3	1808.6	1732.4
27.5°	1886.0	1898.0	1908.6	1925.9	1949.0	1961.0	1962.6	1936.4	1883.0	1808.2	1731.5
30°	1718.3	1728.4	1761.0	1803.6	1836.7	1866.8	1892.8	1899.9	1869.8	1802.6	1721.9
32.5°	1532.3	1546.0	1578.6	1624.4	1679.5	1730.4	1788.9	1818.8	1818.1	1777.7	1703.1
35°	1265.3	1275.3	1305.3	1353.5	1419.7	1495.3	1588.1	1660.2	1709.4	1705.8	1660.2
37.5°	1020.4	1031.7	1062.2	1102.0	1166.2	1259.9	1349.6	1449.1	1539.9	1590.9	1575.7
40°	887.3	887.8	917.4	958.5	1018.6	1100.3	1198.1	1308.3	1409.6	1492.3	1508.4
42.5°	782.2	782.3	801.8	846.1	889.5	966.4	1059.7	1169.2	1287.7	1383.3	1425.8
45°	646.7	651.2	667.2	693.8	727.8	793.1	867.7	969.5	1102.3	1215.6	1286.3
47.5°	547.6	554.2	564.4	586.1	613.2	656.7	718.4	809.8	917.9	1042.5	1143.1
50°	496.2	497.3	510.3	522.4	545.9	580.5	634.6	710.8	810.0	929.9	1041.7
52.5°	452.1	451.9	459.8	475.0	494.2	521.1	564.9	634.2	722.3	829.6	945.0
55°	386.0	388.5	394.5	406.5	421.0	440.2	474.7	526.9	596.1	687.8	792.5
57.5°	335.6	337.0	341.7	346.8	360.1	374.0	399.9	436.1	494.5	569.6	667.2
60°	302.7	303.3	304.8	312.3	322.8	335.8	353.4	384.0	433.1	501.8	579.0
62.5°	270.7	271.5	273.9	279.4	287.6	296.5	314.9	339.5	380.1	438.8	508.4
65°	225.6	226.1	229.6	231.6	238.1	246.1	259.7	276.2	304.3	353.4	406.0
67.5°	188.5	188.5	188.7	191.4	195.9	201.2	209.3	222.5	243.7	273.9	320.3
70°	164.4	164.4	165.4	166.9	169.5	173.9	178.4	188.5	204.1	228.6	264.2
72.5°	141.9	142.3	143.4	143.6	145.0	148.6	152.0	158.4	169.9	188.5	217.3
75°	104.2	105.8	108.3	110.3	112.8	112.3	115.8	119.8	123.3	134.3	150.9
77.5°	77.6	76.8	77.1	78.8	79.1	79.6	82.1	85.2	87.8	93.0	99.0
80°	59.2	59.2	60.7	61.2	60.7	61.2	63.6	65.1	66.2	68.1	73.7
82.5°	44.7	45.5	45.1	45.5	45.8	46.3	48.4	48.7	49.8	50.5	52.9
85°	25.1	25.5	26.1	25.1	25.1	25.1	26.1	26.6	27.6	27.1	28.1
87.5°	17.3	16.8	17.1	17.0	17.2	16.6	16.6	17.1	15.8	15.8	15.4
90°	42.6	42.0	41.4	40.7	40.2	38.8	36.9	35.1	33.2	31.3	28.7
92.5°	63.1	62.7	62.3	61.9	61.5	60.8	59.7	58.5	57.4	56.3	54.5
95°	112.3	112.3	112.3	112.3	112.3	111.8	110.8	109.9	109.0	108.0	105.8
97.5°	176.0	176.0	176.0	176.0	176.0	175.4	174.3	173.1	171.9	170.8	168.2
100°	220.3	220.3	220.3	220.3	220.3	220.0	219.3	218.7	218.1	217.4	214.6
102.5°	270.3	270.0	269.8	269.6	269.3	268.7	267.9	266.9	266.1	265.2	262.6
105°	346.8	345.8	344.9	343.9	343.0	342.0	341.1	340.2	339.2	338.3	337.0
107.5°	421.2	421.3	421.4	421.4	421.5	421.1	420.2	419.3	418.4	417.5	417.4
110°	474.7	473.7	472.8	471.8	470.9	470.7	471.4	472.0	472.6	473.3	473.5



TEST NUMBER: P333072-830

CATALOG NUMBER: S124RDIW-S795D1560U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	529.2	529.0	528.9	528.7	528.5	528.5	528.6	528.7	528.9	529.0	529.5
115°	614.0	614.3	614.6	614.9	615.2	615.6	615.9	616.1	616.5	616.8	617.5
117.5°	694.7	695.3	696.0	696.5	697.2	698.0	699.2	700.2	701.3	702.4	702.8
120°	756.1	755.4	754.8	754.2	753.6	754.0	755.6	757.1	758.7	760.3	761.3
122.5°	807.3	808.4	809.5	810.7	811.8	812.9	814.0	815.0	816.1	817.2	817.7
125°	895.3	896.0	896.6	897.2	897.9	898.5	899.2	899.8	900.4	901.1	901.4
127.5°	976.9	977.4	978.0	978.5	978.9	979.5	980.1	980.8	981.4	982.0	982.6
130°	1030.4	1031.6	1032.9	1034.2	1035.4	1036.3	1037.0	1037.6	1038.3	1038.9	1038.9
132.5°	1087.2	1087.7	1088.3	1088.7	1089.2	1089.8	1090.4	1091.1	1091.7	1092.3	1092.6
135°	1165.4	1166.3	1167.2	1168.2	1169.1	1170.0	1170.6	1171.2	1171.9	1172.5	1172.5
137.5°	1247.5	1247.4	1247.2	1247.0	1246.8	1247.1	1247.9	1248.8	1249.5	1250.4	1249.9
140°	1297.6	1297.9	1298.2	1298.5	1298.8	1299.1	1299.5	1299.8	1300.0	1300.4	1300.4
142.5°	1347.6	1347.6	1347.7	1347.7	1347.8	1347.9	1347.9	1348.0	1348.1	1348.1	1348.4
145°	1415.5	1416.5	1417.4	1418.3	1419.3	1419.9	1420.2	1420.6	1420.9	1421.2	1420.9
147.5°	1484.3	1484.6	1485.0	1485.3	1485.5	1485.8	1486.1	1486.4	1486.6	1486.9	1487.1
150°	1526.4	1526.7	1527.0	1527.3	1527.7	1527.8	1527.8	1527.8	1527.8	1527.8	1527.8
152.5°	1565.0	1565.8	1566.7	1567.4	1568.3	1568.3	1567.5	1566.8	1566.0	1565.3	1565.1
155°	1618.7	1620.0	1621.3	1622.5	1623.8	1623.8	1622.5	1621.3	1620.0	1618.7	1619.1
157.5°	1666.8	1667.8	1669.0	1670.0	1671.0	1671.1	1670.2	1669.2	1668.3	1667.4	1667.5
160°	1694.0	1695.6	1697.2	1698.8	1700.3	1700.7	1699.8	1698.8	1697.9	1697.0	1697.2
162.5°	1722.5	1724.1	1725.7	1727.2	1728.8	1728.7	1727.0	1725.3	1723.6	1721.9	1722.2
165°	1759.4	1760.7	1762.0	1763.2	1764.5	1764.2	1762.3	1760.4	1758.5	1756.6	1757.3
167.5°	1785.8	1787.8	1789.8	1791.8	1793.8	1793.8	1791.9	1790.0	1788.1	1786.2	1786.1
170°	1800.6	1802.9	1805.1	1807.3	1809.5	1809.7	1807.8	1805.9	1803.9	1802.0	1801.8
172.5°	1813.2	1815.3	1817.6	1819.8	1822.0	1822.0	1819.9	1817.8	1815.6	1813.5	1813.4
175°	1826.3	1828.4	1830.7	1832.9	1835.1	1835.1	1832.9	1830.7	1828.4	1826.3	1826.6
177.5°	1833.1	1835.1	1837.1	1839.1	1841.2	1841.3	1839.5	1837.8	1836.0	1834.2	1834.2
180°	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6



TEST NUMBER: P333072-830

CATALOG NUMBER: S124RDIW-S795D1560U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2
2.5°	1281.9	1276.3	1273.5	1267.1	1259.4	1255.4	1251.8	1246.6	1239.7	1232.6	1227.3
5°	1346.9	1334.9	1319.8	1301.8	1285.8	1270.3	1256.7	1243.2	1227.7	1211.5	1195.5
7.5°	1413.7	1390.1	1364.5	1334.9	1306.2	1280.0	1255.9	1232.8	1206.7	1183.5	1162.2
10°	1460.2	1428.1	1392.5	1355.0	1317.4	1284.8	1252.7	1223.6	1191.6	1163.0	1138.9
12.5°	1497.9	1460.2	1417.4	1370.6	1325.4	1286.0	1249.1	1211.2	1174.7	1143.7	1111.6
15°	1560.5	1508.8	1451.2	1395.1	1336.4	1282.8	1233.1	1189.0	1147.5	1103.8	1073.3
17.5°	1603.5	1542.2	1472.2	1404.7	1335.4	1272.1	1214.9	1162.3	1114.4	1069.8	1033.4
20°	1629.2	1561.5	1483.8	1407.1	1329.4	1261.7	1200.0	1141.9	1092.3	1044.1	1006.5
22.5°	1643.6	1568.7	1483.8	1403.4	1323.0	1249.7	1182.0	1121.4	1067.4	1019.3	977.7
25°	1648.2	1568.0	1481.3	1389.0	1300.8	1223.1	1152.9	1087.3	1027.1	979.0	934.9
27.5°	1641.8	1547.4	1458.5	1363.9	1272.8	1190.9	1117.3	1048.3	988.1	936.4	891.2
30°	1632.2	1530.9	1435.7	1337.4	1245.2	1166.5	1088.7	1022.6	960.0	906.3	860.7
32.5°	1611.3	1510.9	1408.3	1307.8	1214.3	1133.2	1059.5	993.0	931.5	876.7	828.2
35°	1570.0	1468.3	1357.0	1253.7	1162.0	1077.7	1008.6	944.4	885.8	827.1	776.0
37.5°	1515.6	1411.6	1300.9	1187.8	1096.0	1016.5	953.0	892.8	835.6	782.0	725.4
40°	1464.2	1369.5	1255.2	1142.9	1048.7	971.9	913.3	858.7	801.1	747.9	691.3
42.5°	1402.0	1321.4	1205.9	1093.2	1000.1	926.2	871.7	818.2	765.7	714.3	655.2
45°	1298.4	1237.2	1128.9	1020.6	926.9	853.7	803.5	756.4	710.3	661.2	605.6
47.5°	1179.4	1138.0	1044.5	933.7	847.0	781.1	732.6	694.2	655.2	606.1	557.2
50°	1096.8	1070.3	980.0	878.7	796.1	735.4	685.8	649.7	617.1	570.0	526.3
52.5°	1008.6	994.5	918.2	821.4	741.5	682.0	639.6	607.2	574.2	535.1	494.3
55°	874.2	881.7	817.1	733.4	658.2	608.0	569.5	542.3	514.3	481.3	449.7
57.5°	736.9	764.3	721.0	647.4	576.9	530.7	501.6	478.8	455.2	427.8	400.9
60°	654.7	677.7	653.2	588.5	526.9	483.7	456.7	439.1	415.6	390.5	369.9
62.5°	574.5	599.2	584.6	532.3	475.1	438.0	414.2	397.8	380.3	358.4	337.1
65°	473.7	489.7	482.8	446.7	406.0	374.5	352.4	340.4	324.3	308.3	289.3
67.5°	362.8	393.8	389.7	370.5	335.5	310.8	296.3	285.7	271.1	259.2	246.2
70°	298.2	326.9	326.3	310.8	291.7	268.7	258.6	249.7	236.6	225.1	214.5
72.5°	244.1	270.3	274.2	262.3	249.2	231.8	222.2	215.9	203.3	195.4	186.9
75°	171.0	190.0	195.0	195.0	189.0	179.9	171.4	167.4	158.4	151.4	146.4
77.5°	112.1	124.1	132.0	133.7	134.7	131.7	124.6	121.8	114.9	112.4	107.5
80°	79.2	87.2	96.2	99.2	101.8	100.8	97.7	95.8	89.3	86.7	84.7
82.5°	54.8	59.2	66.5	73.1	72.5	75.1	72.5	70.9	66.0	65.0	63.1
85°	28.6	29.0	30.1	34.6	37.1	38.1	38.6	37.6	36.1	36.1	32.6
87.5°	14.9	13.9	14.2	13.7	13.4	14.2	14.8	14.5	13.9	13.5	13.0
90°	26.2	23.7	21.2	18.2	14.7	11.2	7.7	4.2	7.7	11.2	14.7
92.5°	52.8	51.0	49.2	46.4	42.3	38.4	34.4	30.4	34.4	38.4	42.3
95°	103.6	101.4	99.2	96.6	93.8	91.0	88.1	85.3	88.1	91.0	93.8
97.5°	165.6	163.1	160.5	158.1	155.8	153.4	151.2	148.9	151.2	153.4	155.8
100°	211.8	209.0	206.0	204.1	202.7	201.5	200.2	199.0	200.2	201.5	202.7
102.5°	260.0	257.4	254.9	253.3	252.8	252.3	251.8	251.3	251.8	252.3	252.8
105°	335.7	334.4	333.2	332.4	332.1	331.8	331.5	331.1	331.5	331.8	332.1
107.5°	417.2	417.0	416.8	416.5	416.1	415.8	415.4	415.0	415.4	415.8	416.1
110°	473.9	474.2	474.6	474.4	473.7	473.1	472.5	471.8	472.5	473.1	473.7





TEST NUMBER: P333072-830

CATALOG NUMBER: S124RDIW-S795D1560U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	530.1	530.7	531.2	531.5	531.3	531.2	531.1	530.9	531.1	531.2	531.3
115°	618.0	618.7	619.3	619.6	619.6	619.6	619.6	619.6	619.6	619.6	619.6
117.5°	703.2	703.7	704.2	704.3	704.0	703.7	703.4	703.2	703.4	703.7	704.0
120°	762.2	763.2	764.1	763.9	762.7	761.5	760.2	758.9	760.2	761.5	762.7
122.5°	818.0	818.5	819.0	818.9	818.4	817.9	817.4	816.9	817.4	817.9	818.4
125°	901.6	902.0	902.3	902.5	902.5	902.5	902.5	902.5	902.5	902.5	902.5
127.5°	983.1	983.5	984.1	983.8	982.9	981.9	981.0	980.1	981.0	981.9	982.9
130°	1038.9	1038.9	1038.9	1038.4	1037.5	1036.5	1035.6	1034.6	1035.6	1036.5	1037.5
132.5°	1092.9	1093.1	1093.3	1093.2	1092.4	1091.7	1091.1	1090.3	1091.1	1091.7	1092.4
135°	1172.5	1172.5	1172.5	1171.6	1169.7	1167.7	1165.8	1163.9	1165.8	1167.7	1169.7
137.5°	1249.3	1248.9	1248.4	1247.6	1246.8	1245.9	1245.0	1244.2	1245.0	1245.9	1246.8
140°	1300.4	1300.4	1300.4	1300.0	1299.5	1298.8	1298.2	1297.6	1298.2	1298.8	1299.5
142.5°	1348.7	1348.9	1349.2	1349.0	1348.3	1347.7	1347.1	1346.4	1347.1	1347.7	1348.3
145°	1420.6	1420.2	1419.9	1419.2	1417.9	1416.6	1415.3	1414.1	1415.3	1416.6	1417.9
147.5°	1487.3	1487.6	1487.9	1487.2	1485.7	1484.2	1482.7	1481.2	1482.7	1484.2	1485.7
150°	1527.8	1527.8	1527.8	1527.2	1525.9	1524.7	1523.3	1522.1	1523.3	1524.7	1525.9
152.5°	1564.8	1564.5	1564.3	1563.8	1563.0	1562.3	1561.5	1560.8	1561.5	1562.3	1563.0
155°	1619.4	1619.7	1620.0	1620.1	1620.1	1620.1	1620.1	1620.1	1620.1	1620.1	1620.1
157.5°	1667.5	1667.5	1667.6	1667.9	1668.5	1669.1	1669.6	1670.2	1669.6	1669.1	1668.5
160°	1697.5	1697.9	1698.2	1698.5	1698.8	1699.1	1699.4	1699.8	1699.4	1699.1	1698.8
162.5°	1722.6	1722.9	1723.2	1723.7	1724.6	1725.4	1726.3	1727.0	1726.3	1725.4	1724.6
165°	1757.8	1758.5	1759.2	1759.9	1760.9	1761.8	1762.7	1763.7	1762.7	1761.8	1760.9
167.5°	1786.0	1786.0	1785.9	1786.6	1787.9	1789.2	1790.5	1791.9	1790.5	1789.2	1787.9
170°	1801.5	1801.1	1800.8	1801.5	1803.0	1804.6	1806.2	1807.8	1806.2	1804.6	1803.0
172.5°	1813.4	1813.3	1813.2	1813.8	1815.1	1816.5	1817.8	1819.1	1817.8	1816.5	1815.1
175°	1826.8	1827.2	1827.5	1828.4	1830.0	1831.6	1833.2	1834.8	1833.2	1831.6	1830.0
177.5°	1834.2	1834.2	1834.2	1834.8	1836.1	1837.4	1838.6	1839.8	1838.6	1837.4	1836.1
180°	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6



TEST NUMBER: P333072-830

CATALOG NUMBER: S124RDIW-S795D1560U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2
2.5°	1221.7	1217.7	1212.5	1206.5	1199.3	1192.9	1190.1	1192.4	1193.6	1190.4	1190.1
5°	1184.5	1172.0	1162.0	1146.9	1134.9	1124.8	1117.9	1114.8	1115.9	1107.9	1105.8
7.5°	1142.7	1127.8	1111.4	1093.6	1076.9	1062.2	1054.5	1050.3	1041.8	1038.1	1032.0
10°	1115.9	1095.8	1079.8	1058.7	1039.6	1022.1	1013.6	1006.5	998.1	994.0	985.5
12.5°	1088.2	1064.9	1047.3	1025.4	1006.0	984.8	976.7	963.7	950.4	941.9	930.9
15°	1049.1	1021.2	999.6	973.5	950.5	926.3	904.8	880.7	871.8	852.7	841.7
17.5°	1003.5	975.1	948.4	913.4	877.9	848.0	825.0	801.9	788.2	776.0	770.3
20°	973.5	947.4	910.3	869.7	830.1	797.0	778.4	763.5	748.4	739.9	733.9
22.5°	945.0	911.7	868.6	824.8	785.2	759.3	743.6	728.1	716.0	707.8	699.7
25°	897.3	853.7	808.0	757.9	730.8	708.3	691.3	678.7	671.2	660.7	656.7
27.5°	848.3	795.4	745.1	711.4	683.2	662.6	647.7	638.3	628.8	622.1	616.9
30°	810.6	757.0	711.8	679.8	651.2	634.1	622.1	611.1	603.5	598.0	594.0
32.5°	773.3	719.6	681.7	647.2	624.7	608.0	595.2	587.0	581.1	574.0	571.6
35°	719.3	671.8	638.7	607.6	584.5	569.5	559.4	550.9	545.9	543.8	542.3
37.5°	667.5	628.5	593.0	567.4	546.9	535.1	523.2	519.1	515.6	512.0	513.6
40°	634.6	598.0	566.5	539.4	522.8	509.8	502.8	497.8	494.7	494.7	494.7
42.5°	606.1	570.3	539.6	515.3	498.8	487.8	479.9	475.7	474.7	474.3	476.7
45°	561.9	528.9	497.8	477.7	463.6	452.6	448.2	444.6	444.6	446.7	447.1
47.5°	518.1	487.1	462.2	439.7	426.9	420.0	416.0	414.2	414.4	416.5	418.8
50°	491.3	460.7	436.1	416.0	404.1	397.5	394.0	393.0	394.0	394.0	397.5
52.5°	461.9	434.6	410.5	393.6	379.9	373.8	371.9	370.5	371.2	372.8	374.3
55°	419.1	394.5	371.5	355.4	345.3	341.4	336.9	337.3	336.4	337.3	337.3
57.5°	376.1	354.0	332.5	319.8	311.0	305.2	300.3	301.7	300.2	300.0	299.2
60°	348.4	324.3	307.3	295.8	285.7	280.7	276.2	277.2	275.7	274.7	272.7
62.5°	318.3	298.2	282.0	270.9	262.9	257.0	252.5	251.6	248.1	244.6	240.3
65°	274.7	258.2	243.6	233.1	225.6	221.0	217.5	214.5	207.0	199.0	195.0
67.5°	232.3	220.4	206.8	197.9	191.8	185.9	179.2	174.1	167.0	162.6	160.1
70°	205.0	193.5	182.0	173.4	166.9	161.5	153.9	150.4	145.3	143.4	140.8
72.5°	179.0	168.2	157.5	149.8	142.9	138.6	132.6	129.1	127.0	126.1	123.7
75°	139.4	130.8	122.8	115.8	110.3	107.3	104.8	102.3	101.2	96.7	94.3
77.5°	101.7	96.0	91.0	86.1	82.1	80.1	75.3	72.4	70.7	68.6	68.1
80°	79.2	75.2	70.2	67.2	61.6	59.7	57.7	57.1	56.6	56.2	55.6
82.5°	59.6	55.5	50.5	48.7	47.2	46.0	44.8	44.3	43.8	44.1	44.0
85°	30.1	28.1	28.1	27.6	27.1	26.6	26.1	26.1	25.5	26.1	25.5
87.5°	13.7	13.9	14.3	14.0	15.0	15.5	15.5	15.8	16.6	16.2	16.4
90°	18.2	21.2	23.7	26.2	28.7	31.3	33.2	35.1	36.9	38.8	40.2
92.5°	46.4	49.2	51.0	52.8	54.5	56.3	57.4	58.5	59.7	60.8	61.5
95°	96.6	99.2	101.4	103.6	105.8	108.0	109.0	109.9	110.8	111.8	112.3
97.5°	158.1	160.5	163.1	165.6	168.2	170.8	171.9	173.1	174.3	175.4	176.0
100°	204.1	206.0	209.0	211.8	214.6	217.4	218.1	218.7	219.3	220.0	220.3
102.5°	253.3	254.9	257.4	260.0	262.6	265.2	266.1	266.9	267.9	268.7	269.3
105°	332.4	333.2	334.4	335.7	337.0	338.3	339.2	340.2	341.1	342.0	343.0
107.5°	416.5	416.8	417.0	417.2	417.4	417.5	418.4	419.3	420.2	421.1	421.5
110°	474.4	474.6	474.2	473.9	473.5	473.3	472.6	472.0	471.4	470.7	470.9



TEST NUMBER: P333072-830

CATALOG NUMBER: S124RDIW-S795D1560U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	531.5	531.2	530.7	530.1	529.5	529.0	528.9	528.7	528.6	528.5	528.5
115°	619.6	619.3	618.7	618.0	617.5	616.8	616.5	616.1	615.9	615.6	615.2
117.5°	704.3	704.2	703.7	703.2	702.8	702.4	701.3	700.2	699.2	698.0	697.2
120°	763.9	764.1	763.2	762.2	761.3	760.3	758.7	757.1	755.6	754.0	753.6
122.5°	818.9	819.0	818.5	818.0	817.7	817.2	816.1	815.0	814.0	812.9	811.8
125°	902.5	902.3	902.0	901.6	901.4	901.1	900.4	899.8	899.2	898.5	897.9
127.5°	983.8	984.1	983.5	983.1	982.6	982.0	981.4	980.8	980.1	979.5	978.9
130°	1038.4	1038.9	1038.9	1038.9	1038.9	1038.9	1038.3	1037.6	1037.0	1036.3	1035.4
132.5°	1093.2	1093.3	1093.1	1092.9	1092.6	1092.3	1091.7	1091.1	1090.4	1089.8	1089.2
135°	1171.6	1172.5	1172.5	1172.5	1172.5	1172.5	1171.9	1171.2	1170.6	1170.0	1169.1
137.5°	1247.6	1248.4	1248.9	1249.3	1249.9	1250.4	1249.5	1248.8	1247.9	1247.1	1246.8
140°	1300.0	1300.4	1300.4	1300.4	1300.4	1300.4	1300.0	1299.8	1299.5	1299.1	1298.8
142.5°	1349.0	1349.2	1348.9	1348.7	1348.4	1348.1	1348.1	1348.0	1347.9	1347.9	1347.8
145°	1419.2	1419.9	1420.2	1420.6	1420.9	1421.2	1420.9	1420.6	1420.2	1419.9	1419.3
147.5°	1487.2	1487.9	1487.6	1487.3	1487.1	1486.9	1486.6	1486.4	1486.1	1485.8	1485.5
150°	1527.2	1527.8	1527.8	1527.8	1527.8	1527.8	1527.8	1527.8	1527.8	1527.8	1527.7
152.5°	1563.8	1564.3	1564.5	1564.8	1565.1	1565.3	1566.0	1566.8	1567.5	1568.3	1568.3
155°	1620.1	1620.0	1619.7	1619.4	1619.1	1618.7	1620.0	1621.3	1622.5	1623.8	1623.8
157.5°	1667.9	1667.6	1667.5	1667.5	1667.5	1667.4	1668.3	1669.2	1670.2	1671.1	1671.0
160°	1698.5	1698.2	1697.9	1697.5	1697.2	1697.0	1697.9	1698.8	1699.8	1700.7	1700.3
162.5°	1723.7	1723.2	1722.9	1722.6	1722.2	1721.9	1723.6	1725.3	1727.0	1728.7	1728.8
165°	1759.9	1759.2	1758.5	1757.8	1757.3	1756.6	1758.5	1760.4	1762.3	1764.2	1764.5
167.5°	1786.6	1785.9	1786.0	1786.0	1786.1	1786.2	1788.1	1790.0	1791.9	1793.8	1793.8
170°	1801.5	1800.8	1801.1	1801.5	1801.8	1802.0	1803.9	1805.9	1807.8	1809.7	1809.5
172.5°	1813.8	1813.2	1813.3	1813.4	1813.4	1813.5	1815.6	1817.8	1819.9	1822.0	1822.0
175°	1828.4	1827.5	1827.2	1826.8	1826.6	1826.3	1828.4	1830.7	1832.9	1835.1	1835.1
177.5°	1834.8	1834.2	1834.2	1834.2	1834.2	1834.2	1836.0	1837.8	1839.5	1841.3	1841.2
180°	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6



TEST NUMBER: P333072-830

CATALOG NUMBER: S124RDIW-S795D1560U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2
2.5°	1187.6	1188.5	1185.6	1184.8	1185.6	1188.5	1187.6	1190.1	1190.4	1193.6	1192.4
5°	1101.8	1100.8	1098.3	1098.8	1098.3	1100.8	1101.8	1105.8	1107.9	1115.9	1114.8
7.5°	1028.4	1024.5	1025.6	1021.6	1025.6	1024.5	1028.4	1032.0	1038.1	1041.8	1050.3
10°	983.5	978.0	973.5	969.5	973.5	978.0	983.5	985.5	994.0	998.1	1006.5
12.5°	922.2	917.5	911.3	912.6	911.3	917.5	922.2	930.9	941.9	950.4	963.7
15°	835.1	827.6	815.6	817.1	815.6	827.6	835.1	841.7	852.7	871.8	880.7
17.5°	761.5	761.6	756.0	757.3	756.0	761.6	761.5	770.3	776.0	788.2	801.9
20°	723.3	719.8	720.3	718.9	720.3	719.8	723.3	733.9	739.9	748.4	763.5
22.5°	696.9	692.6	689.1	686.0	689.1	692.6	696.9	699.7	707.8	716.0	728.1
25°	652.1	649.1	644.6	643.7	644.6	649.1	652.1	656.7	660.7	671.2	678.7
27.5°	612.8	612.3	610.5	608.1	610.5	612.3	612.8	616.9	622.1	628.8	638.3
30°	590.0	589.0	588.0	586.4	588.0	589.0	590.0	594.0	598.0	603.5	611.1
32.5°	569.6	568.9	568.0	568.1	568.0	568.9	569.6	571.6	574.0	581.1	587.0
35°	540.4	539.9	538.9	538.4	538.9	539.9	540.4	542.3	543.8	545.9	550.9
37.5°	513.1	514.4	513.8	513.7	513.8	514.4	513.1	513.6	512.0	515.6	519.1
40°	494.3	494.7	495.8	495.3	495.8	494.7	494.3	494.7	494.7	494.7	497.8
42.5°	478.6	478.7	480.1	478.4	480.1	478.7	478.6	476.7	474.3	474.7	475.7
45°	450.6	453.6	453.2	453.2	453.2	453.6	450.6	447.1	446.7	444.6	444.6
47.5°	420.1	422.6	423.4	423.3	423.4	422.6	420.1	418.8	416.5	414.4	414.2
50°	400.0	399.0	400.5	400.0	400.5	399.0	400.0	397.5	394.0	394.0	393.0
52.5°	375.6	375.8	375.7	375.1	375.7	375.8	375.6	374.3	372.8	371.2	370.5
55°	337.9	338.4	337.3	337.9	337.3	338.4	337.9	337.3	337.3	336.4	337.3
57.5°	297.0	294.5	295.6	294.4	295.6	294.5	297.0	299.2	300.0	300.2	301.7
60°	267.7	263.6	262.7	260.7	262.7	263.6	267.7	272.7	274.7	275.7	277.2
62.5°	234.8	232.0	228.6	230.2	228.6	232.0	234.8	240.3	244.6	248.1	251.6
65°	191.0	189.0	187.5	189.5	187.5	189.0	191.0	195.0	199.0	207.0	214.5
67.5°	158.1	157.0	157.0	156.0	157.0	157.0	158.1	160.1	162.6	167.0	174.1
70°	140.8	139.4	139.4	138.4	139.4	139.4	140.8	140.8	143.4	145.3	150.4
72.5°	123.2	121.7	122.2	121.5	122.2	121.7	123.2	123.7	126.1	127.0	129.1
75°	91.2	88.7	88.7	89.3	88.7	88.7	91.2	94.3	96.7	101.2	102.3
77.5°	68.1	67.6	68.2	67.4	68.2	67.6	68.1	68.1	68.6	70.7	72.4
80°	55.6	55.1	54.7	56.2	54.7	55.1	55.6	55.6	56.2	56.6	57.1
82.5°	43.2	43.1	43.0	45.0	43.0	43.1	43.2	44.0	44.1	43.8	44.3
85°	26.1	25.1	26.1	25.1	26.1	25.1	26.1	25.5	26.1	25.5	26.1
87.5°	17.3	17.1	16.8	17.3	16.8	17.1	17.3	16.4	16.2	16.6	15.8
90°	40.7	41.4	42.0	42.6	42.0	41.4	40.7	40.2	38.8	36.9	35.1
92.5°	61.9	62.3	62.7	63.1	62.7	62.3	61.9	61.5	60.8	59.7	58.5
95°	112.3	112.3	112.3	112.3	112.3	112.3	112.3	112.3	111.8	110.8	109.9
97.5°	176.0	176.0	176.0	176.0	176.0	176.0	176.0	176.0	175.4	174.3	173.1
100°	220.3	220.3	220.3	220.3	220.3	220.3	220.3	220.3	220.0	219.3	218.7
102.5°	269.6	269.8	270.0	270.3	270.0	269.8	269.6	269.3	268.7	267.9	266.9
105°	343.9	344.9	345.8	346.8	345.8	344.9	343.9	343.0	342.0	341.1	340.2
107.5°	421.4	421.4	421.3	421.2	421.3	421.4	421.4	421.5	421.1	420.2	419.3
110°	471.8	472.8	473.7	474.7	473.7	472.8	471.8	470.9	470.7	471.4	472.0



TEST NUMBER: P333072-830

CATALOG NUMBER: S124RDIW-S795D1560U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	528.7	528.9	529.0	529.2	529.0	528.9	528.7	528.5	528.5	528.6	528.7
115°	614.9	614.6	614.3	614.0	614.3	614.6	614.9	615.2	615.6	615.9	616.1
117.5°	696.5	696.0	695.3	694.7	695.3	696.0	696.5	697.2	698.0	699.2	700.2
120°	754.2	754.8	755.4	756.1	755.4	754.8	754.2	753.6	754.0	755.6	757.1
122.5°	810.7	809.5	808.4	807.3	808.4	809.5	810.7	811.8	812.9	814.0	815.0
125°	897.2	896.6	896.0	895.3	896.0	896.6	897.2	897.9	898.5	899.2	899.8
127.5°	978.5	978.0	977.4	976.9	977.4	978.0	978.5	978.9	979.5	980.1	980.8
130°	1034.2	1032.9	1031.6	1030.4	1031.6	1032.9	1034.2	1035.4	1036.3	1037.0	1037.6
132.5°	1088.7	1088.3	1087.7	1087.2	1087.7	1088.3	1088.7	1089.2	1089.8	1090.4	1091.1
135°	1168.2	1167.2	1166.3	1165.4	1166.3	1167.2	1168.2	1169.1	1170.0	1170.6	1171.2
137.5°	1247.0	1247.2	1247.4	1247.5	1247.4	1247.2	1247.0	1246.8	1247.1	1247.9	1248.8
140°	1298.5	1298.2	1297.9	1297.6	1297.9	1298.2	1298.5	1298.8	1299.1	1299.5	1299.8
142.5°	1347.7	1347.7	1347.6	1347.6	1347.6	1347.7	1347.7	1347.8	1347.9	1347.9	1348.0
145°	1418.3	1417.4	1416.5	1415.5	1416.5	1417.4	1418.3	1419.3	1419.9	1420.2	1420.6
147.5°	1485.3	1485.0	1484.6	1484.3	1484.6	1485.0	1485.3	1485.5	1485.8	1486.1	1486.4
150°	1527.3	1527.0	1526.7	1526.4	1526.7	1527.0	1527.3	1527.7	1527.8	1527.8	1527.8
152.5°	1567.4	1566.7	1565.8	1565.0	1565.8	1566.7	1567.4	1568.3	1568.3	1567.5	1566.8
155°	1622.5	1621.3	1620.0	1618.7	1620.0	1621.3	1622.5	1623.8	1623.8	1622.5	1621.3
157.5°	1670.0	1669.0	1667.8	1666.8	1667.8	1669.0	1670.0	1671.0	1671.1	1670.2	1669.2
160°	1698.8	1697.2	1695.6	1694.0	1695.6	1697.2	1698.8	1700.3	1700.7	1699.8	1698.8
162.5°	1727.2	1725.7	1724.1	1722.5	1724.1	1725.7	1727.2	1728.8	1728.7	1727.0	1725.3
165°	1763.2	1762.0	1760.7	1759.4	1760.7	1762.0	1763.2	1764.5	1764.2	1762.3	1760.4
167.5°	1791.8	1789.8	1787.8	1785.8	1787.8	1789.8	1791.8	1793.8	1793.8	1791.9	1790.0
170°	1807.3	1805.1	1802.9	1800.6	1802.9	1805.1	1807.3	1809.5	1809.7	1807.8	1805.9
172.5°	1819.8	1817.6	1815.3	1813.2	1815.3	1817.6	1819.8	1822.0	1822.0	1819.9	1817.8
175°	1832.9	1830.7	1828.4	1826.3	1828.4	1830.7	1832.9	1835.1	1835.1	1832.9	1830.7
177.5°	1839.1	1837.1	1835.1	1833.1	1835.1	1837.1	1839.1	1841.2	1841.3	1839.5	1837.8
180°	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6



TEST NUMBER: P333072-830

CATALOG NUMBER: S124RDIW-S795D1560U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2
2.5°	1190.1	1192.9	1199.3	1206.5	1212.5	1217.7	1221.7	1227.3	1232.6	1239.7	1246.6
5°	1117.9	1124.8	1134.9	1146.9	1162.0	1172.0	1184.5	1195.5	1211.5	1227.7	1243.2
7.5°	1054.5	1062.2	1076.9	1093.6	1111.4	1127.8	1142.7	1162.2	1183.5	1206.7	1232.8
10°	1013.6	1022.1	1039.6	1058.7	1079.8	1095.8	1115.9	1138.9	1163.0	1191.6	1223.6
12.5°	976.7	984.8	1006.0	1025.4	1047.3	1064.9	1088.2	1111.6	1143.7	1174.7	1211.2
15°	904.8	926.3	950.5	973.5	999.6	1021.2	1049.1	1073.3	1103.8	1147.5	1189.0
17.5°	825.0	848.0	877.9	913.4	948.4	975.1	1003.5	1033.4	1069.8	1114.4	1162.3
20°	778.4	797.0	830.1	869.7	910.3	947.4	973.5	1006.5	1044.1	1092.3	1141.9
22.5°	743.6	759.3	785.2	824.8	868.6	911.7	945.0	977.7	1019.3	1067.4	1121.4
25°	691.3	708.3	730.8	757.9	808.0	853.7	897.3	934.9	979.0	1027.1	1087.3
27.5°	647.7	662.6	683.2	711.4	745.1	795.4	848.3	891.2	936.4	988.1	1048.3
30°	622.1	634.1	651.2	679.8	711.8	757.0	810.6	860.7	906.3	960.0	1022.6
32.5°	595.2	608.0	624.7	647.2	681.7	719.6	773.3	828.2	876.7	931.5	993.0
35°	559.4	569.5	584.5	607.6	638.7	671.8	719.3	776.0	827.1	885.8	944.4
37.5°	523.2	535.1	546.9	567.4	593.0	628.5	667.5	725.4	782.0	835.6	892.8
40°	502.8	509.8	522.8	539.4	566.5	598.0	634.6	691.3	747.9	801.1	858.7
42.5°	479.9	487.8	498.8	515.3	539.6	570.3	606.1	655.2	714.3	765.7	818.2
45°	448.2	452.6	463.6	477.7	497.8	528.9	561.9	605.6	661.2	710.3	756.4
47.5°	416.0	420.0	426.9	439.7	462.2	487.1	518.1	557.2	606.1	655.2	694.2
50°	394.0	397.5	404.1	416.0	436.1	460.7	491.3	526.3	570.0	617.1	649.7
52.5°	371.9	373.8	379.9	393.6	410.5	434.6	461.9	494.3	535.1	574.2	607.2
55°	336.9	341.4	345.3	355.4	371.5	394.5	419.1	449.7	481.3	514.3	542.3
57.5°	300.3	305.2	311.0	319.8	332.5	354.0	376.1	400.9	427.8	455.2	478.8
60°	276.2	280.7	285.7	295.8	307.3	324.3	348.4	369.9	390.5	415.6	439.1
62.5°	252.5	257.0	262.9	270.9	282.0	298.2	318.3	337.1	358.4	380.3	397.8
65°	217.5	221.0	225.6	233.1	243.6	258.2	274.7	289.3	308.3	324.3	340.4
67.5°	179.2	185.9	191.8	197.9	206.8	220.4	232.3	246.2	259.2	271.1	285.7
70°	153.9	161.5	166.9	173.4	182.0	193.5	205.0	214.5	225.1	236.6	249.7
72.5°	132.6	138.6	142.9	149.8	157.5	168.2	179.0	186.9	195.4	203.3	215.9
75°	104.8	107.3	110.3	115.8	122.8	130.8	139.4	146.4	151.4	158.4	167.4
77.5°	75.3	80.1	82.1	86.1	91.0	96.0	101.7	107.5	112.4	114.9	121.8
80°	57.7	59.7	61.6	67.2	70.2	75.2	79.2	84.7	86.7	89.3	95.8
82.5°	44.8	46.0	47.2	48.7	50.5	55.5	59.6	63.1	65.0	66.0	70.9
85°	26.1	26.6	27.1	27.6	28.1	28.1	30.1	32.6	36.1	36.1	37.6
87.5°	15.5	15.5	15.0	14.0	14.3	13.9	13.7	13.0	13.5	13.9	14.5
90°	33.2	31.3	28.7	26.2	23.7	21.2	18.2	14.7	11.2	7.7	4.2
92.5°	57.4	56.3	54.5	52.8	51.0	49.2	46.4	42.3	38.4	34.4	30.4
95°	109.0	108.0	105.8	103.6	101.4	99.2	96.6	93.8	91.0	88.1	85.3
97.5°	171.9	170.8	168.2	165.6	163.1	160.5	158.1	155.8	153.4	151.2	148.9
100°	218.1	217.4	214.6	211.8	209.0	206.0	204.1	202.7	201.5	200.2	199.0
102.5°	266.1	265.2	262.6	260.0	257.4	254.9	253.3	252.8	252.3	251.8	251.3
105°	339.2	338.3	337.0	335.7	334.4	333.2	332.4	332.1	331.8	331.5	331.1
107.5°	418.4	417.5	417.4	417.2	417.0	416.8	416.5	416.1	415.8	415.4	415.0
110°	472.6	473.3	473.5	473.9	474.2	474.6	474.4	473.7	473.1	472.5	471.8



TEST NUMBER: P333072-830

CATALOG NUMBER: S124RDIW-S795D1560U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	528.9	529.0	529.5	530.1	530.7	531.2	531.5	531.3	531.2	531.1	530.9
115°	616.5	616.8	617.5	618.0	618.7	619.3	619.6	619.6	619.6	619.6	619.6
117.5°	701.3	702.4	702.8	703.2	703.7	704.2	704.3	704.0	703.7	703.4	703.2
120°	758.7	760.3	761.3	762.2	763.2	764.1	763.9	762.7	761.5	760.2	758.9
122.5°	816.1	817.2	817.7	818.0	818.5	819.0	818.9	818.4	817.9	817.4	816.9
125°	900.4	901.1	901.4	901.6	902.0	902.3	902.5	902.5	902.5	902.5	902.5
127.5°	981.4	982.0	982.6	983.1	983.5	984.1	983.8	982.9	981.9	981.0	980.1
130°	1038.3	1038.9	1038.9	1038.9	1038.9	1038.9	1038.4	1037.5	1036.5	1035.6	1034.6
132.5°	1091.7	1092.3	1092.6	1092.9	1093.1	1093.3	1093.2	1092.4	1091.7	1091.1	1090.3
135°	1171.9	1172.5	1172.5	1172.5	1172.5	1172.5	1171.6	1169.7	1167.7	1165.8	1163.9
137.5°	1249.5	1250.4	1249.9	1249.3	1248.9	1248.4	1247.6	1246.8	1245.9	1245.0	1244.2
140°	1300.0	1300.4	1300.4	1300.4	1300.4	1300.4	1300.0	1299.5	1298.8	1298.2	1297.6
142.5°	1348.1	1348.1	1348.4	1348.7	1348.9	1349.2	1349.0	1348.3	1347.7	1347.1	1346.4
145°	1420.9	1421.2	1420.9	1420.6	1420.2	1419.9	1419.2	1417.9	1416.6	1415.3	1414.1
147.5°	1486.6	1486.9	1487.1	1487.3	1487.6	1487.9	1487.2	1485.7	1484.2	1482.7	1481.2
150°	1527.8	1527.8	1527.8	1527.8	1527.8	1527.8	1527.2	1525.9	1524.7	1523.3	1522.1
152.5°	1566.0	1565.3	1565.1	1564.8	1564.5	1564.3	1563.8	1563.0	1562.3	1561.5	1560.8
155°	1620.0	1618.7	1619.1	1619.4	1619.7	1620.0	1620.1	1620.1	1620.1	1620.1	1620.1
157.5°	1668.3	1667.4	1667.5	1667.5	1667.5	1667.6	1667.9	1668.5	1669.1	1669.6	1670.2
160°	1697.9	1697.0	1697.2	1697.5	1697.9	1698.2	1698.5	1698.8	1699.1	1699.4	1699.8
162.5°	1723.6	1721.9	1722.2	1722.6	1722.9	1723.2	1723.7	1724.6	1725.4	1726.3	1727.0
165°	1758.5	1756.6	1757.3	1757.8	1758.5	1759.2	1759.9	1760.9	1761.8	1762.7	1763.7
167.5°	1788.1	1786.2	1786.1	1786.0	1786.0	1785.9	1786.6	1787.9	1789.2	1790.5	1791.9
170°	1803.9	1802.0	1801.8	1801.5	1801.1	1800.8	1801.5	1803.0	1804.6	1806.2	1807.8
172.5°	1815.6	1813.5	1813.4	1813.4	1813.3	1813.2	1813.8	1815.1	1816.5	1817.8	1819.1
175°	1828.4	1826.3	1826.6	1826.8	1827.2	1827.5	1828.4	1830.0	1831.6	1833.2	1834.8
177.5°	1836.0	1834.2	1834.2	1834.2	1834.2	1834.2	1834.8	1836.1	1837.4	1838.6	1839.8
180°	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6



TEST NUMBER: P333072-830

CATALOG NUMBER: S124RDIW-S795D1560U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2
2.5°	1251.8	1255.4	1259.4	1267.1	1273.5	1276.3	1281.9	1285.9	1284.7	1290.2	1300.0
5°	1256.7	1270.3	1285.8	1301.8	1319.8	1334.9	1346.9	1359.0	1368.5	1380.0	1397.0
7.5°	1255.9	1280.0	1306.2	1334.9	1364.5	1390.1	1413.7	1437.8	1459.2	1482.5	1513.1
10°	1252.7	1284.8	1317.4	1355.0	1392.5	1428.1	1460.2	1490.3	1518.9	1549.4	1588.1
12.5°	1249.1	1286.0	1325.4	1370.6	1417.4	1460.2	1497.9	1541.2	1577.1	1616.5	1661.0
15°	1233.1	1282.8	1336.4	1395.1	1451.2	1508.8	1560.5	1613.6	1663.2	1710.3	1766.5
17.5°	1214.9	1272.1	1335.4	1404.7	1472.2	1542.2	1603.5	1670.5	1721.2	1784.4	1836.5
20°	1200.0	1261.7	1329.4	1407.1	1483.8	1561.5	1629.2	1697.3	1754.4	1818.2	1884.3
22.5°	1182.0	1249.7	1323.0	1403.4	1483.8	1568.7	1643.6	1711.4	1782.2	1853.8	1922.0
25°	1152.9	1223.1	1300.8	1389.0	1481.3	1568.0	1648.2	1732.4	1808.6	1886.3	1947.5
27.5°	1117.3	1190.9	1272.8	1363.9	1458.5	1547.4	1641.8	1731.5	1808.2	1883.0	1936.4
30°	1088.7	1166.5	1245.2	1337.4	1435.7	1530.9	1632.2	1721.9	1802.6	1869.8	1899.9
32.5°	1059.5	1133.2	1214.3	1307.8	1408.3	1510.9	1611.3	1703.1	1777.7	1818.1	1818.8
35°	1008.6	1077.7	1162.0	1253.7	1357.0	1468.3	1570.0	1660.2	1705.8	1709.4	1660.2
37.5°	953.0	1016.5	1096.0	1187.8	1300.9	1411.6	1515.6	1575.7	1590.9	1539.9	1449.1
40°	913.3	971.9	1048.7	1142.9	1255.2	1369.5	1464.2	1508.4	1492.3	1409.6	1308.3
42.5°	871.7	926.2	1000.1	1093.2	1205.9	1321.4	1402.0	1425.8	1383.3	1287.7	1169.2
45°	803.5	853.7	926.9	1020.6	1128.9	1237.2	1298.4	1286.3	1215.6	1102.3	969.5
47.5°	732.6	781.1	847.0	933.7	1044.5	1138.0	1179.4	1143.1	1042.5	917.9	809.8
50°	685.8	735.4	796.1	878.7	980.0	1070.3	1096.8	1041.7	929.9	810.0	710.8
52.5°	639.6	682.0	741.5	821.4	918.2	994.5	1008.6	945.0	829.6	722.3	634.2
55°	569.5	608.0	658.2	733.4	817.1	881.7	874.2	792.5	687.8	596.1	526.9
57.5°	501.6	530.7	576.9	647.4	721.0	764.3	736.9	667.2	569.6	494.5	436.1
60°	456.7	483.7	526.9	588.5	653.2	677.7	654.7	579.0	501.8	433.1	384.0
62.5°	414.2	438.0	475.1	532.3	584.6	599.2	574.5	508.4	438.8	380.1	339.5
65°	352.4	374.5	406.0	446.7	482.8	489.7	473.7	406.0	353.4	304.3	276.2
67.5°	296.3	310.8	335.5	370.5	389.7	393.8	362.8	320.3	273.9	243.7	222.5
70°	258.6	268.7	291.7	310.8	326.3	326.9	298.2	264.2	228.6	204.1	188.5
72.5°	222.2	231.8	249.2	262.3	274.2	270.3	244.1	217.3	188.5	169.9	158.4
75°	171.4	179.9	189.0	195.0	195.0	190.0	171.0	150.9	134.3	123.3	119.8
77.5°	124.6	131.7	134.7	133.7	132.0	124.1	112.1	99.0	93.0	87.8	85.2
80°	97.7	100.8	101.8	99.2	96.2	87.2	79.2	73.7	68.1	66.2	65.1
82.5°	72.5	75.1	72.5	73.1	66.5	59.2	54.8	52.9	50.5	49.8	48.7
85°	38.6	38.1	37.1	34.6	30.1	29.0	28.6	28.1	27.1	27.6	26.6
87.5°	14.8	14.2	13.4	13.7	14.2	13.9	14.9	15.4	15.8	15.8	17.1
90°	7.7	11.2	14.7	18.2	21.2	23.7	26.2	28.7	31.3	33.2	35.1
92.5°	34.4	38.4	42.3	46.4	49.2	51.0	52.8	54.5	56.3	57.4	58.5
95°	88.1	91.0	93.8	96.6	99.2	101.4	103.6	105.8	108.0	109.0	109.9
97.5°	151.2	153.4	155.8	158.1	160.5	163.1	165.6	168.2	170.8	171.9	173.1
100°	200.2	201.5	202.7	204.1	206.0	209.0	211.8	214.6	217.4	218.1	218.7
102.5°	251.8	252.3	252.8	253.3	254.9	257.4	260.0	262.6	265.2	266.1	266.9
105°	331.5	331.8	332.1	332.4	333.2	334.4	335.7	337.0	338.3	339.2	340.2
107.5°	415.4	415.8	416.1	416.5	416.8	417.0	417.2	417.4	417.5	418.4	419.3
110°	472.5	473.1	473.7	474.4	474.6	474.2	473.9	473.5	473.3	472.6	472.0





TEST NUMBER: P333072-830

CATALOG NUMBER: S124RDIW-S795D1560U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	531.1	531.2	531.3	531.5	531.2	530.7	530.1	529.5	529.0	528.9	528.7
115°	619.6	619.6	619.6	619.6	619.3	618.7	618.0	617.5	616.8	616.5	616.1
117.5°	703.4	703.7	704.0	704.3	704.2	703.7	703.2	702.8	702.4	701.3	700.2
120°	760.2	761.5	762.7	763.9	764.1	763.2	762.2	761.3	760.3	758.7	757.1
122.5°	817.4	817.9	818.4	818.9	819.0	818.5	818.0	817.7	817.2	816.1	815.0
125°	902.5	902.5	902.5	902.5	902.3	902.0	901.6	901.4	901.1	900.4	899.8
127.5°	981.0	981.9	982.9	983.8	984.1	983.5	983.1	982.6	982.0	981.4	980.8
130°	1035.6	1036.5	1037.5	1038.4	1038.9	1038.9	1038.9	1038.9	1038.9	1038.3	1037.6
132.5°	1091.1	1091.7	1092.4	1093.2	1093.3	1093.1	1092.9	1092.6	1092.3	1091.7	1091.1
135°	1165.8	1167.7	1169.7	1171.6	1172.5	1172.5	1172.5	1172.5	1172.5	1171.9	1171.2
137.5°	1245.0	1245.9	1246.8	1247.6	1248.4	1248.9	1249.3	1249.9	1250.4	1249.5	1248.8
140°	1298.2	1298.8	1299.5	1300.0	1300.4	1300.4	1300.4	1300.4	1300.4	1300.0	1299.8
142.5°	1347.1	1347.7	1348.3	1349.0	1349.2	1348.9	1348.7	1348.4	1348.1	1348.1	1348.0
145°	1415.3	1416.6	1417.9	1419.2	1419.9	1420.2	1420.6	1420.9	1421.2	1420.9	1420.6
147.5°	1482.7	1484.2	1485.7	1487.2	1487.9	1487.6	1487.3	1487.1	1486.9	1486.6	1486.4
150°	1523.3	1524.7	1525.9	1527.2	1527.8	1527.8	1527.8	1527.8	1527.8	1527.8	1527.8
152.5°	1561.5	1562.3	1563.0	1563.8	1564.3	1564.5	1564.8	1565.1	1565.3	1566.0	1566.8
155°	1620.1	1620.1	1620.1	1620.1	1620.0	1619.7	1619.4	1619.1	1618.7	1620.0	1621.3
157.5°	1669.6	1669.1	1668.5	1667.9	1667.6	1667.5	1667.5	1667.5	1667.4	1668.3	1669.2
160°	1699.4	1699.1	1698.8	1698.5	1698.2	1697.9	1697.5	1697.2	1697.0	1697.9	1698.8
162.5°	1726.3	1725.4	1724.6	1723.7	1723.2	1722.9	1722.6	1722.2	1721.9	1723.6	1725.3
165°	1762.7	1761.8	1760.9	1759.9	1759.2	1758.5	1757.8	1757.3	1756.6	1758.5	1760.4
167.5°	1790.5	1789.2	1787.9	1786.6	1785.9	1786.0	1786.0	1786.1	1786.2	1788.1	1790.0
170°	1806.2	1804.6	1803.0	1801.5	1800.8	1801.1	1801.5	1801.8	1802.0	1803.9	1805.9
172.5°	1817.8	1816.5	1815.1	1813.8	1813.2	1813.3	1813.4	1813.4	1813.5	1815.6	1817.8
175°	1833.2	1831.6	1830.0	1828.4	1827.5	1827.2	1826.8	1826.6	1826.3	1828.4	1830.7
177.5°	1838.6	1837.4	1836.1	1834.8	1834.2	1834.2	1834.2	1834.2	1834.2	1836.0	1837.8
180°	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6



TEST NUMBER: P333072-830

CATALOG NUMBER: S124RDIW-S795D1560U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2	1244.2
2.5°	1305.1	1306.7	1308.0	1311.9	1312.3	1316.0	1312.3
5°	1413.1	1420.1	1431.2	1442.2	1443.2	1450.2	1437.7
7.5°	1534.2	1550.5	1560.6	1578.4	1585.5	1589.9	1582.6
10°	1617.6	1632.7	1659.3	1672.3	1685.3	1687.3	1681.3
12.5°	1698.3	1722.1	1743.0	1767.7	1767.1	1784.8	1778.3
15°	1805.6	1830.1	1859.3	1886.8	1896.9	1896.9	1904.9
17.5°	1882.2	1927.2	1957.3	1979.0	2002.6	2006.7	2003.9
20°	1933.9	1982.5	2014.7	2042.7	2058.8	2063.2	2063.2
22.5°	1972.5	2013.8	2045.1	2070.4	2083.6	2089.0	2087.4
25°	1999.1	2034.7	2053.7	2061.2	2064.7	2063.8	2054.3
27.5°	1962.6	1961.0	1949.0	1925.9	1908.6	1898.0	1886.0
30°	1892.8	1866.8	1836.7	1803.6	1761.0	1728.4	1718.3
32.5°	1788.9	1730.4	1679.5	1624.4	1578.6	1546.0	1532.3
35°	1588.1	1495.3	1419.7	1353.5	1305.3	1275.3	1265.3
37.5°	1349.6	1259.9	1166.2	1102.0	1062.2	1031.7	1020.4
40°	1198.1	1100.3	1018.6	958.5	917.4	887.8	887.3
42.5°	1059.7	966.4	889.5	846.1	801.8	782.3	782.2
45°	867.7	793.1	727.8	693.8	667.2	651.2	646.7
47.5°	718.4	656.7	613.2	586.1	564.4	554.2	547.6
50°	634.6	580.5	545.9	522.4	510.3	497.3	496.2
52.5°	564.9	521.1	494.2	475.0	459.8	451.9	452.1
55°	474.7	440.2	421.0	406.5	394.5	388.5	386.0
57.5°	399.9	374.0	360.1	346.8	341.7	337.0	335.6
60°	353.4	335.8	322.8	312.3	304.8	303.3	302.7
62.5°	314.9	296.5	287.6	279.4	273.9	271.5	270.7
65°	259.7	246.1	238.1	231.6	229.6	226.1	225.6
67.5°	209.3	201.2	195.9	191.4	188.7	188.5	188.5
70°	178.4	173.9	169.5	166.9	165.4	164.4	164.4
72.5°	152.0	148.6	145.0	143.6	143.4	142.3	141.9
75°	115.8	112.3	112.8	110.3	108.3	105.8	104.2
77.5°	82.1	79.6	79.1	78.8	77.1	76.8	77.6
80°	63.6	61.2	60.7	61.2	60.7	59.2	59.2
82.5°	48.4	46.3	45.8	45.5	45.1	45.5	44.7
85°	26.1	25.1	25.1	25.1	26.1	25.5	25.1
87.5°	16.6	16.6	17.2	17.0	17.1	16.8	17.3
90°	36.9	38.8	40.2	40.7	41.4	42.0	42.6
92.5°	59.7	60.8	61.5	61.9	62.3	62.7	63.1
95°	110.8	111.8	112.3	112.3	112.3	112.3	112.3
97.5°	174.3	175.4	176.0	176.0	176.0	176.0	176.0
100°	219.3	220.0	220.3	220.3	220.3	220.3	220.3
102.5°	267.9	268.7	269.3	269.6	269.8	270.0	270.3
105°	341.1	342.0	343.0	343.9	344.9	345.8	346.8
107.5°	420.2	421.1	421.5	421.4	421.4	421.3	421.2
110°	471.4	470.7	470.9	471.8	472.8	473.7	474.7



TEST NUMBER: P333072-830

CATALOG NUMBER: S124RDIW-S795D1560U830-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	528.6	528.5	528.5	528.7	528.9	529.0	529.2
115°	615.9	615.6	615.2	614.9	614.6	614.3	614.0
117.5°	699.2	698.0	697.2	696.5	696.0	695.3	694.7
120°	755.6	754.0	753.6	754.2	754.8	755.4	756.1
122.5°	814.0	812.9	811.8	810.7	809.5	808.4	807.3
125°	899.2	898.5	897.9	897.2	896.6	896.0	895.3
127.5°	980.1	979.5	978.9	978.5	978.0	977.4	976.9
130°	1037.0	1036.3	1035.4	1034.2	1032.9	1031.6	1030.4
132.5°	1090.4	1089.8	1089.2	1088.7	1088.3	1087.7	1087.2
135°	1170.6	1170.0	1169.1	1168.2	1167.2	1166.3	1165.4
137.5°	1247.9	1247.1	1246.8	1247.0	1247.2	1247.4	1247.5
140°	1299.5	1299.1	1298.8	1298.5	1298.2	1297.9	1297.6
142.5°	1347.9	1347.9	1347.8	1347.7	1347.7	1347.6	1347.6
145°	1420.2	1419.9	1419.3	1418.3	1417.4	1416.5	1415.5
147.5°	1486.1	1485.8	1485.5	1485.3	1485.0	1484.6	1484.3
150°	1527.8	1527.8	1527.7	1527.3	1527.0	1526.7	1526.4
152.5°	1567.5	1568.3	1568.3	1567.4	1566.7	1565.8	1565.0
155°	1622.5	1623.8	1623.8	1622.5	1621.3	1620.0	1618.7
157.5°	1670.2	1671.1	1671.0	1670.0	1669.0	1667.8	1666.8
160°	1699.8	1700.7	1700.3	1698.8	1697.2	1695.6	1694.0
162.5°	1727.0	1728.7	1728.8	1727.2	1725.7	1724.1	1722.5
165°	1762.3	1764.2	1764.5	1763.2	1762.0	1760.7	1759.4
167.5°	1791.9	1793.8	1793.8	1791.8	1789.8	1787.8	1785.8
170°	1807.8	1809.7	1809.5	1807.3	1805.1	1802.9	1800.6
172.5°	1819.9	1822.0	1822.0	1819.8	1817.6	1815.3	1813.2
175°	1832.9	1835.1	1835.1	1832.9	1830.7	1828.4	1826.3
177.5°	1839.5	1841.3	1841.2	1839.1	1837.1	1835.1	1833.1
180°	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6	1837.6

(END OF REPORT)