

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332815-930

Luminaire Tested: **S124DIW-S1020D770U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332815-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S1020D770U930-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 770 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6115.3 lumens
Efficiency: N/A
Efficacy: 114.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 53.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332815-930

CATALOG NUMBER: S124DIW-S1020D770U930-4F0-1E-UDD-F

Luminous Intensity Polar Plot

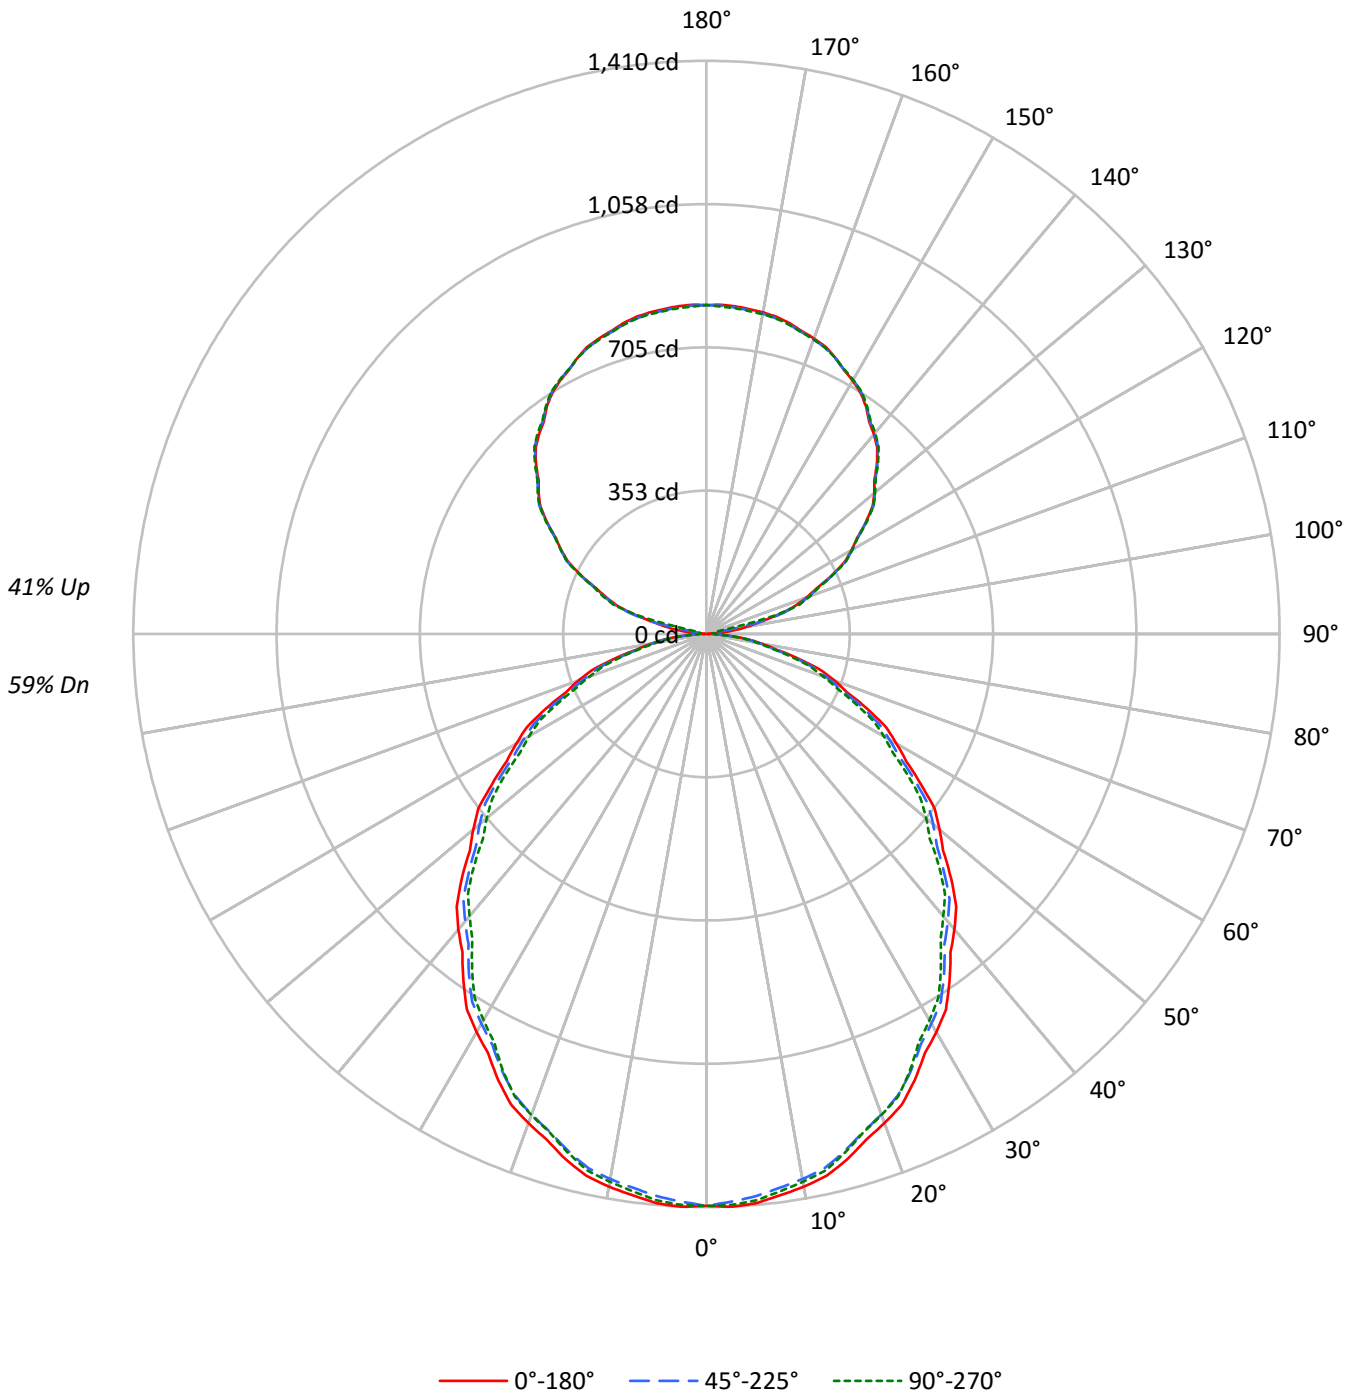



TEST NUMBER: P332815-930

CATALOG NUMBER: S124DIW-S1020D770U930-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64	59
1	100	95	91	88	93	89	86	83	77	75	73	67	65	63	57	56	54	50
2	91	83	77	72	85	78	72	68	68	64	60	59	56	53	50	48	46	42
3	83	73	66	60	77	69	62	57	60	55	51	52	48	45	44	41	39	35
4	76	65	57	51	70	61	54	48	53	48	43	46	42	38	40	36	34	30
5	70	58	50	43	65	54	47	41	48	42	37	42	37	33	36	32	29	26
6	64	52	44	38	60	49	41	36	43	37	33	38	33	29	32	29	26	23
7	59	47	39	33	55	44	37	32	39	33	29	34	29	26	30	26	23	20
8	55	43	35	29	51	40	33	28	36	30	26	31	27	23	27	23	21	18
9	51	39	31	26	48	37	30	25	33	27	23	29	24	21	25	21	19	16
10	48	36	28	24	45	34	27	23	30	25	21	27	22	19	23	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11357	11357	11357
5°	11391	11255	11336
10°	11320	11163	11218
15°	11183	11004	11032
20°	11001	10808	10817
25°	10794	10583	10553
30°	10540	10318	10224
35°	10276	10042	9909
40°	10003	9729	9551
45°	9717	9421	9240
50°	9401	9146	8862
55°	9060	8790	8504
60°	8719	8391	8136
65°	8334	8010	7687
70°	7903	7504	7211
75°	7243	6890	6716
80°	6448	6183	6025
85°	5641	5428	5326



TEST NUMBER: P332815-930

CATALOG NUMBER: S124DIW-S1020D770U930-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	132.5	2.2
10°-20°	373.3	6.1
20°-30°	549.4	9.0
30°-40°	638.7	10.4
40°-50°	638.7	10.4
50°-60°	558.7	9.1
60°-70°	414.9	6.8
70°-80°	235.7	3.9
80°-90°	70.4	1.2
90°-100°	27.7	0.5
100°-110°	176.5	2.9
110°-120°	337.5	5.5
120°-130°	428.5	7.0
130°-140°	458.5	7.5
140°-150°	428.7	7.0
150°-160°	345.7	5.7
160°-170°	223.0	3.6
170°-180°	76.9	1.3
0°-30°	1055.2	17.3
0°-40°	1693.9	27.7
0°-60°	2891.3	47.3
0°-90°	3612.4	59.1
90°-120°	541.7	8.9
90°-150°	1857.3	30.4
90°-180°	2503.0	40.9
0°-180°	6115.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1407	1407	1407	1407	1407	
5°	1406	1401	1389	1400	1399	133
15°	1338	1333	1317	1323	1320	377
25°	1212	1204	1188	1189	1185	557
35°	1043	1034	1019	1011	1006	652
45°	851	843	825	813	809	656
55°	644	640	624	611	604	576
65°	436	430	419	408	402	432
75°	232	227	221	217	215	247
85°	61	61	59	59	58	67
90°	2	8	13	17	18	5
95°	33	14	13	17	18	43
105°	182	186	189	193	172	191
115°	340	342	341	342	342	335
125°	478	480	479	481	482	427
135°	593	593	595	596	597	457
145°	684	686	686	686	688	427
155°	750	750	749	751	749	346
165°	791	788	788	792	787	223
175°	809	806	806	811	804	77
180°	809	809	809	809	809	



TEST NUMBER: P332815-930

CATALOG NUMBER: S124DIW-S1020D770U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1406.8	1406.8	1406.8	1406.8	1406.8	1406.8	1406.8	1406.8	1406.8	1406.8	1406.8
2.5°	1410.4	1409.8	1409.2	1408.6	1408.0	1406.6	1404.4	1402.2	1400.0	1397.7	1399.8
5°	1405.7	1404.7	1403.7	1402.6	1401.7	1399.8	1397.0	1394.2	1391.6	1388.8	1391.6
7.5°	1392.6	1391.6	1390.6	1389.6	1388.6	1386.6	1383.5	1380.5	1377.4	1374.4	1376.6
10°	1380.9	1379.9	1378.8	1377.9	1376.9	1374.8	1371.5	1368.2	1365.0	1361.7	1363.7
12.5°	1365.5	1364.6	1363.5	1362.5	1361.5	1359.3	1355.8	1352.4	1348.9	1345.5	1347.7
15°	1338.1	1337.0	1336.0	1335.1	1334.0	1331.6	1327.9	1324.1	1320.4	1316.6	1318.1
17.5°	1304.9	1303.7	1302.4	1301.1	1299.9	1297.5	1293.9	1290.4	1286.8	1283.3	1284.2
20°	1280.5	1279.3	1278.1	1276.8	1275.5	1273.0	1269.3	1265.5	1261.8	1258.0	1258.7
22.5°	1254.4	1252.7	1251.1	1249.4	1247.8	1245.0	1241.3	1237.5	1233.8	1230.0	1231.4
25°	1211.8	1210.1	1208.3	1206.5	1204.8	1202.2	1198.7	1195.1	1191.6	1188.1	1188.4
27.5°	1163.1	1161.3	1159.4	1157.6	1155.8	1153.3	1150.1	1146.8	1143.5	1140.3	1139.7
30°	1130.7	1128.6	1126.6	1124.6	1122.6	1120.0	1116.7	1113.5	1110.2	1106.9	1106.0
32.5°	1096.3	1094.5	1092.7	1091.0	1089.2	1086.5	1083.0	1079.6	1076.1	1072.7	1071.5
35°	1042.7	1041.0	1039.2	1037.5	1035.7	1033.1	1029.6	1026.1	1022.5	1019.0	1017.2
37.5°	986.1	984.5	982.9	981.3	979.7	977.1	973.2	969.5	965.7	962.0	960.1
40°	949.2	947.1	945.1	943.1	941.1	938.2	934.5	930.7	927.0	923.2	920.7
42.5°	909.5	908.2	907.0	905.9	904.7	902.0	897.8	893.6	889.5	885.3	882.4
45°	851.1	849.3	847.6	845.8	844.1	841.1	837.1	833.2	829.2	825.2	822.4
47.5°	789.9	788.8	787.6	786.4	785.1	782.7	779.0	775.3	771.6	767.8	764.8
50°	748.5	747.5	746.5	745.5	744.4	742.2	738.7	735.2	731.7	728.2	724.7
52.5°	707.9	706.7	705.5	704.3	703.1	700.7	696.9	693.2	689.5	685.8	682.7
55°	643.7	642.9	642.1	641.4	640.7	638.5	635.0	631.5	628.0	624.5	621.5
57.5°	582.4	581.5	580.7	579.8	578.9	576.7	573.3	569.9	566.4	563.0	560.1
60°	540.0	538.7	537.4	536.2	534.9	532.7	529.5	526.2	522.9	519.7	517.4
62.5°	498.5	497.4	496.4	495.3	494.2	492.0	488.5	485.1	481.6	478.2	476.1
65°	436.3	435.0	433.7	432.5	431.2	429.3	426.8	424.4	421.8	419.3	416.9
67.5°	373.6	372.4	371.3	370.1	368.9	367.2	364.8	362.4	360.0	357.6	355.1
70°	334.8	333.0	331.3	329.5	327.8	325.9	323.9	321.9	319.9	317.9	315.8
72.5°	293.3	291.6	289.8	288.0	286.3	284.6	283.0	281.4	279.8	278.2	276.6
75°	232.2	231.0	229.7	228.4	227.2	225.9	224.7	223.5	222.2	220.9	220.0
77.5°	173.8	173.3	172.7	172.2	171.6	170.8	169.7	168.6	167.5	166.4	166.1
80°	138.7	137.9	137.1	136.4	135.7	135.0	134.5	134.0	133.5	133.0	132.5
82.5°	104.4	104.0	103.7	103.3	103.0	102.7	102.6	102.6	102.5	102.3	102.1
85°	60.9	60.9	60.9	60.9	60.9	60.7	60.1	59.6	59.1	58.6	58.6
87.5°	23.8	23.9	24.0	24.1	24.2	24.2	24.3	24.3	24.3	24.3	24.5
90°	1.8	3.3	4.8	6.3	7.7	9.0	10.1	11.2	12.2	13.3	14.1
92.5°	7.7	7.7	7.8	7.8	7.9	8.6	9.6	10.7	11.7	12.8	13.6
95°	33.3	28.7	24.1	19.6	15.0	12.8	12.9	13.0	13.2	13.3	14.1
97.5°	70.7	73.5	76.4	79.2	82.1	76.0	61.0	46.0	31.0	16.0	16.1
100°	99.2	101.7	104.1	106.5	108.9	100.9	82.3	63.8	45.2	26.7	24.4
102.5°	131.2	133.0	134.8	136.6	138.3	137.9	135.6	133.1	130.7	128.3	103.6
105°	182.1	183.0	183.8	184.6	185.4	186.1	186.8	187.4	188.2	188.8	190.0
107.5°	229.5	229.9	230.3	230.7	231.1	231.8	232.7	233.6	234.5	235.4	236.0
110°	261.5	261.9	262.3	262.7	263.0	263.7	264.5	265.3	266.1	266.8	267.2



TEST NUMBER: P332815-930

CATALOG NUMBER: S124DIW-S1020D770U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	292.4	293.2	293.9	294.6	295.3	295.9	296.3	296.6	297.0	297.4	297.3
115°	340.1	340.6	341.0	341.3	341.7	341.9	341.7	341.6	341.4	341.3	341.6
117.5°	383.1	383.6	384.2	384.7	385.2	385.6	386.0	386.2	386.5	386.9	386.8
120°	412.1	412.7	413.2	413.8	414.3	414.5	414.3	414.3	414.1	413.9	414.3
122.5°	439.3	439.5	439.9	440.2	440.5	440.8	441.0	441.2	441.3	441.6	441.7
125°	478.1	478.7	479.2	479.7	480.2	480.4	480.1	479.9	479.6	479.3	479.7
127.5°	514.9	515.0	515.2	515.3	515.4	515.8	516.4	517.1	517.6	518.3	518.2
130°	538.6	538.7	538.9	539.0	539.2	539.4	539.8	540.2	540.6	541.0	541.2
132.5°	560.4	560.7	560.9	561.1	561.3	561.7	562.2	562.8	563.3	563.8	563.9
135°	593.0	593.0	592.8	592.6	592.6	592.7	593.3	593.8	594.4	594.9	595.2
137.5°	622.0	622.1	622.2	622.2	622.2	622.6	623.1	623.7	624.4	624.9	625.2
140°	640.9	641.2	641.4	641.7	642.0	642.2	642.5	642.8	643.0	643.4	643.7
142.5°	657.9	658.4	658.8	659.3	659.7	660.1	660.2	660.4	660.6	660.7	661.0
145°	683.9	684.3	684.7	685.1	685.5	685.7	685.7	685.7	685.7	685.7	685.8
147.5°	704.6	705.3	706.0	706.8	707.6	707.8	707.8	707.6	707.4	707.4	707.4
150°	719.6	720.1	720.6	721.2	721.7	721.9	721.8	721.6	721.5	721.4	721.4
152.5°	732.1	732.5	733.0	733.4	733.9	733.9	733.7	733.5	733.3	733.0	733.2
155°	749.8	750.0	750.1	750.2	750.4	750.2	749.8	749.4	749.0	748.6	749.2
157.5°	764.8	764.7	764.6	764.5	764.4	764.1	763.7	763.2	762.7	762.3	763.0
160°	773.4	773.0	772.7	772.3	771.8	771.5	771.4	771.3	771.1	771.0	771.8
162.5°	781.1	780.6	780.2	779.7	779.1	778.8	778.7	778.5	778.4	778.3	779.1
165°	791.0	790.3	789.6	789.0	788.3	788.0	788.0	788.0	788.0	788.0	789.0
167.5°	798.7	798.0	797.4	796.6	795.9	795.6	795.5	795.4	795.3	795.2	796.4
170°	803.1	802.3	801.4	800.6	799.9	799.5	799.6	799.8	799.9	800.1	801.1
172.5°	806.0	805.2	804.4	803.6	802.7	802.4	802.6	802.7	802.8	803.0	804.0
175°	809.1	808.3	807.6	806.7	805.9	805.6	805.7	805.8	806.0	806.1	807.3
177.5°	810.6	809.8	809.1	808.3	807.6	807.3	807.6	807.7	808.0	808.1	809.0
180°	809.1	809.1	809.1	809.1	809.1	809.1	809.1	809.1	809.1	809.1	809.1



TEST NUMBER: P332815-930

CATALOG NUMBER: S124DIW-S1020D770U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1406.8	1406.8	1406.8	1406.8	1406.8	1406.8	1406.8	1406.8
2.5°	1401.7	1403.8	1405.8	1406.7	1406.5	1406.3	1406.1	1405.9
5°	1394.2	1397.0	1399.8	1400.9	1400.4	1399.9	1399.4	1398.9
7.5°	1378.8	1381.0	1383.2	1384.1	1383.8	1383.5	1383.2	1382.9
10°	1365.7	1367.7	1369.7	1370.4	1369.9	1369.5	1369.0	1368.5
12.5°	1349.9	1352.1	1354.3	1355.0	1354.4	1353.6	1352.9	1352.3
15°	1319.6	1321.1	1322.7	1323.0	1322.3	1321.5	1320.8	1320.0
17.5°	1285.2	1286.1	1287.0	1287.3	1286.8	1286.3	1285.8	1285.2
20°	1259.5	1260.3	1261.0	1261.1	1260.6	1260.1	1259.6	1259.1
22.5°	1232.7	1234.1	1235.4	1235.7	1234.8	1233.9	1233.0	1232.1
25°	1188.6	1188.9	1189.1	1188.7	1187.7	1186.7	1185.7	1184.7
27.5°	1139.1	1138.5	1137.9	1137.0	1135.7	1134.5	1133.2	1132.0
30°	1105.0	1103.9	1102.9	1101.8	1100.6	1099.3	1098.0	1096.8
32.5°	1070.2	1069.1	1067.9	1066.7	1065.4	1064.1	1062.9	1061.6
35°	1015.5	1013.7	1012.0	1010.5	1009.3	1008.0	1006.7	1005.5
37.5°	958.1	956.3	954.4	952.6	951.0	949.3	947.6	946.0
40°	918.2	915.7	913.2	911.3	910.0	908.8	907.6	906.3
42.5°	879.5	876.6	873.7	871.8	871.0	870.1	869.3	868.5
45°	819.6	816.8	814.1	812.4	811.6	810.9	810.1	809.3
47.5°	761.7	758.6	755.5	752.9	751.1	749.1	747.2	745.3
50°	721.2	717.7	714.2	711.7	710.1	708.7	707.2	705.6
52.5°	679.6	676.5	673.4	670.9	669.0	667.1	665.2	663.2
55°	618.5	615.5	612.5	610.3	608.7	607.2	605.7	604.2
57.5°	557.3	554.4	551.5	549.3	547.9	546.5	545.0	543.6
60°	515.2	512.9	510.6	508.9	507.6	506.4	505.2	503.9
62.5°	474.1	472.0	469.9	468.3	467.1	465.8	464.6	463.3
65°	414.3	411.8	409.3	407.4	406.2	405.0	403.7	402.4
67.5°	352.8	350.3	348.0	346.6	346.2	345.8	345.5	345.2
70°	313.9	311.9	309.9	308.5	307.8	307.0	306.2	305.5
72.5°	275.0	273.4	271.8	270.6	269.9	269.1	268.4	267.6
75°	218.9	217.9	217.0	216.3	216.1	215.8	215.6	215.3
77.5°	165.8	165.5	165.2	164.7	164.0	163.4	162.7	162.1
80°	132.0	131.5	131.0	130.6	130.4	130.1	129.9	129.6
82.5°	101.7	101.4	101.2	100.9	100.6	100.4	100.1	99.9
85°	58.6	58.6	58.6	58.5	58.2	58.0	57.7	57.5
87.5°	24.6	24.8	24.9	25.0	25.1	25.2	25.2	25.3
90°	14.9	15.7	16.6	17.0	17.4	17.6	17.9	18.2
92.5°	14.4	15.2	16.1	16.5	16.6	16.6	16.6	16.7
95°	14.9	15.7	16.6	17.0	17.1	17.3	17.4	17.5
97.5°	16.1	16.2	16.3	16.4	16.6	16.7	16.8	17.0
100°	22.1	19.7	17.4	16.4	16.6	16.7	16.8	17.0
102.5°	79.0	54.3	29.7	17.3	17.4	17.4	17.4	17.4
105°	191.3	192.4	193.6	191.8	187.0	182.1	177.3	172.5
107.5°	236.6	237.2	237.8	238.3	238.9	239.4	239.9	240.4
110°	267.4	267.7	268.0	268.3	268.7	269.1	269.5	269.9



TEST NUMBER: P332815-930

CATALOG NUMBER: S124DIW-S1020D770U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	297.3	297.3	297.2	297.4	297.9	298.4	299.0	299.5
115°	341.9	342.1	342.4	342.5	342.5	342.5	342.5	342.5
117.5°	386.7	386.7	386.6	386.5	386.5	386.5	386.4	386.4
120°	414.5	414.7	415.0	415.0	414.7	414.5	414.3	413.9
122.5°	441.9	442.1	442.2	442.1	441.9	441.6	441.3	441.1
125°	480.1	480.5	480.9	481.2	481.4	481.4	481.6	481.8
127.5°	518.1	518.0	518.0	517.9	517.8	517.6	517.6	517.5
130°	541.3	541.4	541.6	541.6	541.6	541.6	541.6	541.6
132.5°	564.0	564.2	564.4	564.4	564.3	564.1	564.0	563.9
135°	595.4	595.7	596.0	596.2	596.5	596.8	597.0	597.3
137.5°	625.5	625.8	626.1	626.2	626.1	626.1	626.0	625.9
140°	644.1	644.5	644.9	645.2	645.3	645.5	645.6	645.7
142.5°	661.4	661.6	661.9	662.1	662.1	662.1	662.2	662.2
145°	685.9	686.1	686.2	686.4	686.6	687.0	687.2	687.5
147.5°	707.5	707.7	707.8	707.9	708.0	708.2	708.3	708.4
150°	721.4	721.4	721.4	721.5	721.6	721.7	721.9	721.9
152.5°	733.4	733.6	733.9	733.9	733.9	733.8	733.7	733.6
155°	749.7	750.2	750.7	750.8	750.4	750.0	749.6	749.3
157.5°	763.7	764.4	765.1	765.1	764.4	763.7	763.0	762.3
160°	772.7	773.4	774.2	774.2	773.4	772.7	771.8	771.0
162.5°	779.9	780.6	781.5	781.5	780.6	779.6	778.7	777.8
165°	790.1	791.2	792.2	792.2	791.0	789.8	788.6	787.3
167.5°	797.6	798.7	800.0	799.9	798.5	797.2	795.8	794.5
170°	802.2	803.3	804.4	804.2	802.9	801.5	800.2	798.8
172.5°	805.1	806.2	807.2	807.1	805.6	804.2	802.7	801.3
175°	808.5	809.8	811.0	810.7	809.1	807.6	805.9	804.3
177.5°	809.9	810.7	811.6	811.4	810.1	808.8	807.6	806.2
180°	809.1	809.1	809.1	809.1	809.1	809.1	809.1	809.1

(END OF REPORT)