

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332839-930

Luminaire Tested: **S124DIW-S1195D470U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332839-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124DIW-S1195D470U930-4F0-1E-UDD-F  
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 470 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5698.9 lumens  
Efficiency: N/A  
Efficacy: 108.8 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: Semi-Direct  
  
Input Watts (W): 52.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332839-930

CATALOG NUMBER: S124DIW-S1195D470U930-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

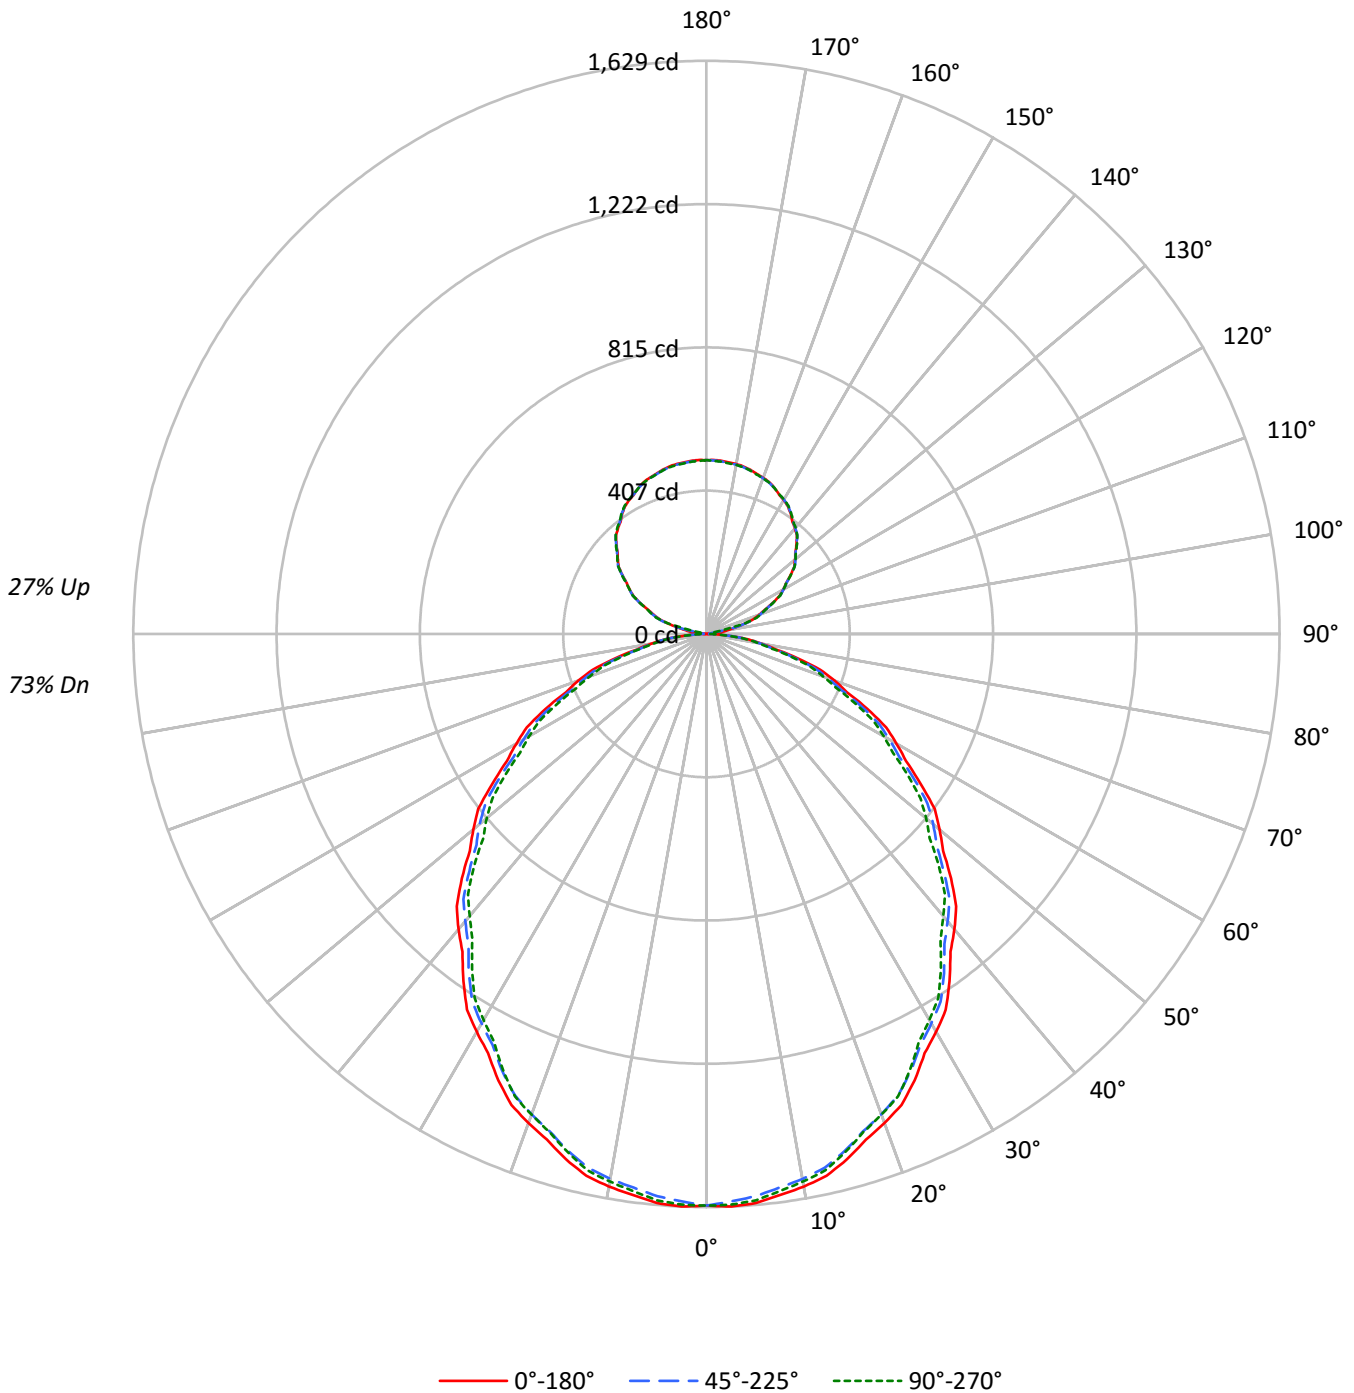



TEST NUMBER: P332839-930

CATALOG NUMBER: S124DIW-S1195D470U930-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	113	113	113	113	107	107	107	107	96	96	96	86	86	86	77	77	77	73
1	103	98	94	91	98	94	90	87	84	82	79	76	74	72	68	67	65	62
2	94	86	80	74	89	82	76	71	74	69	66	67	63	60	60	57	55	52
3	86	76	68	62	81	72	65	60	65	60	55	59	55	51	53	50	47	44
4	78	67	59	52	74	64	56	51	58	52	47	53	48	44	48	44	40	37
5	72	60	51	45	68	57	49	44	52	46	41	47	42	38	43	39	35	33
6	66	54	45	39	63	52	44	38	47	41	36	43	38	33	39	35	31	29
7	62	49	40	35	58	47	39	34	43	36	32	39	34	30	36	31	28	25
8	57	44	36	31	54	43	35	30	39	33	28	36	30	27	33	28	25	23
9	53	41	33	28	51	39	32	27	36	30	25	33	28	24	30	26	22	20
10	50	37	30	25	48	36	29	24	33	27	23	31	25	22	28	24	20	19

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	13116	13116	13116
5°	13156	12998	13092
10°	13073	12892	12956
15°	12915	12709	12741
20°	12706	12482	12493
25°	12466	12222	12188
30°	12172	11918	11808
35°	11869	11599	11445
40°	11552	11236	11031
45°	11222	10880	10671
50°	10857	10562	10236
55°	10463	10151	9821
60°	10069	9689	9397
65°	9626	9251	8879
70°	9128	8665	8327
75°	8366	7960	7757
80°	7443	7141	6960
85°	6512	6271	6150



TEST NUMBER: P332839-930

CATALOG NUMBER: S124DIW-S1195D470U930-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	153.0	2.7
10°-20°	431.1	7.6
20°-30°	634.5	11.1
30°-40°	737.7	12.9
40°-50°	737.7	12.9
50°-60°	645.3	11.3
60°-70°	479.2	8.4
70°-80°	272.3	4.8
80°-90°	80.0	1.4
90°-100°	16.9	0.3
100°-110°	107.7	1.9
110°-120°	206.1	3.6
120°-130°	261.6	4.6
130°-140°	279.9	4.9
140°-150°	261.7	4.6
150°-160°	211.1	3.7
160°-170°	136.1	2.4
170°-180°	46.9	0.8
0°-30°	1218.6	21.4
0°-40°	1956.3	34.3
0°-60°	3339.3	58.6
0°-90°	4170.8	73.2
90°-120°	330.7	5.8
90°-150°	1134.0	19.9
90°-180°	1528.0	26.8
0°-180°	5698.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1625	1625	1625	1625	1625	
5°	1623	1618	1604	1617	1616	154
15°	1545	1539	1521	1528	1524	435
25°	1400	1390	1372	1373	1368	644
35°	1204	1195	1177	1168	1161	753
45°	983	973	953	939	935	757
55°	743	739	721	706	698	666
65°	504	497	484	472	465	499
75°	268	262	255	250	249	285
85°	70	70	68	68	66	77
90°	1	5	8	10	11	5
95°	20	8	8	10	11	26
105°	111	113	115	118	105	116
115°	208	209	208	209	209	204
125°	292	293	293	294	294	261
135°	362	362	363	364	365	279
145°	418	419	419	419	420	261
155°	458	458	457	458	458	211
165°	483	481	481	484	481	136
175°	494	492	492	495	491	47
180°	494	494	494	494	494	



TEST NUMBER: P332839-930

CATALOG NUMBER: S124DIW-S1195D470U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7
2.5°	1628.9	1628.2	1627.5	1626.8	1626.1	1624.5	1622.0	1619.4	1616.9	1614.4	1616.7
5°	1623.4	1622.3	1621.1	1620.0	1618.9	1616.7	1613.5	1610.3	1607.1	1603.9	1607.1
7.5°	1608.3	1607.2	1606.1	1604.8	1603.7	1601.4	1597.8	1594.3	1590.8	1587.2	1589.8
10°	1594.8	1593.7	1592.5	1591.3	1590.2	1587.7	1584.0	1580.2	1576.5	1572.7	1575.0
12.5°	1577.1	1576.0	1574.8	1573.6	1572.5	1569.9	1565.9	1562.0	1558.0	1554.0	1556.5
15°	1545.3	1544.2	1543.0	1541.9	1540.7	1538.0	1533.6	1529.3	1524.9	1520.6	1522.3
17.5°	1507.1	1505.6	1504.1	1502.8	1501.3	1498.5	1494.4	1490.3	1486.2	1482.1	1483.2
20°	1479.0	1477.5	1476.0	1474.6	1473.2	1470.2	1465.9	1461.6	1457.3	1452.9	1453.8
22.5°	1448.7	1446.8	1445.0	1443.0	1441.1	1437.9	1433.6	1429.3	1425.0	1420.6	1422.2
25°	1399.5	1397.5	1395.5	1393.4	1391.4	1388.4	1384.3	1380.3	1376.2	1372.1	1372.5
27.5°	1343.3	1341.2	1339.1	1337.0	1335.0	1332.0	1328.3	1324.5	1320.8	1317.0	1316.3
30°	1305.8	1303.5	1301.1	1298.9	1296.6	1293.5	1289.7	1286.0	1282.2	1278.5	1277.3
32.5°	1266.2	1264.1	1262.1	1260.0	1257.8	1254.8	1250.8	1246.8	1242.8	1238.8	1237.5
35°	1204.3	1202.2	1200.2	1198.2	1196.1	1193.1	1189.0	1185.0	1181.0	1176.9	1174.8
37.5°	1138.9	1137.0	1135.2	1133.3	1131.5	1128.4	1124.1	1119.7	1115.3	1111.0	1108.8
40°	1096.2	1093.9	1091.5	1089.2	1087.0	1083.6	1079.3	1074.9	1070.6	1066.2	1063.3
42.5°	1050.4	1049.0	1047.6	1046.2	1044.8	1041.7	1036.9	1032.1	1027.3	1022.5	1019.1
45°	982.9	980.9	978.8	976.8	974.9	971.5	966.9	962.2	957.6	953.0	949.8
47.5°	912.3	910.9	909.5	908.2	906.8	904.0	899.7	895.4	891.1	886.9	883.3
50°	864.5	863.3	862.1	861.0	859.8	857.2	853.1	849.1	845.1	841.0	837.0
52.5°	817.6	816.2	814.8	813.4	812.0	809.2	804.9	800.6	796.4	792.1	788.5
55°	743.4	742.5	741.7	740.8	739.9	737.4	733.4	729.4	725.3	721.2	717.8
57.5°	672.5	671.6	670.6	669.6	668.6	666.1	662.1	658.1	654.1	650.1	646.9
60°	623.6	622.2	620.7	619.3	617.8	615.2	611.5	607.7	603.9	600.1	597.5
62.5°	575.7	574.5	573.2	572.0	570.9	568.3	564.3	560.3	556.3	552.3	549.9
65°	503.9	502.4	500.9	499.5	498.1	495.9	493.0	490.1	487.2	484.3	481.4
67.5°	431.5	430.2	428.8	427.5	426.2	424.0	421.3	418.5	415.7	412.9	410.2
70°	386.7	384.7	382.6	380.6	378.5	376.4	374.1	371.8	369.4	367.1	364.8
72.5°	338.8	336.7	334.7	332.6	330.7	328.7	326.9	325.0	323.2	321.3	319.4
75°	268.2	266.8	265.3	263.8	262.4	261.0	259.5	258.0	256.7	255.2	254.0
77.5°	200.7	200.1	199.5	198.9	198.2	197.2	196.0	194.7	193.5	192.2	191.8
80°	160.1	159.2	158.4	157.5	156.7	156.0	155.4	154.7	154.2	153.6	153.0
82.5°	120.6	120.2	119.8	119.4	119.0	118.7	118.5	118.5	118.3	118.2	117.9
85°	70.3	70.3	70.3	70.3	70.3	70.0	69.5	68.9	68.2	67.7	67.7
87.5°	27.3	27.2	27.2	27.1	27.1	27.0	26.9	26.8	26.7	26.7	26.7
90°	1.1	2.0	2.9	3.8	4.7	5.5	6.2	6.8	7.5	8.2	8.6
92.5°	4.6	4.7	4.7	4.8	4.9	5.2	5.9	6.5	7.2	7.8	8.3
95°	20.3	17.5	14.8	12.0	9.1	7.8	7.9	8.0	8.1	8.2	8.6
97.5°	43.1	44.9	46.6	48.3	50.1	46.4	37.3	28.0	18.9	9.8	9.8
100°	60.6	62.0	63.6	65.1	66.5	61.6	50.2	38.9	27.6	16.2	14.8
102.5°	80.1	81.2	82.3	83.3	84.5	84.2	82.8	81.3	79.8	78.4	63.3
105°	111.2	111.7	112.2	112.7	113.2	113.7	114.1	114.5	114.9	115.3	116.0
107.5°	140.1	140.4	140.6	140.9	141.1	141.5	142.0	142.6	143.2	143.7	144.1
110°	159.6	159.9	160.1	160.4	160.6	160.9	161.4	162.0	162.5	163.0	163.1



TEST NUMBER: P332839-930

CATALOG NUMBER: S124DIW-S1195D470U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	178.6	179.0	179.4	179.9	180.3	180.7	180.9	181.1	181.3	181.6	181.6
115°	207.7	207.9	208.1	208.4	208.6	208.7	208.6	208.6	208.5	208.4	208.6
117.5°	233.9	234.2	234.6	234.9	235.2	235.5	235.6	235.8	236.0	236.2	236.1
120°	251.6	251.9	252.3	252.6	252.9	253.1	253.0	252.9	252.8	252.7	252.9
122.5°	268.2	268.4	268.6	268.8	269.0	269.1	269.2	269.4	269.5	269.6	269.7
125°	291.9	292.2	292.5	292.9	293.2	293.3	293.1	292.9	292.8	292.6	292.9
127.5°	314.4	314.5	314.5	314.6	314.7	315.0	315.3	315.7	316.1	316.4	316.4
130°	328.8	328.9	329.1	329.1	329.2	329.4	329.6	329.9	330.1	330.4	330.4
132.5°	342.2	342.3	342.4	342.6	342.8	343.0	343.3	343.6	343.9	344.2	344.3
135°	362.1	362.0	361.9	361.8	361.7	361.9	362.2	362.6	362.9	363.2	363.4
137.5°	379.8	379.8	379.8	379.8	379.9	380.1	380.4	380.8	381.2	381.6	381.7
140°	391.3	391.4	391.6	391.8	391.9	392.1	392.2	392.5	392.6	392.8	393.1
142.5°	401.6	401.9	402.3	402.5	402.8	403.0	403.1	403.2	403.3	403.4	403.6
145°	417.5	417.8	418.0	418.2	418.5	418.7	418.7	418.7	418.7	418.7	418.7
147.5°	430.2	430.6	431.0	431.5	432.0	432.2	432.1	432.0	431.9	431.9	431.9
150°	439.4	439.7	440.0	440.3	440.7	440.8	440.7	440.6	440.5	440.4	440.4
152.5°	447.0	447.3	447.5	447.8	448.1	448.1	448.0	447.8	447.7	447.5	447.7
155°	457.8	457.9	458.0	458.0	458.1	458.0	457.8	457.5	457.3	457.1	457.4
157.5°	466.9	466.8	466.8	466.8	466.7	466.5	466.3	465.9	465.7	465.5	465.9
160°	472.2	472.0	471.7	471.5	471.2	471.1	471.0	470.9	470.8	470.8	471.2
162.5°	477.0	476.6	476.3	476.0	475.7	475.5	475.4	475.3	475.2	475.2	475.6
165°	482.9	482.5	482.1	481.7	481.3	481.1	481.1	481.1	481.1	481.1	481.8
167.5°	487.6	487.2	486.8	486.4	485.9	485.7	485.7	485.6	485.6	485.5	486.2
170°	490.3	489.8	489.3	488.9	488.4	488.1	488.2	488.3	488.4	488.4	489.1
172.5°	492.1	491.6	491.1	490.6	490.2	489.9	490.0	490.1	490.2	490.2	490.9
175°	494.0	493.5	493.0	492.5	492.0	491.9	492.0	492.0	492.1	492.2	492.9
177.5°	494.9	494.5	494.0	493.5	493.1	492.9	493.0	493.2	493.3	493.4	493.9
180°	494.0	494.0	494.0	494.0	494.0	494.0	494.0	494.0	494.0	494.0	494.0



TEST NUMBER: P332839-930

CATALOG NUMBER: S124DIW-S1195D470U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7
2.5°	1618.9	1621.3	1623.6	1624.6	1624.4	1624.2	1623.9	1623.7
5°	1610.3	1613.5	1616.7	1618.0	1617.4	1616.8	1616.2	1615.6
7.5°	1592.4	1594.9	1597.4	1598.6	1598.2	1597.8	1597.5	1597.2
10°	1577.3	1579.6	1581.9	1582.8	1582.3	1581.7	1581.0	1580.5
12.5°	1559.0	1561.5	1564.2	1565.0	1564.2	1563.3	1562.5	1561.7
15°	1524.0	1525.8	1527.5	1528.0	1527.1	1526.2	1525.3	1524.5
17.5°	1484.3	1485.4	1486.5	1486.7	1486.1	1485.6	1485.0	1484.4
20°	1454.7	1455.5	1456.4	1456.5	1456.0	1455.4	1454.8	1454.2
22.5°	1423.8	1425.3	1426.9	1427.1	1426.1	1425.1	1424.0	1422.9
25°	1372.8	1373.0	1373.4	1372.9	1371.7	1370.6	1369.5	1368.3
27.5°	1315.6	1314.9	1314.2	1313.1	1311.7	1310.3	1308.8	1307.3
30°	1276.1	1275.0	1273.8	1272.5	1271.1	1269.7	1268.2	1266.7
32.5°	1236.1	1234.7	1233.3	1231.9	1230.4	1229.0	1227.6	1226.1
35°	1172.9	1170.9	1168.8	1167.1	1165.6	1164.2	1162.7	1161.3
37.5°	1106.6	1104.4	1102.2	1100.2	1098.3	1096.3	1094.5	1092.5
40°	1060.5	1057.5	1054.7	1052.5	1051.1	1049.6	1048.1	1046.7
42.5°	1015.8	1012.4	1009.1	1006.9	1005.9	1004.9	1004.0	1003.0
45°	946.6	943.5	940.3	938.2	937.3	936.5	935.6	934.7
47.5°	879.7	876.1	872.5	869.6	867.4	865.2	863.0	860.8
50°	832.9	828.8	824.8	821.9	820.2	818.5	816.7	815.0
52.5°	784.9	781.3	777.7	774.9	772.7	770.5	768.3	766.1
55°	714.3	710.9	707.4	704.7	703.0	701.3	699.5	697.8
57.5°	643.6	640.3	637.0	634.5	632.8	631.1	629.4	627.8
60°	594.9	592.4	589.8	587.7	586.3	584.8	583.4	582.0
62.5°	547.5	545.1	542.7	540.9	539.4	537.9	536.5	535.1
65°	478.5	475.6	472.7	470.6	469.1	467.7	466.2	464.8
67.5°	407.4	404.6	401.9	400.2	399.8	399.4	399.0	398.6
70°	362.5	360.2	357.8	356.3	355.4	354.6	353.7	352.8
72.5°	317.6	315.8	313.9	312.5	311.7	310.8	309.9	309.1
75°	252.8	251.7	250.5	249.8	249.6	249.2	248.9	248.7
77.5°	191.4	191.1	190.8	190.2	189.5	188.7	187.9	187.2
80°	152.5	151.9	151.3	150.9	150.6	150.3	150.0	149.7
82.5°	117.5	117.2	116.8	116.5	116.2	115.9	115.6	115.4
85°	67.7	67.7	67.7	67.6	67.3	66.9	66.7	66.4
87.5°	26.8	26.9	27.0	27.1	27.1	27.1	27.1	27.2
90°	9.1	9.6	10.1	10.4	10.6	10.8	10.9	11.1
92.5°	8.8	9.3	9.8	10.0	10.1	10.1	10.2	10.2
95°	9.1	9.6	10.1	10.4	10.4	10.5	10.6	10.7
97.5°	9.9	9.9	9.9	10.0	10.1	10.2	10.3	10.4
100°	13.5	12.1	10.7	10.0	10.1	10.2	10.3	10.4
102.5°	48.2	33.2	18.1	10.6	10.6	10.6	10.6	10.7
105°	116.8	117.5	118.2	117.2	114.1	111.2	108.3	105.3
107.5°	144.5	144.8	145.2	145.5	145.9	146.1	146.4	146.8
110°	163.3	163.5	163.6	163.8	164.0	164.3	164.5	164.8





TEST NUMBER: P332839-930

CATALOG NUMBER: S124DIW-S1195D470U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	181.5	181.5	181.4	181.6	181.9	182.2	182.5	182.8
115°	208.7	208.9	209.0	209.1	209.1	209.1	209.1	209.1
117.5°	236.1	236.1	236.0	236.0	235.9	235.9	235.9	235.9
120°	253.1	253.2	253.4	253.4	253.2	253.1	252.9	252.7
122.5°	269.8	269.9	269.9	269.9	269.8	269.6	269.5	269.3
125°	293.1	293.3	293.6	293.8	293.8	293.9	294.0	294.1
127.5°	316.3	316.3	316.3	316.2	316.1	316.0	316.0	315.9
130°	330.5	330.6	330.7	330.7	330.7	330.7	330.7	330.7
132.5°	344.4	344.5	344.5	344.5	344.5	344.5	344.4	344.3
135°	363.5	363.7	363.9	364.0	364.2	364.4	364.5	364.7
137.5°	381.9	382.0	382.3	382.3	382.3	382.2	382.2	382.1
140°	393.3	393.5	393.8	394.0	394.0	394.1	394.2	394.3
142.5°	403.7	404.0	404.1	404.2	404.2	404.3	404.3	404.3
145°	418.8	418.9	419.0	419.1	419.2	419.4	419.6	419.7
147.5°	432.0	432.0	432.1	432.2	432.3	432.4	432.4	432.5
150°	440.4	440.4	440.4	440.5	440.6	440.7	440.8	440.8
152.5°	447.8	447.9	448.1	448.1	448.1	448.0	447.9	447.9
155°	457.7	458.0	458.4	458.4	458.2	458.0	457.7	457.5
157.5°	466.3	466.7	467.1	467.1	466.7	466.3	465.9	465.5
160°	471.7	472.2	472.7	472.7	472.2	471.7	471.2	470.8
162.5°	476.1	476.6	477.1	477.1	476.5	476.0	475.4	474.9
165°	482.4	483.1	483.7	483.6	482.9	482.2	481.4	480.7
167.5°	487.0	487.7	488.4	488.4	487.5	486.7	485.9	485.1
170°	489.8	490.4	491.1	491.1	490.2	489.3	488.5	487.7
172.5°	491.5	492.2	492.8	492.8	491.9	491.0	490.1	489.2
175°	493.7	494.4	495.1	495.0	494.0	493.0	492.0	491.1
177.5°	494.5	495.0	495.5	495.4	494.6	493.8	493.0	492.3
180°	494.0	494.0	494.0	494.0	494.0	494.0	494.0	494.0

(END OF REPORT)