

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332846-930

Luminaire Tested: **S124DIW-S1195D770U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332846-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124DIW-S1195D770U930-4F0-1E-UDD-F1  
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 770 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6342.4 lumens  
Efficiency: N/A  
Efficacy: 106.1 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 59.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332846-930

CATALOG NUMBER: S124DIW-S1195D770U930-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

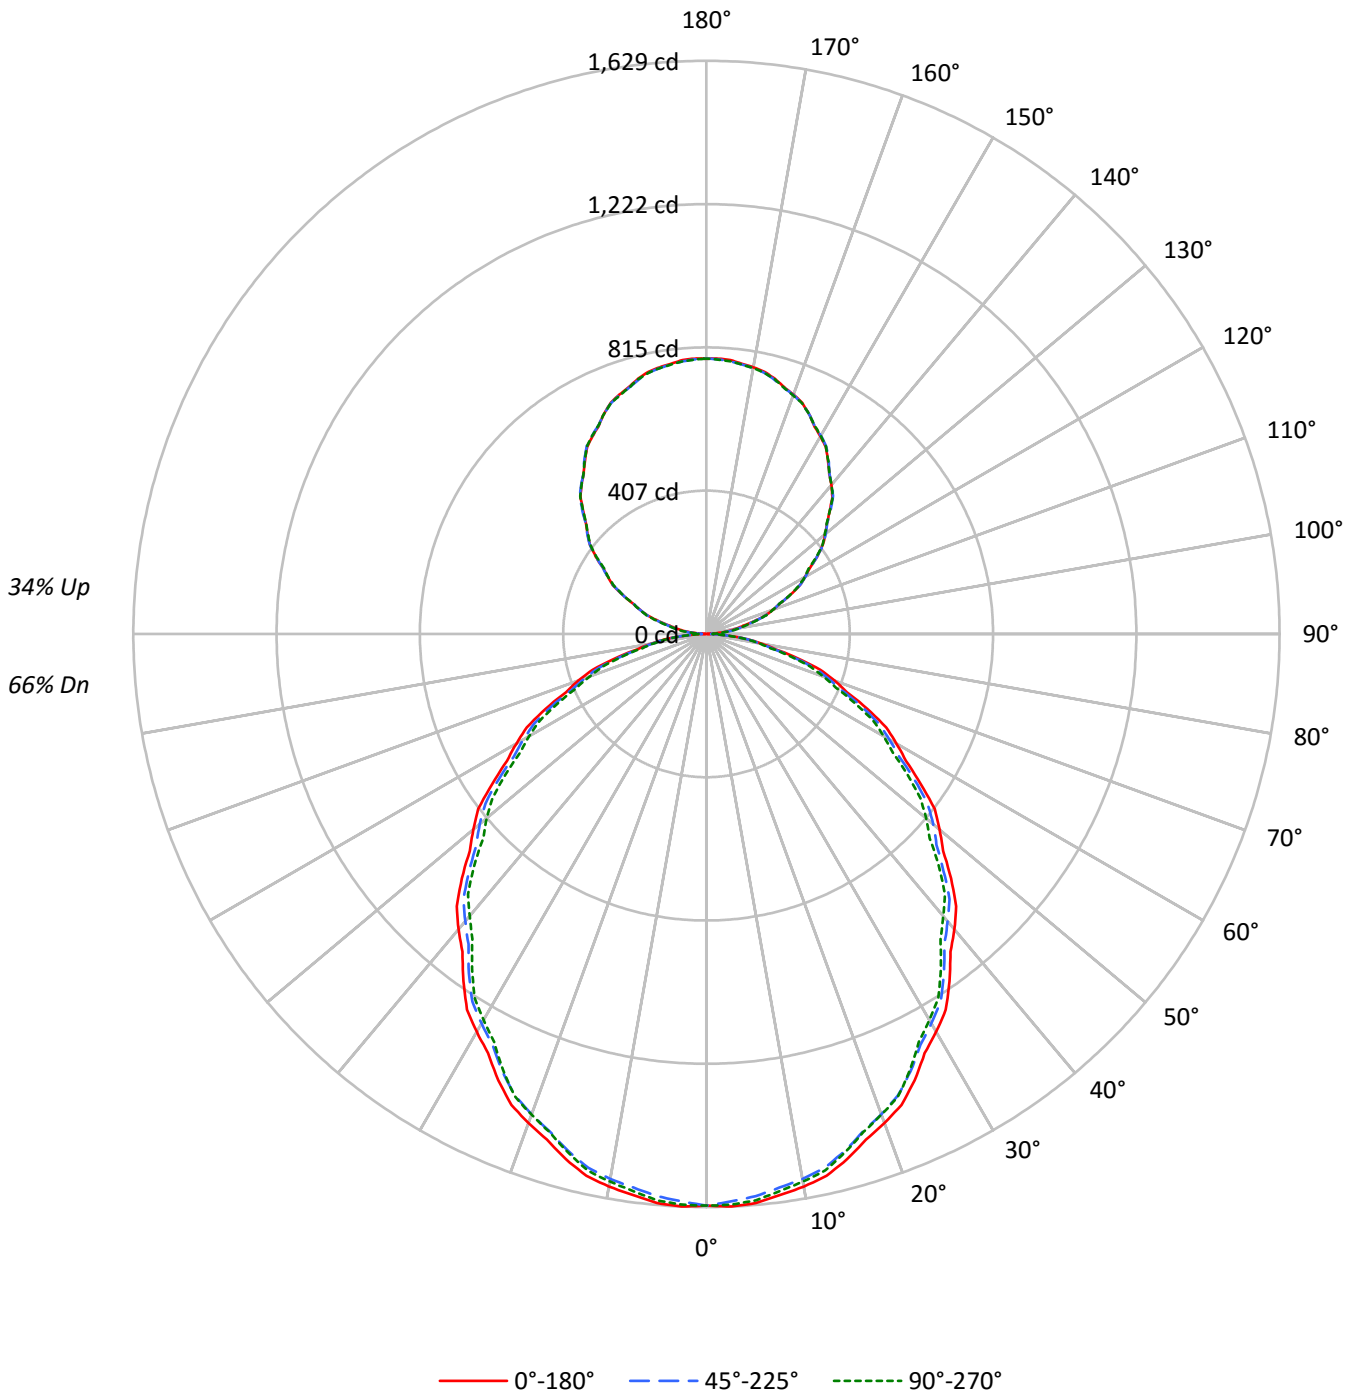



TEST NUMBER: P332846-930

CATALOG NUMBER: S124DIW-S1195D770U930-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	104	104	104	104	92	92	92	81	81	81	71	71	71	66
1	101	97	93	89	95	91	88	85	81	78	76	71	69	67	62	61	60	55
2	92	85	78	73	86	80	74	69	71	66	63	63	59	56	55	52	50	46
3	84	74	67	61	79	70	63	58	62	57	53	55	51	48	49	45	43	39
4	77	66	58	51	72	62	55	49	56	50	45	49	45	41	43	40	37	34
5	71	59	50	44	66	56	48	42	50	44	39	44	39	35	39	35	32	29
6	65	53	45	39	61	50	43	37	45	39	34	40	35	31	36	31	28	26
7	60	48	40	34	57	45	38	33	41	35	30	37	31	28	33	28	25	23
8	56	44	36	30	53	41	34	29	37	31	27	33	28	25	30	26	23	20
9	52	40	32	27	49	38	31	26	34	28	24	31	26	22	28	23	20	18
10	49	37	29	24	46	35	28	23	32	26	22	29	24	20	26	22	19	17

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	13116	13116	13116
5°	13156	12998	13092
10°	13073	12892	12956
15°	12915	12709	12741
20°	12706	12482	12493
25°	12466	12222	12188
30°	12172	11918	11808
35°	11869	11599	11445
40°	11552	11236	11031
45°	11222	10880	10671
50°	10857	10562	10236
55°	10463	10151	9821
60°	10069	9689	9397
65°	9626	9251	8879
70°	9128	8665	8327
75°	8366	7960	7757
80°	7443	7141	6960
85°	6512	6271	6150



TEST NUMBER: P332846-930

CATALOG NUMBER: S124DIW-S1195D770U930-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	153.0	2.4
10°-20°	431.1	6.8
20°-30°	634.5	10.0
30°-40°	737.7	11.6
40°-50°	737.7	11.6
50°-60°	645.3	10.2
60°-70°	479.2	7.6
70°-80°	272.3	4.3
80°-90°	80.9	1.3
90°-100°	51.6	0.8
100°-110°	152.9	2.4
110°-120°	259.5	4.1
120°-130°	342.1	5.4
130°-140°	384.2	6.1
140°-150°	377.6	6.0
150°-160°	317.6	5.0
160°-170°	211.3	3.3
170°-180°	74.0	1.2
0°-30°	1218.6	19.2
0°-40°	1956.3	30.8
0°-60°	3339.3	52.7
0°-90°	4171.7	65.8
90°-120°	463.9	7.3
90°-150°	1567.9	24.7
90°-180°	2171.0	34.2
0°-180°	6342.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1625	1625	1625	1625	1625	
5°	1623	1618	1604	1617	1616	154
15°	1545	1539	1521	1528	1524	435
25°	1400	1390	1372	1373	1368	644
35°	1204	1195	1177	1168	1161	753
45°	983	973	953	939	935	757
55°	743	739	721	706	698	666
65°	504	497	484	472	465	499
75°	268	262	255	250	249	285
85°	70	70	68	68	66	77
90°	2	8	13	17	18	6
95°	36	42	46	48	48	40
105°	141	142	144	146	148	150
115°	264	264	263	262	261	260
125°	384	384	384	382	381	342
135°	496	499	499	498	496	383
145°	602	604	605	604	603	377
155°	690	690	689	691	689	317
165°	751	749	748	751	749	212
175°	781	778	778	781	778	74
180°	782	782	782	782	782	



TEST NUMBER: P332846-930

CATALOG NUMBER: S124DIW-S1195D770U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7
2.5°	1628.9	1628.2	1627.5	1626.8	1626.1	1624.5	1622.0	1619.4	1616.9	1614.4	1616.7
5°	1623.4	1622.3	1621.1	1620.0	1618.9	1616.7	1613.5	1610.3	1607.1	1603.9	1607.1
7.5°	1608.3	1607.2	1606.1	1604.8	1603.7	1601.4	1597.8	1594.3	1590.8	1587.2	1589.8
10°	1594.8	1593.7	1592.5	1591.3	1590.2	1587.7	1584.0	1580.2	1576.5	1572.7	1575.0
12.5°	1577.1	1576.0	1574.8	1573.6	1572.5	1569.9	1565.9	1562.0	1558.0	1554.0	1556.5
15°	1545.3	1544.2	1543.0	1541.9	1540.7	1538.0	1533.6	1529.3	1524.9	1520.6	1522.3
17.5°	1507.1	1505.6	1504.1	1502.8	1501.3	1498.5	1494.4	1490.3	1486.2	1482.1	1483.2
20°	1479.0	1477.5	1476.0	1474.6	1473.2	1470.2	1465.9	1461.6	1457.3	1452.9	1453.8
22.5°	1448.7	1446.8	1445.0	1443.0	1441.1	1437.9	1433.6	1429.3	1425.0	1420.6	1422.2
25°	1399.5	1397.5	1395.5	1393.4	1391.4	1388.4	1384.3	1380.3	1376.2	1372.1	1372.5
27.5°	1343.3	1341.2	1339.1	1337.0	1335.0	1332.0	1328.3	1324.5	1320.8	1317.0	1316.3
30°	1305.8	1303.5	1301.1	1298.9	1296.6	1293.5	1289.7	1286.0	1282.2	1278.5	1277.3
32.5°	1266.2	1264.1	1262.1	1260.0	1257.8	1254.8	1250.8	1246.8	1242.8	1238.8	1237.5
35°	1204.3	1202.2	1200.2	1198.2	1196.1	1193.1	1189.0	1185.0	1181.0	1176.9	1174.8
37.5°	1138.9	1137.0	1135.2	1133.3	1131.5	1128.4	1124.1	1119.7	1115.3	1111.0	1108.8
40°	1096.2	1093.9	1091.5	1089.2	1087.0	1083.6	1079.3	1074.9	1070.6	1066.2	1063.3
42.5°	1050.4	1049.0	1047.6	1046.2	1044.8	1041.7	1036.9	1032.1	1027.3	1022.5	1019.1
45°	982.9	980.9	978.8	976.8	974.9	971.5	966.9	962.2	957.6	953.0	949.8
47.5°	912.3	910.9	909.5	908.2	906.8	904.0	899.7	895.4	891.1	886.9	883.3
50°	864.5	863.3	862.1	861.0	859.8	857.2	853.1	849.1	845.1	841.0	837.0
52.5°	817.6	816.2	814.8	813.4	812.0	809.2	804.9	800.6	796.4	792.1	788.5
55°	743.4	742.5	741.7	740.8	739.9	737.4	733.4	729.4	725.3	721.2	717.8
57.5°	672.5	671.6	670.6	669.6	668.6	666.1	662.1	658.1	654.1	650.1	646.9
60°	623.6	622.2	620.7	619.3	617.8	615.2	611.5	607.7	603.9	600.1	597.5
62.5°	575.7	574.5	573.2	572.0	570.9	568.3	564.3	560.3	556.3	552.3	549.9
65°	503.9	502.4	500.9	499.5	498.1	495.9	493.0	490.1	487.2	484.3	481.4
67.5°	431.5	430.2	428.8	427.5	426.2	424.0	421.3	418.5	415.7	412.9	410.2
70°	386.7	384.7	382.6	380.6	378.5	376.4	374.1	371.8	369.4	367.1	364.8
72.5°	338.8	336.7	334.7	332.6	330.7	328.7	326.9	325.0	323.2	321.3	319.4
75°	268.2	266.8	265.3	263.8	262.4	261.0	259.5	258.0	256.7	255.2	254.0
77.5°	200.7	200.1	199.5	198.9	198.2	197.2	196.0	194.7	193.5	192.2	191.8
80°	160.1	159.2	158.4	157.5	156.7	156.0	155.4	154.7	154.2	153.6	153.0
82.5°	120.6	120.2	119.8	119.4	119.0	118.7	118.5	118.5	118.3	118.2	117.9
85°	70.3	70.3	70.3	70.3	70.3	70.0	69.5	68.9	68.2	67.7	67.7
87.5°	27.5	27.5	27.6	27.6	27.7	27.7	27.7	27.7	27.6	27.6	27.8
90°	1.8	3.3	4.8	6.3	7.7	9.0	10.1	11.2	12.2	13.3	14.1
92.5°	13.0	14.7	16.3	18.0	19.7	21.0	21.7	22.4	23.2	24.0	24.5
95°	36.3	37.5	38.7	39.9	41.2	42.2	43.1	44.1	45.1	46.0	46.4
97.5°	63.4	64.4	65.4	66.3	67.3	68.3	69.5	70.5	71.7	72.7	73.2
100°	84.7	85.3	85.8	86.3	86.8	87.7	88.9	90.2	91.4	92.6	92.9
102.5°	107.0	107.2	107.4	107.6	107.9	108.5	109.6	110.7	111.8	112.9	113.3
105°	141.0	141.1	141.3	141.4	141.5	141.9	142.4	142.9	143.5	144.0	144.4
107.5°	176.7	176.8	177.0	177.2	177.3	177.5	177.6	177.7	177.7	177.8	178.1
110°	200.9	201.1	201.5	201.7	201.9	202.0	201.9	201.8	201.6	201.5	201.2



TEST NUMBER: P332846-930

CATALOG NUMBER: S124DIW-S1195D770U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	226.1	226.1	226.2	226.2	226.2	226.2	225.9	225.7	225.4	225.2	225.2
115°	263.8	263.8	263.8	263.8	263.8	263.7	263.4	263.2	262.9	262.6	262.4
117.5°	299.4	299.5	299.6	299.7	299.9	299.8	299.6	299.5	299.2	299.1	298.6
120°	323.1	323.7	324.2	324.7	325.3	325.3	325.0	324.6	324.2	323.8	323.0
122.5°	347.8	348.1	348.2	348.5	348.7	348.7	348.5	348.3	348.1	348.0	347.5
125°	384.3	384.3	384.3	384.3	384.3	384.2	384.0	383.9	383.8	383.6	383.4
127.5°	417.3	417.7	418.1	418.5	418.9	419.0	418.7	418.6	418.3	418.2	417.8
130°	440.5	440.9	441.3	441.7	442.1	442.3	442.3	442.3	442.3	442.3	442.1
132.5°	464.2	464.6	464.8	465.1	465.5	465.5	465.4	465.3	465.2	465.0	464.8
135°	495.6	496.4	497.2	498.0	498.8	499.2	499.2	499.2	499.2	499.2	499.0
137.5°	529.7	530.1	530.4	530.8	531.2	531.5	531.7	531.9	532.1	532.4	532.0
140°	552.4	552.7	553.0	553.3	553.5	553.7	553.7	553.7	553.7	553.7	553.5
142.5°	573.2	573.6	573.8	574.1	574.4	574.5	574.3	574.2	574.1	574.0	574.0
145°	602.1	602.6	603.2	603.7	604.2	604.5	604.7	604.9	605.0	605.1	605.0
147.5°	630.6	631.3	631.9	632.6	633.2	633.5	633.4	633.2	633.2	633.1	632.9
150°	648.1	648.6	649.1	649.7	650.2	650.5	650.5	650.5	650.5	650.5	650.5
152.5°	664.6	664.9	665.2	665.5	665.9	666.0	666.1	666.3	666.3	666.4	666.8
155°	689.8	689.8	689.8	689.8	689.8	689.7	689.6	689.5	689.3	689.3	689.7
157.5°	711.1	710.9	710.6	710.4	710.1	710.0	710.0	710.0	710.0	709.9	710.3
160°	723.7	723.6	723.4	723.3	723.2	723.0	722.9	722.8	722.6	722.5	722.9
162.5°	735.3	735.0	734.6	734.3	733.9	733.7	733.5	733.4	733.3	733.1	733.9
165°	751.0	750.6	750.2	749.7	749.3	749.0	748.7	748.4	748.2	747.9	748.7
167.5°	762.9	762.4	761.8	761.2	760.7	760.3	760.4	760.4	760.4	760.5	761.3
170°	769.7	769.0	768.3	767.7	767.0	766.7	766.9	767.0	767.1	767.3	768.1
172.5°	774.5	774.0	773.4	772.8	772.3	772.0	772.0	772.1	772.1	772.1	773.1
175°	781.2	780.5	779.8	779.2	778.5	778.1	778.0	777.8	777.7	777.6	778.5
177.5°	783.3	782.9	782.3	781.8	781.2	781.0	781.0	781.0	781.0	781.0	781.7
180°	782.4	782.4	782.4	782.4	782.4	782.4	782.4	782.4	782.4	782.4	782.4



TEST NUMBER: P332846-930

CATALOG NUMBER: S124DIW-S1195D770U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7	1624.7
2.5°	1618.9	1621.3	1623.6	1624.6	1624.4	1624.2	1623.9	1623.7
5°	1610.3	1613.5	1616.7	1618.0	1617.4	1616.8	1616.2	1615.6
7.5°	1592.4	1594.9	1597.4	1598.6	1598.2	1597.8	1597.5	1597.2
10°	1577.3	1579.6	1581.9	1582.8	1582.3	1581.7	1581.0	1580.5
12.5°	1559.0	1561.5	1564.2	1565.0	1564.2	1563.3	1562.5	1561.7
15°	1524.0	1525.8	1527.5	1528.0	1527.1	1526.2	1525.3	1524.5
17.5°	1484.3	1485.4	1486.5	1486.7	1486.1	1485.6	1485.0	1484.4
20°	1454.7	1455.5	1456.4	1456.5	1456.0	1455.4	1454.8	1454.2
22.5°	1423.8	1425.3	1426.9	1427.1	1426.1	1425.1	1424.0	1422.9
25°	1372.8	1373.0	1373.4	1372.9	1371.7	1370.6	1369.5	1368.3
27.5°	1315.6	1314.9	1314.2	1313.1	1311.7	1310.3	1308.8	1307.3
30°	1276.1	1275.0	1273.8	1272.5	1271.1	1269.7	1268.2	1266.7
32.5°	1236.1	1234.7	1233.3	1231.9	1230.4	1229.0	1227.6	1226.1
35°	1172.9	1170.9	1168.8	1167.1	1165.6	1164.2	1162.7	1161.3
37.5°	1106.6	1104.4	1102.2	1100.2	1098.3	1096.3	1094.5	1092.5
40°	1060.5	1057.5	1054.7	1052.5	1051.1	1049.6	1048.1	1046.7
42.5°	1015.8	1012.4	1009.1	1006.9	1005.9	1004.9	1004.0	1003.0
45°	946.6	943.5	940.3	938.2	937.3	936.5	935.6	934.7
47.5°	879.7	876.1	872.5	869.6	867.4	865.2	863.0	860.8
50°	832.9	828.8	824.8	821.9	820.2	818.5	816.7	815.0
52.5°	784.9	781.3	777.7	774.9	772.7	770.5	768.3	766.1
55°	714.3	710.9	707.4	704.7	703.0	701.3	699.5	697.8
57.5°	643.6	640.3	637.0	634.5	632.8	631.1	629.4	627.8
60°	594.9	592.4	589.8	587.7	586.3	584.8	583.4	582.0
62.5°	547.5	545.1	542.7	540.9	539.4	537.9	536.5	535.1
65°	478.5	475.6	472.7	470.6	469.1	467.7	466.2	464.8
67.5°	407.4	404.6	401.9	400.2	399.8	399.4	399.0	398.6
70°	362.5	360.2	357.8	356.3	355.4	354.6	353.7	352.8
72.5°	317.6	315.8	313.9	312.5	311.7	310.8	309.9	309.1
75°	252.8	251.7	250.5	249.8	249.6	249.2	248.9	248.7
77.5°	191.4	191.1	190.8	190.2	189.5	188.7	187.9	187.2
80°	152.5	151.9	151.3	150.9	150.6	150.3	150.0	149.7
82.5°	117.5	117.2	116.8	116.5	116.2	115.9	115.6	115.4
85°	67.7	67.7	67.7	67.6	67.3	66.9	66.7	66.4
87.5°	28.0	28.1	28.3	28.4	28.5	28.5	28.5	28.6
90°	14.9	15.7	16.6	17.0	17.4	17.6	17.9	18.2
92.5°	24.9	25.4	25.9	26.3	26.4	26.6	26.7	26.9
95°	46.8	47.2	47.6	47.8	47.8	47.8	47.8	47.8
97.5°	73.7	74.2	74.7	74.9	74.9	74.9	74.9	74.9
100°	93.1	93.4	93.7	93.8	93.8	93.8	93.8	93.8
102.5°	113.7	114.1	114.4	114.6	114.8	114.9	115.0	115.1
105°	144.8	145.2	145.6	146.0	146.4	146.8	147.2	147.7
107.5°	178.6	178.9	179.3	179.4	179.4	179.4	179.4	179.4
110°	201.0	200.7	200.4	200.5	200.9	201.3	201.7	202.1





TEST NUMBER: P332846-930

CATALOG NUMBER: S124DIW-S1195D770U930-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	225.1	225.0	225.0	225.0	225.1	225.2	225.3	225.3
115°	262.4	262.2	262.0	262.0	261.8	261.7	261.5	261.4
117.5°	298.2	297.7	297.2	296.9	296.6	296.3	296.0	295.8
120°	322.4	321.7	321.1	320.8	321.1	321.4	321.6	321.9
122.5°	347.0	346.6	346.1	345.6	345.1	344.6	344.2	343.7
125°	383.1	382.9	382.5	382.3	382.0	381.7	381.5	381.2
127.5°	417.6	417.4	417.0	416.8	416.6	416.4	416.1	416.0
130°	441.8	441.5	441.2	440.8	440.3	439.8	439.2	438.7
132.5°	464.6	464.3	464.0	463.7	463.6	463.3	463.1	462.9
135°	498.6	498.4	498.1	497.8	497.4	497.0	496.6	496.2
137.5°	531.7	531.3	531.0	530.8	530.9	531.0	531.1	531.2
140°	553.4	553.3	553.1	553.0	552.9	552.7	552.6	552.4
142.5°	574.0	573.9	573.9	573.9	573.8	573.8	573.8	573.7
145°	604.9	604.7	604.5	604.3	603.9	603.5	603.1	602.7
147.5°	632.8	632.8	632.6	632.5	632.3	632.3	632.1	631.9
150°	650.5	650.5	650.5	650.4	650.3	650.1	650.0	649.9
152.5°	667.1	667.4	667.7	667.7	667.4	667.1	666.7	666.3
155°	690.3	690.8	691.4	691.4	690.8	690.3	689.7	689.3
157.5°	710.7	711.1	711.5	711.5	711.0	710.6	710.1	709.6
160°	723.3	723.7	724.1	724.0	723.3	722.6	721.9	721.3
162.5°	734.6	735.3	736.1	736.1	735.4	734.7	734.1	733.4
165°	749.5	750.3	751.1	751.3	750.7	750.2	749.7	749.1
167.5°	762.1	762.9	763.7	763.7	762.9	762.1	761.2	760.3
170°	768.9	769.7	770.5	770.5	769.5	768.6	767.6	766.7
172.5°	774.0	774.9	775.8	775.8	774.8	773.9	772.9	772.0
175°	779.4	780.4	781.3	781.3	780.4	779.4	778.5	777.6
177.5°	782.4	783.2	784.0	783.9	783.0	782.2	781.3	780.5
180°	782.4	782.4	782.4	782.4	782.4	782.4	782.4	782.4

(END OF REPORT)