

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332794-930

Luminaire Tested: **S124DIW-S795D1340U930-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332794-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S795D1340U930-4F0-1E-UDD-A1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6685.1 lumens
Efficiency: N/A
Efficacy: 108.9 lumens/watt
Spacing Criteria (0/90/45): 1.31 / 1.23 / 1.41
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 61.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332794-930
CATALOG NUMBER: S124DIW-S795D1340U930-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

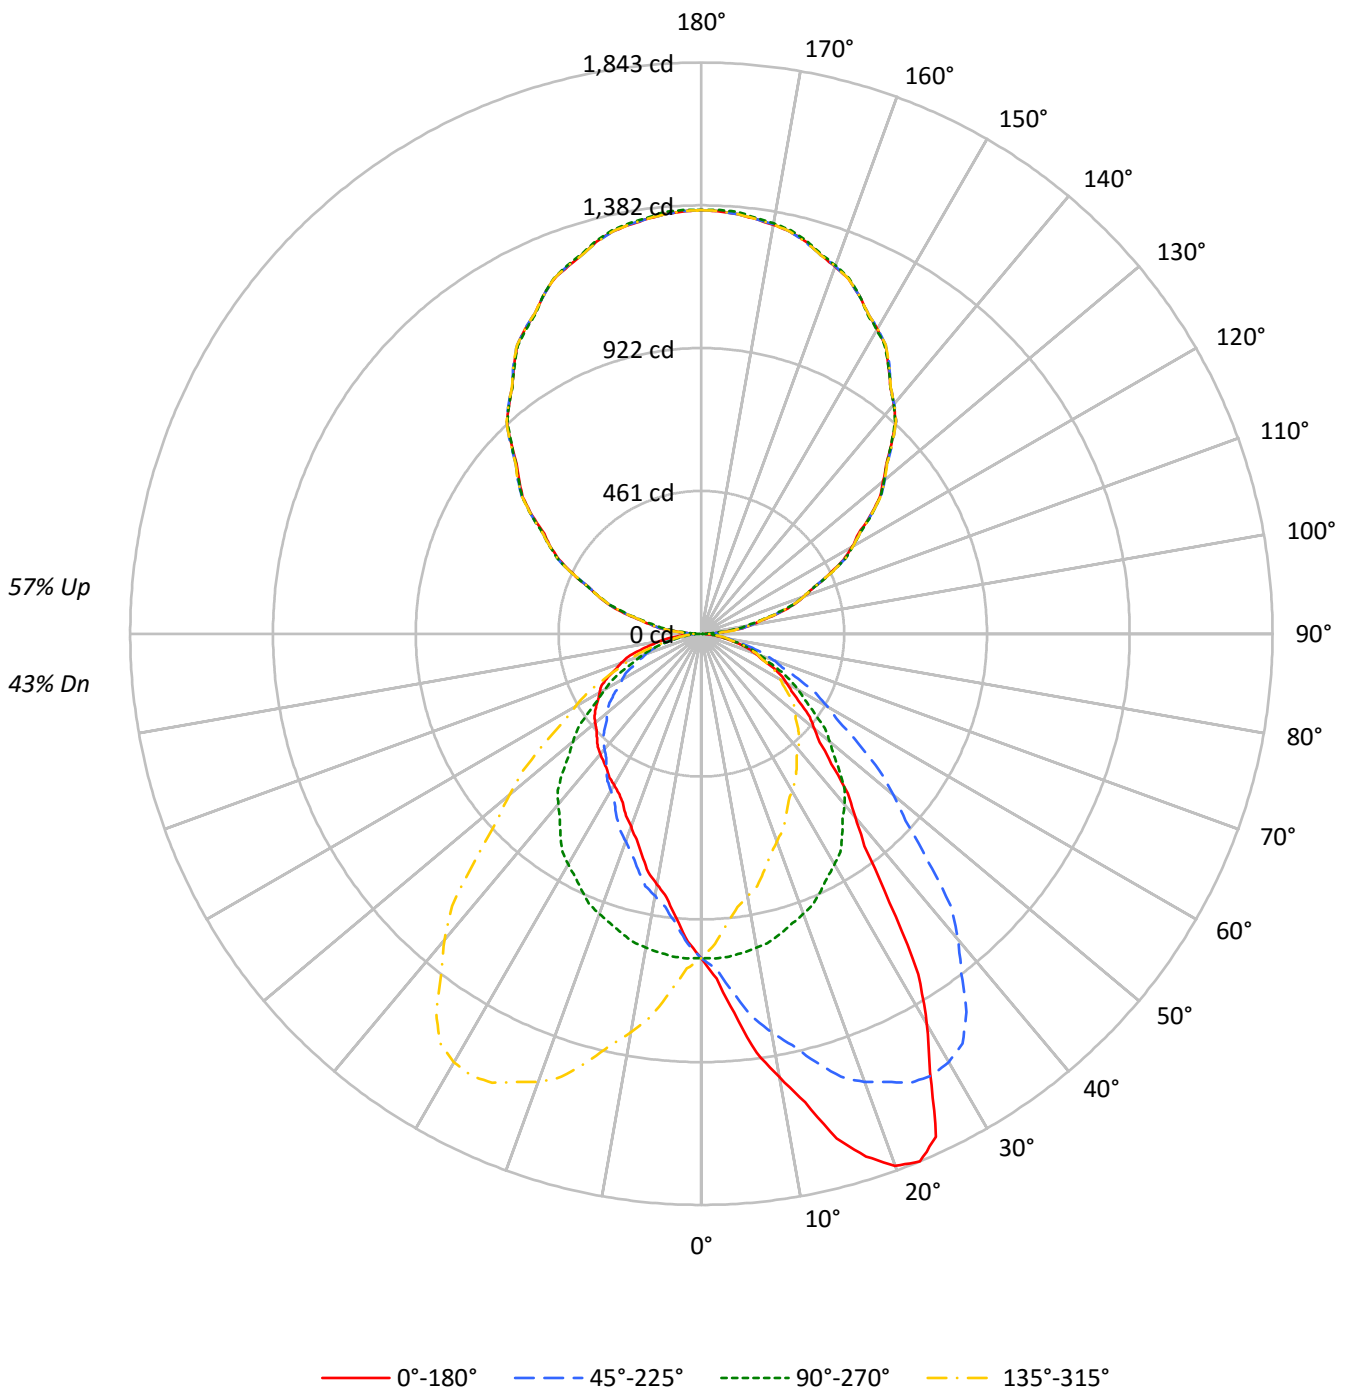



TEST NUMBER: P332794-930

CATALOG NUMBER: S124DIW-S795D1340U930-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	96	96	96	96	80	80	80	64	64	64	50	50	50	43				
1	96	92	88	85	88	84	81	78	70	68	66	57	55	54	44	43	42	37				
2	88	81	75	70	80	74	69	65	62	58	55	50	47	45	39	38	36	31				
3	80	71	64	58	73	65	59	54	54	50	46	44	41	38	35	33	31	27				
4	74	63	55	49	67	58	51	46	48	43	39	40	36	33	31	29	27	23				
5	68	56	48	42	62	52	45	40	43	38	34	36	32	29	28	26	23	20				
6	62	50	42	37	57	47	40	34	39	34	30	32	28	25	26	23	21	18				
7	58	46	38	32	53	42	35	30	35	30	26	29	25	22	24	21	18	16				
8	53	41	34	29	49	38	31	27	32	27	23	27	23	20	22	19	17	14				
9	50	38	30	25	45	35	28	24	30	24	21	25	21	18	20	17	15	13				
10	46	35	27	23	42	32	26	21	27	22	19	23	19	16	19	16	14	12				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	8451	8451	8451	8451
5°	9951	8473	7478	8473
10°	11914	8435	6733	8435
15°	14098	8350	6182	8350
20°	15698	8262	5692	8262
25°	15952	8134	5353	8134
30°	13573	8011	5246	8011
35°	10435	7811	5248	7811
40°	8134	7576	5347	7576
45°	6782	7223	5436	7223
50°	5968	6791	5620	6791
55°	5468	6273	5847	6273
60°	5125	5811	6119	5811
65°	4770	5291	6346	5291
70°	4360	4780	6489	4780
75°	3896	4208	6410	4208
80°	3268	3445	6206	3445
85°	2408	2492	5947	2492



TEST NUMBER: P332794-930

CATALOG NUMBER: S124DIW-S795D1340U930-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	102.0	1.5
10°-20°	314.3	4.7
20°-30°	498.4	7.5
30°-40°	554.7	8.3
40°-50°	504.9	7.6
50°-60°	412.6	6.2
60°-70°	294.6	4.4
70°-80°	162.2	2.4
80°-90°	48.4	0.7
90°-100°	90.2	1.3
100°-110°	267.1	4.0
110°-120°	453.4	6.8
120°-130°	597.8	8.9
130°-140°	671.4	10.0
140°-150°	659.8	9.9
150°-160°	554.9	8.3
160°-170°	369.2	5.5
170°-180°	129.3	1.9
0°-30°	914.7	13.7
0°-40°	1469.4	22.0
0°-60°	2386.9	35.7
0°-90°	2892.0	43.3
90°-120°	810.7	12.1
90°-150°	2739.7	41.0
90°-180°	3793.0	56.7
0°-180°	6685.1	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1047	1047	1047	1047	1047	
5°	1228	1046	923	1046	1228	125
15°	1687	999	740	999	1687	477
25°	1791	913	601	913	1791	789
35°	1059	793	532	793	1059	672
45°	594	633	476	633	594	468
55°	388	446	415	446	388	351
65°	250	277	332	277	250	247
75°	125	135	206	135	125	133
85°	26	27	64	27	26	33
90°	32	3	32	3	32	17
95°	84	63	84	63	84	87
105°	258	246	258	246	258	272
115°	457	461	457	461	457	452
125°	666	671	666	671	666	594
135°	867	866	867	866	867	670
145°	1053	1052	1053	1052	1053	659
155°	1204	1205	1204	1205	1204	554
165°	1309	1312	1309	1312	1309	369
175°	1359	1365	1359	1365	1359	129
180°	1367	1367	1367	1367	1367	



TEST NUMBER: P332794-930

CATALOG NUMBER: S124DIW-S795D1340U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8
2.5°	1114.0	1113.7	1110.2	1109.5	1107.1	1104.0	1103.3	1097.7	1086.6	1081.4	1080.0
5°	1228.0	1236.6	1225.4	1223.2	1221.9	1207.6	1200.2	1191.6	1171.6	1159.9	1150.8
7.5°	1364.0	1365.0	1360.1	1356.1	1345.1	1332.5	1313.9	1293.9	1270.2	1245.4	1226.8
10°	1453.4	1456.9	1451.3	1450.4	1428.3	1414.5	1386.7	1363.3	1336.4	1306.4	1279.1
12.5°	1547.8	1543.0	1540.1	1521.5	1517.4	1492.2	1459.9	1435.7	1394.3	1359.9	1323.6
15°	1686.8	1677.2	1671.1	1645.5	1633.0	1597.8	1563.6	1537.2	1482.9	1431.3	1392.3
17.5°	1768.2	1777.8	1763.7	1753.2	1720.7	1696.1	1661.1	1605.6	1563.2	1499.1	1449.8
20°	1827.2	1828.1	1820.3	1809.5	1783.9	1752.6	1714.5	1653.8	1603.0	1539.3	1471.7
22.5°	1843.1	1843.4	1840.0	1829.9	1810.5	1785.3	1746.8	1696.1	1634.6	1565.3	1497.7
25°	1790.8	1789.1	1793.0	1804.3	1796.8	1789.1	1766.9	1729.2	1672.0	1598.7	1525.8
27.5°	1596.2	1608.2	1630.2	1657.9	1684.7	1705.0	1710.7	1703.0	1667.5	1607.3	1531.0
30°	1456.0	1470.8	1487.3	1515.0	1568.8	1599.6	1633.4	1659.0	1644.7	1596.5	1525.4
32.5°	1302.0	1305.7	1330.2	1361.7	1411.0	1470.2	1523.8	1575.7	1593.0	1567.7	1508.5
35°	1058.8	1064.9	1091.4	1122.6	1182.9	1255.3	1335.9	1407.9	1467.3	1491.2	1460.9
37.5°	864.1	881.5	900.2	933.8	986.8	1052.0	1135.8	1228.9	1317.4	1376.8	1386.8
40°	771.8	782.7	796.1	821.7	866.7	931.0	1002.9	1109.6	1203.7	1288.7	1316.5
42.5°	699.0	705.3	713.5	736.7	771.0	834.9	900.6	994.4	1088.9	1190.5	1237.0
45°	594.0	600.5	614.4	627.9	653.9	698.1	759.2	836.4	931.4	1029.4	1115.2
47.5°	518.3	522.4	530.7	545.0	567.1	596.3	646.0	710.5	798.5	893.6	985.1
50°	475.2	478.7	485.2	498.2	515.1	541.1	581.9	642.2	711.1	807.0	896.7
52.5°	441.2	442.6	447.4	456.2	469.7	491.5	525.0	574.9	639.0	724.4	813.8
55°	388.5	390.3	394.6	401.1	412.8	426.6	452.2	489.5	545.5	619.6	697.2
57.5°	345.1	346.3	350.0	352.5	362.2	373.4	393.1	419.7	462.1	525.0	594.3
60°	317.4	316.5	320.9	323.0	329.5	339.1	354.2	379.8	416.7	467.4	531.2
62.5°	290.3	289.1	292.8	295.6	299.4	307.5	319.9	340.0	369.9	415.7	470.8
65°	249.7	248.0	250.2	253.6	257.1	261.5	270.6	288.4	312.2	345.1	387.2
67.5°	209.0	210.8	211.2	212.9	214.9	220.8	227.1	239.6	256.4	282.8	318.5
70°	184.7	185.2	186.9	186.9	188.2	193.4	198.6	205.9	222.4	246.7	275.7
72.5°	160.5	162.2	161.6	163.0	163.9	167.4	171.2	178.2	192.2	210.3	234.8
75°	124.9	126.2	126.2	126.6	127.9	129.2	132.2	137.5	147.4	160.9	177.8
77.5°	91.1	91.2	91.8	93.4	93.4	95.5	97.8	101.9	106.8	116.0	126.4
80°	70.3	71.1	70.7	71.6	71.6	73.3	74.1	79.3	81.5	87.6	95.8
82.5°	51.5	52.3	52.3	53.5	54.2	54.5	55.8	57.8	60.0	65.4	68.7
85°	26.0	26.9	26.0	26.9	28.2	28.6	29.9	30.3	32.1	33.4	36.4
87.5°	13.9	14.9	14.8	15.1	15.7	15.8	15.9	15.2	16.4	16.5	17.4
90°	31.7	31.2	30.8	30.3	29.8	28.9	27.5	26.1	24.7	23.2	21.4
92.5°	47.0	46.6	46.4	46.1	45.8	45.2	44.4	43.5	42.7	41.9	40.5
95°	83.6	83.6	83.6	83.6	83.6	83.2	82.5	81.8	81.0	80.4	78.7
97.5°	130.9	130.9	130.9	130.9	130.9	130.4	129.6	128.8	127.9	127.1	125.1
100°	163.9	163.9	163.9	163.9	163.9	163.6	163.2	162.7	162.2	161.8	159.6
102.5°	201.1	200.9	200.7	200.6	200.3	199.9	199.3	198.6	198.0	197.3	195.3
105°	258.0	257.3	256.6	255.8	255.2	254.5	253.8	253.1	252.3	251.7	250.7
107.5°	313.4	313.5	313.5	313.6	313.6	313.3	312.6	311.9	311.3	310.6	310.5
110°	353.2	352.5	351.7	351.1	350.3	350.3	350.7	351.1	351.6	352.1	352.4



TEST NUMBER: P332794-930

CATALOG NUMBER: S124DIW-S795D1340U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	393.8	393.6	393.5	393.3	393.2	393.1	393.3	393.4	393.5	393.5	394.0
115°	456.8	457.0	457.2	457.5	457.7	458.0	458.2	458.4	458.7	458.9	459.3
117.5°	516.8	517.3	517.8	518.2	518.7	519.3	520.2	521.0	521.7	522.5	522.9
120°	562.5	562.1	561.6	561.1	560.6	561.0	562.1	563.4	564.5	565.7	566.4
122.5°	600.5	601.4	602.3	603.1	604.0	604.8	605.6	606.3	607.2	608.0	608.3
125°	666.1	666.6	667.1	667.6	668.0	668.5	669.0	669.4	669.8	670.3	670.6
127.5°	726.8	727.2	727.6	728.0	728.3	728.7	729.2	729.7	730.2	730.6	731.0
130°	766.5	767.5	768.4	769.4	770.4	771.0	771.5	772.0	772.4	772.9	772.9
132.5°	808.9	809.3	809.6	810.0	810.4	810.8	811.3	811.7	812.2	812.7	812.9
135°	867.0	867.7	868.5	869.1	869.8	870.4	870.9	871.4	871.9	872.3	872.3
137.5°	928.1	928.0	927.9	927.7	927.6	927.8	928.5	929.0	929.6	930.3	929.8
140°	965.4	965.6	965.8	966.0	966.3	966.5	966.8	967.0	967.3	967.4	967.4
142.5°	1002.6	1002.7	1002.7	1002.7	1002.7	1002.8	1002.9	1002.9	1003.0	1003.0	1003.2
145°	1053.1	1053.9	1054.5	1055.2	1056.0	1056.4	1056.6	1056.9	1057.1	1057.4	1057.1
147.5°	1104.3	1104.6	1104.7	1105.0	1105.2	1105.5	1105.6	1105.8	1106.0	1106.2	1106.4
150°	1135.6	1135.8	1136.0	1136.3	1136.5	1136.6	1136.6	1136.6	1136.6	1136.6	1136.6
152.5°	1164.3	1165.0	1165.6	1166.2	1166.8	1166.9	1166.3	1165.7	1165.1	1164.6	1164.4
155°	1204.4	1205.3	1206.2	1207.1	1208.1	1208.1	1207.1	1206.2	1205.3	1204.4	1204.5
157.5°	1240.1	1240.9	1241.6	1242.4	1243.2	1243.3	1242.6	1241.9	1241.2	1240.5	1240.6
160°	1260.4	1261.5	1262.7	1263.9	1265.0	1265.3	1264.6	1263.9	1263.1	1262.5	1262.7
162.5°	1281.5	1282.7	1283.9	1285.0	1286.2	1286.1	1284.9	1283.6	1282.4	1281.1	1281.3
165°	1309.0	1309.9	1310.8	1311.8	1312.8	1312.6	1311.1	1309.7	1308.3	1306.8	1307.3
167.5°	1328.7	1330.2	1331.5	1333.0	1334.5	1334.5	1333.1	1331.7	1330.3	1328.9	1328.9
170°	1339.7	1341.3	1343.0	1344.6	1346.2	1346.4	1344.9	1343.5	1342.1	1340.7	1340.5
172.5°	1349.0	1350.6	1352.3	1353.9	1355.5	1355.6	1354.0	1352.3	1350.8	1349.2	1349.2
175°	1358.7	1360.3	1362.0	1363.6	1365.3	1365.3	1363.6	1362.0	1360.3	1358.7	1358.9
177.5°	1363.8	1365.3	1366.8	1368.3	1369.8	1369.9	1368.6	1367.3	1366.0	1364.6	1364.6
180°	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2



TEST NUMBER: P332794-930

CATALOG NUMBER: S124DIW-S795D1340U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8
2.5°	1080.4	1075.5	1072.0	1069.3	1061.7	1057.1	1053.7	1048.8	1043.3	1037.4	1030.0
5°	1141.7	1126.9	1116.1	1099.6	1084.0	1071.0	1057.6	1045.5	1030.7	1014.6	1002.9
7.5°	1206.2	1184.2	1156.1	1131.7	1104.3	1080.4	1059.2	1037.3	1014.6	992.5	972.3
10°	1247.1	1218.9	1187.6	1150.8	1116.1	1085.3	1056.7	1029.0	1002.1	975.2	952.2
12.5°	1291.1	1256.0	1209.8	1166.8	1127.9	1086.7	1052.2	1018.2	985.8	957.5	930.7
15°	1350.2	1299.5	1246.2	1188.5	1137.3	1089.2	1042.0	999.1	962.6	925.3	899.3
17.5°	1386.6	1323.8	1262.8	1202.6	1140.7	1079.9	1029.0	979.4	933.8	896.7	864.0
20°	1410.5	1348.1	1272.2	1211.9	1138.2	1075.8	1016.8	961.7	914.0	874.6	840.7
22.5°	1431.3	1359.2	1283.3	1204.0	1130.6	1064.4	999.8	944.4	895.7	854.1	821.7
25°	1442.6	1359.8	1277.4	1198.5	1115.2	1036.7	978.2	913.2	861.1	817.3	782.7
27.5°	1443.8	1355.3	1262.1	1174.4	1088.4	1015.4	941.4	883.4	829.3	783.0	749.7
30°	1440.0	1347.7	1247.5	1152.5	1066.2	986.9	922.8	859.4	804.4	758.4	723.7
32.5°	1427.8	1331.7	1228.7	1128.2	1038.9	961.2	895.0	834.8	781.1	735.8	699.4
35°	1392.8	1297.8	1188.1	1083.6	992.1	913.6	853.8	792.6	738.9	695.9	660.8
37.5°	1337.8	1252.0	1140.4	1032.3	942.5	863.6	804.4	749.1	700.6	657.0	621.0
40°	1290.0	1214.6	1102.7	997.3	900.2	825.2	769.6	718.9	670.8	629.6	595.3
42.5°	1234.9	1169.1	1065.9	954.3	860.6	785.3	731.2	685.6	640.3	602.2	567.9
45°	1136.4	1093.2	996.0	892.8	795.2	724.1	672.5	632.7	594.5	557.2	528.6
47.5°	1023.4	1001.9	920.1	822.1	729.5	659.4	614.7	577.8	544.4	512.8	487.5
50°	947.5	937.0	866.3	771.8	683.4	617.4	572.3	540.7	512.1	484.4	460.5
52.5°	872.5	872.1	808.5	721.9	640.0	576.5	531.7	502.2	477.4	454.9	433.4
55°	758.0	770.1	720.2	643.0	569.7	512.5	472.2	445.7	428.4	409.8	393.7
57.5°	652.7	672.9	631.8	563.8	502.6	449.9	414.8	394.9	376.4	365.2	353.5
60°	584.1	603.2	571.0	513.8	456.2	411.1	377.6	359.9	343.8	336.1	327.8
62.5°	523.0	540.1	516.2	463.2	413.1	369.8	341.6	324.5	313.6	305.2	299.7
65°	435.8	450.0	429.7	391.1	348.2	313.5	290.5	277.0	266.7	263.2	257.1
67.5°	352.3	365.3	354.2	321.5	287.1	260.7	242.8	229.9	223.7	220.7	216.4
70°	302.6	315.7	303.9	275.3	248.9	226.8	209.9	202.5	196.0	194.7	188.6
72.5°	260.7	269.5	257.8	235.5	212.8	194.2	181.1	173.3	170.0	167.6	164.4
75°	195.6	203.3	195.6	178.2	162.2	149.2	137.9	134.9	130.9	129.6	127.5
77.5°	138.4	145.2	139.2	128.3	116.3	106.3	100.3	96.4	95.5	93.2	94.2
80°	105.8	110.1	104.5	97.1	87.6	80.6	76.3	74.1	71.6	70.7	72.4
82.5°	76.0	77.9	75.0	70.0	62.9	58.5	55.5	53.0	52.5	52.7	52.7
85°	39.5	39.1	38.6	34.2	32.1	29.0	27.3	26.9	26.4	27.3	28.2
87.5°	17.1	17.0	16.3	14.5	13.0	11.4	10.5	9.6	10.5	11.4	12.2
90°	19.5	17.6	15.7	13.5	10.9	8.3	5.8	3.2	5.8	8.3	10.9
92.5°	39.2	37.9	36.6	34.5	31.5	28.5	25.6	22.7	25.6	28.5	31.5
95°	77.0	75.4	73.8	71.9	69.8	67.7	65.6	63.4	65.6	67.7	69.8
97.5°	123.3	121.3	119.4	117.6	115.9	114.2	112.5	110.8	112.5	114.2	115.9
100°	157.5	155.4	153.3	151.8	150.8	149.9	149.0	148.1	149.0	149.9	150.8
102.5°	193.5	191.5	189.6	188.4	188.1	187.7	187.4	186.9	187.4	187.7	188.1
105°	249.8	248.8	247.9	247.3	247.0	246.9	246.6	246.4	246.6	246.9	247.0
107.5°	310.4	310.2	310.1	309.9	309.6	309.3	309.0	308.8	309.0	309.3	309.6
110°	352.5	352.8	353.0	352.9	352.5	352.0	351.5	351.1	351.5	352.0	352.5



TEST NUMBER: P332794-930

CATALOG NUMBER: S124DIW-S795D1340U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	394.4	394.8	395.3	395.4	395.3	395.2	395.1	395.0	395.1	395.2	395.3
115°	459.8	460.3	460.8	461.0	461.0	461.0	461.0	461.0	461.0	461.0	461.0
117.5°	523.2	523.5	523.8	523.9	523.7	523.6	523.3	523.2	523.3	523.6	523.7
120°	567.1	567.8	568.5	568.3	567.4	566.5	565.6	564.6	565.6	566.5	567.4
122.5°	608.6	608.9	609.3	609.3	608.9	608.5	608.1	607.7	608.1	608.5	608.9
125°	670.8	671.1	671.3	671.4	671.4	671.4	671.4	671.4	671.4	671.4	671.4
127.5°	731.4	731.7	732.1	732.0	731.2	730.6	729.9	729.1	729.9	730.6	731.2
130°	772.9	772.9	772.9	772.6	771.8	771.2	770.5	769.7	770.5	771.2	771.8
132.5°	813.0	813.3	813.4	813.3	812.8	812.2	811.7	811.2	811.7	812.2	812.8
135°	872.3	872.3	872.3	871.6	870.2	868.8	867.4	865.9	867.4	868.8	870.2
137.5°	929.5	929.1	928.8	928.2	927.6	926.9	926.3	925.6	926.3	926.9	927.6
140°	967.4	967.4	967.4	967.3	966.8	966.3	965.8	965.4	965.8	966.3	966.8
142.5°	1003.4	1003.6	1003.7	1003.6	1003.1	1002.7	1002.2	1001.8	1002.2	1002.7	1003.1
145°	1056.9	1056.6	1056.4	1055.8	1054.9	1053.9	1053.0	1052.1	1053.0	1053.9	1054.9
147.5°	1106.6	1106.8	1106.9	1106.4	1105.4	1104.2	1103.1	1102.0	1103.1	1104.2	1105.4
150°	1136.6	1136.6	1136.6	1136.2	1135.2	1134.3	1133.3	1132.5	1133.3	1134.3	1135.2
152.5°	1164.2	1164.0	1163.8	1163.4	1162.9	1162.3	1161.7	1161.1	1161.7	1162.3	1162.9
155°	1204.8	1205.0	1205.3	1205.3	1205.3	1205.3	1205.3	1205.3	1205.3	1205.3	1205.3
157.5°	1240.6	1240.6	1240.6	1240.9	1241.3	1241.8	1242.2	1242.6	1242.2	1241.8	1241.3
160°	1263.0	1263.1	1263.4	1263.6	1263.9	1264.1	1264.4	1264.6	1264.4	1264.1	1263.9
162.5°	1281.6	1281.8	1282.1	1282.5	1283.0	1283.7	1284.3	1284.9	1284.3	1283.7	1283.0
165°	1307.8	1308.3	1308.8	1309.4	1310.0	1310.8	1311.5	1312.1	1311.5	1310.8	1310.0
167.5°	1328.8	1328.8	1328.7	1329.2	1330.2	1331.1	1332.1	1333.1	1332.1	1331.1	1330.2
170°	1340.3	1340.0	1339.8	1340.3	1341.4	1342.6	1343.8	1344.9	1343.8	1342.6	1341.4
172.5°	1349.1	1349.1	1349.0	1349.5	1350.5	1351.4	1352.4	1353.4	1352.4	1351.4	1350.5
175°	1359.2	1359.4	1359.6	1360.3	1361.5	1362.7	1363.8	1365.1	1363.8	1362.7	1361.5
177.5°	1364.6	1364.6	1364.6	1365.1	1366.0	1366.9	1367.9	1368.8	1367.9	1366.9	1366.0
180°	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2



TEST NUMBER: P332794-930

CATALOG NUMBER: S124DIW-S795D1340U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8
2.5°	1026.6	1023.5	1019.0	1012.8	1007.5	1002.0	1000.6	998.5	1002.7	999.2	998.2
5°	993.0	983.8	972.2	958.7	950.9	939.6	937.4	933.1	928.8	928.4	924.0
7.5°	957.3	944.0	928.6	914.9	902.2	889.9	881.9	880.1	873.8	870.0	865.7
10°	934.4	917.9	900.2	887.1	872.5	859.4	850.3	845.1	840.7	836.0	831.7
12.5°	907.3	889.8	875.2	861.1	843.6	833.7	818.7	809.8	808.9	808.9	797.7
15°	875.9	858.5	836.0	816.0	806.5	787.4	779.2	768.7	762.3	755.8	750.6
17.5°	839.9	818.3	800.7	777.8	759.6	744.4	733.6	727.3	717.5	708.3	701.6
20°	817.3	794.3	775.8	751.5	731.5	712.8	703.8	695.0	687.7	679.9	672.5
22.5°	794.4	770.5	747.6	724.1	705.5	685.8	677.0	665.2	658.2	653.9	646.5
25°	758.4	732.4	706.4	683.8	664.7	647.3	635.7	626.6	618.7	615.3	610.5
27.5°	719.2	693.3	668.2	642.6	620.9	608.4	599.0	592.2	587.6	583.0	580.9
30°	694.2	667.3	640.4	616.6	596.6	584.1	575.4	570.6	567.1	565.0	562.8
32.5°	668.9	642.4	614.1	592.3	574.5	563.3	556.7	551.9	550.2	549.3	548.6
35°	628.3	601.4	575.4	555.9	539.0	534.7	529.0	526.4	525.5	528.6	529.9
37.5°	589.0	564.0	540.1	521.2	510.1	503.8	501.8	502.0	505.1	507.8	510.9
40°	563.7	539.4	516.9	500.3	490.0	486.1	485.2	487.4	490.8	493.9	497.3
42.5°	539.1	515.1	494.6	479.2	472.0	468.4	468.9	471.1	475.9	479.6	484.9
45°	500.8	480.9	460.9	448.3	442.3	443.1	443.1	447.0	451.8	457.5	463.1
47.5°	464.8	444.7	428.3	417.8	414.6	413.8	416.3	421.3	428.2	435.2	443.0
50°	440.5	421.4	407.2	397.6	394.1	395.4	398.9	403.7	411.9	420.6	428.8
52.5°	415.9	398.6	385.3	376.4	374.1	376.3	379.8	387.3	394.6	404.0	413.9
55°	377.6	362.9	352.5	346.0	345.1	346.4	350.3	358.6	369.0	380.7	390.3
57.5°	339.6	327.3	317.7	313.2	313.6	314.9	321.3	331.1	342.2	354.7	367.0
60°	314.0	302.6	294.9	291.4	291.8	294.4	302.2	311.4	325.2	337.4	350.3
62.5°	289.7	279.7	272.3	269.2	268.6	274.3	281.8	291.2	305.1	318.6	332.6
65°	250.6	242.8	236.8	235.1	236.4	240.7	250.2	262.8	274.5	288.8	303.5
67.5°	212.5	206.0	201.9	202.7	204.2	210.7	218.7	229.4	242.7	257.6	272.1
70°	188.2	182.1	178.6	179.0	181.6	189.5	196.4	207.2	221.6	236.8	248.9
72.5°	163.2	159.2	156.1	157.9	160.5	165.9	174.6	185.4	198.0	212.1	224.9
75°	125.3	125.3	123.6	124.9	128.8	134.0	140.5	151.7	164.4	175.6	186.1
77.5°	92.9	92.0	93.1	94.7	96.9	103.1	110.6	118.6	128.1	139.3	148.0
80°	71.1	71.6	73.7	76.3	77.2	81.9	89.8	97.1	104.5	114.1	122.3
82.5°	53.4	53.9	55.0	58.3	59.1	64.2	69.3	76.6	83.3	89.8	96.6
85°	29.0	29.0	31.2	32.5	34.7	38.2	41.2	45.5	51.6	55.9	62.5
87.5°	13.8	14.3	16.0	17.1	18.5	20.6	21.6	25.7	27.3	29.4	32.7
90°	13.5	15.7	17.6	19.5	21.4	23.2	24.7	26.1	27.5	28.9	29.8
92.5°	34.5	36.6	37.9	39.2	40.5	41.9	42.7	43.5	44.4	45.2	45.8
95°	71.9	73.8	75.4	77.0	78.7	80.4	81.0	81.8	82.5	83.2	83.6
97.5°	117.6	119.4	121.3	123.3	125.1	127.1	127.9	128.8	129.6	130.4	130.9
100°	151.8	153.3	155.4	157.5	159.6	161.8	162.2	162.7	163.2	163.6	163.9
102.5°	188.4	189.6	191.5	193.5	195.3	197.3	198.0	198.6	199.3	199.9	200.3
105°	247.3	247.9	248.8	249.8	250.7	251.7	252.3	253.1	253.8	254.5	255.2
107.5°	309.9	310.1	310.2	310.4	310.5	310.6	311.3	311.9	312.6	313.3	313.6
110°	352.9	353.0	352.8	352.5	352.4	352.1	351.6	351.1	350.7	350.3	350.3



TEST NUMBER: P332794-930

CATALOG NUMBER: S124DIW-S795D1340U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	395.4	395.3	394.8	394.4	394.0	393.5	393.5	393.4	393.3	393.1	393.2
115°	461.0	460.8	460.3	459.8	459.3	458.9	458.7	458.4	458.2	458.0	457.7
117.5°	523.9	523.8	523.5	523.2	522.9	522.5	521.7	521.0	520.2	519.3	518.7
120°	568.3	568.5	567.8	567.1	566.4	565.7	564.5	563.4	562.1	561.0	560.6
122.5°	609.3	609.3	608.9	608.6	608.3	608.0	607.2	606.3	605.6	604.8	604.0
125°	671.4	671.3	671.1	670.8	670.6	670.3	669.8	669.4	669.0	668.5	668.0
127.5°	732.0	732.1	731.7	731.4	731.0	730.6	730.2	729.7	729.2	728.7	728.3
130°	772.6	772.9	772.9	772.9	772.9	772.9	772.4	772.0	771.5	771.0	770.4
132.5°	813.3	813.4	813.3	813.0	812.9	812.7	812.2	811.7	811.3	810.8	810.4
135°	871.6	872.3	872.3	872.3	872.3	872.3	871.9	871.4	870.9	870.4	869.8
137.5°	928.2	928.8	929.1	929.5	929.8	930.3	929.6	929.0	928.5	927.8	927.6
140°	967.3	967.4	967.4	967.4	967.4	967.4	967.3	967.0	966.8	966.5	966.3
142.5°	1003.6	1003.7	1003.6	1003.4	1003.2	1003.0	1003.0	1002.9	1002.9	1002.8	1002.7
145°	1055.8	1056.4	1056.6	1056.9	1057.1	1057.4	1057.1	1056.9	1056.6	1056.4	1056.0
147.5°	1106.4	1106.9	1106.8	1106.6	1106.4	1106.2	1106.0	1105.8	1105.6	1105.5	1105.2
150°	1136.2	1136.6	1136.6	1136.6	1136.6	1136.6	1136.6	1136.6	1136.6	1136.6	1136.5
152.5°	1163.4	1163.8	1164.0	1164.2	1164.4	1164.6	1165.1	1165.7	1166.3	1166.9	1166.8
155°	1205.3	1205.3	1205.0	1204.8	1204.5	1204.4	1205.3	1206.2	1207.1	1208.1	1208.1
157.5°	1240.9	1240.6	1240.6	1240.6	1240.6	1240.5	1241.2	1241.9	1242.6	1243.3	1243.2
160°	1263.6	1263.4	1263.1	1263.0	1262.7	1262.5	1263.1	1263.9	1264.6	1265.3	1265.0
162.5°	1282.5	1282.1	1281.8	1281.6	1281.3	1281.1	1282.4	1283.6	1284.9	1286.1	1286.2
165°	1309.4	1308.8	1308.3	1307.8	1307.3	1306.8	1308.3	1309.7	1311.1	1312.6	1312.8
167.5°	1329.2	1328.7	1328.8	1328.8	1328.9	1328.9	1330.3	1331.7	1333.1	1334.5	1334.5
170°	1340.3	1339.8	1340.0	1340.3	1340.5	1340.7	1342.1	1343.5	1344.9	1346.4	1346.2
172.5°	1349.5	1349.0	1349.1	1349.1	1349.2	1349.2	1350.8	1352.3	1354.0	1355.6	1355.5
175°	1360.3	1359.6	1359.4	1359.2	1358.9	1358.7	1360.3	1362.0	1363.6	1365.3	1365.3
177.5°	1365.1	1364.6	1364.6	1364.6	1364.6	1364.6	1366.0	1367.3	1368.6	1369.9	1369.8
180°	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2



TEST NUMBER: P332794-930

CATALOG NUMBER: S124DIW-S795D1340U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8
2.5°	997.4	996.8	994.3	994.0	994.3	996.8	997.4	998.2	999.2	1002.7	998.5
5°	921.5	919.2	917.9	922.8	917.9	919.2	921.5	924.0	928.4	928.8	933.1
7.5°	864.1	862.3	858.5	857.4	858.5	862.3	864.1	865.7	870.0	873.8	880.1
10°	827.3	825.6	822.1	821.3	822.1	825.6	827.3	831.7	836.0	840.7	845.1
12.5°	791.9	788.5	787.7	788.6	787.7	788.5	791.9	797.7	808.9	808.9	809.8
15°	744.9	743.2	738.4	739.7	738.4	743.2	744.9	750.6	755.8	762.3	768.7
17.5°	698.6	696.5	690.7	695.9	690.7	696.5	698.6	701.6	708.3	717.5	727.3
20°	669.5	666.0	663.0	662.5	663.0	666.0	669.5	672.5	679.9	687.7	695.0
22.5°	641.7	638.6	638.4	635.5	638.4	638.6	641.7	646.5	653.9	658.2	665.2
25°	607.1	604.1	603.2	601.0	603.2	604.1	607.1	610.5	615.3	618.7	626.6
27.5°	580.4	578.9	577.4	578.0	577.4	578.9	580.4	580.9	583.0	587.6	592.2
30°	564.1	563.7	562.8	562.8	562.8	563.7	564.1	562.8	565.0	567.1	570.6
32.5°	550.6	550.5	551.1	551.1	551.1	550.5	550.6	548.6	549.3	550.2	551.9
35°	531.6	532.9	533.8	532.5	533.8	532.9	531.6	529.9	528.6	525.5	526.4
37.5°	514.5	515.8	517.0	518.4	517.0	515.8	514.5	510.9	507.8	505.1	502.0
40°	501.2	504.3	505.2	507.4	505.2	504.3	501.2	497.3	493.9	490.8	487.4
42.5°	488.8	492.1	494.4	494.8	494.4	492.1	488.8	484.9	479.6	475.9	471.1
45°	469.6	473.0	476.1	476.1	476.1	473.0	469.6	463.1	457.5	451.8	447.0
47.5°	449.7	454.8	457.8	458.6	457.8	454.8	449.7	443.0	435.2	428.2	421.3
50°	436.2	442.3	445.3	447.5	445.3	442.3	436.2	428.8	420.6	411.9	403.7
52.5°	423.1	429.1	433.2	434.3	433.2	429.1	423.1	413.9	404.0	394.6	387.3
55°	400.2	408.9	413.7	415.4	413.7	408.9	400.2	390.3	380.7	369.0	358.6
57.5°	378.7	386.7	392.2	393.5	392.2	386.7	378.7	367.0	354.7	342.2	331.1
60°	362.1	370.7	377.6	379.0	377.6	370.7	362.1	350.3	337.4	325.2	311.4
62.5°	345.0	354.1	360.4	363.7	360.4	354.1	345.0	332.6	318.6	305.1	291.2
65°	315.7	324.7	330.8	332.2	330.8	324.7	315.7	303.5	288.8	274.5	262.8
67.5°	283.6	292.7	296.7	299.2	296.7	292.7	283.6	272.1	257.6	242.7	229.4
70°	261.1	268.4	272.7	274.9	272.7	268.4	261.1	248.9	236.8	221.6	207.2
72.5°	235.4	243.0	248.1	248.5	248.1	243.0	235.4	224.9	212.1	198.0	185.4
75°	196.0	202.9	205.5	205.5	205.5	202.9	196.0	186.1	175.6	164.4	151.7
77.5°	155.2	158.7	162.0	162.7	162.0	158.7	155.2	148.0	139.3	128.1	118.6
80°	128.8	130.9	133.5	133.5	133.5	130.9	128.8	122.3	114.1	104.5	97.1
82.5°	101.7	103.5	106.2	105.8	106.2	103.5	101.7	96.6	89.8	83.3	76.6
85°	61.6	65.5	65.1	64.2	65.1	65.5	61.6	62.5	55.9	51.6	45.5
87.5°	33.8	34.2	35.4	36.2	35.4	34.2	33.8	32.7	29.4	27.3	25.7
90°	30.3	30.8	31.2	31.7	31.2	30.8	30.3	29.8	28.9	27.5	26.1
92.5°	46.1	46.4	46.6	47.0	46.6	46.4	46.1	45.8	45.2	44.4	43.5
95°	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.2	82.5	81.8
97.5°	130.9	130.9	130.9	130.9	130.9	130.9	130.9	130.9	130.4	129.6	128.8
100°	163.9	163.9	163.9	163.9	163.9	163.9	163.9	163.9	163.6	163.2	162.7
102.5°	200.6	200.7	200.9	201.1	200.9	200.7	200.6	200.3	199.9	199.3	198.6
105°	255.8	256.6	257.3	258.0	257.3	256.6	255.8	255.2	254.5	253.8	253.1
107.5°	313.6	313.5	313.5	313.4	313.5	313.5	313.6	313.6	313.3	312.6	311.9
110°	351.1	351.7	352.5	353.2	352.5	351.7	351.1	350.3	350.3	350.7	351.1



TEST NUMBER: P332794-930

CATALOG NUMBER: S124DIW-S795D1340U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	393.3	393.5	393.6	393.8	393.6	393.5	393.3	393.2	393.1	393.3	393.4
115°	457.5	457.2	457.0	456.8	457.0	457.2	457.5	457.7	458.0	458.2	458.4
117.5°	518.2	517.8	517.3	516.8	517.3	517.8	518.2	518.7	519.3	520.2	521.0
120°	561.1	561.6	562.1	562.5	562.1	561.6	561.1	560.6	561.0	562.1	563.4
122.5°	603.1	602.3	601.4	600.5	601.4	602.3	603.1	604.0	604.8	605.6	606.3
125°	667.6	667.1	666.6	666.1	666.6	667.1	667.6	668.0	668.5	669.0	669.4
127.5°	728.0	727.6	727.2	726.8	727.2	727.6	728.0	728.3	728.7	729.2	729.7
130°	769.4	768.4	767.5	766.5	767.5	768.4	769.4	770.4	771.0	771.5	772.0
132.5°	810.0	809.6	809.3	808.9	809.3	809.6	810.0	810.4	810.8	811.3	811.7
135°	869.1	868.5	867.7	867.0	867.7	868.5	869.1	869.8	870.4	870.9	871.4
137.5°	927.7	927.9	928.0	928.1	928.0	927.9	927.7	927.6	927.8	928.5	929.0
140°	966.0	965.8	965.6	965.4	965.6	965.8	966.0	966.3	966.5	966.8	967.0
142.5°	1002.7	1002.7	1002.7	1002.6	1002.7	1002.7	1002.7	1002.7	1002.8	1002.9	1002.9
145°	1055.2	1054.5	1053.9	1053.1	1053.9	1054.5	1055.2	1056.0	1056.4	1056.6	1056.9
147.5°	1105.0	1104.7	1104.6	1104.3	1104.6	1104.7	1105.0	1105.2	1105.5	1105.6	1105.8
150°	1136.3	1136.0	1135.8	1135.6	1135.8	1136.0	1136.3	1136.5	1136.6	1136.6	1136.6
152.5°	1166.2	1165.6	1165.0	1164.3	1165.0	1165.6	1166.2	1166.8	1166.9	1166.3	1165.7
155°	1207.1	1206.2	1205.3	1204.4	1205.3	1206.2	1207.1	1208.1	1208.1	1207.1	1206.2
157.5°	1242.4	1241.6	1240.9	1240.1	1240.9	1241.6	1242.4	1243.2	1243.3	1242.6	1241.9
160°	1263.9	1262.7	1261.5	1260.4	1261.5	1262.7	1263.9	1265.0	1265.3	1264.6	1263.9
162.5°	1285.0	1283.9	1282.7	1281.5	1282.7	1283.9	1285.0	1286.2	1286.1	1284.9	1283.6
165°	1311.8	1310.8	1309.9	1309.0	1309.9	1310.8	1311.8	1312.8	1312.6	1311.1	1309.7
167.5°	1333.0	1331.5	1330.2	1328.7	1330.2	1331.5	1333.0	1334.5	1334.5	1333.1	1331.7
170°	1344.6	1343.0	1341.3	1339.7	1341.3	1343.0	1344.6	1346.2	1346.4	1344.9	1343.5
172.5°	1353.9	1352.3	1350.6	1349.0	1350.6	1352.3	1353.9	1355.5	1355.6	1354.0	1352.3
175°	1363.6	1362.0	1360.3	1358.7	1360.3	1362.0	1363.6	1365.3	1365.3	1363.6	1362.0
177.5°	1368.3	1366.8	1365.3	1363.8	1365.3	1366.8	1368.3	1369.8	1369.9	1368.6	1367.3
180°	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2



TEST NUMBER: P332794-930

CATALOG NUMBER: S124DIW-S795D1340U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8
2.5°	1000.6	1002.0	1007.5	1012.8	1019.0	1023.5	1026.6	1030.0	1037.4	1043.3	1048.8
5°	937.4	939.6	950.9	958.7	972.2	983.8	993.0	1002.9	1014.6	1030.7	1045.5
7.5°	881.9	889.9	902.2	914.9	928.6	944.0	957.3	972.3	992.5	1014.6	1037.3
10°	850.3	859.4	872.5	887.1	900.2	917.9	934.4	952.2	975.2	1002.1	1029.0
12.5°	818.7	833.7	843.6	861.1	875.2	889.8	907.3	930.7	957.5	985.8	1018.2
15°	779.2	787.4	806.5	816.0	836.0	858.5	875.9	899.3	925.3	962.6	999.1
17.5°	733.6	744.4	759.6	777.8	800.7	818.3	839.9	864.0	896.7	933.8	979.4
20°	703.8	712.8	731.5	751.5	775.8	794.3	817.3	840.7	874.6	914.0	961.7
22.5°	677.0	685.8	705.5	724.1	747.6	770.5	794.4	821.7	854.1	895.7	944.4
25°	635.7	647.3	664.7	683.8	706.4	732.4	758.4	782.7	817.3	861.1	913.2
27.5°	599.0	608.4	620.9	642.6	668.2	693.3	719.2	749.7	783.0	829.3	883.4
30°	575.4	584.1	596.6	616.6	640.4	667.3	694.2	723.7	758.4	804.4	859.4
32.5°	556.7	563.3	574.5	592.3	614.1	642.4	668.9	699.4	735.8	781.1	834.8
35°	529.0	534.7	539.0	555.9	575.4	601.4	628.3	660.8	695.9	738.9	792.6
37.5°	501.8	503.8	510.1	521.2	540.1	564.0	589.0	621.0	657.0	700.6	749.1
40°	485.2	486.1	490.0	500.3	516.9	539.4	563.7	595.3	629.6	670.8	718.9
42.5°	468.9	468.4	472.0	479.2	494.6	515.1	539.1	567.9	602.2	640.3	685.6
45°	443.1	443.1	442.3	448.3	460.9	480.9	500.8	528.6	557.2	594.5	632.7
47.5°	416.3	413.8	414.6	417.8	428.3	444.7	464.8	487.5	512.8	544.4	577.8
50°	398.9	395.4	394.1	397.6	407.2	421.4	440.5	460.5	484.4	512.1	540.7
52.5°	379.8	376.3	374.1	376.4	385.3	398.6	415.9	433.4	454.9	477.4	502.2
55°	350.3	346.4	345.1	346.0	352.5	362.9	377.6	393.7	409.8	428.4	445.7
57.5°	321.3	314.9	313.6	313.2	317.7	327.3	339.6	353.5	365.2	376.4	394.9
60°	302.2	294.4	291.8	291.4	294.9	302.6	314.0	327.8	336.1	343.8	359.9
62.5°	281.8	274.3	268.6	269.2	272.3	279.7	289.7	299.7	305.2	313.6	324.5
65°	250.2	240.7	236.4	235.1	236.8	242.8	250.6	257.1	263.2	266.7	277.0
67.5°	218.7	210.7	204.2	202.7	201.9	206.0	212.5	216.4	220.7	223.7	229.9
70°	196.4	189.5	181.6	179.0	178.6	182.1	188.2	188.6	194.7	196.0	202.5
72.5°	174.6	165.9	160.5	157.9	156.1	159.2	163.2	164.4	167.6	170.0	173.3
75°	140.5	134.0	128.8	124.9	123.6	125.3	125.3	127.5	129.6	130.9	134.9
77.5°	110.6	103.1	96.9	94.7	93.1	92.0	92.9	94.2	93.2	95.5	96.4
80°	89.8	81.9	77.2	76.3	73.7	71.6	71.1	72.4	70.7	71.6	74.1
82.5°	69.3	64.2	59.1	58.3	55.0	53.9	53.4	52.7	52.7	52.5	53.0
85°	41.2	38.2	34.7	32.5	31.2	29.0	29.0	28.2	27.3	26.4	26.9
87.5°	21.6	20.6	18.5	17.1	16.0	14.3	13.8	12.2	11.4	10.5	9.6
90°	24.7	23.2	21.4	19.5	17.6	15.7	13.5	10.9	8.3	5.8	3.2
92.5°	42.7	41.9	40.5	39.2	37.9	36.6	34.5	31.5	28.5	25.6	22.7
95°	81.0	80.4	78.7	77.0	75.4	73.8	71.9	69.8	67.7	65.6	63.4
97.5°	127.9	127.1	125.1	123.3	121.3	119.4	117.6	115.9	114.2	112.5	110.8
100°	162.2	161.8	159.6	157.5	155.4	153.3	151.8	150.8	149.9	149.0	148.1
102.5°	198.0	197.3	195.3	193.5	191.5	189.6	188.4	188.1	187.7	187.4	186.9
105°	252.3	251.7	250.7	249.8	248.8	247.9	247.3	247.0	246.9	246.6	246.4
107.5°	311.3	310.6	310.5	310.4	310.2	310.1	309.9	309.6	309.3	309.0	308.8
110°	351.6	352.1	352.4	352.5	352.8	353.0	352.9	352.5	352.0	351.5	351.1



TEST NUMBER: P332794-930

CATALOG NUMBER: S124DIW-S795D1340U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	393.5	393.5	394.0	394.4	394.8	395.3	395.4	395.3	395.2	395.1	395.0
115°	458.7	458.9	459.3	459.8	460.3	460.8	461.0	461.0	461.0	461.0	461.0
117.5°	521.7	522.5	522.9	523.2	523.5	523.8	523.9	523.7	523.6	523.3	523.2
120°	564.5	565.7	566.4	567.1	567.8	568.5	568.3	567.4	566.5	565.6	564.6
122.5°	607.2	608.0	608.3	608.6	608.9	609.3	609.3	608.9	608.5	608.1	607.7
125°	669.8	670.3	670.6	670.8	671.1	671.3	671.4	671.4	671.4	671.4	671.4
127.5°	730.2	730.6	731.0	731.4	731.7	732.1	732.0	731.2	730.6	729.9	729.1
130°	772.4	772.9	772.9	772.9	772.9	772.9	772.6	771.8	771.2	770.5	769.7
132.5°	812.2	812.7	812.9	813.0	813.3	813.4	813.3	812.8	812.2	811.7	811.2
135°	871.9	872.3	872.3	872.3	872.3	872.3	871.6	870.2	868.8	867.4	865.9
137.5°	929.6	930.3	929.8	929.5	929.1	928.8	928.2	927.6	926.9	926.3	925.6
140°	967.3	967.4	967.4	967.4	967.4	967.4	967.3	966.8	966.3	965.8	965.4
142.5°	1003.0	1003.0	1003.2	1003.4	1003.6	1003.7	1003.6	1003.1	1002.7	1002.2	1001.8
145°	1057.1	1057.4	1057.1	1056.9	1056.6	1056.4	1055.8	1054.9	1053.9	1053.0	1052.1
147.5°	1106.0	1106.2	1106.4	1106.6	1106.8	1106.9	1106.4	1105.4	1104.2	1103.1	1102.0
150°	1136.6	1136.6	1136.6	1136.6	1136.6	1136.6	1136.2	1135.2	1134.3	1133.3	1132.5
152.5°	1165.1	1164.6	1164.4	1164.2	1164.0	1163.8	1163.4	1162.9	1162.3	1161.7	1161.1
155°	1205.3	1204.4	1204.5	1204.8	1205.0	1205.3	1205.3	1205.3	1205.3	1205.3	1205.3
157.5°	1241.2	1240.5	1240.6	1240.6	1240.6	1240.6	1240.9	1241.3	1241.8	1242.2	1242.6
160°	1263.1	1262.5	1262.7	1263.0	1263.1	1263.4	1263.6	1263.9	1264.1	1264.4	1264.6
162.5°	1282.4	1281.1	1281.3	1281.6	1281.8	1282.1	1282.5	1283.0	1283.7	1284.3	1284.9
165°	1308.3	1306.8	1307.3	1307.8	1308.3	1308.8	1309.4	1310.0	1310.8	1311.5	1312.1
167.5°	1330.3	1328.9	1328.9	1328.8	1328.8	1328.7	1329.2	1330.2	1331.1	1332.1	1333.1
170°	1342.1	1340.7	1340.5	1340.3	1340.0	1339.8	1340.3	1341.4	1342.6	1343.8	1344.9
172.5°	1350.8	1349.2	1349.2	1349.1	1349.1	1349.0	1349.5	1350.5	1351.4	1352.4	1353.4
175°	1360.3	1358.7	1358.9	1359.2	1359.4	1359.6	1360.3	1361.5	1362.7	1363.8	1365.1
177.5°	1366.0	1364.6	1364.6	1364.6	1364.6	1364.6	1365.1	1366.0	1366.9	1367.9	1368.8
180°	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2



TEST NUMBER: P332794-930

CATALOG NUMBER: S124DIW-S795D1340U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8
2.5°	1053.7	1057.1	1061.7	1069.3	1072.0	1075.5	1080.4	1080.0	1081.4	1086.6	1097.7
5°	1057.6	1071.0	1084.0	1099.6	1116.1	1126.9	1141.7	1150.8	1159.9	1171.6	1191.6
7.5°	1059.2	1080.4	1104.3	1131.7	1156.1	1184.2	1206.2	1226.8	1245.4	1270.2	1293.9
10°	1056.7	1085.3	1116.1	1150.8	1187.6	1218.9	1247.1	1279.1	1306.4	1336.4	1363.3
12.5°	1052.2	1086.7	1127.9	1166.8	1209.8	1256.0	1291.1	1323.6	1359.9	1394.3	1435.7
15°	1042.0	1089.2	1137.3	1188.5	1246.2	1299.5	1350.2	1392.3	1431.3	1482.9	1537.2
17.5°	1029.0	1079.9	1140.7	1202.6	1262.8	1323.8	1386.6	1449.8	1499.1	1563.2	1605.6
20°	1016.8	1075.8	1138.2	1211.9	1272.2	1348.1	1410.5	1471.7	1539.3	1603.0	1653.8
22.5°	999.8	1064.4	1130.6	1204.0	1283.3	1359.2	1431.3	1497.7	1565.3	1634.6	1696.1
25°	978.2	1036.7	1115.2	1198.5	1277.4	1359.8	1442.6	1525.8	1598.7	1672.0	1729.2
27.5°	941.4	1015.4	1088.4	1174.4	1262.1	1355.3	1443.8	1531.0	1607.3	1667.5	1703.0
30°	922.8	986.9	1066.2	1152.5	1247.5	1347.7	1440.0	1525.4	1596.5	1644.7	1659.0
32.5°	895.0	961.2	1038.9	1128.2	1228.7	1331.7	1427.8	1508.5	1567.7	1593.0	1575.7
35°	853.8	913.6	992.1	1083.6	1188.1	1297.8	1392.8	1460.9	1491.2	1467.3	1407.9
37.5°	804.4	863.6	942.5	1032.3	1140.4	1252.0	1337.8	1386.8	1376.8	1317.4	1228.9
40°	769.6	825.2	900.2	997.3	1102.7	1214.6	1290.0	1316.5	1288.7	1203.7	1109.6
42.5°	731.2	785.3	860.6	954.3	1065.9	1169.1	1234.9	1237.0	1190.5	1088.9	994.4
45°	672.5	724.1	795.2	892.8	996.0	1093.2	1136.4	1115.2	1029.4	931.4	836.4
47.5°	614.7	659.4	729.5	822.1	920.1	1001.9	1023.4	985.1	893.6	798.5	710.5
50°	572.3	617.4	683.4	771.8	866.3	937.0	947.5	896.7	807.0	711.1	642.2
52.5°	531.7	576.5	640.0	721.9	808.5	872.1	872.5	813.8	724.4	639.0	574.9
55°	472.2	512.5	569.7	643.0	720.2	770.1	758.0	697.2	619.6	545.5	489.5
57.5°	414.8	449.9	502.6	563.8	631.8	672.9	652.7	594.3	525.0	462.1	419.7
60°	377.6	411.1	456.2	513.8	571.0	603.2	584.1	531.2	467.4	416.7	379.8
62.5°	341.6	369.8	413.1	463.2	516.2	540.1	523.0	470.8	415.7	369.9	340.0
65°	290.5	313.5	348.2	391.1	429.7	450.0	435.8	387.2	345.1	312.2	288.4
67.5°	242.8	260.7	287.1	321.5	354.2	365.3	352.3	318.5	282.8	256.4	239.6
70°	209.9	226.8	248.9	275.3	303.9	315.7	302.6	275.7	246.7	222.4	205.9
72.5°	181.1	194.2	212.8	235.5	257.8	269.5	260.7	234.8	210.3	192.2	178.2
75°	137.9	149.2	162.2	178.2	195.6	203.3	195.6	177.8	160.9	147.4	137.5
77.5°	100.3	106.3	116.3	128.3	139.2	145.2	138.4	126.4	116.0	106.8	101.9
80°	76.3	80.6	87.6	97.1	104.5	110.1	105.8	95.8	87.6	81.5	79.3
82.5°	55.5	58.5	62.9	70.0	75.0	77.9	76.0	68.7	65.4	60.0	57.8
85°	27.3	29.0	32.1	34.2	38.6	39.1	39.5	36.4	33.4	32.1	30.3
87.5°	10.5	11.4	13.0	14.5	16.3	17.0	17.1	17.4	16.5	16.4	15.2
90°	5.8	8.3	10.9	13.5	15.7	17.6	19.5	21.4	23.2	24.7	26.1
92.5°	25.6	28.5	31.5	34.5	36.6	37.9	39.2	40.5	41.9	42.7	43.5
95°	65.6	67.7	69.8	71.9	73.8	75.4	77.0	78.7	80.4	81.0	81.8
97.5°	112.5	114.2	115.9	117.6	119.4	121.3	123.3	125.1	127.1	127.9	128.8
100°	149.0	149.9	150.8	151.8	153.3	155.4	157.5	159.6	161.8	162.2	162.7
102.5°	187.4	187.7	188.1	188.4	189.6	191.5	193.5	195.3	197.3	198.0	198.6
105°	246.6	246.9	247.0	247.3	247.9	248.8	249.8	250.7	251.7	252.3	253.1
107.5°	309.0	309.3	309.6	309.9	310.1	310.2	310.4	310.5	310.6	311.3	311.9
110°	351.5	352.0	352.5	352.9	353.0	352.8	352.5	352.4	352.1	351.6	351.1



TEST NUMBER: P332794-930

CATALOG NUMBER: S124DIW-S795D1340U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	395.1	395.2	395.3	395.4	395.3	394.8	394.4	394.0	393.5	393.5	393.4
115°	461.0	461.0	461.0	461.0	460.8	460.3	459.8	459.3	458.9	458.7	458.4
117.5°	523.3	523.6	523.7	523.9	523.8	523.5	523.2	522.9	522.5	521.7	521.0
120°	565.6	566.5	567.4	568.3	568.5	567.8	567.1	566.4	565.7	564.5	563.4
122.5°	608.1	608.5	608.9	609.3	609.3	608.9	608.6	608.3	608.0	607.2	606.3
125°	671.4	671.4	671.4	671.4	671.3	671.1	670.8	670.6	670.3	669.8	669.4
127.5°	729.9	730.6	731.2	732.0	732.1	731.7	731.4	731.0	730.6	730.2	729.7
130°	770.5	771.2	771.8	772.6	772.9	772.9	772.9	772.9	772.9	772.4	772.0
132.5°	811.7	812.2	812.8	813.3	813.4	813.3	813.0	812.9	812.7	812.2	811.7
135°	867.4	868.8	870.2	871.6	872.3	872.3	872.3	872.3	872.3	871.9	871.4
137.5°	926.3	926.9	927.6	928.2	928.8	929.1	929.5	929.8	930.3	929.6	929.0
140°	965.8	966.3	966.8	967.3	967.4	967.4	967.4	967.4	967.4	967.3	967.0
142.5°	1002.2	1002.7	1003.1	1003.6	1003.7	1003.6	1003.4	1003.2	1003.0	1003.0	1002.9
145°	1053.0	1053.9	1054.9	1055.8	1056.4	1056.6	1056.9	1057.1	1057.4	1057.1	1056.9
147.5°	1103.1	1104.2	1105.4	1106.4	1106.9	1106.8	1106.6	1106.4	1106.2	1106.0	1105.8
150°	1133.3	1134.3	1135.2	1136.2	1136.6	1136.6	1136.6	1136.6	1136.6	1136.6	1136.6
152.5°	1161.7	1162.3	1162.9	1163.4	1163.8	1164.0	1164.2	1164.4	1164.6	1165.1	1165.7
155°	1205.3	1205.3	1205.3	1205.3	1205.3	1205.0	1204.8	1204.5	1204.4	1205.3	1206.2
157.5°	1242.2	1241.8	1241.3	1240.9	1240.6	1240.6	1240.6	1240.6	1240.5	1241.2	1241.9
160°	1264.4	1264.1	1263.9	1263.6	1263.4	1263.1	1263.0	1262.7	1262.5	1263.1	1263.9
162.5°	1284.3	1283.7	1283.0	1282.5	1282.1	1281.8	1281.6	1281.3	1281.1	1282.4	1283.6
165°	1311.5	1310.8	1310.0	1309.4	1308.8	1308.3	1307.8	1307.3	1306.8	1308.3	1309.7
167.5°	1332.1	1331.1	1330.2	1329.2	1328.7	1328.8	1328.8	1328.9	1328.9	1330.3	1331.7
170°	1343.8	1342.6	1341.4	1340.3	1339.8	1340.0	1340.3	1340.5	1340.7	1342.1	1343.5
172.5°	1352.4	1351.4	1350.5	1349.5	1349.0	1349.1	1349.1	1349.2	1349.2	1350.8	1352.3
175°	1363.8	1362.7	1361.5	1360.3	1359.6	1359.4	1359.2	1358.9	1358.7	1360.3	1362.0
177.5°	1367.9	1366.9	1366.0	1365.1	1364.6	1364.6	1364.6	1364.6	1364.6	1366.0	1367.3
180°	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2



TEST NUMBER: P332794-930

CATALOG NUMBER: S124DIW-S795D1340U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8	1046.8
2.5°	1103.3	1104.0	1107.1	1109.5	1110.2	1113.7	1114.0
5°	1200.2	1207.6	1221.9	1223.2	1225.4	1236.6	1228.0
7.5°	1313.9	1332.5	1345.1	1356.1	1360.1	1365.0	1364.0
10°	1386.7	1414.5	1428.3	1450.4	1451.3	1456.9	1453.4
12.5°	1459.9	1492.2	1517.4	1521.5	1540.1	1543.0	1547.8
15°	1563.6	1597.8	1633.0	1645.5	1671.1	1677.2	1686.8
17.5°	1661.1	1696.1	1720.7	1753.2	1763.7	1777.8	1768.2
20°	1714.5	1752.6	1783.9	1809.5	1820.3	1828.1	1827.2
22.5°	1746.8	1785.3	1810.5	1829.9	1840.0	1843.4	1843.1
25°	1766.9	1789.1	1796.8	1804.3	1793.0	1789.1	1790.8
27.5°	1710.7	1705.0	1684.7	1657.9	1630.2	1608.2	1596.2
30°	1633.4	1599.6	1568.8	1515.0	1487.3	1470.8	1456.0
32.5°	1523.8	1470.2	1411.0	1361.7	1330.2	1305.7	1302.0
35°	1335.9	1255.3	1182.9	1122.6	1091.4	1064.9	1058.8
37.5°	1135.8	1052.0	986.8	933.8	900.2	881.5	864.1
40°	1002.9	931.0	866.7	821.7	796.1	782.7	771.8
42.5°	900.6	834.9	771.0	736.7	713.5	705.3	699.0
45°	759.2	698.1	653.9	627.9	614.4	600.5	594.0
47.5°	646.0	596.3	567.1	545.0	530.7	522.4	518.3
50°	581.9	541.1	515.1	498.2	485.2	478.7	475.2
52.5°	525.0	491.5	469.7	456.2	447.4	442.6	441.2
55°	452.2	426.6	412.8	401.1	394.6	390.3	388.5
57.5°	393.1	373.4	362.2	352.5	350.0	346.3	345.1
60°	354.2	339.1	329.5	323.0	320.9	316.5	317.4
62.5°	319.9	307.5	299.4	295.6	292.8	289.1	290.3
65°	270.6	261.5	257.1	253.6	250.2	248.0	249.7
67.5°	227.1	220.8	214.9	212.9	211.2	210.8	209.0
70°	198.6	193.4	188.2	186.9	186.9	185.2	184.7
72.5°	171.2	167.4	163.9	163.0	161.6	162.2	160.5
75°	132.2	129.2	127.9	126.6	126.2	126.2	124.9
77.5°	97.8	95.5	93.4	93.4	91.8	91.2	91.1
80°	74.1	73.3	71.6	71.6	70.7	71.1	70.3
82.5°	55.8	54.5	54.2	53.5	52.3	52.3	51.5
85°	29.9	28.6	28.2	26.9	26.0	26.9	26.0
87.5°	15.9	15.8	15.7	15.1	14.8	14.9	13.9
90°	27.5	28.9	29.8	30.3	30.8	31.2	31.7
92.5°	44.4	45.2	45.8	46.1	46.4	46.6	47.0
95°	82.5	83.2	83.6	83.6	83.6	83.6	83.6
97.5°	129.6	130.4	130.9	130.9	130.9	130.9	130.9
100°	163.2	163.6	163.9	163.9	163.9	163.9	163.9
102.5°	199.3	199.9	200.3	200.6	200.7	200.9	201.1
105°	253.8	254.5	255.2	255.8	256.6	257.3	258.0
107.5°	312.6	313.3	313.6	313.6	313.5	313.5	313.4
110°	350.7	350.3	350.3	351.1	351.7	352.5	353.2



TEST NUMBER: P332794-930

CATALOG NUMBER: S124DIW-S795D1340U930-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	393.3	393.1	393.2	393.3	393.5	393.6	393.8
115°	458.2	458.0	457.7	457.5	457.2	457.0	456.8
117.5°	520.2	519.3	518.7	518.2	517.8	517.3	516.8
120°	562.1	561.0	560.6	561.1	561.6	562.1	562.5
122.5°	605.6	604.8	604.0	603.1	602.3	601.4	600.5
125°	669.0	668.5	668.0	667.6	667.1	666.6	666.1
127.5°	729.2	728.7	728.3	728.0	727.6	727.2	726.8
130°	771.5	771.0	770.4	769.4	768.4	767.5	766.5
132.5°	811.3	810.8	810.4	810.0	809.6	809.3	808.9
135°	870.9	870.4	869.8	869.1	868.5	867.7	867.0
137.5°	928.5	927.8	927.6	927.7	927.9	928.0	928.1
140°	966.8	966.5	966.3	966.0	965.8	965.6	965.4
142.5°	1002.9	1002.8	1002.7	1002.7	1002.7	1002.7	1002.6
145°	1056.6	1056.4	1056.0	1055.2	1054.5	1053.9	1053.1
147.5°	1105.6	1105.5	1105.2	1105.0	1104.7	1104.6	1104.3
150°	1136.6	1136.6	1136.5	1136.3	1136.0	1135.8	1135.6
152.5°	1166.3	1166.9	1166.8	1166.2	1165.6	1165.0	1164.3
155°	1207.1	1208.1	1208.1	1207.1	1206.2	1205.3	1204.4
157.5°	1242.6	1243.3	1243.2	1242.4	1241.6	1240.9	1240.1
160°	1264.6	1265.3	1265.0	1263.9	1262.7	1261.5	1260.4
162.5°	1284.9	1286.1	1286.2	1285.0	1283.9	1282.7	1281.5
165°	1311.1	1312.6	1312.8	1311.8	1310.8	1309.9	1309.0
167.5°	1333.1	1334.5	1334.5	1333.0	1331.5	1330.2	1328.7
170°	1344.9	1346.4	1346.2	1344.6	1343.0	1341.3	1339.7
172.5°	1354.0	1355.6	1355.5	1353.9	1352.3	1350.6	1349.0
175°	1363.6	1365.3	1365.3	1363.6	1362.0	1360.3	1358.7
177.5°	1368.6	1369.9	1369.8	1368.3	1366.8	1365.3	1363.8
180°	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2

(END OF REPORT)