

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332779-930

Luminaire Tested: **S124DIW-S795D470U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332779-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124DIW-S795D470U930-4F0-1E-UDD-F  
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 470 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4306.8 lumens  
Efficiency: N/A  
Efficacy: 114.2 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: Semi-Direct  
  
Input Watts (W): 37.7  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332779-930  
CATALOG NUMBER: S124DIW-S795D470U930-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

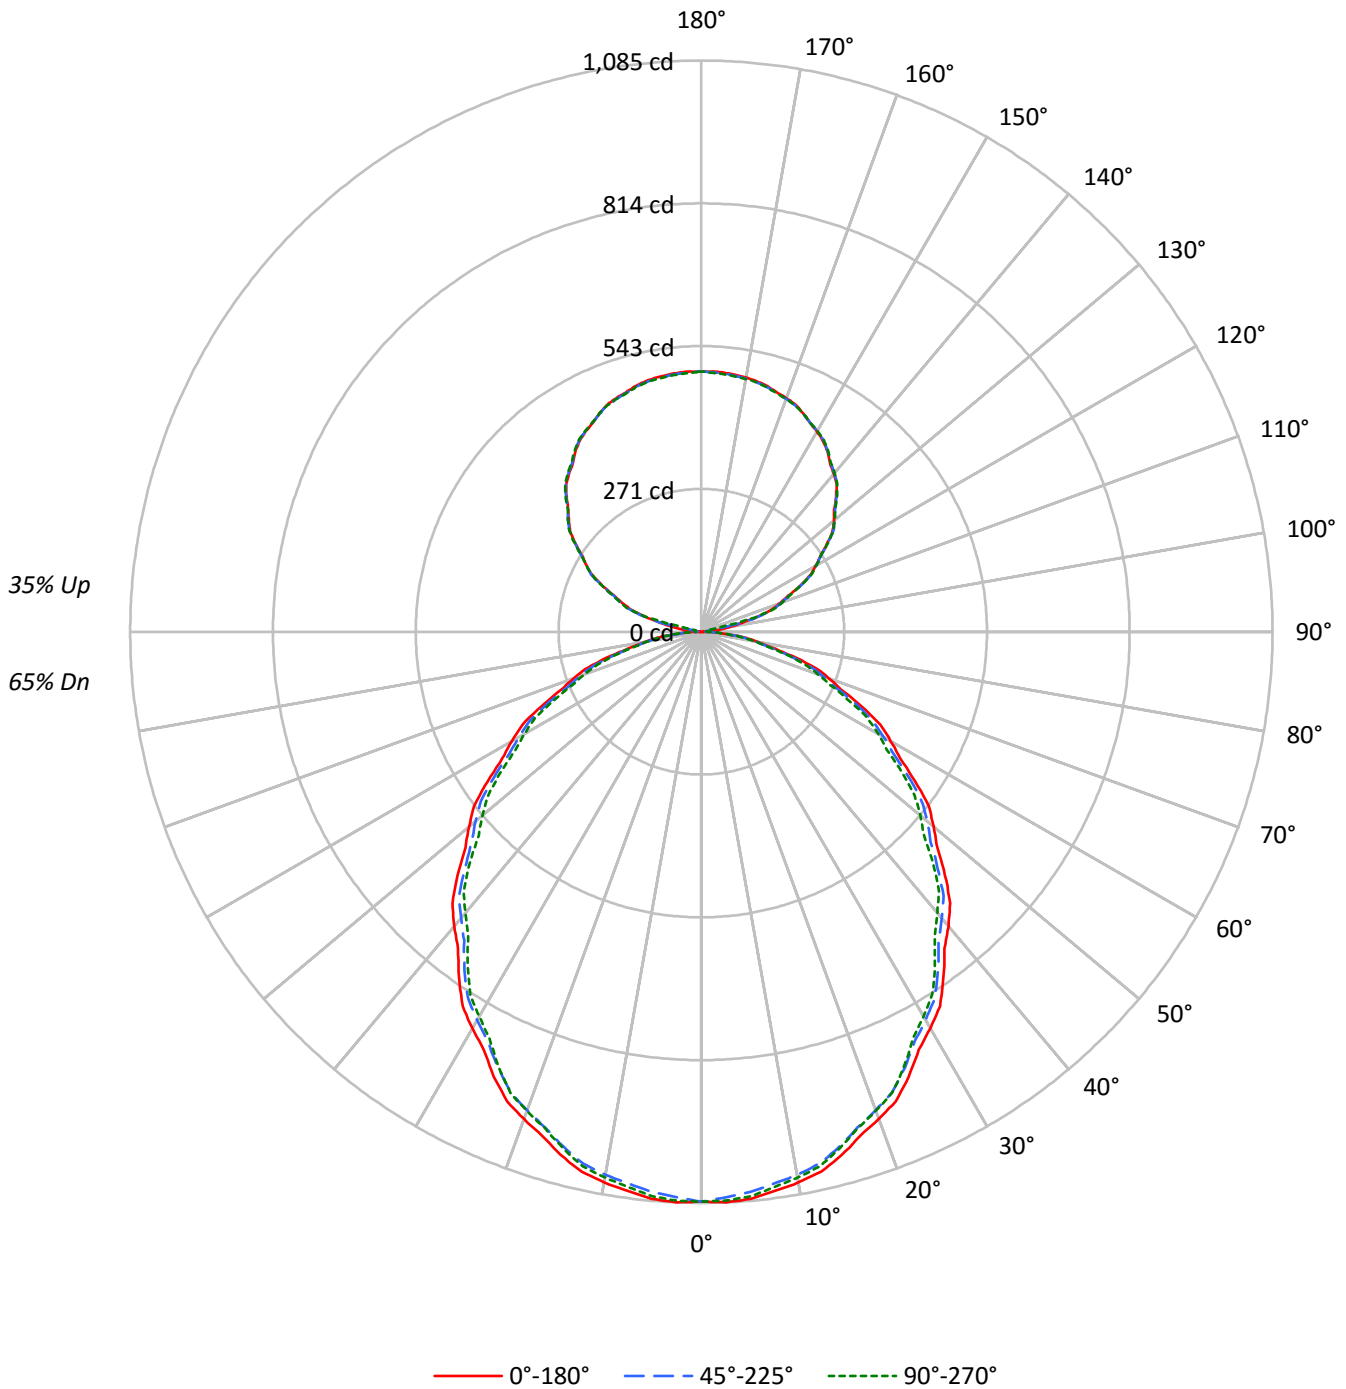



TEST NUMBER: P332779-930

CATALOG NUMBER: S124DIW-S795D470U930-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	104	104	104	104	91	91	91	80	80	80	69	69	69	65
1	101	97	93	89	95	91	87	84	80	78	75	70	68	67	61	60	59	54
2	92	84	78	73	86	79	74	69	70	66	62	62	59	56	54	52	49	45
3	84	74	67	61	79	70	63	58	62	57	52	55	51	47	48	45	42	38
4	77	66	58	51	72	62	55	49	55	49	45	49	44	40	43	39	36	33
5	71	59	50	44	66	55	48	42	49	43	39	44	39	35	39	35	32	29
6	65	53	44	38	61	50	42	37	45	38	34	40	35	31	35	31	28	25
7	60	48	39	34	56	45	38	32	40	34	30	36	31	27	32	28	25	22
8	56	43	35	30	53	41	34	29	37	31	27	33	28	24	29	25	22	20
9	52	40	32	27	49	38	31	26	34	28	24	30	26	22	27	23	20	18
10	49	36	29	24	46	35	28	23	31	26	22	28	23	20	25	21	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	8737	8737	8737
5°	8763	8658	8721
10°	8708	8588	8630
15°	8603	8466	8487
20°	8463	8314	8322
25°	8304	8141	8118
30°	8108	7938	7866
35°	7906	7727	7624
40°	7695	7484	7347
45°	7476	7247	7108
50°	7232	7036	6818
55°	6970	6763	6542
60°	6707	6455	6260
65°	6411	6162	5914
70°	6080	5773	5549
75°	5571	5303	5168
80°	4956	4756	4635
85°	4335	4177	4094



TEST NUMBER: P332779-930

CATALOG NUMBER: S124DIW-S795D470U930-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	101.9	2.4
10°-20°	287.2	6.7
20°-30°	422.7	9.8
30°-40°	491.4	11.4
40°-50°	491.4	11.4
50°-60°	429.8	10.0
60°-70°	319.2	7.4
70°-80°	181.4	4.2
80°-90°	53.8	1.2
90°-100°	16.9	0.4
100°-110°	107.7	2.5
110°-120°	206.1	4.8
120°-130°	261.6	6.1
130°-140°	279.9	6.5
140°-150°	261.7	6.1
150°-160°	211.1	4.9
160°-170°	136.1	3.2
170°-180°	46.9	1.1
0°-30°	811.8	18.8
0°-40°	1303.1	30.3
0°-60°	2224.4	51.6
0°-90°	2778.7	64.5
90°-120°	330.7	7.7
90°-150°	1134.0	26.3
90°-180°	1528.0	35.5
0°-180°	4306.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1082	1082	1082	1082	1082	
5°	1081	1078	1068	1077	1076	103
15°	1029	1025	1013	1018	1016	290
25°	932	926	914	915	911	429
35°	802	796	784	778	774	501
45°	655	648	635	626	623	505
55°	495	492	480	470	465	443
65°	336	331	323	314	310	332
75°	179	174	170	167	166	190
85°	47	47	45	45	44	52
90°	1	5	8	10	11	3
95°	20	8	8	10	11	26
105°	111	113	115	118	105	116
115°	208	209	208	209	209	204
125°	292	293	293	294	294	261
135°	362	362	363	364	365	279
145°	418	419	419	419	420	261
155°	458	458	457	458	458	211
165°	483	481	481	484	481	136
175°	494	492	492	495	491	47
180°	494	494	494	494	494	



TEST NUMBER: P332779-930

CATALOG NUMBER: S124DIW-S795D470U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1082.3	1082.3	1082.3	1082.3	1082.3	1082.3	1082.3	1082.3	1082.3	1082.3	1082.3
2.5°	1085.1	1084.6	1084.1	1083.7	1083.2	1082.1	1080.4	1078.7	1077.0	1075.4	1076.8
5°	1081.4	1080.7	1079.9	1079.1	1078.3	1076.8	1074.7	1072.6	1070.5	1068.4	1070.5
7.5°	1071.4	1070.6	1069.8	1069.0	1068.3	1066.7	1064.4	1062.0	1059.6	1057.3	1059.0
10°	1062.3	1061.6	1060.8	1060.1	1059.2	1057.6	1055.1	1052.6	1050.1	1047.6	1049.1
12.5°	1050.5	1049.8	1049.0	1048.2	1047.5	1045.7	1043.1	1040.4	1037.8	1035.1	1036.8
15°	1029.4	1028.6	1027.8	1027.0	1026.3	1024.5	1021.6	1018.7	1015.8	1012.9	1014.1
17.5°	1003.9	1002.9	1001.9	1001.0	1000.0	998.2	995.5	992.7	989.9	987.2	988.0
20°	985.1	984.1	983.3	982.3	981.3	979.3	976.5	973.5	970.7	967.8	968.4
22.5°	965.1	963.8	962.5	961.2	959.9	957.9	955.0	952.1	949.2	946.3	947.4
25°	932.2	930.9	929.5	928.2	926.8	924.8	922.1	919.4	916.7	914.0	914.2
27.5°	894.8	893.4	892.0	890.6	889.2	887.3	884.8	882.3	879.8	877.3	876.8
30°	869.8	868.3	866.7	865.2	863.6	861.6	859.1	856.6	854.1	851.6	850.8
32.5°	843.4	842.0	840.7	839.3	837.9	835.8	833.2	830.5	827.9	825.2	824.3
35°	802.2	800.8	799.5	798.1	796.8	794.8	792.1	789.4	786.7	784.0	782.6
37.5°	758.6	757.4	756.2	755.0	753.7	751.6	748.8	745.8	743.0	740.0	738.6
40°	730.2	728.6	727.1	725.5	724.0	721.8	718.9	716.0	713.1	710.2	708.3
42.5°	699.7	698.7	697.8	696.9	695.9	693.9	690.7	687.5	684.3	681.1	678.9
45°	654.8	653.4	652.1	650.7	649.4	647.1	644.1	641.0	637.9	634.8	632.7
47.5°	607.7	606.8	605.9	605.0	604.1	602.2	599.3	596.5	593.6	590.8	588.3
50°	575.8	575.0	574.3	573.5	572.7	571.0	568.3	565.7	562.9	560.2	557.5
52.5°	544.6	543.7	542.7	541.8	540.9	539.0	536.1	533.3	530.4	527.6	525.2
55°	495.2	494.6	494.0	493.4	492.8	491.2	488.5	485.8	483.1	480.5	478.1
57.5°	448.0	447.4	446.7	446.1	445.4	443.7	441.1	438.4	435.8	433.1	430.9
60°	415.4	414.4	413.4	412.5	411.6	409.8	407.3	404.8	402.3	399.8	398.0
62.5°	383.5	382.7	381.9	381.1	380.3	378.5	375.9	373.2	370.6	367.9	366.3
65°	335.6	334.7	333.7	332.7	331.7	330.3	328.4	326.4	324.5	322.6	320.7
67.5°	287.4	286.5	285.6	284.7	283.9	282.5	280.6	278.8	277.0	275.1	273.2
70°	257.6	256.2	254.9	253.5	252.2	250.7	249.2	247.6	246.1	244.6	243.0
72.5°	225.7	224.3	223.0	221.6	220.2	219.0	217.8	216.5	215.2	214.0	212.8
75°	178.6	177.7	176.8	175.8	174.8	173.8	172.8	171.9	171.0	170.0	169.2
77.5°	133.7	133.3	132.9	132.5	132.0	131.4	130.5	129.7	128.8	128.0	127.8
80°	106.6	106.1	105.5	104.9	104.4	103.9	103.5	103.1	102.7	102.3	101.9
82.5°	80.3	80.1	79.7	79.5	79.2	79.1	79.0	78.9	78.8	78.8	78.5
85°	46.8	46.8	46.8	46.8	46.8	46.6	46.2	45.9	45.5	45.1	45.1
87.5°	18.3	18.3	18.3	18.3	18.3	18.3	18.3	18.3	18.3	18.3	18.3
90°	1.1	2.0	2.9	3.8	4.7	5.5	6.2	6.8	7.5	8.2	8.6
92.5°	4.6	4.7	4.7	4.8	4.9	5.2	5.9	6.5	7.2	7.8	8.3
95°	20.3	17.5	14.8	12.0	9.1	7.8	7.9	8.0	8.1	8.2	8.6
97.5°	43.1	44.9	46.6	48.3	50.1	46.4	37.3	28.0	18.9	9.8	9.8
100°	60.6	62.0	63.6	65.1	66.5	61.6	50.2	38.9	27.6	16.2	14.8
102.5°	80.1	81.2	82.3	83.3	84.5	84.2	82.8	81.3	79.8	78.4	63.3
105°	111.2	111.7	112.2	112.7	113.2	113.7	114.1	114.5	114.9	115.3	116.0
107.5°	140.1	140.4	140.6	140.9	141.1	141.5	142.0	142.6	143.2	143.7	144.1
110°	159.6	159.9	160.1	160.4	160.6	160.9	161.4	162.0	162.5	163.0	163.1



TEST NUMBER: P332779-930

CATALOG NUMBER: S124DIW-S795D470U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	178.6	179.0	179.4	179.9	180.3	180.7	180.9	181.1	181.3	181.6	181.6
115°	207.7	207.9	208.1	208.4	208.6	208.7	208.6	208.6	208.5	208.4	208.6
117.5°	233.9	234.2	234.6	234.9	235.2	235.5	235.6	235.8	236.0	236.2	236.1
120°	251.6	251.9	252.3	252.6	252.9	253.1	253.0	252.9	252.8	252.7	252.9
122.5°	268.2	268.4	268.6	268.8	269.0	269.1	269.2	269.4	269.5	269.6	269.7
125°	291.9	292.2	292.5	292.9	293.2	293.3	293.1	292.9	292.8	292.6	292.9
127.5°	314.4	314.5	314.5	314.6	314.7	315.0	315.3	315.7	316.1	316.4	316.4
130°	328.8	328.9	329.1	329.1	329.2	329.4	329.6	329.9	330.1	330.4	330.4
132.5°	342.2	342.3	342.4	342.6	342.8	343.0	343.3	343.6	343.9	344.2	344.3
135°	362.1	362.0	361.9	361.8	361.7	361.9	362.2	362.6	362.9	363.2	363.4
137.5°	379.8	379.8	379.8	379.8	379.9	380.1	380.4	380.8	381.2	381.6	381.7
140°	391.3	391.4	391.6	391.8	391.9	392.1	392.2	392.5	392.6	392.8	393.1
142.5°	401.6	401.9	402.3	402.5	402.8	403.0	403.1	403.2	403.3	403.4	403.6
145°	417.5	417.8	418.0	418.2	418.5	418.7	418.7	418.7	418.7	418.7	418.7
147.5°	430.2	430.6	431.0	431.5	432.0	432.2	432.1	432.0	431.9	431.9	431.9
150°	439.4	439.7	440.0	440.3	440.7	440.8	440.7	440.6	440.5	440.4	440.4
152.5°	447.0	447.3	447.5	447.8	448.1	448.1	448.0	447.8	447.7	447.5	447.7
155°	457.8	457.9	458.0	458.0	458.1	458.0	457.8	457.5	457.3	457.1	457.4
157.5°	466.9	466.8	466.8	466.8	466.7	466.5	466.3	465.9	465.7	465.5	465.9
160°	472.2	472.0	471.7	471.5	471.2	471.1	471.0	470.9	470.8	470.8	471.2
162.5°	477.0	476.6	476.3	476.0	475.7	475.5	475.4	475.3	475.2	475.2	475.6
165°	482.9	482.5	482.1	481.7	481.3	481.1	481.1	481.1	481.1	481.1	481.8
167.5°	487.6	487.2	486.8	486.4	485.9	485.7	485.7	485.6	485.6	485.5	486.2
170°	490.3	489.8	489.3	488.9	488.4	488.1	488.2	488.3	488.4	488.4	489.1
172.5°	492.1	491.6	491.1	490.6	490.2	489.9	490.0	490.1	490.2	490.2	490.9
175°	494.0	493.5	493.0	492.5	492.0	491.9	492.0	492.0	492.1	492.2	492.9
177.5°	494.9	494.5	494.0	493.5	493.1	492.9	493.0	493.2	493.3	493.4	493.9
180°	494.0	494.0	494.0	494.0	494.0	494.0	494.0	494.0	494.0	494.0	494.0



TEST NUMBER: P332779-930

CATALOG NUMBER: S124DIW-S795D470U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1082.3	1082.3	1082.3	1082.3	1082.3	1082.3	1082.3	1082.3
2.5°	1078.4	1079.9	1081.5	1082.2	1082.1	1081.9	1081.7	1081.6
5°	1072.6	1074.7	1076.8	1077.7	1077.3	1077.0	1076.6	1076.2
7.5°	1060.7	1062.4	1064.0	1064.8	1064.6	1064.4	1064.1	1063.9
10°	1050.7	1052.2	1053.8	1054.3	1053.9	1053.5	1053.2	1052.8
12.5°	1038.5	1040.2	1041.9	1042.4	1042.0	1041.4	1040.8	1040.3
15°	1015.2	1016.4	1017.5	1017.8	1017.2	1016.7	1016.1	1015.5
17.5°	988.7	989.4	990.2	990.3	989.9	989.5	989.2	988.8
20°	969.0	969.6	970.1	970.2	969.8	969.5	969.1	968.7
22.5°	948.4	949.4	950.5	950.6	949.9	949.3	948.5	947.9
25°	914.4	914.6	914.8	914.5	913.8	913.0	912.2	911.4
27.5°	876.4	875.9	875.4	874.7	873.8	872.8	871.8	870.8
30°	850.0	849.3	848.5	847.7	846.7	845.7	844.7	843.8
32.5°	823.4	822.5	821.6	820.6	819.6	818.6	817.7	816.8
35°	781.3	779.9	778.5	777.4	776.4	775.5	774.5	773.6
37.5°	737.1	735.6	734.3	732.9	731.6	730.3	729.0	727.7
40°	706.4	704.5	702.5	701.1	700.1	699.2	698.2	697.2
42.5°	676.6	674.4	672.1	670.7	670.1	669.4	668.8	668.1
45°	630.6	628.4	626.3	625.0	624.4	623.8	623.2	622.6
47.5°	586.0	583.6	581.1	579.3	577.8	576.3	574.9	573.4
50°	554.8	552.1	549.4	547.5	546.3	545.2	544.0	542.9
52.5°	522.9	520.4	518.0	516.2	514.7	513.2	511.8	510.3
55°	475.8	473.5	471.2	469.4	468.3	467.2	465.9	464.8
57.5°	428.7	426.5	424.3	422.7	421.5	420.4	419.3	418.2
60°	396.3	394.6	392.8	391.5	390.5	389.6	388.6	387.7
62.5°	364.7	363.1	361.6	360.3	359.3	358.3	357.4	356.4
65°	318.8	316.8	314.9	313.5	312.5	311.5	310.5	309.6
67.5°	271.4	269.5	267.7	266.6	266.4	266.1	265.8	265.5
70°	241.5	239.9	238.4	237.3	236.8	236.2	235.6	235.1
72.5°	211.6	210.3	209.1	208.2	207.6	207.0	206.4	205.9
75°	168.4	167.6	166.9	166.4	166.2	166.0	165.8	165.7
77.5°	127.5	127.3	127.1	126.7	126.2	125.7	125.2	124.7
80°	101.6	101.2	100.8	100.5	100.3	100.1	100.0	99.7
82.5°	78.3	78.0	77.8	77.6	77.5	77.2	77.0	76.8
85°	45.1	45.1	45.1	45.0	44.8	44.6	44.4	44.2
87.5°	18.5	18.6	18.7	18.8	18.8	18.8	18.8	18.8
90°	9.1	9.6	10.1	10.4	10.6	10.8	10.9	11.1
92.5°	8.8	9.3	9.8	10.0	10.1	10.1	10.2	10.2
95°	9.1	9.6	10.1	10.4	10.4	10.5	10.6	10.7
97.5°	9.9	9.9	9.9	10.0	10.1	10.2	10.3	10.4
100°	13.5	12.1	10.7	10.0	10.1	10.2	10.3	10.4
102.5°	48.2	33.2	18.1	10.6	10.6	10.6	10.6	10.7
105°	116.8	117.5	118.2	117.2	114.1	111.2	108.3	105.3
107.5°	144.5	144.8	145.2	145.5	145.9	146.1	146.4	146.8
110°	163.3	163.5	163.6	163.8	164.0	164.3	164.5	164.8





TEST NUMBER: P332779-930

CATALOG NUMBER: S124DIW-S795D470U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	181.5	181.5	181.4	181.6	181.9	182.2	182.5	182.8
115°	208.7	208.9	209.0	209.1	209.1	209.1	209.1	209.1
117.5°	236.1	236.1	236.0	236.0	235.9	235.9	235.9	235.9
120°	253.1	253.2	253.4	253.4	253.2	253.1	252.9	252.7
122.5°	269.8	269.9	269.9	269.9	269.8	269.6	269.5	269.3
125°	293.1	293.3	293.6	293.8	293.8	293.9	294.0	294.1
127.5°	316.3	316.3	316.3	316.2	316.1	316.0	316.0	315.9
130°	330.5	330.6	330.7	330.7	330.7	330.7	330.7	330.7
132.5°	344.4	344.5	344.5	344.5	344.5	344.5	344.4	344.3
135°	363.5	363.7	363.9	364.0	364.2	364.4	364.5	364.7
137.5°	381.9	382.0	382.3	382.3	382.3	382.2	382.2	382.1
140°	393.3	393.5	393.8	394.0	394.0	394.1	394.2	394.3
142.5°	403.7	404.0	404.1	404.2	404.2	404.3	404.3	404.3
145°	418.8	418.9	419.0	419.1	419.2	419.4	419.6	419.7
147.5°	432.0	432.0	432.1	432.2	432.3	432.4	432.4	432.5
150°	440.4	440.4	440.4	440.5	440.6	440.7	440.8	440.8
152.5°	447.8	447.9	448.1	448.1	448.1	448.0	447.9	447.9
155°	457.7	458.0	458.4	458.4	458.2	458.0	457.7	457.5
157.5°	466.3	466.7	467.1	467.1	466.7	466.3	465.9	465.5
160°	471.7	472.2	472.7	472.7	472.2	471.7	471.2	470.8
162.5°	476.1	476.6	477.1	477.1	476.5	476.0	475.4	474.9
165°	482.4	483.1	483.7	483.6	482.9	482.2	481.4	480.7
167.5°	487.0	487.7	488.4	488.4	487.5	486.7	485.9	485.1
170°	489.8	490.4	491.1	491.1	490.2	489.3	488.5	487.7
172.5°	491.5	492.2	492.8	492.8	491.9	491.0	490.1	489.2
175°	493.7	494.4	495.1	495.0	494.0	493.0	492.0	491.1
177.5°	494.5	495.0	495.5	495.4	494.6	493.8	493.0	492.3
180°	494.0	494.0	494.0	494.0	494.0	494.0	494.0	494.0

(END OF REPORT)