

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333086-930

Luminaire Tested: **S124RDIW-S1020D1050U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333086-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIW-S1020D1050U930-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1050 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6367.4 lumens
Efficiency: N/A
Efficacy: 104.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 61.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333086-930

CATALOG NUMBER: S124RDIW-S1020D1050U930-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

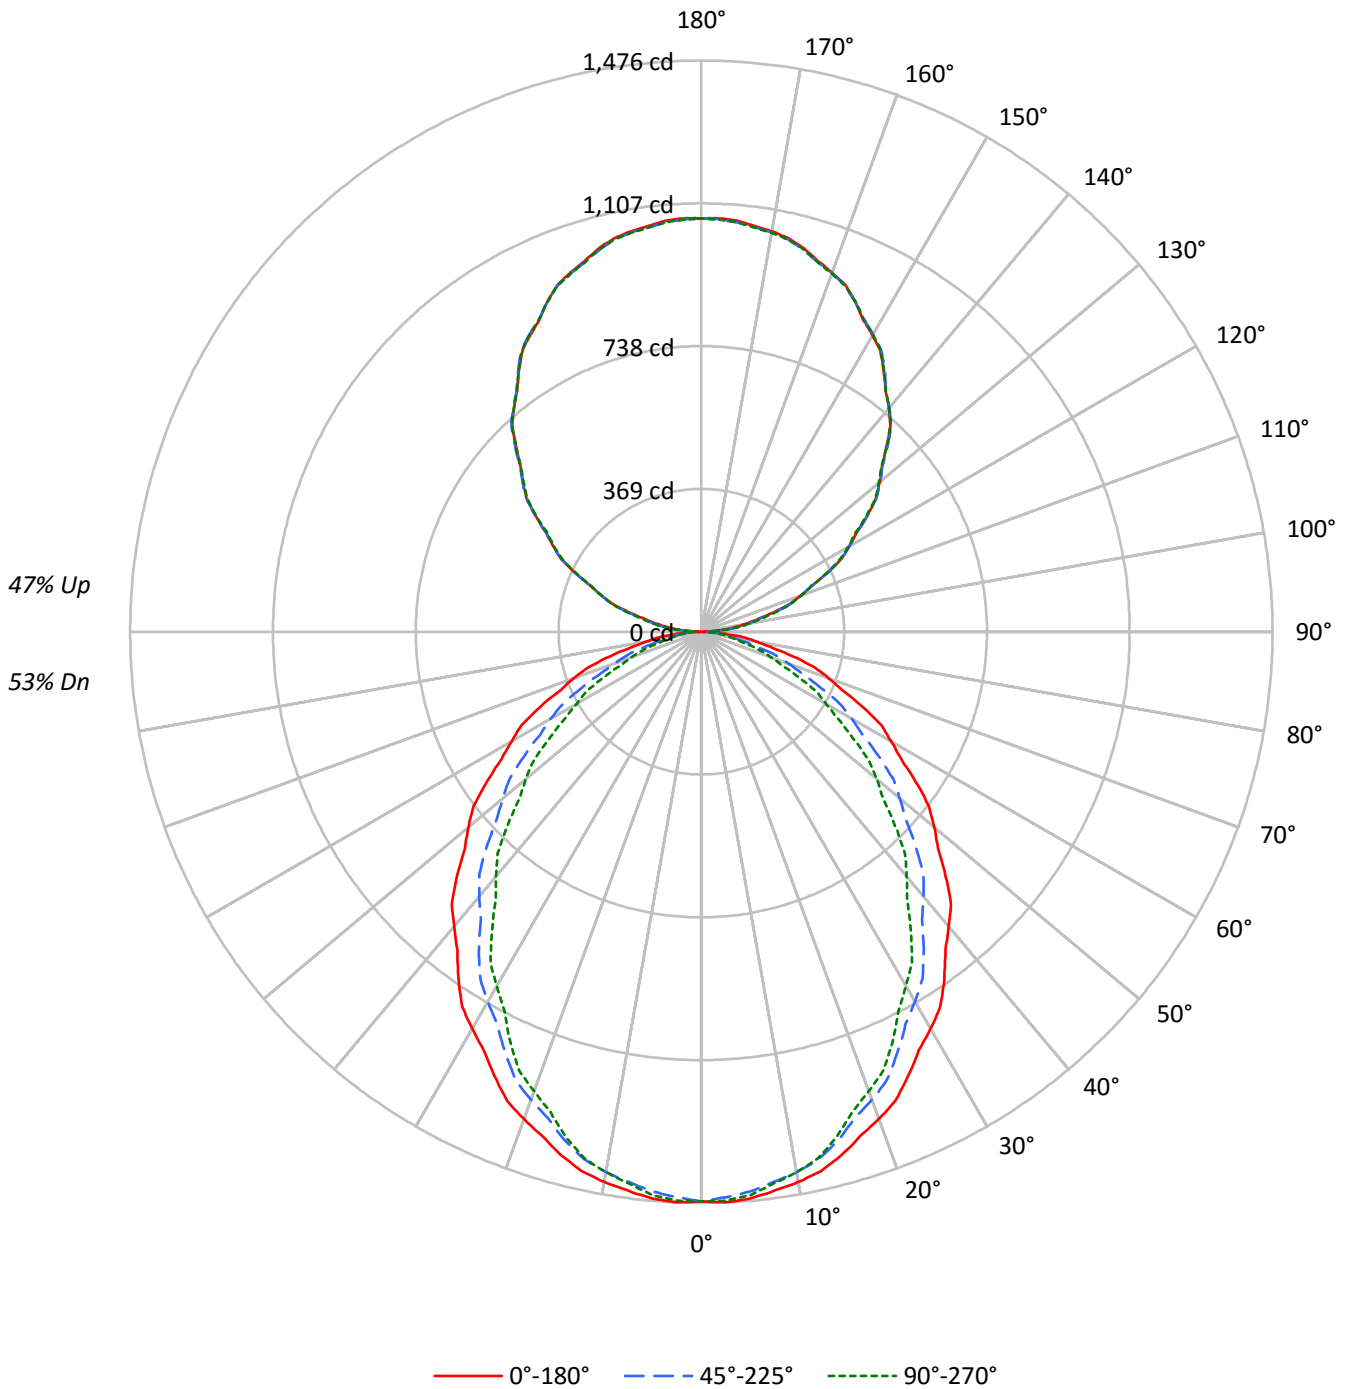



TEST NUMBER: P333086-930

CATALOG NUMBER: S124RDIW-S1020D1050U930-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	59	59	59	53				53
1	99	95	91	87	91	88	85	82	75	73	71	64	62	60	53	52	51	46				46
2	90	83	77	72	83	77	72	67	66	62	59	56	53	51	47	45	43	39				39
3	82	73	66	60	76	68	62	57	59	54	50	50	46	43	42	39	37	33				33
4	76	65	57	51	70	61	54	48	52	47	43	45	41	37	37	35	32	29				29
5	69	58	50	44	64	54	47	42	47	41	37	40	36	33	34	31	28	25				25
6	64	52	44	38	59	49	42	36	42	37	32	36	32	29	31	27	25	22				22
7	59	47	39	34	55	44	37	32	38	33	29	33	29	25	28	25	22	20				20
8	55	43	35	30	51	40	33	28	35	30	26	30	26	23	26	23	20	18				18
9	51	39	32	27	48	37	30	25	32	27	23	28	24	21	24	21	18	16				16
10	48	36	29	24	45	34	27	23	30	24	21	26	22	19	22	19	16	15				15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11885	11885	11885
5°	11912	11766	11839
10°	11837	11625	11625
15°	11701	11381	11295
20°	11515	11059	10856
25°	11276	10684	10413
30°	11044	10288	9857
35°	10787	9876	9298
40°	10478	9409	8696
45°	10193	8944	8082
50°	9868	8410	7433
55°	9520	7854	6726
60°	9137	7245	6006
65°	8785	6481	5297
70°	8275	5641	4497
75°	7629	4676	3656
80°	6657	3561	3357
85°	5641	3242	3029



TEST NUMBER: P333086-930

CATALOG NUMBER: S124RDIW-S1020D1050U930-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	138.3	2.2
10°-20°	385.6	6.1
20°-30°	556.9	8.7
30°-40°	631.2	9.9
40°-50°	609.5	9.6
50°-60°	506.9	8.0
60°-70°	350.0	5.5
70°-80°	177.4	2.8
80°-90°	48.7	0.8
90°-100°	70.4	1.1
100°-110°	208.7	3.3
110°-120°	354.2	5.6
120°-130°	467.0	7.3
130°-140°	524.5	8.2
140°-150°	515.4	8.1
150°-160°	433.5	6.8
160°-170°	288.4	4.5
170°-180°	101.0	1.6
0°-30°	1080.8	17.0
0°-40°	1712.0	26.9
0°-60°	2828.4	44.4
0°-90°	3404.5	53.5
90°-120°	633.2	9.9
90°-150°	2140.1	33.6
90°-180°	2963.0	46.5
0°-180°	6367.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1472	1472	1472	1472	1472	
5°	1470	1465	1452	1462	1461	139
15°	1400	1389	1362	1359	1352	394
25°	1266	1244	1199	1181	1169	583
35°	1094	1057	1002	965	944	684
45°	893	850	783	730	708	688
55°	676	630	558	501	478	605
65°	460	410	339	293	277	454
75°	245	202	150	125	117	258
85°	61	39	35	33	33	69
90°	2	11	18	23	25	6
95°	50	57	63	65	65	55
105°	192	193	197	199	202	204
115°	360	360	358	358	357	355
125°	524	524	524	522	520	467
135°	676	681	681	680	677	523
145°	822	825	826	825	823	514
155°	942	942	941	944	941	433
165°	1025	1023	1021	1025	1022	289
175°	1066	1062	1061	1066	1061	101
180°	1068	1068	1068	1068	1068	



TEST NUMBER: P333086-930

CATALOG NUMBER: S124RDIW-S1020D1050U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1472.2	1472.2	1472.2	1472.2	1472.2	1472.2	1472.2	1472.2	1472.2	1472.2	1472.2
2.5°	1475.8	1475.0	1474.1	1473.4	1472.6	1471.0	1468.8	1466.6	1464.4	1462.2	1464.4
5°	1469.9	1468.9	1467.9	1466.9	1465.9	1463.9	1460.9	1457.9	1454.9	1451.9	1454.4
7.5°	1456.6	1455.6	1454.5	1453.4	1452.4	1449.9	1446.0	1442.1	1438.2	1434.3	1435.9
10°	1444.0	1442.8	1441.4	1440.2	1439.0	1436.1	1431.6	1427.1	1422.5	1418.1	1419.0
12.5°	1427.8	1426.3	1424.8	1423.4	1422.0	1418.5	1413.2	1407.9	1402.6	1397.3	1397.9
15°	1400.0	1397.7	1395.5	1393.3	1391.0	1386.7	1380.5	1374.2	1368.0	1361.7	1361.2
17.5°	1366.4	1363.2	1359.9	1356.7	1353.4	1348.0	1340.5	1333.0	1325.5	1317.9	1316.5
20°	1340.3	1337.0	1333.7	1330.5	1327.2	1321.4	1312.9	1304.3	1295.8	1287.3	1285.3
22.5°	1311.4	1307.7	1304.1	1300.5	1296.8	1290.4	1281.3	1272.2	1263.1	1253.9	1250.9
25°	1265.9	1261.3	1256.9	1252.4	1247.8	1240.5	1230.2	1219.9	1209.7	1199.4	1195.1
27.5°	1218.1	1212.4	1206.8	1201.1	1195.5	1187.2	1176.2	1165.2	1154.2	1143.2	1138.0
30°	1184.7	1178.4	1172.2	1166.0	1159.7	1150.6	1138.9	1127.1	1115.3	1103.6	1097.3
32.5°	1149.6	1142.5	1135.4	1128.4	1121.3	1111.7	1099.5	1087.4	1075.1	1063.0	1055.7
35°	1094.5	1086.5	1078.5	1070.5	1062.5	1052.2	1039.7	1027.2	1014.6	1002.1	993.6
37.5°	1035.7	1027.4	1019.2	1010.9	1002.7	991.6	977.7	963.8	949.9	936.0	926.5
40°	994.3	985.9	977.7	969.4	961.2	949.9	935.6	921.3	907.0	892.8	882.2
42.5°	954.6	945.9	937.2	928.5	919.9	908.1	893.2	878.3	863.5	848.6	837.9
45°	892.8	883.5	874.2	865.0	855.7	843.5	828.5	813.5	798.4	783.4	771.2
47.5°	829.0	819.4	809.8	800.3	790.7	778.1	762.5	746.8	731.2	715.6	702.9
50°	785.7	775.9	766.1	756.4	746.6	733.7	717.7	701.6	685.6	669.6	657.0
52.5°	741.5	731.9	722.4	712.8	703.2	690.2	673.8	657.4	640.9	624.5	611.8
55°	676.4	666.3	656.3	646.3	636.3	623.1	606.8	590.5	574.3	558.0	544.9
57.5°	611.9	601.4	591.0	580.6	570.2	556.9	541.0	524.9	508.8	492.8	479.6
60°	565.9	555.9	545.8	535.8	525.8	512.7	496.8	480.7	464.6	448.7	435.6
62.5°	524.4	514.0	503.5	493.1	482.7	469.3	452.8	436.4	420.0	403.6	391.5
65°	459.9	449.1	438.4	427.6	416.9	403.4	387.4	371.4	355.3	339.3	328.6
67.5°	393.0	382.6	372.3	362.0	351.6	339.1	324.2	309.3	294.4	279.6	270.3
70°	350.6	340.1	329.5	319.0	308.5	296.1	281.8	267.5	253.2	239.0	230.7
72.5°	305.5	296.0	286.4	277.0	267.4	255.9	242.5	228.9	215.5	202.0	194.9
75°	244.6	235.4	226.1	216.8	207.6	197.0	185.2	173.5	161.7	149.9	144.1
77.5°	182.9	175.0	167.1	159.2	151.4	142.7	133.1	123.7	114.1	104.6	101.3
80°	143.2	135.9	128.7	121.4	114.1	106.7	99.2	91.7	84.1	76.6	75.9
82.5°	108.9	102.2	95.6	88.9	82.3	76.7	72.5	68.2	63.8	59.5	58.9
85°	60.9	55.8	50.9	45.8	40.8	37.9	37.2	36.4	35.7	35.0	34.4
87.5°	21.2	20.1	18.8	17.6	16.5	15.9	16.0	16.1	16.1	16.2	16.3
90°	2.4	4.5	6.5	8.6	10.5	12.3	13.8	15.2	16.7	18.2	19.2
92.5°	17.7	20.0	22.3	24.6	26.9	28.6	29.6	30.7	31.7	32.7	33.3
95°	49.6	51.2	52.8	54.5	56.2	57.6	58.9	60.2	61.5	62.8	63.3
97.5°	86.6	87.9	89.2	90.5	91.9	93.3	94.7	96.3	97.8	99.3	100.0
100°	115.6	116.3	117.1	117.8	118.5	119.8	121.4	123.0	124.7	126.4	126.7
102.5°	146.0	146.3	146.6	146.9	147.2	148.1	149.6	151.1	152.6	154.1	154.7
105°	192.4	192.7	192.8	193.0	193.1	193.6	194.4	195.1	195.8	196.6	197.1
107.5°	241.2	241.4	241.6	241.8	242.1	242.2	242.3	242.5	242.6	242.6	243.2
110°	274.2	274.6	274.9	275.3	275.7	275.7	275.6	275.4	275.2	275.0	274.7



TEST NUMBER: P333086-930

CATALOG NUMBER: S124RDIW-S1020D1050U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	308.6	308.7	308.8	308.8	308.8	308.8	308.4	308.1	307.8	307.4	307.4
115°	360.1	360.1	360.1	360.1	360.1	360.0	359.5	359.2	358.8	358.5	358.2
117.5°	408.7	408.8	409.0	409.1	409.3	409.2	409.0	408.7	408.5	408.1	407.6
120°	441.1	441.8	442.5	443.3	444.0	444.1	443.5	443.0	442.5	441.9	441.0
122.5°	474.7	475.1	475.3	475.6	475.9	476.0	475.6	475.4	475.2	474.9	474.3
125°	524.5	524.5	524.5	524.5	524.5	524.4	524.2	524.0	523.8	523.7	523.3
127.5°	569.6	570.1	570.6	571.2	571.8	571.9	571.6	571.3	571.0	570.7	570.4
130°	601.3	601.9	602.3	602.9	603.5	603.7	603.7	603.7	603.7	603.7	603.4
132.5°	633.7	634.1	634.5	634.9	635.3	635.4	635.3	635.1	635.0	634.8	634.5
135°	676.5	677.5	678.7	679.7	680.9	681.4	681.4	681.4	681.4	681.4	681.0
137.5°	723.0	723.5	724.1	724.6	725.0	725.5	725.8	726.1	726.4	726.7	726.2
140°	754.1	754.5	754.8	755.2	755.5	755.7	755.7	755.7	755.7	755.7	755.5
142.5°	782.5	782.9	783.3	783.6	784.0	784.1	783.9	783.7	783.7	783.5	783.4
145°	821.8	822.6	823.3	824.0	824.8	825.2	825.4	825.6	825.7	825.9	825.7
147.5°	860.8	861.7	862.6	863.4	864.3	864.7	864.5	864.4	864.2	864.1	864.0
150°	884.6	885.3	886.1	886.8	887.5	887.9	887.9	887.9	887.9	887.9	887.9
152.5°	907.0	907.5	907.9	908.3	908.8	909.1	909.2	909.4	909.5	909.7	910.1
155°	941.6	941.6	941.6	941.6	941.6	941.5	941.3	941.1	940.9	940.8	941.5
157.5°	970.6	970.3	970.0	969.6	969.3	969.1	969.1	969.1	969.0	969.0	969.6
160°	987.8	987.7	987.4	987.2	987.1	986.9	986.7	986.5	986.3	986.2	986.7
162.5°	1003.6	1003.2	1002.7	1002.2	1001.8	1001.4	1001.3	1001.1	1000.9	1000.7	1001.7
165°	1025.0	1024.4	1023.9	1023.4	1022.8	1022.3	1022.0	1021.6	1021.2	1020.8	1022.0
167.5°	1041.3	1040.6	1039.8	1039.0	1038.3	1037.9	1038.0	1038.0	1038.0	1038.0	1039.1
170°	1050.6	1049.7	1048.7	1047.8	1046.9	1046.5	1046.8	1046.9	1047.1	1047.3	1048.4
172.5°	1057.2	1056.4	1055.6	1054.9	1054.1	1053.8	1053.8	1053.9	1053.9	1053.9	1055.2
175°	1066.2	1065.4	1064.5	1063.6	1062.6	1062.1	1061.8	1061.7	1061.5	1061.4	1062.6
177.5°	1069.3	1068.5	1067.8	1067.1	1066.3	1065.9	1065.9	1065.9	1065.9	1065.9	1067.0
180°	1068.0	1068.0	1068.0	1068.0	1068.0	1068.0	1068.0	1068.0	1068.0	1068.0	1068.0



TEST NUMBER: P333086-930

CATALOG NUMBER: S124RDIW-S1020D1050U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1472.2	1472.2	1472.2	1472.2	1472.2	1472.2	1472.2	1472.2
2.5°	1466.6	1468.8	1471.0	1472.1	1471.9	1471.7	1471.5	1471.3
5°	1456.9	1459.4	1461.9	1462.9	1462.4	1461.9	1461.4	1460.9
7.5°	1437.5	1439.1	1440.7	1441.1	1440.3	1439.5	1438.7	1437.9
10°	1420.1	1421.1	1422.0	1422.0	1421.1	1420.1	1419.0	1418.1
12.5°	1398.5	1399.1	1399.7	1399.3	1397.9	1396.5	1395.1	1393.8
15°	1360.7	1360.2	1359.7	1358.5	1356.8	1355.0	1353.3	1351.5
17.5°	1315.2	1313.8	1312.4	1310.3	1307.7	1305.0	1302.4	1299.7
20°	1283.3	1281.3	1279.3	1276.7	1273.4	1270.2	1266.9	1263.6
22.5°	1247.9	1244.9	1241.9	1239.1	1236.4	1233.8	1231.1	1228.5
25°	1190.8	1186.6	1182.3	1178.9	1176.5	1173.9	1171.4	1169.0
27.5°	1132.7	1127.5	1122.2	1117.8	1114.2	1110.5	1106.9	1103.3
30°	1091.0	1084.8	1078.5	1073.3	1069.3	1065.4	1061.4	1057.4
32.5°	1048.5	1041.2	1034.0	1028.4	1024.6	1020.8	1017.0	1013.2
35°	985.0	976.6	968.0	961.6	957.0	952.5	948.0	943.5
37.5°	917.0	907.5	898.0	891.0	886.5	881.9	877.4	872.9
40°	871.7	861.2	850.7	843.2	838.7	834.1	829.6	825.2
42.5°	827.1	816.4	805.7	798.0	793.3	788.6	783.8	779.2
45°	758.9	746.6	734.3	725.9	721.5	716.9	712.4	707.9
47.5°	690.2	677.4	664.6	655.8	650.9	645.9	640.9	636.0
50°	644.5	632.0	619.5	610.8	606.1	601.3	596.6	591.8
52.5°	599.0	586.3	573.6	564.8	559.8	554.8	549.8	544.9
55°	531.9	518.9	505.9	497.0	492.2	487.5	482.7	477.9
57.5°	466.4	453.1	439.9	431.5	427.9	424.3	420.7	417.1
60°	422.6	409.5	396.6	388.0	384.0	380.0	376.0	372.0
62.5°	379.5	367.5	355.5	347.8	344.6	341.4	338.2	335.0
65°	317.7	307.0	296.2	289.3	286.3	283.3	280.3	277.3
67.5°	261.0	251.8	242.5	236.2	232.8	229.6	226.2	223.0
70°	222.4	214.2	205.9	200.5	198.0	195.5	193.0	190.5
72.5°	187.8	180.8	173.7	169.1	166.7	164.4	162.2	159.9
75°	138.4	132.6	126.9	123.3	121.7	120.3	118.7	117.2
77.5°	97.9	94.6	91.2	89.3	88.8	88.4	87.9	87.5
80°	75.2	74.4	73.6	73.1	72.9	72.6	72.4	72.2
82.5°	58.4	57.9	57.3	56.9	56.7	56.4	56.2	55.9
85°	33.9	33.4	32.9	32.7	32.7	32.7	32.7	32.7
87.5°	16.3	16.3	16.3	16.5	16.8	17.0	17.3	17.6
90°	20.4	21.4	22.6	23.3	23.6	24.1	24.4	24.8
92.5°	34.0	34.7	35.4	35.8	36.0	36.2	36.4	36.7
95°	63.8	64.4	65.0	65.2	65.2	65.2	65.2	65.2
97.5°	100.6	101.3	101.9	102.2	102.2	102.2	102.2	102.2
100°	127.1	127.4	127.8	128.0	128.0	128.0	128.0	128.0
102.5°	155.2	155.6	156.2	156.5	156.6	156.8	156.9	157.1
105°	197.7	198.2	198.8	199.3	199.9	200.4	201.0	201.5
107.5°	243.7	244.2	244.8	244.9	244.9	244.9	244.8	244.8
110°	274.3	273.9	273.5	273.7	274.2	274.8	275.3	275.9



TEST NUMBER: P333086-930

CATALOG NUMBER: S124RDIW-S1020D1050U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	307.3	307.2	307.1	307.1	307.3	307.4	307.4	307.6
115°	358.1	357.9	357.8	357.5	357.3	357.2	357.0	356.8
117.5°	406.9	406.3	405.7	405.2	404.8	404.5	404.1	403.7
120°	440.0	439.1	438.2	437.9	438.3	438.6	439.0	439.4
122.5°	473.7	473.0	472.4	471.7	471.1	470.4	469.8	469.1
125°	522.9	522.5	522.2	521.8	521.5	521.1	520.7	520.3
127.5°	570.0	569.6	569.2	568.9	568.6	568.3	568.0	567.8
130°	603.0	602.7	602.3	601.8	601.0	600.3	599.6	598.8
132.5°	634.1	633.7	633.3	633.0	632.8	632.4	632.1	631.9
135°	680.7	680.3	680.0	679.5	678.9	678.3	677.8	677.3
137.5°	725.7	725.2	724.7	724.6	724.6	724.8	724.9	725.0
140°	755.4	755.2	755.0	754.8	754.6	754.5	754.2	754.1
142.5°	783.4	783.3	783.3	783.3	783.3	783.3	783.2	783.2
145°	825.6	825.4	825.2	824.8	824.3	823.7	823.2	822.6
147.5°	863.8	863.6	863.5	863.3	863.2	863.0	862.7	862.6
150°	887.9	887.9	887.9	887.8	887.6	887.5	887.2	887.0
152.5°	910.5	911.0	911.4	911.4	910.9	910.4	910.0	909.5
155°	942.2	943.0	943.7	943.7	943.0	942.2	941.5	940.8
157.5°	970.1	970.6	971.2	971.2	970.5	969.9	969.3	968.7
160°	987.2	987.8	988.4	988.1	987.2	986.3	985.5	984.5
162.5°	1002.7	1003.6	1004.7	1004.7	1003.8	1002.9	1001.9	1001.0
165°	1023.0	1024.2	1025.2	1025.4	1024.7	1023.9	1023.2	1022.5
167.5°	1040.2	1041.3	1042.4	1042.4	1041.3	1040.2	1039.0	1037.9
170°	1049.5	1050.6	1051.7	1051.6	1050.4	1049.0	1047.7	1046.4
172.5°	1056.4	1057.6	1058.9	1058.8	1057.6	1056.3	1055.0	1053.7
175°	1063.9	1065.2	1066.5	1066.5	1065.2	1063.9	1062.6	1061.4
177.5°	1068.0	1069.0	1070.1	1070.0	1068.8	1067.6	1066.5	1065.3
180°	1068.0	1068.0	1068.0	1068.0	1068.0	1068.0	1068.0	1068.0

(END OF REPORT)