

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333053-930

Luminaire Tested: **S124RDIW-S575D1560U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333053-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIW-S575D1560U930-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 575 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1560 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7004.0 lumens
Efficiency: N/A
Efficacy: 115.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 60.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333053-930

CATALOG NUMBER: S124RDIW-S575D1560U930-4F0-1E-UDD-F

Luminous Intensity Polar Plot

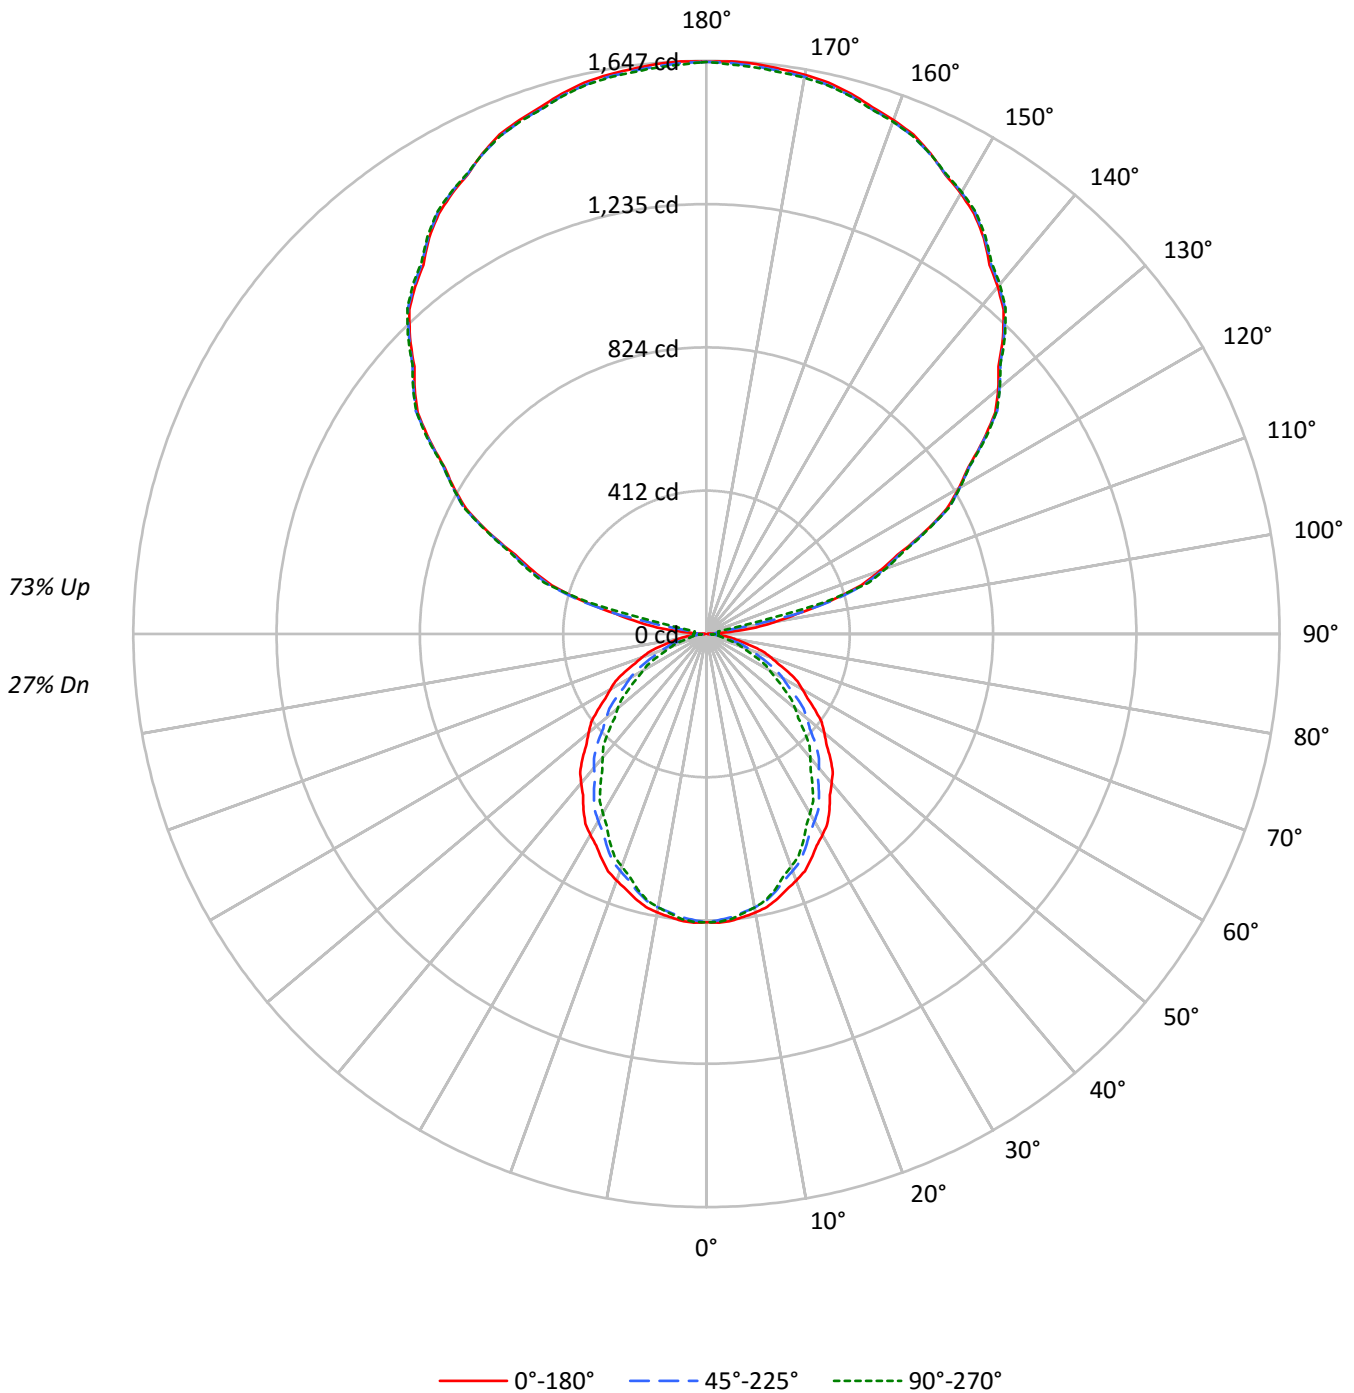



TEST NUMBER: P333053-930

CATALOG NUMBER: S124RDIW-S575D1560U930-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	71	71	71	52	52	52	35	35	35	27
1	93	89	85	82	83	79	76	74	62	60	58	46	45	44	31	31	30	23
2	85	78	72	67	75	70	65	61	55	51	48	41	39	37	28	27	26	20
3	77	68	61	56	69	61	55	51	48	44	41	36	33	31	25	23	22	17
4	71	60	53	47	63	54	48	43	43	38	35	32	29	27	22	20	19	15
5	65	54	46	40	58	48	42	37	38	33	30	29	26	23	20	18	17	13
6	60	48	40	35	53	43	37	32	34	30	26	26	23	20	18	16	15	11
7	55	43	36	30	49	39	32	28	31	26	23	24	20	18	17	15	13	10
8	51	39	32	27	45	35	29	24	28	24	20	22	18	16	15	13	12	9
9	47	36	28	24	42	32	26	22	26	21	18	20	17	14	14	12	10	8
10	44	33	26	21	39	30	23	19	24	19	16	18	15	13	13	11	10	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6689	6689	6689
5°	6704	6622	6663
10°	6662	6542	6542
15°	6586	6405	6358
20°	6480	6225	6110
25°	6347	6013	5860
30°	6216	5790	5547
35°	6071	5558	5233
40°	5896	5296	4894
45°	5737	5034	4548
50°	5554	4732	4182
55°	5358	4421	3786
60°	5142	4077	3381
65°	4946	3647	2980
70°	4657	3175	2530
75°	4295	2633	2059
80°	3747	2004	1888
85°	3168	1815	1704



TEST NUMBER: P333053-930

CATALOG NUMBER: S124RDIW-S575D1560U930-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	77.8	1.1
10°-20°	217.0	3.1
20°-30°	313.4	4.5
30°-40°	355.3	5.1
40°-50°	343.1	4.9
50°-60°	285.3	4.1
60°-70°	197.0	2.8
70°-80°	99.8	1.4
80°-90°	30.4	0.4
90°-100°	56.2	0.8
100°-110°	358.5	5.1
110°-120°	685.8	9.8
120°-130°	870.5	12.4
130°-140°	931.4	13.3
140°-150°	871.0	12.4
150°-160°	702.4	10.0
160°-170°	453.0	6.5
170°-180°	156.1	2.2
0°-30°	608.3	8.7
0°-40°	963.6	13.8
0°-60°	1591.9	22.7
0°-90°	1919.1	27.4
90°-120°	1100.5	15.7
90°-150°	3773.4	53.9
90°-180°	5085.0	72.6
0°-180°	7004.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	829	829	829	829	829	
5°	827	824	817	823	822	78
15°	788	782	766	765	761	222
25°	712	700	675	664	658	328
35°	616	595	564	543	531	385
45°	502	478	441	411	398	387
55°	381	354	314	282	269	340
65°	259	231	191	165	156	256
75°	138	114	84	70	66	145
85°	34	22	20	18	18	39
90°	4	17	27	34	37	5
95°	68	28	27	34	36	87
105°	370	377	384	392	350	387
115°	691	694	693	696	696	680
125°	971	976	974	977	979	867
135°	1205	1204	1209	1211	1214	928
145°	1389	1393	1393	1394	1397	868
155°	1523	1524	1521	1525	1522	702
165°	1607	1601	1601	1610	1600	454
175°	1644	1637	1638	1647	1634	156
180°	1644	1644	1644	1644	1644	



TEST NUMBER: P333053-930

CATALOG NUMBER: S124RDIW-S575D1560U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	828.6	828.6	828.6	828.6	828.6	828.6	828.6	828.6	828.6	828.6	828.6
2.5°	830.6	830.1	829.7	829.2	828.8	827.9	826.7	825.5	824.2	823.0	824.2
5°	827.3	826.7	826.1	825.6	825.1	823.9	822.2	820.5	818.8	817.2	818.6
7.5°	819.8	819.2	818.6	818.1	817.4	816.0	813.8	811.6	809.4	807.2	808.1
10°	812.7	812.0	811.3	810.6	809.9	808.3	805.8	803.2	800.6	798.1	798.7
12.5°	803.6	802.7	801.9	801.1	800.3	798.4	795.4	792.4	789.5	786.4	786.8
15°	788.0	786.7	785.5	784.2	782.9	780.5	777.0	773.5	769.9	766.4	766.1
17.5°	769.1	767.2	765.4	763.5	761.7	758.7	754.5	750.2	746.0	741.8	741.0
20°	754.3	752.5	750.6	748.9	747.0	743.7	738.9	734.1	729.3	724.6	723.4
22.5°	738.1	736.1	734.0	731.9	729.9	726.3	721.1	716.0	710.9	705.7	704.0
25°	712.5	710.0	707.4	704.8	702.3	698.1	692.4	686.6	680.8	675.1	672.6
27.5°	685.6	682.4	679.2	676.0	672.8	668.1	661.9	655.8	649.6	643.4	640.5
30°	666.8	663.2	659.7	656.2	652.7	647.6	641.0	634.4	627.7	621.1	617.6
32.5°	647.0	643.0	639.0	635.0	631.1	625.7	618.8	612.0	605.1	598.3	594.2
35°	616.0	611.6	607.0	602.5	598.0	592.2	585.1	578.1	571.0	564.0	559.2
37.5°	582.9	578.3	573.6	569.0	564.3	558.1	550.2	542.4	534.7	526.8	521.5
40°	559.5	554.9	550.2	545.6	541.0	534.6	526.6	518.5	510.5	502.5	496.5
42.5°	537.2	532.4	527.5	522.6	517.7	511.1	502.7	494.3	486.0	477.6	471.6
45°	502.5	497.3	492.0	486.8	481.6	474.7	466.3	457.9	449.4	440.9	434.0
47.5°	466.6	461.2	455.8	450.4	445.0	437.9	429.1	420.4	411.6	402.8	395.6
50°	442.2	436.7	431.2	425.7	420.2	412.9	403.9	394.9	385.9	376.8	369.8
52.5°	417.4	412.0	406.6	401.2	395.7	388.5	379.2	370.0	360.7	351.5	344.3
55°	380.7	375.0	369.4	363.7	358.1	350.7	341.5	332.4	323.2	314.1	306.7
57.5°	344.4	338.5	332.6	326.8	320.9	313.5	304.4	295.4	286.4	277.4	269.9
60°	318.5	312.8	307.2	301.6	296.0	288.6	279.6	270.5	261.5	252.5	245.2
62.5°	295.1	289.3	283.4	277.5	271.7	264.2	254.9	245.6	236.4	227.1	220.4
65°	258.9	252.8	246.7	240.7	234.6	227.1	218.0	209.0	200.0	190.9	184.9
67.5°	221.2	215.3	209.5	203.7	198.0	190.9	182.5	174.1	165.8	157.4	152.1
70°	197.3	191.4	185.5	179.5	173.7	166.6	158.6	150.6	142.5	134.5	129.9
72.5°	171.9	166.6	161.2	155.9	150.5	144.1	136.5	128.9	121.2	113.7	109.7
75°	137.7	132.5	127.3	122.1	116.8	110.9	104.3	97.6	91.0	84.4	81.1
77.5°	102.9	98.5	94.1	89.6	85.2	80.3	74.9	69.6	64.2	58.9	57.0
80°	80.6	76.5	72.4	68.3	64.2	60.1	55.8	51.6	47.4	43.1	42.7
82.5°	61.3	57.6	53.8	50.1	46.3	43.2	40.8	38.3	36.0	33.5	33.2
85°	34.2	31.5	28.6	25.8	23.0	21.4	21.0	20.5	20.1	19.6	19.4
87.5°	12.4	12.1	11.8	11.5	11.2	11.3	11.6	11.9	12.2	12.6	12.7
90°	3.7	6.7	9.7	12.7	15.7	18.3	20.5	22.7	24.9	27.1	28.7
92.5°	15.5	15.7	15.8	16.0	16.1	17.3	19.5	21.7	23.9	26.1	27.7
95°	67.6	58.3	49.1	39.8	30.5	25.9	26.3	26.5	26.7	27.1	28.7
97.5°	143.6	149.4	155.2	161.0	166.8	154.4	123.9	93.4	62.9	32.4	32.6
100°	201.6	206.6	211.5	216.4	221.3	204.9	167.2	129.5	91.8	54.1	49.5
102.5°	266.5	270.2	273.8	277.4	281.0	280.3	275.4	270.5	265.5	260.7	210.5
105°	370.1	371.7	373.3	375.0	376.7	378.1	379.5	380.9	382.2	383.6	386.0
107.5°	466.2	467.1	467.9	468.7	469.5	470.8	472.7	474.6	476.4	478.3	479.5
110°	531.2	532.0	532.8	533.6	534.4	535.7	537.3	538.9	540.5	542.2	542.7



TEST NUMBER: P333053-930

CATALOG NUMBER: S124RDIW-S575D1560U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	594.1	595.6	597.0	598.5	600.0	601.1	601.9	602.7	603.4	604.2	604.1
115°	691.0	691.8	692.6	693.4	694.2	694.6	694.2	694.0	693.7	693.4	694.0
117.5°	778.3	779.3	780.5	781.5	782.7	783.5	784.1	784.7	785.3	785.9	785.8
120°	837.3	838.4	839.5	840.6	841.6	842.0	841.8	841.6	841.2	841.0	841.6
122.5°	892.3	893.0	893.6	894.3	895.0	895.5	895.9	896.3	896.7	897.1	897.4
125°	971.3	972.4	973.5	974.6	975.7	975.9	975.4	974.9	974.3	973.8	974.6
127.5°	1046.0	1046.4	1046.6	1046.8	1047.2	1047.9	1049.2	1050.4	1051.7	1053.0	1052.8
130°	1094.3	1094.5	1094.8	1095.1	1095.4	1095.9	1096.7	1097.6	1098.4	1099.2	1099.4
132.5°	1138.5	1139.0	1139.5	1140.0	1140.5	1141.3	1142.3	1143.3	1144.4	1145.4	1145.7
135°	1204.9	1204.6	1204.4	1204.1	1203.8	1204.2	1205.3	1206.4	1207.5	1208.6	1209.2
137.5°	1263.7	1263.8	1263.9	1264.0	1264.1	1264.8	1266.0	1267.2	1268.4	1269.6	1270.2
140°	1302.0	1302.6	1303.2	1303.7	1304.2	1304.8	1305.3	1305.9	1306.4	1306.9	1307.8
142.5°	1336.4	1337.4	1338.5	1339.5	1340.4	1341.1	1341.4	1341.7	1342.1	1342.4	1343.0
145°	1389.4	1390.2	1391.0	1391.8	1392.6	1393.0	1393.0	1393.0	1393.0	1393.0	1393.3
147.5°	1431.4	1432.9	1434.4	1436.0	1437.5	1438.1	1437.9	1437.6	1437.3	1437.0	1437.3
150°	1461.9	1463.0	1464.0	1465.2	1466.2	1466.6	1466.4	1466.2	1465.8	1465.6	1465.6
152.5°	1487.4	1488.3	1489.2	1490.0	1490.9	1491.2	1490.6	1490.1	1489.6	1489.1	1489.6
155°	1523.4	1523.6	1523.9	1524.2	1524.4	1524.2	1523.4	1522.6	1521.8	1520.9	1522.0
157.5°	1553.6	1553.5	1553.3	1553.1	1553.0	1552.4	1551.4	1550.5	1549.6	1548.7	1550.1
160°	1571.3	1570.5	1569.7	1568.9	1568.1	1567.5	1567.2	1566.9	1566.7	1566.4	1568.1
162.5°	1587.1	1586.0	1584.9	1584.0	1582.9	1582.3	1581.9	1581.7	1581.4	1581.1	1582.7
165°	1607.0	1605.6	1604.3	1602.9	1601.5	1600.8	1600.8	1600.8	1600.8	1600.8	1603.0
167.5°	1622.7	1621.3	1619.8	1618.5	1617.0	1616.2	1616.1	1615.9	1615.8	1615.6	1618.0
170°	1631.6	1629.9	1628.2	1626.6	1625.0	1624.3	1624.6	1624.9	1625.1	1625.4	1627.6
172.5°	1637.4	1635.8	1634.2	1632.6	1630.9	1630.2	1630.5	1630.8	1631.0	1631.3	1633.5
175°	1643.8	1642.2	1640.5	1638.9	1637.3	1636.6	1636.9	1637.1	1637.4	1637.7	1640.1
177.5°	1646.8	1645.3	1643.7	1642.2	1640.7	1640.1	1640.5	1641.0	1641.4	1641.8	1643.6
180°	1643.8	1643.8	1643.8	1643.8	1643.8	1643.8	1643.8	1643.8	1643.8	1643.8	1643.8



TEST NUMBER: P333053-930

CATALOG NUMBER: S124RDIW-S575D1560U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	828.6	828.6	828.6	828.6	828.6	828.6	828.6	828.6
2.5°	825.5	826.7	827.9	828.5	828.4	828.3	828.2	828.1
5°	819.9	821.4	822.8	823.4	823.0	822.8	822.5	822.2
7.5°	809.0	809.9	810.9	811.1	810.7	810.2	809.8	809.3
10°	799.2	799.8	800.4	800.4	799.8	799.2	798.7	798.1
12.5°	787.1	787.4	787.8	787.6	786.8	786.0	785.2	784.4
15°	765.8	765.6	765.2	764.7	763.6	762.6	761.7	760.7
17.5°	740.2	739.4	738.6	737.4	736.0	734.5	733.0	731.5
20°	722.3	721.1	720.0	718.5	716.7	714.9	713.1	711.2
22.5°	702.4	700.7	699.0	697.4	695.9	694.4	692.9	691.4
25°	670.3	667.8	665.4	663.6	662.1	660.7	659.3	657.9
27.5°	637.5	634.5	631.6	629.1	627.0	625.0	623.1	621.0
30°	614.1	610.5	607.0	604.1	601.9	599.6	597.4	595.1
32.5°	590.1	586.0	581.9	578.8	576.7	574.5	572.3	570.2
35°	554.4	549.6	544.9	541.2	538.7	536.1	533.5	531.0
37.5°	516.1	510.8	505.4	501.5	498.9	496.4	493.8	491.3
40°	490.6	484.7	478.7	474.6	472.0	469.4	466.9	464.4
42.5°	465.5	459.5	453.5	449.1	446.5	443.8	441.2	438.5
45°	427.1	420.2	413.3	408.5	406.0	403.5	401.0	398.4
47.5°	388.4	381.2	374.1	369.1	366.3	363.5	360.8	357.9
50°	362.7	355.7	348.6	343.8	341.1	338.4	335.7	333.0
52.5°	337.1	330.0	322.9	317.9	315.0	312.3	309.5	306.7
55°	299.4	292.0	284.7	279.7	277.0	274.3	271.7	269.0
57.5°	262.4	255.0	247.6	242.9	240.8	238.8	236.8	234.7
60°	237.8	230.5	223.1	218.4	216.1	213.9	211.7	209.4
62.5°	213.6	206.8	200.1	195.8	194.0	192.2	190.4	188.6
65°	178.9	172.8	166.7	162.8	161.2	159.5	157.8	156.0
67.5°	146.9	141.7	136.5	133.0	131.1	129.2	127.3	125.5
70°	125.2	120.6	115.9	112.8	111.5	110.1	108.6	107.2
72.5°	105.7	101.7	97.8	95.1	93.8	92.5	91.2	89.9
75°	77.9	74.7	71.4	69.4	68.5	67.7	66.9	66.0
77.5°	55.1	53.2	51.3	50.2	50.0	49.7	49.5	49.2
80°	42.3	41.9	41.4	41.2	41.0	40.8	40.8	40.6
82.5°	32.9	32.5	32.3	32.0	31.9	31.7	31.6	31.5
85°	19.1	18.8	18.5	18.4	18.4	18.4	18.4	18.4
87.5°	13.0	13.1	13.4	13.6	13.8	14.0	14.3	14.5
90°	30.3	32.0	33.6	34.7	35.2	35.8	36.4	36.9
92.5°	29.4	31.0	32.6	33.5	33.6	33.8	33.8	33.9
95°	30.3	32.0	33.6	34.6	34.8	35.1	35.4	35.6
97.5°	32.8	32.9	33.1	33.3	33.6	33.9	34.2	34.4
100°	44.8	40.2	35.5	33.3	33.6	33.9	34.2	34.4
102.5°	160.5	110.3	60.3	35.2	35.2	35.3	35.4	35.4
105°	388.5	391.0	393.5	389.7	379.9	370.1	360.3	350.4
107.5°	480.7	481.9	483.1	484.2	485.3	486.2	487.3	488.4
110°	543.3	543.9	544.4	545.1	545.9	546.7	547.6	548.4



TEST NUMBER: P333053-930

CATALOG NUMBER: S124RDIW-S575D1560U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	604.0	603.8	603.7	604.2	605.3	606.3	607.3	608.4
115°	694.6	695.0	695.6	695.9	695.9	695.9	695.9	695.9
117.5°	785.7	785.5	785.5	785.4	785.2	785.1	785.1	784.9
120°	842.0	842.6	843.2	843.2	842.6	842.0	841.6	841.0
122.5°	897.7	898.1	898.4	898.2	897.7	897.2	896.6	896.1
125°	975.4	976.2	977.1	977.6	977.9	978.1	978.4	978.7
127.5°	1052.6	1052.5	1052.3	1052.1	1051.9	1051.7	1051.4	1051.2
130°	1099.8	1100.0	1100.2	1100.4	1100.4	1100.4	1100.4	1100.4
132.5°	1146.0	1146.2	1146.5	1146.6	1146.3	1146.1	1145.9	1145.7
135°	1209.7	1210.2	1210.8	1211.4	1211.9	1212.4	1213.0	1213.5
137.5°	1270.8	1271.4	1272.0	1272.2	1272.0	1271.9	1271.7	1271.5
140°	1308.6	1309.5	1310.3	1310.8	1311.1	1311.3	1311.6	1311.9
142.5°	1343.6	1344.2	1344.8	1345.1	1345.2	1345.2	1345.2	1345.3
145°	1393.6	1393.8	1394.1	1394.6	1395.1	1395.6	1396.2	1396.7
147.5°	1437.5	1437.7	1437.9	1438.2	1438.4	1438.7	1439.0	1439.2
150°	1465.6	1465.6	1465.6	1465.7	1466.0	1466.2	1466.6	1466.8
152.5°	1490.0	1490.4	1490.9	1491.0	1490.9	1490.7	1490.5	1490.4
155°	1523.1	1524.2	1525.3	1525.4	1524.6	1523.8	1523.0	1522.2
157.5°	1551.5	1553.0	1554.4	1554.4	1553.0	1551.5	1550.1	1548.7
160°	1569.7	1571.3	1573.0	1573.0	1571.3	1569.7	1568.1	1566.4
162.5°	1584.5	1586.1	1587.7	1587.6	1585.8	1583.9	1582.0	1580.1
165°	1605.2	1607.4	1609.6	1609.4	1607.0	1604.5	1602.1	1599.6
167.5°	1620.4	1622.8	1625.2	1625.1	1622.3	1619.6	1616.8	1614.1
170°	1629.8	1632.0	1634.2	1633.9	1631.2	1628.4	1625.7	1622.9
172.5°	1635.7	1637.9	1640.1	1639.6	1636.7	1633.8	1630.8	1627.8
175°	1642.6	1645.1	1647.6	1647.1	1643.8	1640.5	1637.3	1634.0
177.5°	1645.4	1647.1	1648.9	1648.5	1645.8	1643.2	1640.5	1637.9
180°	1643.8	1643.8	1643.8	1643.8	1643.8	1643.8	1643.8	1643.8

(END OF REPORT)