

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333068-930

Luminaire Tested: **S124RDIW-S795D1340U930-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333068-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124RDIW-S795D1340U930-4F0-1E-UDD-A1  
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 795 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 1340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6517.6 lumens  
Efficiency: N/A  
Efficacy: 106.1 lumens/watt  
Spacing Criteria (0/90/45): 1.28 / 1.23 / 1.39  
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 61.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333068-930

CATALOG NUMBER: S124RDIW-S795D1340U930-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

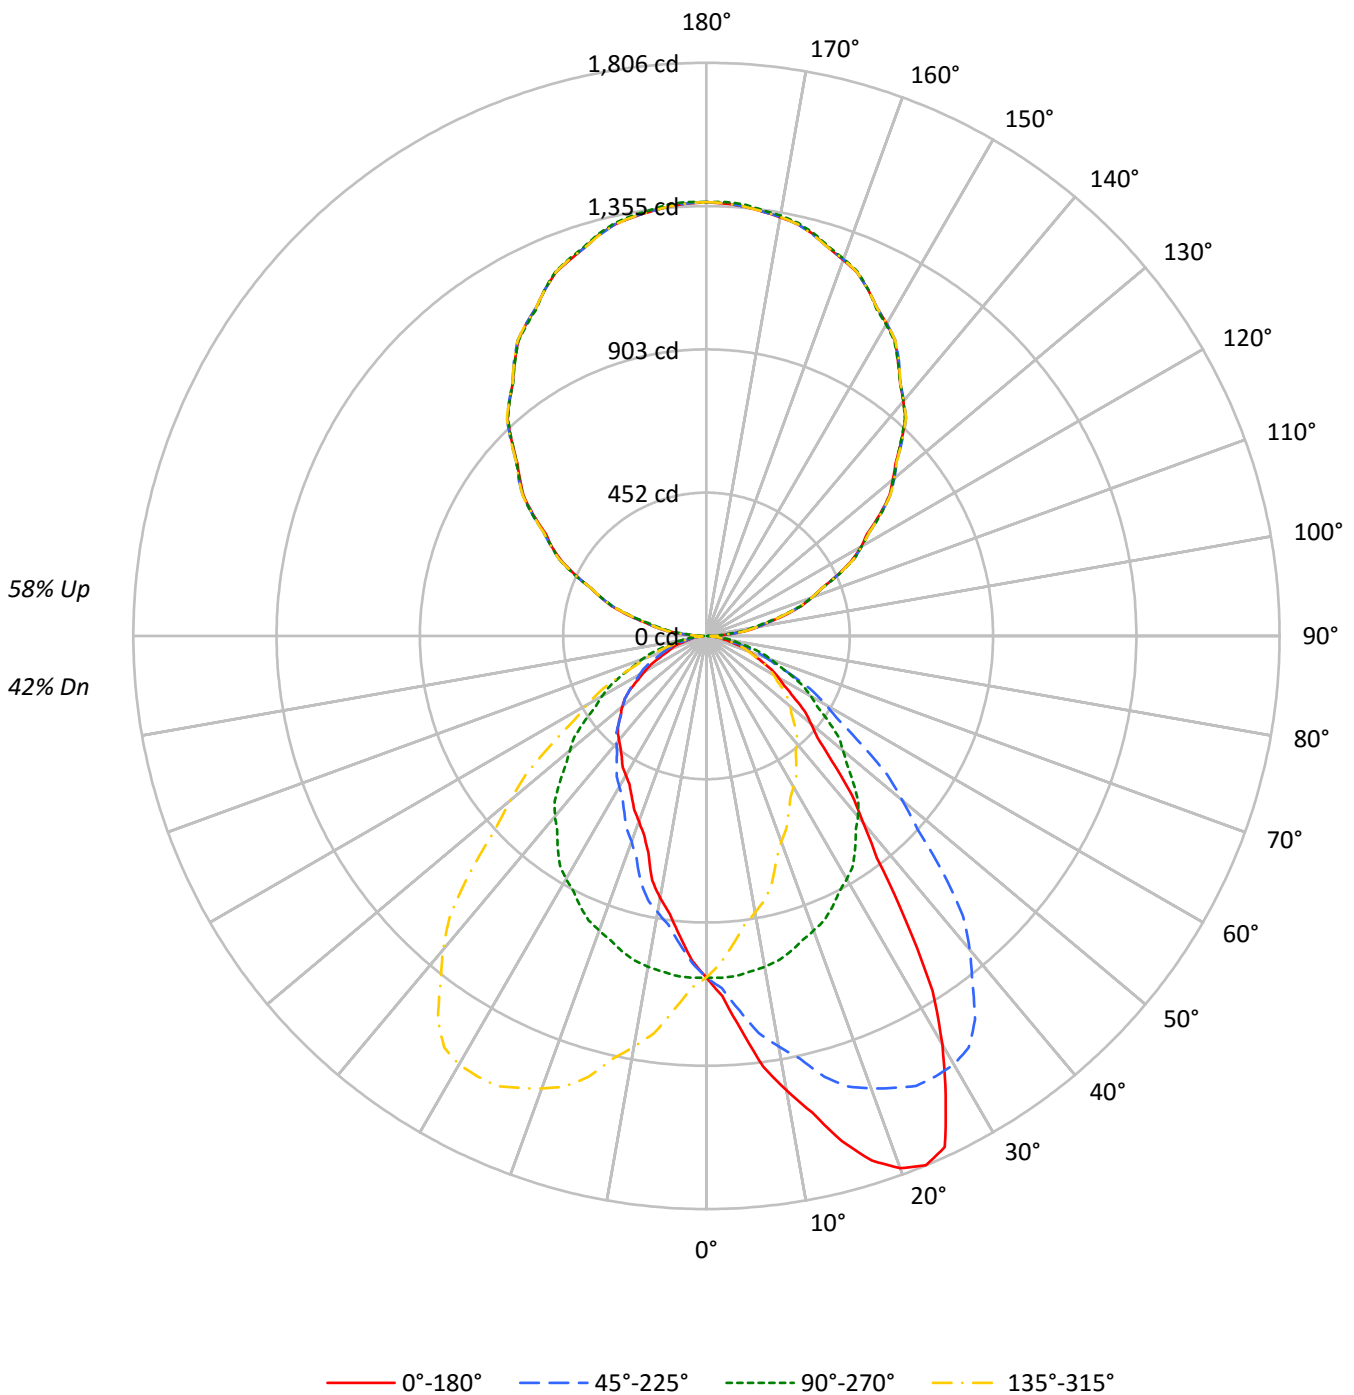



TEST NUMBER: P333068-930

CATALOG NUMBER: S124RDIW-S795D1340U930-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49	42
1	96	92	89	85	88	84	81	78	70	67	65	56	55	53	44	43	42	36
2	88	81	75	70	80	74	69	65	61	58	55	50	47	45	39	37	36	31
3	80	71	64	59	73	66	59	55	54	50	46	44	41	38	35	33	31	26
4	74	63	56	50	67	58	52	47	49	44	40	40	36	33	31	29	27	23
5	68	57	49	43	62	52	45	40	44	38	34	36	32	29	28	26	24	20
6	62	51	43	37	57	47	40	35	39	34	30	32	28	25	26	23	21	18
7	58	46	38	33	53	42	36	31	36	30	27	29	25	23	24	21	19	16
8	54	42	34	29	49	39	32	27	33	27	24	27	23	20	22	19	17	14
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	20	17	15	13
10	47	35	28	23	43	32	26	22	27	23	19	23	19	16	19	16	14	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	8688	8688	8688	8688
5°	10078	8715	7703	8715
10°	11922	8676	6874	8676
15°	13771	8596	5907	8596
20°	15332	8485	5342	8485
25°	15828	8378	4960	8378
30°	13856	8245	4729	8245
35°	10787	8051	4590	8051
40°	8088	7827	4515	7827
45°	6387	7470	4475	7470
50°	5392	7058	4346	7058
55°	4700	6602	4114	6602
60°	4229	6132	3641	6132
65°	3727	5624	3131	5624
70°	3356	5098	2825	5098
75°	2813	4517	2408	4517
80°	2380	3849	2259	3849
85°	2010	3010	2010	3010



TEST NUMBER: P333068-930

CATALOG NUMBER: S124RDIW-S795D1340U930-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	104.3	1.6
10°-20°	314.5	4.8
20°-30°	492.0	7.5
30°-40°	546.9	8.4
40°-50°	485.2	7.4
50°-60°	378.1	5.8
60°-70°	247.6	3.8
70°-80°	121.7	1.9
80°-90°	34.1	0.5
90°-100°	90.2	1.4
100°-110°	267.1	4.1
110°-120°	453.4	7.0
120°-130°	597.8	9.2
130°-140°	671.4	10.3
140°-150°	659.8	10.1
150°-160°	554.9	8.5
160°-170°	369.2	5.7
170°-180°	129.3	2.0
0°-30°	910.8	14.0
0°-40°	1457.7	22.4
0°-60°	2321.1	35.6
0°-90°	2724.5	41.8
90°-120°	810.7	12.4
90°-150°	2739.7	42.0
90°-180°	3793.0	58.2
0°-180°	6517.6	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1076	1076	1076	1076	1076	
5°	1244	1075	950	1075	1244	126
15°	1648	1028	707	1028	1648	469
25°	1777	940	557	940	1777	788
35°	1094	817	466	817	1094	686
45°	559	654	392	654	559	443
55°	334	469	292	469	334	304
65°	195	294	164	294	195	196
75°	90	145	77	145	90	99
85°	22	32	22	32	22	25
90°	32	3	32	3	32	17
95°	84	63	84	63	84	87
105°	258	246	258	246	258	272
115°	457	461	457	461	457	452
125°	666	671	666	671	666	594
135°	867	866	867	866	867	670
145°	1053	1052	1053	1052	1053	659
155°	1204	1205	1204	1205	1204	554
165°	1309	1312	1309	1312	1309	369
175°	1359	1365	1359	1365	1359	129
180°	1367	1367	1367	1367	1367	



TEST NUMBER: P333068-930

CATALOG NUMBER: S124RDIW-S795D1340U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2
2.5°	1135.1	1138.3	1135.1	1134.8	1131.4	1130.3	1128.9	1124.5	1116.1	1111.3	1112.3
5°	1243.6	1254.4	1248.4	1247.5	1238.0	1228.4	1222.3	1208.4	1193.7	1183.7	1175.5
7.5°	1369.0	1375.2	1371.4	1365.3	1349.9	1341.2	1327.1	1308.8	1282.4	1262.2	1243.7
10°	1454.3	1459.5	1457.8	1446.5	1435.3	1412.3	1399.2	1373.7	1340.3	1313.9	1289.2
12.5°	1538.2	1543.9	1528.5	1529.1	1507.7	1489.6	1469.0	1436.8	1398.2	1364.2	1333.2
15°	1647.7	1640.8	1640.8	1632.1	1608.3	1583.1	1561.9	1528.0	1479.4	1438.7	1395.8
17.5°	1733.4	1735.8	1732.3	1711.8	1693.1	1667.0	1628.1	1588.6	1543.5	1488.8	1445.0
20°	1784.7	1784.7	1780.9	1766.9	1742.7	1714.9	1672.8	1629.9	1572.7	1517.6	1468.2
22.5°	1805.6	1806.9	1802.3	1790.9	1769.0	1742.0	1706.2	1662.6	1603.5	1541.6	1480.3
25°	1776.9	1785.2	1786.0	1783.0	1776.5	1760.0	1729.2	1684.6	1631.7	1564.5	1498.5
27.5°	1631.4	1641.8	1650.9	1665.9	1685.9	1696.2	1697.6	1675.0	1628.8	1564.1	1497.8
30°	1486.4	1495.1	1523.2	1560.1	1588.8	1614.8	1637.3	1643.4	1617.4	1559.3	1489.5
32.5°	1325.4	1337.3	1365.5	1405.1	1452.8	1496.8	1547.4	1573.3	1572.6	1537.7	1473.2
35°	1094.5	1103.1	1129.1	1170.8	1228.0	1293.5	1373.7	1436.1	1478.6	1475.5	1436.1
37.5°	882.6	892.4	918.8	953.2	1008.8	1089.8	1167.4	1253.4	1332.0	1376.1	1363.0
40°	767.5	767.9	793.5	829.1	881.1	951.8	1036.3	1131.7	1219.3	1290.9	1304.7
42.5°	676.6	676.7	693.6	731.9	769.4	835.9	916.6	1011.4	1113.9	1196.5	1233.3
45°	559.4	563.3	577.2	600.1	629.6	686.0	750.6	838.6	953.5	1051.5	1112.6
47.5°	473.7	479.4	488.2	507.0	530.4	568.0	621.4	700.5	794.0	901.8	988.8
50°	429.3	430.2	441.4	451.8	472.2	502.1	548.9	614.8	700.7	804.4	901.1
52.5°	391.1	390.9	397.7	410.9	427.5	450.8	488.6	548.6	624.8	717.6	817.4
55°	333.9	336.1	341.3	351.6	364.2	380.7	410.6	455.8	515.6	594.9	685.5
57.5°	290.3	291.5	295.5	299.9	311.5	323.5	345.9	377.2	427.7	492.7	577.2
60°	261.9	262.4	263.7	270.1	279.2	290.5	305.7	332.2	374.6	434.1	500.8
62.5°	234.2	234.9	236.9	241.7	248.7	256.5	272.4	293.7	328.8	379.6	439.8
65°	195.1	195.6	198.6	200.3	205.9	212.9	224.6	238.9	263.2	305.7	351.2
67.5°	163.1	163.1	163.2	165.6	169.4	174.1	181.1	192.5	210.8	236.9	277.0
70°	142.2	142.2	143.1	144.4	146.6	150.4	154.3	163.1	176.5	197.7	228.5
72.5°	122.8	123.1	124.0	124.3	125.4	128.6	131.5	137.1	147.0	163.1	187.9
75°	90.2	91.5	93.7	95.4	97.6	97.1	100.2	103.6	106.6	116.2	130.5
77.5°	67.1	66.4	66.7	68.2	68.4	68.9	71.0	73.7	76.0	80.5	85.6
80°	51.2	51.2	52.5	52.9	52.5	52.9	55.0	56.3	57.2	58.9	63.8
82.5°	38.6	39.4	39.0	39.4	39.6	40.0	41.9	42.2	43.0	43.7	45.7
85°	21.7	22.1	22.6	21.7	21.7	21.7	22.6	23.0	23.9	23.4	24.3
87.5°	13.9	13.5	13.8	13.7	13.9	13.4	13.5	13.9	12.9	13.0	12.6
90°	31.7	31.2	30.8	30.3	29.8	28.9	27.5	26.1	24.7	23.2	21.4
92.5°	47.0	46.6	46.4	46.1	45.8	45.2	44.4	43.5	42.7	41.9	40.5
95°	83.6	83.6	83.6	83.6	83.6	83.2	82.5	81.8	81.0	80.4	78.7
97.5°	130.9	130.9	130.9	130.9	130.9	130.4	129.6	128.8	127.9	127.1	125.1
100°	163.9	163.9	163.9	163.9	163.9	163.6	163.2	162.7	162.2	161.8	159.6
102.5°	201.1	200.9	200.7	200.6	200.3	199.9	199.3	198.6	198.0	197.3	195.3
105°	258.0	257.3	256.6	255.8	255.2	254.5	253.8	253.1	252.3	251.7	250.7
107.5°	313.4	313.5	313.5	313.6	313.6	313.3	312.6	311.9	311.3	310.6	310.5
110°	353.2	352.5	351.7	351.1	350.3	350.3	350.7	351.1	351.6	352.1	352.4



TEST NUMBER: P333068-930

CATALOG NUMBER: S124RDIW-S795D1340U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	393.8	393.6	393.5	393.3	393.2	393.1	393.3	393.4	393.5	393.5	394.0
115°	456.8	457.0	457.2	457.5	457.7	458.0	458.2	458.4	458.7	458.9	459.3
117.5°	516.8	517.3	517.8	518.2	518.7	519.3	520.2	521.0	521.7	522.5	522.9
120°	562.5	562.1	561.6	561.1	560.6	561.0	562.1	563.4	564.5	565.7	566.4
122.5°	600.5	601.4	602.3	603.1	604.0	604.8	605.6	606.3	607.2	608.0	608.3
125°	666.1	666.6	667.1	667.6	668.0	668.5	669.0	669.4	669.8	670.3	670.6
127.5°	726.8	727.2	727.6	728.0	728.3	728.7	729.2	729.7	730.2	730.6	731.0
130°	766.5	767.5	768.4	769.4	770.4	771.0	771.5	772.0	772.4	772.9	772.9
132.5°	808.9	809.3	809.6	810.0	810.4	810.8	811.3	811.7	812.2	812.7	812.9
135°	867.0	867.7	868.5	869.1	869.8	870.4	870.9	871.4	871.9	872.3	872.3
137.5°	928.1	928.0	927.9	927.7	927.6	927.8	928.5	929.0	929.6	930.3	929.8
140°	965.4	965.6	965.8	966.0	966.3	966.5	966.8	967.0	967.3	967.4	967.4
142.5°	1002.6	1002.7	1002.7	1002.7	1002.7	1002.8	1002.9	1002.9	1003.0	1003.0	1003.2
145°	1053.1	1053.9	1054.5	1055.2	1056.0	1056.4	1056.6	1056.9	1057.1	1057.4	1057.1
147.5°	1104.3	1104.6	1104.7	1105.0	1105.2	1105.5	1105.6	1105.8	1106.0	1106.2	1106.4
150°	1135.6	1135.8	1136.0	1136.3	1136.5	1136.6	1136.6	1136.6	1136.6	1136.6	1136.6
152.5°	1164.3	1165.0	1165.6	1166.2	1166.8	1166.9	1166.3	1165.7	1165.1	1164.6	1164.4
155°	1204.4	1205.3	1206.2	1207.1	1208.1	1208.1	1207.1	1206.2	1205.3	1204.4	1204.5
157.5°	1240.1	1240.9	1241.6	1242.4	1243.2	1243.3	1242.6	1241.9	1241.2	1240.5	1240.6
160°	1260.4	1261.5	1262.7	1263.9	1265.0	1265.3	1264.6	1263.9	1263.1	1262.5	1262.7
162.5°	1281.5	1282.7	1283.9	1285.0	1286.2	1286.1	1284.9	1283.6	1282.4	1281.1	1281.3
165°	1309.0	1309.9	1310.8	1311.8	1312.8	1312.6	1311.1	1309.7	1308.3	1306.8	1307.3
167.5°	1328.7	1330.2	1331.5	1333.0	1334.5	1334.5	1333.1	1331.7	1330.3	1328.9	1328.9
170°	1339.7	1341.3	1343.0	1344.6	1346.2	1346.4	1344.9	1343.5	1342.1	1340.7	1340.5
172.5°	1349.0	1350.6	1352.3	1353.9	1355.5	1355.6	1354.0	1352.3	1350.8	1349.2	1349.2
175°	1358.7	1360.3	1362.0	1363.6	1365.3	1365.3	1363.6	1362.0	1360.3	1358.7	1358.9
177.5°	1363.8	1365.3	1366.8	1368.3	1369.8	1369.9	1368.6	1367.3	1366.0	1364.6	1364.6
180°	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2



TEST NUMBER: P333068-930

CATALOG NUMBER: S124RDIW-S795D1340U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2
2.5°	1108.8	1104.0	1101.6	1096.0	1089.4	1085.9	1082.8	1078.3	1072.4	1066.2	1061.6
5°	1165.1	1154.7	1141.7	1126.1	1112.2	1098.8	1087.0	1075.4	1061.9	1048.0	1034.1
7.5°	1222.9	1202.4	1180.3	1154.7	1129.8	1107.2	1086.4	1066.4	1043.8	1023.7	1005.3
10°	1263.1	1235.3	1204.5	1172.1	1139.5	1111.3	1083.6	1058.4	1030.7	1006.0	985.1
12.5°	1295.7	1263.1	1226.0	1185.5	1146.5	1112.4	1080.4	1047.7	1016.1	989.3	961.6
15°	1349.8	1305.1	1255.3	1206.7	1156.0	1109.6	1066.7	1028.5	992.5	954.8	928.4
17.5°	1387.0	1334.0	1273.4	1215.0	1155.1	1100.4	1050.9	1005.4	963.9	925.4	893.9
20°	1409.2	1350.7	1283.4	1217.2	1149.9	1091.4	1038.0	987.7	944.9	903.2	870.7
22.5°	1421.7	1356.9	1283.4	1214.0	1144.4	1081.0	1022.5	970.0	923.3	881.7	845.7
25°	1425.7	1356.3	1281.3	1201.5	1125.2	1058.0	997.3	940.5	888.4	846.9	808.7
27.5°	1420.2	1338.5	1261.6	1179.7	1101.0	1030.1	966.5	906.8	854.7	810.0	770.9
30°	1411.9	1324.2	1241.9	1156.8	1077.1	1009.0	941.8	884.5	830.4	784.0	744.5
32.5°	1393.8	1306.9	1218.2	1131.2	1050.4	980.2	916.5	858.9	805.8	758.3	716.4
35°	1358.0	1270.1	1173.8	1084.4	1005.1	932.2	872.5	816.9	766.2	715.4	671.2
37.5°	1311.0	1221.1	1125.3	1027.4	948.0	879.3	824.3	772.3	722.8	676.5	627.5
40°	1266.6	1184.6	1085.7	988.6	907.1	840.7	790.0	742.7	692.9	646.9	597.9
42.5°	1212.8	1143.0	1043.1	945.6	865.1	801.2	754.0	707.8	662.3	617.8	566.7
45°	1123.1	1070.2	976.5	882.8	801.8	738.4	695.0	654.3	614.4	571.9	523.8
47.5°	1020.2	984.4	903.5	807.6	732.6	675.6	633.7	600.5	566.7	524.2	482.0
50°	948.8	925.8	847.7	760.1	688.6	636.1	593.2	562.0	533.8	493.0	455.3
52.5°	872.5	860.2	794.3	710.5	641.4	590.0	553.3	525.2	496.7	462.8	427.5
55°	756.2	762.7	706.8	634.4	569.3	525.9	492.6	469.1	444.9	416.3	389.0
57.5°	637.4	661.1	623.6	560.0	499.0	459.0	433.9	414.2	393.8	370.1	346.7
60°	566.3	586.2	565.0	509.1	455.8	418.4	395.0	379.8	359.5	337.8	320.0
62.5°	496.9	518.3	505.6	460.5	411.0	378.9	358.2	344.1	329.0	310.1	291.6
65°	409.8	423.6	417.6	386.4	351.2	323.9	304.8	294.4	280.5	266.7	250.2
67.5°	313.8	340.6	337.1	320.5	290.2	268.8	256.3	247.1	234.5	224.2	213.0
70°	258.0	282.7	282.3	268.8	252.3	232.4	223.7	216.0	204.6	194.7	185.6
72.5°	211.2	233.8	237.2	226.9	215.6	200.5	192.2	186.8	175.9	169.0	161.7
75°	147.9	164.4	168.7	168.7	163.5	155.6	148.3	144.8	137.1	130.9	126.6
77.5°	96.9	107.4	114.1	115.7	116.5	113.9	107.8	105.3	99.4	97.2	93.0
80°	68.5	75.4	83.2	85.9	88.1	87.2	84.5	82.8	77.2	75.0	73.3
82.5°	47.4	51.2	57.6	63.3	62.7	65.0	62.7	61.3	57.1	56.3	54.5
85°	24.7	25.1	26.0	29.9	32.1	32.9	33.4	32.5	31.2	31.2	28.2
87.5°	12.2	11.5	11.8	11.4	11.2	12.1	12.6	12.4	11.9	11.4	10.8
90°	19.5	17.6	15.7	13.5	10.9	8.3	5.8	3.2	5.8	8.3	10.9
92.5°	39.2	37.9	36.6	34.5	31.5	28.5	25.6	22.7	25.6	28.5	31.5
95°	77.0	75.4	73.8	71.9	69.8	67.7	65.6	63.4	65.6	67.7	69.8
97.5°	123.3	121.3	119.4	117.6	115.9	114.2	112.5	110.8	112.5	114.2	115.9
100°	157.5	155.4	153.3	151.8	150.8	149.9	149.0	148.1	149.0	149.9	150.8
102.5°	193.5	191.5	189.6	188.4	188.1	187.7	187.4	186.9	187.4	187.7	188.1
105°	249.8	248.8	247.9	247.3	247.0	246.9	246.6	246.4	246.6	246.9	247.0
107.5°	310.4	310.2	310.1	309.9	309.6	309.3	309.0	308.8	309.0	309.3	309.6
110°	352.5	352.8	353.0	352.9	352.5	352.0	351.5	351.1	351.5	352.0	352.5





TEST NUMBER: P333068-930

CATALOG NUMBER: S124RDIW-S795D1340U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	394.4	394.8	395.3	395.4	395.3	395.2	395.1	395.0	395.1	395.2	395.3
115°	459.8	460.3	460.8	461.0	461.0	461.0	461.0	461.0	461.0	461.0	461.0
117.5°	523.2	523.5	523.8	523.9	523.7	523.6	523.3	523.2	523.3	523.6	523.7
120°	567.1	567.8	568.5	568.3	567.4	566.5	565.6	564.6	565.6	566.5	567.4
122.5°	608.6	608.9	609.3	609.3	608.9	608.5	608.1	607.7	608.1	608.5	608.9
125°	670.8	671.1	671.3	671.4	671.4	671.4	671.4	671.4	671.4	671.4	671.4
127.5°	731.4	731.7	732.1	732.0	731.2	730.6	729.9	729.1	729.9	730.6	731.2
130°	772.9	772.9	772.9	772.6	771.8	771.2	770.5	769.7	770.5	771.2	771.8
132.5°	813.0	813.3	813.4	813.3	812.8	812.2	811.7	811.2	811.7	812.2	812.8
135°	872.3	872.3	872.3	871.6	870.2	868.8	867.4	865.9	867.4	868.8	870.2
137.5°	929.5	929.1	928.8	928.2	927.6	926.9	926.3	925.6	926.3	926.9	927.6
140°	967.4	967.4	967.4	967.3	966.8	966.3	965.8	965.4	965.8	966.3	966.8
142.5°	1003.4	1003.6	1003.7	1003.6	1003.1	1002.7	1002.2	1001.8	1002.2	1002.7	1003.1
145°	1056.9	1056.6	1056.4	1055.8	1054.9	1053.9	1053.0	1052.1	1053.0	1053.9	1054.9
147.5°	1106.6	1106.8	1106.9	1106.4	1105.4	1104.2	1103.1	1102.0	1103.1	1104.2	1105.4
150°	1136.6	1136.6	1136.6	1136.2	1135.2	1134.3	1133.3	1132.5	1133.3	1134.3	1135.2
152.5°	1164.2	1164.0	1163.8	1163.4	1162.9	1162.3	1161.7	1161.1	1161.7	1162.3	1162.9
155°	1204.8	1205.0	1205.3	1205.3	1205.3	1205.3	1205.3	1205.3	1205.3	1205.3	1205.3
157.5°	1240.6	1240.6	1240.6	1240.9	1241.3	1241.8	1242.2	1242.6	1242.2	1241.8	1241.3
160°	1263.0	1263.1	1263.4	1263.6	1263.9	1264.1	1264.4	1264.6	1264.4	1264.1	1263.9
162.5°	1281.6	1281.8	1282.1	1282.5	1283.0	1283.7	1284.3	1284.9	1284.3	1283.7	1283.0
165°	1307.8	1308.3	1308.8	1309.4	1310.0	1310.8	1311.5	1312.1	1311.5	1310.8	1310.0
167.5°	1328.8	1328.8	1328.7	1329.2	1330.2	1331.1	1332.1	1333.1	1332.1	1331.1	1330.2
170°	1340.3	1340.0	1339.8	1340.3	1341.4	1342.6	1343.8	1344.9	1343.8	1342.6	1341.4
172.5°	1349.1	1349.1	1349.0	1349.5	1350.5	1351.4	1352.4	1353.4	1352.4	1351.4	1350.5
175°	1359.2	1359.4	1359.6	1360.3	1361.5	1362.7	1363.8	1365.1	1363.8	1362.7	1361.5
177.5°	1364.6	1364.6	1364.6	1365.1	1366.0	1366.9	1367.9	1368.8	1367.9	1366.9	1366.0
180°	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2



TEST NUMBER: P333068-930

CATALOG NUMBER: S124RDIW-S795D1340U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2
2.5°	1056.8	1053.3	1048.8	1043.6	1037.4	1031.8	1029.4	1031.4	1032.5	1029.7	1029.4
5°	1024.6	1013.7	1005.1	992.1	981.7	973.0	966.9	964.3	965.2	958.3	956.5
7.5°	988.5	975.6	961.4	946.0	931.6	918.8	912.2	908.5	901.2	898.0	892.7
10°	965.2	947.9	934.0	915.7	899.3	884.1	876.8	870.7	863.3	859.8	852.5
12.5°	941.3	921.1	905.9	887.0	870.2	851.8	844.8	833.6	822.1	814.7	805.3
15°	907.5	883.3	864.6	842.0	822.1	801.3	782.7	761.8	754.1	737.6	728.1
17.5°	868.0	843.4	820.4	790.1	759.4	733.5	713.6	693.7	681.8	671.2	666.3
20°	842.0	819.5	787.4	752.3	718.0	689.4	673.4	660.4	647.3	640.0	634.8
22.5°	817.4	788.6	751.4	713.5	679.2	656.8	643.2	629.8	619.3	612.3	605.3
25°	776.2	738.4	699.0	655.6	632.2	612.7	597.9	587.1	580.6	571.5	568.0
27.5°	733.8	688.0	644.5	615.4	591.0	573.2	560.3	552.1	543.9	538.1	533.6
30°	701.2	654.8	615.7	588.0	563.3	548.5	538.1	528.6	522.0	517.3	513.8
32.5°	668.9	622.5	589.7	559.9	540.4	525.9	514.9	507.8	502.6	496.5	494.4
35°	622.2	581.1	552.4	525.5	505.6	492.6	483.9	476.5	472.2	470.4	469.1
37.5°	577.4	543.6	512.9	490.8	473.0	462.8	452.6	449.0	446.0	442.9	444.3
40°	548.9	517.3	490.0	466.6	452.2	441.0	434.9	430.6	428.0	428.0	428.0
42.5°	524.3	493.3	466.8	445.7	431.5	421.9	415.2	411.5	410.6	410.3	412.4
45°	486.1	457.5	430.6	413.2	401.0	391.5	387.7	384.6	384.6	386.4	386.8
47.5°	448.2	421.3	399.8	380.3	369.2	363.3	359.9	358.3	358.5	360.3	362.2
50°	424.9	398.5	377.2	359.9	349.5	343.8	340.8	340.0	340.8	340.8	343.8
52.5°	399.6	375.9	355.1	340.5	328.6	323.3	321.7	320.5	321.1	322.5	323.8
55°	362.5	341.3	321.3	307.4	298.7	295.3	291.4	291.8	291.0	291.8	291.8
57.5°	325.3	306.2	287.6	276.6	269.0	264.0	259.8	261.0	259.7	259.5	258.8
60°	301.3	280.5	265.8	255.8	247.1	242.8	238.9	239.8	238.5	237.6	235.9
62.5°	275.3	258.0	243.9	234.3	227.4	222.3	218.4	217.6	214.6	211.6	207.8
65°	237.6	223.3	210.8	201.6	195.1	191.2	188.2	185.6	179.0	172.1	168.7
67.5°	201.0	190.6	178.9	171.2	165.9	160.8	155.0	150.6	144.5	140.6	138.5
70°	177.3	167.4	157.4	150.0	144.4	139.7	133.1	130.1	125.7	124.0	121.8
72.5°	154.8	145.5	136.2	129.6	123.6	119.8	114.7	111.7	109.8	109.1	107.0
75°	120.6	113.2	106.2	100.2	95.4	92.8	90.7	88.5	87.6	83.6	81.5
77.5°	88.0	83.1	78.8	74.4	71.0	69.3	65.1	62.6	61.1	59.4	58.9
80°	68.5	65.1	60.7	58.1	53.3	51.6	49.9	49.4	49.0	48.6	48.1
82.5°	51.5	48.0	43.7	42.2	40.8	39.8	38.7	38.3	37.9	38.2	38.1
85°	26.0	24.3	24.3	23.9	23.4	23.0	22.6	22.6	22.1	22.6	22.1
87.5°	11.4	11.5	11.8	11.5	12.2	12.6	12.6	12.9	13.5	13.0	13.3
90°	13.5	15.7	17.6	19.5	21.4	23.2	24.7	26.1	27.5	28.9	29.8
92.5°	34.5	36.6	37.9	39.2	40.5	41.9	42.7	43.5	44.4	45.2	45.8
95°	71.9	73.8	75.4	77.0	78.7	80.4	81.0	81.8	82.5	83.2	83.6
97.5°	117.6	119.4	121.3	123.3	125.1	127.1	127.9	128.8	129.6	130.4	130.9
100°	151.8	153.3	155.4	157.5	159.6	161.8	162.2	162.7	163.2	163.6	163.9
102.5°	188.4	189.6	191.5	193.5	195.3	197.3	198.0	198.6	199.3	199.9	200.3
105°	247.3	247.9	248.8	249.8	250.7	251.7	252.3	253.1	253.8	254.5	255.2
107.5°	309.9	310.1	310.2	310.4	310.5	310.6	311.3	311.9	312.6	313.3	313.6
110°	352.9	353.0	352.8	352.5	352.4	352.1	351.6	351.1	350.7	350.3	350.3



TEST NUMBER: P333068-930

CATALOG NUMBER: S124RDIW-S795D1340U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	395.4	395.3	394.8	394.4	394.0	393.5	393.5	393.4	393.3	393.1	393.2
115°	461.0	460.8	460.3	459.8	459.3	458.9	458.7	458.4	458.2	458.0	457.7
117.5°	523.9	523.8	523.5	523.2	522.9	522.5	521.7	521.0	520.2	519.3	518.7
120°	568.3	568.5	567.8	567.1	566.4	565.7	564.5	563.4	562.1	561.0	560.6
122.5°	609.3	609.3	608.9	608.6	608.3	608.0	607.2	606.3	605.6	604.8	604.0
125°	671.4	671.3	671.1	670.8	670.6	670.3	669.8	669.4	669.0	668.5	668.0
127.5°	732.0	732.1	731.7	731.4	731.0	730.6	730.2	729.7	729.2	728.7	728.3
130°	772.6	772.9	772.9	772.9	772.9	772.9	772.4	772.0	771.5	771.0	770.4
132.5°	813.3	813.4	813.3	813.0	812.9	812.7	812.2	811.7	811.3	810.8	810.4
135°	871.6	872.3	872.3	872.3	872.3	872.3	871.9	871.4	870.9	870.4	869.8
137.5°	928.2	928.8	929.1	929.5	929.8	930.3	929.6	929.0	928.5	927.8	927.6
140°	967.3	967.4	967.4	967.4	967.4	967.4	967.3	967.0	966.8	966.5	966.3
142.5°	1003.6	1003.7	1003.6	1003.4	1003.2	1003.0	1003.0	1002.9	1002.9	1002.8	1002.7
145°	1055.8	1056.4	1056.6	1056.9	1057.1	1057.4	1057.1	1056.9	1056.6	1056.4	1056.0
147.5°	1106.4	1106.9	1106.8	1106.6	1106.4	1106.2	1106.0	1105.8	1105.6	1105.5	1105.2
150°	1136.2	1136.6	1136.6	1136.6	1136.6	1136.6	1136.6	1136.6	1136.6	1136.6	1136.5
152.5°	1163.4	1163.8	1164.0	1164.2	1164.4	1164.6	1165.1	1165.7	1166.3	1166.9	1166.8
155°	1205.3	1205.3	1205.0	1204.8	1204.5	1204.4	1205.3	1206.2	1207.1	1208.1	1208.1
157.5°	1240.9	1240.6	1240.6	1240.6	1240.6	1240.5	1241.2	1241.9	1242.6	1243.3	1243.2
160°	1263.6	1263.4	1263.1	1263.0	1262.7	1262.5	1263.1	1263.9	1264.6	1265.3	1265.0
162.5°	1282.5	1282.1	1281.8	1281.6	1281.3	1281.1	1282.4	1283.6	1284.9	1286.1	1286.2
165°	1309.4	1308.8	1308.3	1307.8	1307.3	1306.8	1308.3	1309.7	1311.1	1312.6	1312.8
167.5°	1329.2	1328.7	1328.8	1328.8	1328.9	1328.9	1330.3	1331.7	1333.1	1334.5	1334.5
170°	1340.3	1339.8	1340.0	1340.3	1340.5	1340.7	1342.1	1343.5	1344.9	1346.4	1346.2
172.5°	1349.5	1349.0	1349.1	1349.1	1349.2	1349.2	1350.8	1352.3	1354.0	1355.6	1355.5
175°	1360.3	1359.6	1359.4	1359.2	1358.9	1358.7	1360.3	1362.0	1363.6	1365.3	1365.3
177.5°	1365.1	1364.6	1364.6	1364.6	1364.6	1364.6	1366.0	1367.3	1368.6	1369.9	1369.8
180°	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2



TEST NUMBER: P333068-930

CATALOG NUMBER: S124RDIW-S795D1340U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2
2.5°	1027.3	1028.0	1025.6	1024.8	1025.6	1028.0	1027.3	1029.4	1029.7	1032.5	1031.4
5°	953.1	952.2	950.1	950.5	950.1	952.2	953.1	956.5	958.3	965.2	964.3
7.5°	889.6	886.2	887.1	883.7	887.1	886.2	889.6	892.7	898.0	901.2	908.5
10°	850.8	846.0	842.0	838.6	842.0	846.0	850.8	852.5	859.8	863.3	870.7
12.5°	797.7	793.6	788.3	789.4	788.3	793.6	797.7	805.3	814.7	822.1	833.6
15°	722.4	715.9	705.5	706.8	705.5	715.9	722.4	728.1	737.6	754.1	761.8
17.5°	658.7	658.8	654.0	655.1	654.0	658.8	658.7	666.3	671.2	681.8	693.7
20°	625.7	622.6	623.1	621.8	623.1	622.6	625.7	634.8	640.0	647.3	660.4
22.5°	602.8	599.1	596.1	593.4	596.1	599.1	602.8	605.3	612.3	619.3	629.8
25°	564.1	561.5	557.6	556.8	557.6	561.5	564.1	568.0	571.5	580.6	587.1
27.5°	530.1	529.6	528.1	526.0	528.1	529.6	530.1	533.6	538.1	543.9	552.1
30°	510.4	509.5	508.6	507.3	508.6	509.5	510.4	513.8	517.3	522.0	528.6
32.5°	492.7	492.1	491.3	491.4	491.3	492.1	492.7	494.4	496.5	502.6	507.8
35°	467.4	467.0	466.1	465.7	466.1	467.0	467.4	469.1	470.4	472.2	476.5
37.5°	443.8	445.0	444.4	444.3	444.4	445.0	443.8	444.3	442.9	446.0	449.0
40°	427.5	428.0	428.8	428.4	428.8	428.0	427.5	428.0	428.0	428.0	430.6
42.5°	414.0	414.1	415.3	413.8	415.3	414.1	414.0	412.4	410.3	410.6	411.5
45°	389.8	392.4	392.0	392.0	392.0	392.4	389.8	386.8	386.4	384.6	384.6
47.5°	363.4	365.6	366.2	366.2	366.2	365.6	363.4	362.2	360.3	358.5	358.3
50°	346.0	345.1	346.4	346.0	346.4	345.1	346.0	343.8	340.8	340.8	340.0
52.5°	324.9	325.1	325.0	324.5	325.0	325.1	324.9	323.8	322.5	321.1	320.5
55°	292.3	292.7	291.8	292.3	291.8	292.7	292.3	291.8	291.8	291.0	291.8
57.5°	256.9	254.8	255.7	254.6	255.7	254.8	256.9	258.8	259.5	259.7	261.0
60°	231.5	228.0	227.2	225.5	227.2	228.0	231.5	235.9	237.6	238.5	239.8
62.5°	203.1	200.6	197.7	199.1	197.7	200.6	203.1	207.8	211.6	214.6	217.6
65°	165.2	163.5	162.2	163.9	162.2	163.5	165.2	168.7	172.1	179.0	185.6
67.5°	136.7	135.8	135.8	134.9	135.8	135.8	136.7	138.5	140.6	144.5	150.6
70°	121.8	120.6	120.6	119.7	120.6	120.6	121.8	121.8	124.0	125.7	130.1
72.5°	106.6	105.3	105.7	105.1	105.7	105.3	106.6	107.0	109.1	109.8	111.7
75°	78.9	76.7	76.7	77.2	76.7	76.7	78.9	81.5	83.6	87.6	88.5
77.5°	58.9	58.5	59.0	58.3	59.0	58.5	58.9	58.9	59.4	61.1	62.6
80°	48.1	47.7	47.3	48.6	47.3	47.7	48.1	48.1	48.6	49.0	49.4
82.5°	37.3	37.3	37.2	38.9	37.2	37.3	37.3	38.1	38.2	37.9	38.3
85°	22.6	21.7	22.6	21.7	22.6	21.7	22.6	22.1	22.6	22.1	22.6
87.5°	14.0	13.8	13.5	13.9	13.5	13.8	14.0	13.3	13.0	13.5	12.9
90°	30.3	30.8	31.2	31.7	31.2	30.8	30.3	29.8	28.9	27.5	26.1
92.5°	46.1	46.4	46.6	47.0	46.6	46.4	46.1	45.8	45.2	44.4	43.5
95°	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.6	83.2	82.5	81.8
97.5°	130.9	130.9	130.9	130.9	130.9	130.9	130.9	130.9	130.4	129.6	128.8
100°	163.9	163.9	163.9	163.9	163.9	163.9	163.9	163.9	163.6	163.2	162.7
102.5°	200.6	200.7	200.9	201.1	200.9	200.7	200.6	200.3	199.9	199.3	198.6
105°	255.8	256.6	257.3	258.0	257.3	256.6	255.8	255.2	254.5	253.8	253.1
107.5°	313.6	313.5	313.5	313.4	313.5	313.5	313.6	313.6	313.3	312.6	311.9
110°	351.1	351.7	352.5	353.2	352.5	351.7	351.1	350.3	350.3	350.7	351.1



TEST NUMBER: P333068-930

CATALOG NUMBER: S124RDIW-S795D1340U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	393.3	393.5	393.6	393.8	393.6	393.5	393.3	393.2	393.1	393.3	393.4
115°	457.5	457.2	457.0	456.8	457.0	457.2	457.5	457.7	458.0	458.2	458.4
117.5°	518.2	517.8	517.3	516.8	517.3	517.8	518.2	518.7	519.3	520.2	521.0
120°	561.1	561.6	562.1	562.5	562.1	561.6	561.1	560.6	561.0	562.1	563.4
122.5°	603.1	602.3	601.4	600.5	601.4	602.3	603.1	604.0	604.8	605.6	606.3
125°	667.6	667.1	666.6	666.1	666.6	667.1	667.6	668.0	668.5	669.0	669.4
127.5°	728.0	727.6	727.2	726.8	727.2	727.6	728.0	728.3	728.7	729.2	729.7
130°	769.4	768.4	767.5	766.5	767.5	768.4	769.4	770.4	771.0	771.5	772.0
132.5°	810.0	809.6	809.3	808.9	809.3	809.6	810.0	810.4	810.8	811.3	811.7
135°	869.1	868.5	867.7	867.0	867.7	868.5	869.1	869.8	870.4	870.9	871.4
137.5°	927.7	927.9	928.0	928.1	928.0	927.9	927.7	927.6	927.8	928.5	929.0
140°	966.0	965.8	965.6	965.4	965.6	965.8	966.0	966.3	966.5	966.8	967.0
142.5°	1002.7	1002.7	1002.7	1002.6	1002.7	1002.7	1002.7	1002.7	1002.8	1002.9	1002.9
145°	1055.2	1054.5	1053.9	1053.1	1053.9	1054.5	1055.2	1056.0	1056.4	1056.6	1056.9
147.5°	1105.0	1104.7	1104.6	1104.3	1104.6	1104.7	1105.0	1105.2	1105.5	1105.6	1105.8
150°	1136.3	1136.0	1135.8	1135.6	1135.8	1136.0	1136.3	1136.5	1136.6	1136.6	1136.6
152.5°	1166.2	1165.6	1165.0	1164.3	1165.0	1165.6	1166.2	1166.8	1166.9	1166.3	1165.7
155°	1207.1	1206.2	1205.3	1204.4	1205.3	1206.2	1207.1	1208.1	1208.1	1207.1	1206.2
157.5°	1242.4	1241.6	1240.9	1240.1	1240.9	1241.6	1242.4	1243.2	1243.3	1242.6	1241.9
160°	1263.9	1262.7	1261.5	1260.4	1261.5	1262.7	1263.9	1265.0	1265.3	1264.6	1263.9
162.5°	1285.0	1283.9	1282.7	1281.5	1282.7	1283.9	1285.0	1286.2	1286.1	1284.9	1283.6
165°	1311.8	1310.8	1309.9	1309.0	1309.9	1310.8	1311.8	1312.8	1312.6	1311.1	1309.7
167.5°	1333.0	1331.5	1330.2	1328.7	1330.2	1331.5	1333.0	1334.5	1334.5	1333.1	1331.7
170°	1344.6	1343.0	1341.3	1339.7	1341.3	1343.0	1344.6	1346.2	1346.4	1344.9	1343.5
172.5°	1353.9	1352.3	1350.6	1349.0	1350.6	1352.3	1353.9	1355.5	1355.6	1354.0	1352.3
175°	1363.6	1362.0	1360.3	1358.7	1360.3	1362.0	1363.6	1365.3	1365.3	1363.6	1362.0
177.5°	1368.3	1366.8	1365.3	1363.8	1365.3	1366.8	1368.3	1369.8	1369.9	1368.6	1367.3
180°	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2



TEST NUMBER: P333068-930

CATALOG NUMBER: S124RDIW-S795D1340U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2
2.5°	1029.4	1031.8	1037.4	1043.6	1048.8	1053.3	1056.8	1061.6	1066.2	1072.4	1078.3
5°	966.9	973.0	981.7	992.1	1005.1	1013.7	1024.6	1034.1	1048.0	1061.9	1075.4
7.5°	912.2	918.8	931.6	946.0	961.4	975.6	988.5	1005.3	1023.7	1043.8	1066.4
10°	876.8	884.1	899.3	915.7	934.0	947.9	965.2	985.1	1006.0	1030.7	1058.4
12.5°	844.8	851.8	870.2	887.0	905.9	921.1	941.3	961.6	989.3	1016.1	1047.7
15°	782.7	801.3	822.1	842.0	864.6	883.3	907.5	928.4	954.8	992.5	1028.5
17.5°	713.6	733.5	759.4	790.1	820.4	843.4	868.0	893.9	925.4	963.9	1005.4
20°	673.4	689.4	718.0	752.3	787.4	819.5	842.0	870.7	903.2	944.9	987.7
22.5°	643.2	656.8	679.2	713.5	751.4	788.6	817.4	845.7	881.7	923.3	970.0
25°	597.9	612.7	632.2	655.6	699.0	738.4	776.2	808.7	846.9	888.4	940.5
27.5°	560.3	573.2	591.0	615.4	644.5	688.0	733.8	770.9	810.0	854.7	906.8
30°	538.1	548.5	563.3	588.0	615.7	654.8	701.2	744.5	784.0	830.4	884.5
32.5°	514.9	525.9	540.4	559.9	589.7	622.5	668.9	716.4	758.3	805.8	858.9
35°	483.9	492.6	505.6	525.5	552.4	581.1	622.2	671.2	715.4	766.2	816.9
37.5°	452.6	462.8	473.0	490.8	512.9	543.6	577.4	627.5	676.5	722.8	772.3
40°	434.9	441.0	452.2	466.6	490.0	517.3	548.9	597.9	646.9	692.9	742.7
42.5°	415.2	421.9	431.5	445.7	466.8	493.3	524.3	566.7	617.8	662.3	707.8
45°	387.7	391.5	401.0	413.2	430.6	457.5	486.1	523.8	571.9	614.4	654.3
47.5°	359.9	363.3	369.2	380.3	399.8	421.3	448.2	482.0	524.2	566.7	600.5
50°	340.8	343.8	349.5	359.9	377.2	398.5	424.9	455.3	493.0	533.8	562.0
52.5°	321.7	323.3	328.6	340.5	355.1	375.9	399.6	427.5	462.8	496.7	525.2
55°	291.4	295.3	298.7	307.4	321.3	341.3	362.5	389.0	416.3	444.9	469.1
57.5°	259.8	264.0	269.0	276.6	287.6	306.2	325.3	346.7	370.1	393.8	414.2
60°	238.9	242.8	247.1	255.8	265.8	280.5	301.3	320.0	337.8	359.5	379.8
62.5°	218.4	222.3	227.4	234.3	243.9	258.0	275.3	291.6	310.1	329.0	344.1
65°	188.2	191.2	195.1	201.6	210.8	223.3	237.6	250.2	266.7	280.5	294.4
67.5°	155.0	160.8	165.9	171.2	178.9	190.6	201.0	213.0	224.2	234.5	247.1
70°	133.1	139.7	144.4	150.0	157.4	167.4	177.3	185.6	194.7	204.6	216.0
72.5°	114.7	119.8	123.6	129.6	136.2	145.5	154.8	161.7	169.0	175.9	186.8
75°	90.7	92.8	95.4	100.2	106.2	113.2	120.6	126.6	130.9	137.1	144.8
77.5°	65.1	69.3	71.0	74.4	78.8	83.1	88.0	93.0	97.2	99.4	105.3
80°	49.9	51.6	53.3	58.1	60.7	65.1	68.5	73.3	75.0	77.2	82.8
82.5°	38.7	39.8	40.8	42.2	43.7	48.0	51.5	54.5	56.3	57.1	61.3
85°	22.6	23.0	23.4	23.9	24.3	24.3	26.0	28.2	31.2	31.2	32.5
87.5°	12.6	12.6	12.2	11.5	11.8	11.5	11.4	10.8	11.4	11.9	12.4
90°	24.7	23.2	21.4	19.5	17.6	15.7	13.5	10.9	8.3	5.8	3.2
92.5°	42.7	41.9	40.5	39.2	37.9	36.6	34.5	31.5	28.5	25.6	22.7
95°	81.0	80.4	78.7	77.0	75.4	73.8	71.9	69.8	67.7	65.6	63.4
97.5°	127.9	127.1	125.1	123.3	121.3	119.4	117.6	115.9	114.2	112.5	110.8
100°	162.2	161.8	159.6	157.5	155.4	153.3	151.8	150.8	149.9	149.0	148.1
102.5°	198.0	197.3	195.3	193.5	191.5	189.6	188.4	188.1	187.7	187.4	186.9
105°	252.3	251.7	250.7	249.8	248.8	247.9	247.3	247.0	246.9	246.6	246.4
107.5°	311.3	310.6	310.5	310.4	310.2	310.1	309.9	309.6	309.3	309.0	308.8
110°	351.6	352.1	352.4	352.5	352.8	353.0	352.9	352.5	352.0	351.5	351.1



TEST NUMBER: P333068-930

CATALOG NUMBER: S124RDIW-S795D1340U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	393.5	393.5	394.0	394.4	394.8	395.3	395.4	395.3	395.2	395.1	395.0
115°	458.7	458.9	459.3	459.8	460.3	460.8	461.0	461.0	461.0	461.0	461.0
117.5°	521.7	522.5	522.9	523.2	523.5	523.8	523.9	523.7	523.6	523.3	523.2
120°	564.5	565.7	566.4	567.1	567.8	568.5	568.3	567.4	566.5	565.6	564.6
122.5°	607.2	608.0	608.3	608.6	608.9	609.3	609.3	608.9	608.5	608.1	607.7
125°	669.8	670.3	670.6	670.8	671.1	671.3	671.4	671.4	671.4	671.4	671.4
127.5°	730.2	730.6	731.0	731.4	731.7	732.1	732.0	731.2	730.6	729.9	729.1
130°	772.4	772.9	772.9	772.9	772.9	772.9	772.6	771.8	771.2	770.5	769.7
132.5°	812.2	812.7	812.9	813.0	813.3	813.4	813.3	812.8	812.2	811.7	811.2
135°	871.9	872.3	872.3	872.3	872.3	872.3	871.6	870.2	868.8	867.4	865.9
137.5°	929.6	930.3	929.8	929.5	929.1	928.8	928.2	927.6	926.9	926.3	925.6
140°	967.3	967.4	967.4	967.4	967.4	967.4	967.3	966.8	966.3	965.8	965.4
142.5°	1003.0	1003.0	1003.2	1003.4	1003.6	1003.7	1003.6	1003.1	1002.7	1002.2	1001.8
145°	1057.1	1057.4	1057.1	1056.9	1056.6	1056.4	1055.8	1054.9	1053.9	1053.0	1052.1
147.5°	1106.0	1106.2	1106.4	1106.6	1106.8	1106.9	1106.4	1105.4	1104.2	1103.1	1102.0
150°	1136.6	1136.6	1136.6	1136.6	1136.6	1136.6	1136.2	1135.2	1134.3	1133.3	1132.5
152.5°	1165.1	1164.6	1164.4	1164.2	1164.0	1163.8	1163.4	1162.9	1162.3	1161.7	1161.1
155°	1205.3	1204.4	1204.5	1204.8	1205.0	1205.3	1205.3	1205.3	1205.3	1205.3	1205.3
157.5°	1241.2	1240.5	1240.6	1240.6	1240.6	1240.6	1240.9	1241.3	1241.8	1242.2	1242.6
160°	1263.1	1262.5	1262.7	1263.0	1263.1	1263.4	1263.6	1263.9	1264.1	1264.4	1264.6
162.5°	1282.4	1281.1	1281.3	1281.6	1281.8	1282.1	1282.5	1283.0	1283.7	1284.3	1284.9
165°	1308.3	1306.8	1307.3	1307.8	1308.3	1308.8	1309.4	1310.0	1310.8	1311.5	1312.1
167.5°	1330.3	1328.9	1328.9	1328.8	1328.8	1328.7	1329.2	1330.2	1331.1	1332.1	1333.1
170°	1342.1	1340.7	1340.5	1340.3	1340.0	1339.8	1340.3	1341.4	1342.6	1343.8	1344.9
172.5°	1350.8	1349.2	1349.2	1349.1	1349.1	1349.0	1349.5	1350.5	1351.4	1352.4	1353.4
175°	1360.3	1358.7	1358.9	1359.2	1359.4	1359.6	1360.3	1361.5	1362.7	1363.8	1365.1
177.5°	1366.0	1364.6	1364.6	1364.6	1364.6	1364.6	1365.1	1366.0	1366.9	1367.9	1368.8
180°	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2



TEST NUMBER: P333068-930

CATALOG NUMBER: S124RDIW-S795D1340U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2
2.5°	1082.8	1085.9	1089.4	1096.0	1101.6	1104.0	1108.8	1112.3	1111.3	1116.1	1124.5
5°	1087.0	1098.8	1112.2	1126.1	1141.7	1154.7	1165.1	1175.5	1183.7	1193.7	1208.4
7.5°	1086.4	1107.2	1129.8	1154.7	1180.3	1202.4	1222.9	1243.7	1262.2	1282.4	1308.8
10°	1083.6	1111.3	1139.5	1172.1	1204.5	1235.3	1263.1	1289.2	1313.9	1340.3	1373.7
12.5°	1080.4	1112.4	1146.5	1185.5	1226.0	1263.1	1295.7	1333.2	1364.2	1398.2	1436.8
15°	1066.7	1109.6	1156.0	1206.7	1255.3	1305.1	1349.8	1395.8	1438.7	1479.4	1528.0
17.5°	1050.9	1100.4	1155.1	1215.0	1273.4	1334.0	1387.0	1445.0	1488.8	1543.5	1588.6
20°	1038.0	1091.4	1149.9	1217.2	1283.4	1350.7	1409.2	1468.2	1517.6	1572.7	1629.9
22.5°	1022.5	1081.0	1144.4	1214.0	1283.4	1356.9	1421.7	1480.3	1541.6	1603.5	1662.6
25°	997.3	1058.0	1125.2	1201.5	1281.3	1356.3	1425.7	1498.5	1564.5	1631.7	1684.6
27.5°	966.5	1030.1	1101.0	1179.7	1261.6	1338.5	1420.2	1497.8	1564.1	1628.8	1675.0
30°	941.8	1009.0	1077.1	1156.8	1241.9	1324.2	1411.9	1489.5	1559.3	1617.4	1643.4
32.5°	916.5	980.2	1050.4	1131.2	1218.2	1306.9	1393.8	1473.2	1537.7	1572.6	1573.3
35°	872.5	932.2	1005.1	1084.4	1173.8	1270.1	1358.0	1436.1	1475.5	1478.6	1436.1
37.5°	824.3	879.3	948.0	1027.4	1125.3	1221.1	1311.0	1363.0	1376.1	1332.0	1253.4
40°	790.0	840.7	907.1	988.6	1085.7	1184.6	1266.6	1304.7	1290.9	1219.3	1131.7
42.5°	754.0	801.2	865.1	945.6	1043.1	1143.0	1212.8	1233.3	1196.5	1113.9	1011.4
45°	695.0	738.4	801.8	882.8	976.5	1070.2	1123.1	1112.6	1051.5	953.5	838.6
47.5°	633.7	675.6	732.6	807.6	903.5	984.4	1020.2	988.8	901.8	794.0	700.5
50°	593.2	636.1	688.6	760.1	847.7	925.8	948.8	901.1	804.4	700.7	614.8
52.5°	553.3	590.0	641.4	710.5	794.3	860.2	872.5	817.4	717.6	624.8	548.6
55°	492.6	525.9	569.3	634.4	706.8	762.7	756.2	685.5	594.9	515.6	455.8
57.5°	433.9	459.0	499.0	560.0	623.6	661.1	637.4	577.2	492.7	427.7	377.2
60°	395.0	418.4	455.8	509.1	565.0	586.2	566.3	500.8	434.1	374.6	332.2
62.5°	358.2	378.9	411.0	460.5	505.6	518.3	496.9	439.8	379.6	328.8	293.7
65°	304.8	323.9	351.2	386.4	417.6	423.6	409.8	351.2	305.7	263.2	238.9
67.5°	256.3	268.8	290.2	320.5	337.1	340.6	313.8	277.0	236.9	210.8	192.5
70°	223.7	232.4	252.3	268.8	282.3	282.7	258.0	228.5	197.7	176.5	163.1
72.5°	192.2	200.5	215.6	226.9	237.2	233.8	211.2	187.9	163.1	147.0	137.1
75°	148.3	155.6	163.5	168.7	168.7	164.4	147.9	130.5	116.2	106.6	103.6
77.5°	107.8	113.9	116.5	115.7	114.1	107.4	96.9	85.6	80.5	76.0	73.7
80°	84.5	87.2	88.1	85.9	83.2	75.4	68.5	63.8	58.9	57.2	56.3
82.5°	62.7	65.0	62.7	63.3	57.6	51.2	47.4	45.7	43.7	43.0	42.2
85°	33.4	32.9	32.1	29.9	26.0	25.1	24.7	24.3	23.4	23.9	23.0
87.5°	12.6	12.1	11.2	11.4	11.8	11.5	12.2	12.6	13.0	12.9	13.9
90°	5.8	8.3	10.9	13.5	15.7	17.6	19.5	21.4	23.2	24.7	26.1
92.5°	25.6	28.5	31.5	34.5	36.6	37.9	39.2	40.5	41.9	42.7	43.5
95°	65.6	67.7	69.8	71.9	73.8	75.4	77.0	78.7	80.4	81.0	81.8
97.5°	112.5	114.2	115.9	117.6	119.4	121.3	123.3	125.1	127.1	127.9	128.8
100°	149.0	149.9	150.8	151.8	153.3	155.4	157.5	159.6	161.8	162.2	162.7
102.5°	187.4	187.7	188.1	188.4	189.6	191.5	193.5	195.3	197.3	198.0	198.6
105°	246.6	246.9	247.0	247.3	247.9	248.8	249.8	250.7	251.7	252.3	253.1
107.5°	309.0	309.3	309.6	309.9	310.1	310.2	310.4	310.5	310.6	311.3	311.9
110°	351.5	352.0	352.5	352.9	353.0	352.8	352.5	352.4	352.1	351.6	351.1





TEST NUMBER: P333068-930

CATALOG NUMBER: S124RDIW-S795D1340U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	395.1	395.2	395.3	395.4	395.3	394.8	394.4	394.0	393.5	393.5	393.4
115°	461.0	461.0	461.0	461.0	460.8	460.3	459.8	459.3	458.9	458.7	458.4
117.5°	523.3	523.6	523.7	523.9	523.8	523.5	523.2	522.9	522.5	521.7	521.0
120°	565.6	566.5	567.4	568.3	568.5	567.8	567.1	566.4	565.7	564.5	563.4
122.5°	608.1	608.5	608.9	609.3	609.3	608.9	608.6	608.3	608.0	607.2	606.3
125°	671.4	671.4	671.4	671.4	671.3	671.1	670.8	670.6	670.3	669.8	669.4
127.5°	729.9	730.6	731.2	732.0	732.1	731.7	731.4	731.0	730.6	730.2	729.7
130°	770.5	771.2	771.8	772.6	772.9	772.9	772.9	772.9	772.9	772.4	772.0
132.5°	811.7	812.2	812.8	813.3	813.4	813.3	813.0	812.9	812.7	812.2	811.7
135°	867.4	868.8	870.2	871.6	872.3	872.3	872.3	872.3	872.3	871.9	871.4
137.5°	926.3	926.9	927.6	928.2	928.8	929.1	929.5	929.8	930.3	929.6	929.0
140°	965.8	966.3	966.8	967.3	967.4	967.4	967.4	967.4	967.4	967.3	967.0
142.5°	1002.2	1002.7	1003.1	1003.6	1003.7	1003.6	1003.4	1003.2	1003.0	1003.0	1002.9
145°	1053.0	1053.9	1054.9	1055.8	1056.4	1056.6	1056.9	1057.1	1057.4	1057.1	1056.9
147.5°	1103.1	1104.2	1105.4	1106.4	1106.9	1106.8	1106.6	1106.4	1106.2	1106.0	1105.8
150°	1133.3	1134.3	1135.2	1136.2	1136.6	1136.6	1136.6	1136.6	1136.6	1136.6	1136.6
152.5°	1161.7	1162.3	1162.9	1163.4	1163.8	1164.0	1164.2	1164.4	1164.6	1165.1	1165.7
155°	1205.3	1205.3	1205.3	1205.3	1205.3	1205.0	1204.8	1204.5	1204.4	1205.3	1206.2
157.5°	1242.2	1241.8	1241.3	1240.9	1240.6	1240.6	1240.6	1240.6	1240.5	1241.2	1241.9
160°	1264.4	1264.1	1263.9	1263.6	1263.4	1263.1	1263.0	1262.7	1262.5	1263.1	1263.9
162.5°	1284.3	1283.7	1283.0	1282.5	1282.1	1281.8	1281.6	1281.3	1281.1	1282.4	1283.6
165°	1311.5	1310.8	1310.0	1309.4	1308.8	1308.3	1307.8	1307.3	1306.8	1308.3	1309.7
167.5°	1332.1	1331.1	1330.2	1329.2	1328.7	1328.8	1328.8	1328.9	1328.9	1330.3	1331.7
170°	1343.8	1342.6	1341.4	1340.3	1339.8	1340.0	1340.3	1340.5	1340.7	1342.1	1343.5
172.5°	1352.4	1351.4	1350.5	1349.5	1349.0	1349.1	1349.1	1349.2	1349.2	1350.8	1352.3
175°	1363.8	1362.7	1361.5	1360.3	1359.6	1359.4	1359.2	1358.9	1358.7	1360.3	1362.0
177.5°	1367.9	1366.9	1366.0	1365.1	1364.6	1364.6	1364.6	1364.6	1364.6	1366.0	1367.3
180°	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2



TEST NUMBER: P333068-930

CATALOG NUMBER: S124RDIW-S795D1340U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2	1076.2
2.5°	1128.9	1130.3	1131.4	1134.8	1135.1	1138.3	1135.1
5°	1222.3	1228.4	1238.0	1247.5	1248.4	1254.4	1243.6
7.5°	1327.1	1341.2	1349.9	1365.3	1371.4	1375.2	1369.0
10°	1399.2	1412.3	1435.3	1446.5	1457.8	1459.5	1454.3
12.5°	1469.0	1489.6	1507.7	1529.1	1528.5	1543.9	1538.2
15°	1561.9	1583.1	1608.3	1632.1	1640.8	1640.8	1647.7
17.5°	1628.1	1667.0	1693.1	1711.8	1732.3	1735.8	1733.4
20°	1672.8	1714.9	1742.7	1766.9	1780.9	1784.7	1784.7
22.5°	1706.2	1742.0	1769.0	1790.9	1802.3	1806.9	1805.6
25°	1729.2	1760.0	1776.5	1783.0	1786.0	1785.2	1776.9
27.5°	1697.6	1696.2	1685.9	1665.9	1650.9	1641.8	1631.4
30°	1637.3	1614.8	1588.8	1560.1	1523.2	1495.1	1486.4
32.5°	1547.4	1496.8	1452.8	1405.1	1365.5	1337.3	1325.4
35°	1373.7	1293.5	1228.0	1170.8	1129.1	1103.1	1094.5
37.5°	1167.4	1089.8	1008.8	953.2	918.8	892.4	882.6
40°	1036.3	951.8	881.1	829.1	793.5	767.9	767.5
42.5°	916.6	835.9	769.4	731.9	693.6	676.7	676.6
45°	750.6	686.0	629.6	600.1	577.2	563.3	559.4
47.5°	621.4	568.0	530.4	507.0	488.2	479.4	473.7
50°	548.9	502.1	472.2	451.8	441.4	430.2	429.3
52.5°	488.6	450.8	427.5	410.9	397.7	390.9	391.1
55°	410.6	380.7	364.2	351.6	341.3	336.1	333.9
57.5°	345.9	323.5	311.5	299.9	295.5	291.5	290.3
60°	305.7	290.5	279.2	270.1	263.7	262.4	261.9
62.5°	272.4	256.5	248.7	241.7	236.9	234.9	234.2
65°	224.6	212.9	205.9	200.3	198.6	195.6	195.1
67.5°	181.1	174.1	169.4	165.6	163.2	163.1	163.1
70°	154.3	150.4	146.6	144.4	143.1	142.2	142.2
72.5°	131.5	128.6	125.4	124.3	124.0	123.1	122.8
75°	100.2	97.1	97.6	95.4	93.7	91.5	90.2
77.5°	71.0	68.9	68.4	68.2	66.7	66.4	67.1
80°	55.0	52.9	52.5	52.9	52.5	51.2	51.2
82.5°	41.9	40.0	39.6	39.4	39.0	39.4	38.6
85°	22.6	21.7	21.7	21.7	22.6	22.1	21.7
87.5°	13.5	13.4	13.9	13.7	13.8	13.5	13.9
90°	27.5	28.9	29.8	30.3	30.8	31.2	31.7
92.5°	44.4	45.2	45.8	46.1	46.4	46.6	47.0
95°	82.5	83.2	83.6	83.6	83.6	83.6	83.6
97.5°	129.6	130.4	130.9	130.9	130.9	130.9	130.9
100°	163.2	163.6	163.9	163.9	163.9	163.9	163.9
102.5°	199.3	199.9	200.3	200.6	200.7	200.9	201.1
105°	253.8	254.5	255.2	255.8	256.6	257.3	258.0
107.5°	312.6	313.3	313.6	313.6	313.5	313.5	313.4
110°	350.7	350.3	350.3	351.1	351.7	352.5	353.2



TEST NUMBER: P333068-930

CATALOG NUMBER: S124RDIW-S795D1340U930-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	393.3	393.1	393.2	393.3	393.5	393.6	393.8
115°	458.2	458.0	457.7	457.5	457.2	457.0	456.8
117.5°	520.2	519.3	518.7	518.2	517.8	517.3	516.8
120°	562.1	561.0	560.6	561.1	561.6	562.1	562.5
122.5°	605.6	604.8	604.0	603.1	602.3	601.4	600.5
125°	669.0	668.5	668.0	667.6	667.1	666.6	666.1
127.5°	729.2	728.7	728.3	728.0	727.6	727.2	726.8
130°	771.5	771.0	770.4	769.4	768.4	767.5	766.5
132.5°	811.3	810.8	810.4	810.0	809.6	809.3	808.9
135°	870.9	870.4	869.8	869.1	868.5	867.7	867.0
137.5°	928.5	927.8	927.6	927.7	927.9	928.0	928.1
140°	966.8	966.5	966.3	966.0	965.8	965.6	965.4
142.5°	1002.9	1002.8	1002.7	1002.7	1002.7	1002.7	1002.6
145°	1056.6	1056.4	1056.0	1055.2	1054.5	1053.9	1053.1
147.5°	1105.6	1105.5	1105.2	1105.0	1104.7	1104.6	1104.3
150°	1136.6	1136.6	1136.5	1136.3	1136.0	1135.8	1135.6
152.5°	1166.3	1166.9	1166.8	1166.2	1165.6	1165.0	1164.3
155°	1207.1	1208.1	1208.1	1207.1	1206.2	1205.3	1204.4
157.5°	1242.6	1243.3	1243.2	1242.4	1241.6	1240.9	1240.1
160°	1264.6	1265.3	1265.0	1263.9	1262.7	1261.5	1260.4
162.5°	1284.9	1286.1	1286.2	1285.0	1283.9	1282.7	1281.5
165°	1311.1	1312.6	1312.8	1311.8	1310.8	1309.9	1309.0
167.5°	1333.1	1334.5	1334.5	1333.0	1331.5	1330.2	1328.7
170°	1344.9	1346.4	1346.2	1344.6	1343.0	1341.3	1339.7
172.5°	1354.0	1355.6	1355.5	1353.9	1352.3	1350.6	1349.0
175°	1363.6	1365.3	1365.3	1363.6	1362.0	1360.3	1358.7
177.5°	1368.6	1369.9	1369.8	1368.3	1366.8	1365.3	1363.8
180°	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2	1367.2

(END OF REPORT)