

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332860

Luminaire Tested: **S124DIW-S1195D1560U835-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332860
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S1195D1560U835-4F0-1E-UDD-A1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1195 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10732.6 lumens
Efficiency: N/A
Efficacy: 129.5 lumens/watt
Spacing Criteria (0/90/45): 1.31 / 1.23 / 1.41
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 82.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332860

CATALOG NUMBER: S124DIW-S1195D1560U835-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

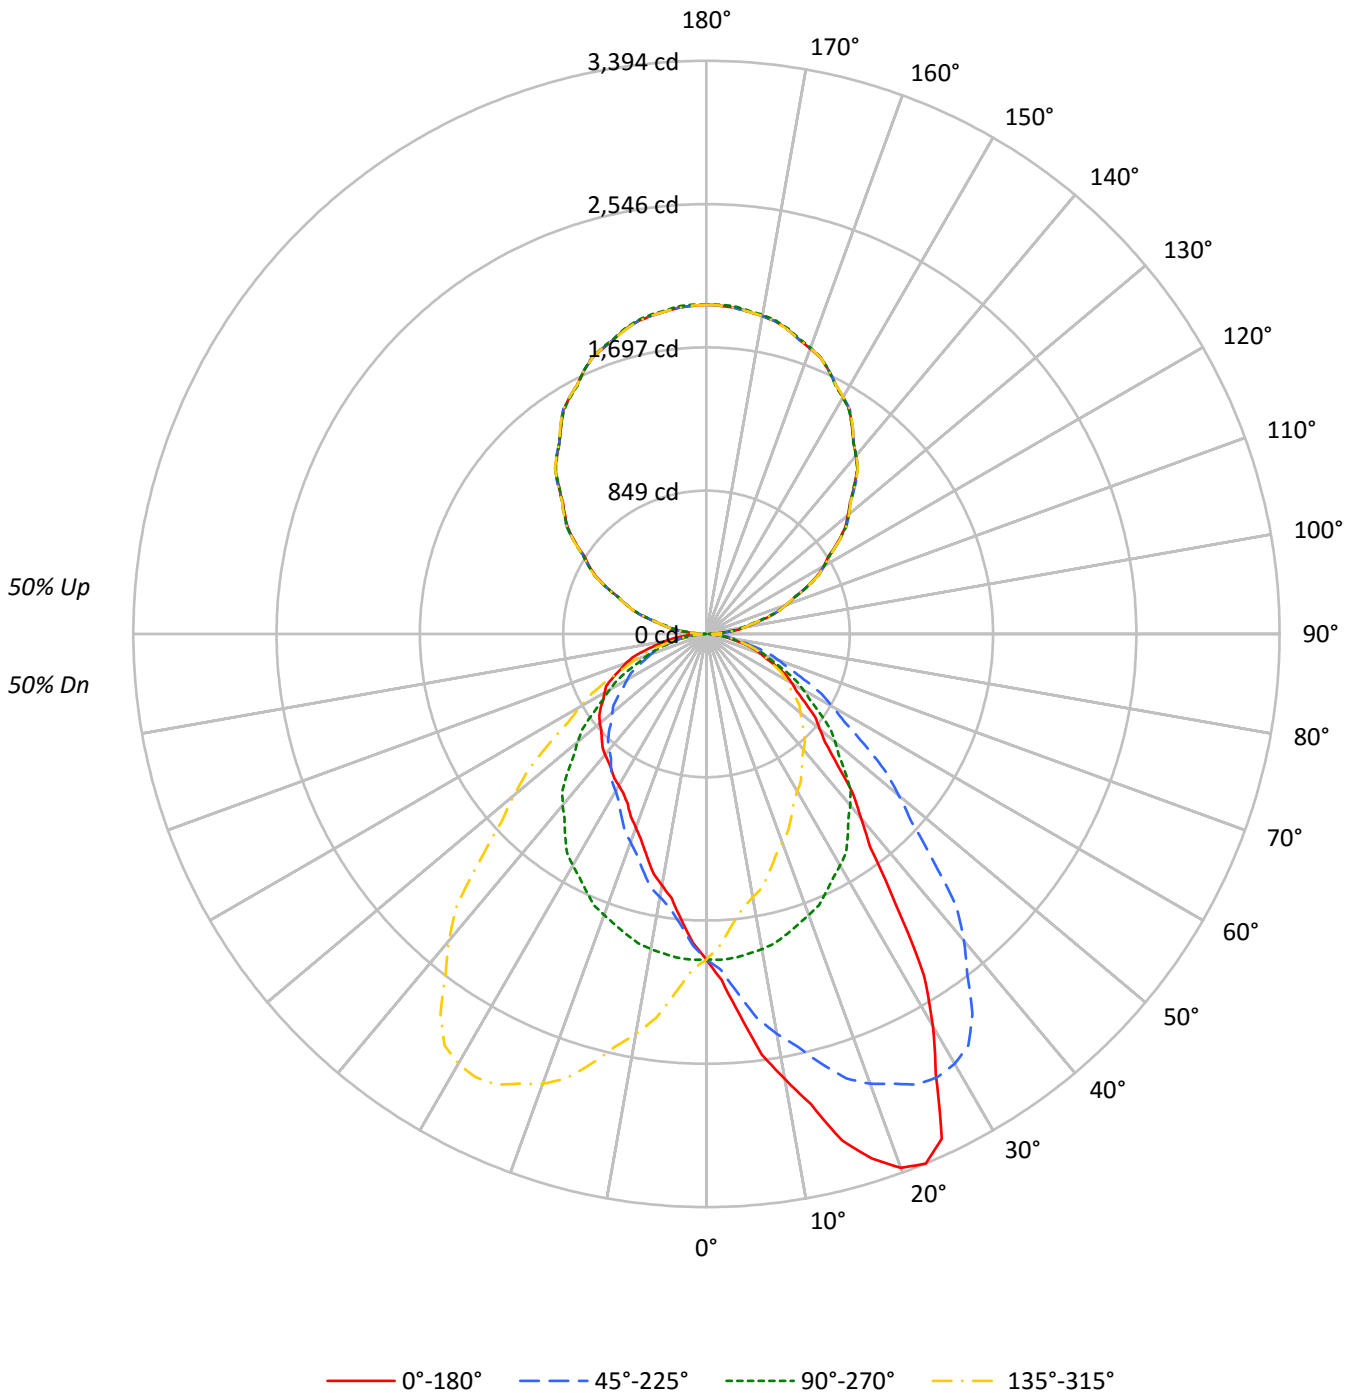



TEST NUMBER: P332860

CATALOG NUMBER: S124DIW-S1195D1560U835-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50																				
1	98	94	90	86	90	87	83	80	73	71	69	61	59	58	50	48	47	42																				
2	89	82	76	71	82	76	71	66	64	61	57	54	51	49	44	42	40	36																				
3	82	72	65	59	75	67	61	56	57	52	48	48	44	41	39	37	35	30																				
4	75	64	56	50	69	59	53	47	51	46	41	43	39	36	35	32	30	26																				
5	69	57	49	43	63	53	46	41	46	40	36	38	34	31	32	29	26	23																				
6	63	51	43	38	58	48	41	36	41	35	31	35	30	27	29	26	23	20																				
7	59	46	39	33	54	43	36	31	37	32	28	32	27	24	26	23	21	18																				
8	54	42	35	29	50	39	32	28	34	29	25	29	25	22	24	21	19	16																				
9	51	39	31	26	47	36	29	25	31	26	22	27	22	19	22	19	17	15																				
10	47	35	28	23	44	33	27	22	29	24	20	25	21	18	21	18	15	13																				

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	15560	15560	15560	15560
5°	18323	15600	13768	15600
10°	21939	15531	12396	15531
15°	25957	15374	11384	15374
20°	28905	15214	10481	15214
25°	29372	14978	9857	14978
30°	24993	14752	9660	14752
35°	19215	14384	9662	14384
40°	14977	13951	9844	13951
45°	12488	13300	10009	13300
50°	10991	12504	10349	12504
55°	10069	11553	10766	11553
60°	9436	10700	11267	10700
65°	8785	9746	11683	9746
70°	8028	8802	11948	8802
75°	7171	7745	11803	7745
80°	6011	6346	11432	6346
85°	4437	4585	10948	4585



TEST NUMBER: P332860

CATALOG NUMBER: S124DIW-S1195D1560U835-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	187.8	1.7
10°-20°	578.8	5.4
20°-30°	917.8	8.6
30°-40°	1021.3	9.5
40°-50°	929.7	8.7
50°-60°	759.7	7.1
60°-70°	542.4	5.1
70°-80°	298.7	2.8
80°-90°	87.4	0.8
90°-100°	128.6	1.2
100°-110°	380.9	3.5
110°-120°	646.6	6.0
120°-130°	852.5	7.9
130°-140°	957.5	8.9
140°-150°	940.9	8.8
150°-160°	791.3	7.4
160°-170°	526.5	4.9
170°-180°	184.4	1.7
0°-30°	1684.3	15.7
0°-40°	2705.6	25.2
0°-60°	4395.1	41.0
0°-90°	5323.5	49.6
90°-120°	1156.1	10.8
90°-150°	3906.9	36.4
90°-180°	5409.0	50.4
0°-180°	10732.6	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1927	1927	1927	1927	1927	
5°	2261	1925	1699	1925	2261	230
15°	3106	1840	1362	1840	3106	878
25°	3297	1682	1107	1682	3297	1454
35°	1950	1460	980	1460	1950	1238
45°	1094	1165	877	1165	1094	862
55°	715	821	765	821	715	646
65°	460	510	612	510	460	455
75°	230	248	378	248	230	244
85°	48	50	118	50	48	60
90°	45	4	45	4	45	25
95°	119	90	119	90	119	124
105°	368	351	368	351	368	388
115°	651	657	651	657	651	644
125°	950	958	950	958	950	847
135°	1236	1235	1236	1235	1236	955
145°	1502	1500	1502	1500	1502	940
155°	1717	1719	1717	1719	1717	791
165°	1867	1871	1867	1871	1867	526
175°	1938	1947	1938	1947	1938	184
180°	1950	1950	1950	1950	1950	



TEST NUMBER: P332860

CATALOG NUMBER: S124DIW-S1195D1560U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4
2.5°	2051.3	2050.6	2044.3	2043.0	2038.5	2032.8	2031.5	2021.3	2000.8	1991.2	1988.7
5°	2261.1	2277.1	2256.3	2252.3	2249.9	2223.6	2210.0	2194.0	2157.3	2135.8	2119.0
7.5°	2511.5	2513.4	2504.3	2497.0	2476.7	2453.7	2419.2	2382.5	2338.7	2293.2	2258.9
10°	2676.3	2682.7	2672.3	2670.7	2630.0	2604.4	2553.3	2510.2	2460.7	2405.6	2355.3
12.5°	2850.0	2841.1	2835.8	2801.6	2794.1	2747.5	2688.1	2643.7	2567.4	2504.0	2437.1
15°	3105.8	3088.3	3077.1	3030.0	3006.8	2942.1	2879.1	2830.4	2730.6	2635.6	2563.7
17.5°	3255.9	3273.5	3247.6	3228.3	3168.4	3123.1	3058.6	2956.4	2878.3	2760.3	2669.6
20°	3364.5	3366.1	3351.7	3331.8	3284.7	3227.2	3156.9	3045.1	2951.7	2834.4	2709.8
22.5°	3393.9	3394.2	3388.1	3369.5	3333.8	3287.2	3216.3	3123.1	3009.9	2882.3	2757.7
25°	3297.4	3294.2	3301.4	3322.2	3308.6	3294.2	3253.5	3184.1	3078.7	2943.7	2809.6
27.5°	2939.1	2961.1	3001.7	3052.8	3102.0	3139.5	3150.1	3135.8	3070.5	2959.6	2819.0
30°	2681.1	2708.2	2738.6	2789.6	2888.7	2945.3	3007.6	3054.7	3028.4	2939.8	2808.8
32.5°	2397.5	2404.2	2449.2	2507.3	2598.0	2707.1	2805.8	2901.4	2933.2	2886.7	2777.5
35°	1949.7	1960.9	2009.6	2067.1	2178.1	2311.4	2459.9	2592.4	2701.8	2745.7	2689.8
37.5°	1591.1	1623.2	1657.5	1719.3	1817.0	1937.1	2091.4	2262.9	2425.9	2535.1	2553.6
40°	1421.2	1441.1	1465.9	1513.0	1596.0	1714.2	1846.7	2043.1	2216.4	2372.9	2424.0
42.5°	1287.0	1298.7	1313.9	1356.5	1419.7	1537.3	1658.3	1831.1	2005.0	2192.1	2277.7
45°	1093.8	1105.8	1131.3	1156.1	1204.0	1285.4	1398.0	1540.1	1715.0	1895.4	2053.5
47.5°	954.3	961.9	977.1	1003.6	1044.3	1098.0	1189.6	1308.3	1470.4	1645.5	1814.0
50°	875.1	881.4	893.4	917.4	948.5	996.4	1071.5	1182.4	1309.4	1485.8	1651.1
52.5°	812.5	815.0	823.8	840.1	864.8	905.1	966.7	1058.5	1176.5	1333.8	1498.5
55°	715.4	718.6	726.6	738.5	760.1	785.6	832.7	901.4	1004.4	1140.9	1283.8
57.5°	635.5	637.8	644.5	649.1	666.8	687.6	723.8	772.9	850.9	966.7	1094.3
60°	584.4	582.8	590.8	594.8	606.8	624.4	652.3	699.4	767.3	860.7	978.1
62.5°	534.6	532.4	539.1	544.4	551.2	566.2	589.1	626.0	681.0	765.5	866.9
65°	459.9	456.7	460.7	467.1	473.5	481.4	498.2	530.9	574.9	635.5	713.0
67.5°	384.8	388.2	388.8	392.0	395.7	406.6	418.0	441.2	472.2	520.7	586.4
70°	340.1	340.9	344.1	344.1	346.5	356.1	365.7	379.2	409.6	454.3	507.8
72.5°	295.4	298.8	297.5	300.0	301.8	308.2	315.2	328.1	354.0	387.2	432.4
75°	229.9	232.3	232.3	233.1	235.5	237.9	243.5	253.1	271.5	296.2	327.3
77.5°	167.7	168.0	169.1	172.0	172.0	175.8	180.0	187.6	196.7	213.7	232.7
80°	129.3	130.9	130.1	131.7	131.7	134.9	136.5	146.1	150.1	161.3	176.4
82.5°	94.9	96.4	96.3	98.5	99.8	100.4	102.7	106.5	110.5	120.4	126.6
85°	47.9	49.5	47.9	49.5	51.9	52.7	55.1	55.9	59.1	61.5	67.1
87.5°	23.1	24.9	24.7	25.3	26.4	26.8	27.0	26.0	28.1	28.4	30.4
90°	45.2	44.6	43.9	43.2	42.6	41.2	39.2	37.2	35.2	33.2	30.5
92.5°	66.9	66.5	66.1	65.7	65.3	64.5	63.3	62.1	60.9	59.7	57.8
95°	119.1	119.1	119.1	119.1	119.1	118.6	117.6	116.6	115.6	114.6	112.3
97.5°	186.7	186.7	186.7	186.7	186.7	186.1	184.9	183.7	182.4	181.2	178.5
100°	233.7	233.7	233.7	233.7	233.7	233.4	232.7	232.0	231.4	230.7	227.7
102.5°	286.8	286.5	286.3	286.0	285.7	285.1	284.2	283.2	282.3	281.4	278.6
105°	367.9	366.9	365.9	364.9	363.9	362.9	361.9	360.9	359.9	358.9	357.5
107.5°	446.9	447.0	447.1	447.1	447.2	446.8	445.8	444.9	443.9	443.0	442.8
110°	503.6	502.6	501.6	500.6	499.6	499.4	500.1	500.8	501.4	502.1	502.4



TEST NUMBER: P332860

CATALOG NUMBER: S124DIW-S1195D1560U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	561.5	561.3	561.1	560.9	560.7	560.7	560.8	560.9	561.1	561.2	561.8
115°	651.4	651.7	652.1	652.4	652.7	653.1	653.4	653.7	654.1	654.4	655.1
117.5°	737.0	737.7	738.4	739.0	739.7	740.6	741.8	742.9	744.0	745.2	745.6
120°	802.2	801.5	800.8	800.2	799.5	800.0	801.7	803.3	805.0	806.7	807.7
122.5°	856.5	857.7	858.9	860.1	861.3	862.5	863.6	864.7	865.9	867.0	867.5
125°	949.9	950.6	951.3	951.9	952.6	953.3	954.0	954.6	955.3	956.0	956.3
127.5°	1036.5	1037.0	1037.6	1038.1	1038.6	1039.2	1039.9	1040.6	1041.2	1041.9	1042.5
130°	1093.2	1094.5	1095.9	1097.2	1098.5	1099.5	1100.2	1100.9	1101.6	1102.2	1102.2
132.5°	1153.5	1154.0	1154.6	1155.1	1155.6	1156.2	1156.9	1157.6	1158.3	1158.9	1159.2
135°	1236.4	1237.4	1238.4	1239.4	1240.4	1241.3	1242.0	1242.6	1243.3	1244.0	1244.0
137.5°	1323.6	1323.4	1323.2	1323.0	1322.8	1323.1	1324.0	1324.9	1325.7	1326.6	1326.1
140°	1376.7	1377.0	1377.3	1377.7	1378.0	1378.3	1378.7	1379.0	1379.3	1379.7	1379.7
142.5°	1429.7	1429.8	1429.9	1429.9	1430.0	1430.1	1430.1	1430.2	1430.3	1430.3	1430.6
145°	1501.8	1502.8	1503.8	1504.8	1505.8	1506.5	1506.8	1507.2	1507.5	1507.8	1507.5
147.5°	1574.8	1575.1	1575.5	1575.8	1576.1	1576.4	1576.7	1577.0	1577.2	1577.5	1577.8
150°	1619.4	1619.8	1620.1	1620.4	1620.8	1620.9	1620.9	1620.9	1620.9	1620.9	1620.9
152.5°	1660.4	1661.3	1662.2	1663.0	1663.9	1663.9	1663.1	1662.3	1661.5	1660.7	1660.5
155°	1717.4	1718.8	1720.1	1721.4	1722.8	1722.8	1721.4	1720.1	1718.8	1717.4	1717.8
157.5°	1768.4	1769.5	1770.7	1771.8	1772.9	1773.0	1772.0	1771.0	1770.0	1769.0	1769.1
160°	1797.3	1799.0	1800.7	1802.4	1804.0	1804.4	1803.4	1802.4	1801.4	1800.4	1800.7
162.5°	1827.5	1829.2	1830.9	1832.5	1834.2	1834.1	1832.3	1830.5	1828.7	1826.9	1827.2
165°	1866.7	1868.0	1869.4	1870.7	1872.1	1871.7	1869.7	1867.7	1865.7	1863.7	1864.4
167.5°	1894.7	1896.8	1898.9	1901.0	1903.1	1903.1	1901.1	1899.1	1897.1	1895.1	1895.0
170°	1910.4	1912.8	1915.1	1917.5	1919.8	1920.0	1918.0	1916.0	1913.9	1911.9	1911.6
172.5°	1923.7	1926.0	1928.4	1930.7	1933.1	1933.1	1930.8	1928.6	1926.3	1924.0	1923.9
175°	1937.6	1939.9	1942.3	1944.6	1947.0	1947.0	1944.6	1942.3	1939.9	1937.6	1937.9
177.5°	1944.8	1947.0	1949.1	1951.2	1953.4	1953.5	1951.6	1949.8	1947.9	1946.0	1946.0
180°	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6



TEST NUMBER: P332860

CATALOG NUMBER: S124DIW-S1195D1560U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4
2.5°	1989.3	1980.4	1974.0	1968.9	1954.8	1946.5	1940.1	1931.2	1921.0	1910.1	1896.7
5°	2102.2	2075.1	2055.1	2024.8	1996.0	1972.1	1947.3	1925.0	1897.8	1868.3	1846.7
7.5°	2220.9	2180.5	2128.7	2083.9	2033.4	1989.5	1950.2	1910.0	1868.1	1827.6	1790.4
10°	2296.2	2244.3	2186.8	2119.0	2055.1	1998.4	1945.7	1894.6	1845.1	1795.6	1753.3
12.5°	2377.4	2312.7	2227.7	2148.4	2076.8	2001.0	1937.4	1874.8	1815.1	1763.1	1713.7
15°	2486.3	2392.8	2294.6	2188.4	2094.2	2005.6	1918.6	1839.5	1772.5	1703.8	1655.9
17.5°	2553.2	2437.6	2325.3	2214.3	2100.3	1988.5	1894.6	1803.5	1719.5	1651.3	1590.9
20°	2597.2	2482.3	2342.5	2231.6	2095.8	1980.9	1872.3	1770.9	1683.1	1610.4	1548.1
22.5°	2635.6	2502.7	2363.0	2216.9	2081.8	1959.8	1841.0	1738.9	1649.2	1572.7	1513.0
25°	2656.3	2503.8	2352.1	2206.8	2053.5	1909.0	1801.2	1681.5	1585.6	1505.0	1441.1
27.5°	2658.6	2495.5	2323.9	2162.4	2004.2	1869.6	1733.5	1626.5	1527.0	1441.8	1380.5
30°	2651.5	2481.5	2297.0	2122.2	1963.3	1817.2	1699.0	1582.5	1481.1	1396.4	1332.5
32.5°	2629.2	2452.1	2262.5	2077.5	1912.8	1769.9	1647.9	1537.1	1438.3	1354.9	1287.8
35°	2564.5	2389.6	2187.6	1995.2	1826.8	1682.3	1572.1	1459.5	1360.5	1281.5	1216.8
37.5°	2463.4	2305.3	2100.0	1900.9	1735.4	1590.3	1481.1	1379.3	1290.1	1209.8	1143.5
40°	2375.3	2236.4	2030.4	1836.3	1657.5	1519.4	1417.2	1323.8	1235.1	1159.3	1096.2
42.5°	2273.7	2152.7	1962.7	1757.1	1584.7	1445.9	1346.3	1262.4	1178.9	1108.8	1045.8
45°	2092.6	2012.8	1834.0	1643.9	1464.3	1333.3	1238.3	1164.9	1094.6	1026.0	973.3
47.5°	1884.4	1844.8	1694.2	1513.8	1343.2	1214.2	1131.8	1064.0	1002.3	944.2	897.7
50°	1744.5	1725.4	1595.2	1421.2	1258.3	1136.9	1053.9	995.6	942.9	891.8	847.9
52.5°	1606.6	1605.9	1488.6	1329.2	1178.5	1061.6	979.2	924.7	879.1	837.5	798.1
55°	1395.6	1418.0	1326.2	1184.0	1049.1	943.7	869.5	820.8	788.8	754.5	725.0
57.5°	1201.9	1239.0	1163.3	1038.1	925.5	828.4	763.8	727.2	693.2	672.4	650.9
60°	1075.5	1110.6	1051.5	946.1	839.9	756.9	695.4	662.7	633.1	618.8	603.6
62.5°	963.0	994.3	950.6	852.9	760.7	680.9	629.0	597.5	577.6	561.9	551.9
65°	802.4	828.8	791.2	720.2	641.1	577.3	534.9	510.2	491.0	484.6	473.5
67.5°	648.6	672.6	652.3	591.9	528.5	480.2	447.1	423.3	412.0	406.4	398.4
70°	557.3	581.2	559.7	507.0	458.3	417.6	386.4	372.9	360.9	358.5	347.3
72.5°	480.0	496.3	474.7	433.5	391.9	357.5	333.4	319.2	313.0	308.7	302.6
75°	360.1	374.5	360.1	328.1	298.6	274.7	253.9	248.3	241.1	238.7	234.7
77.5°	254.9	267.3	256.3	236.3	214.3	195.8	184.6	177.4	175.8	171.7	173.6
80°	194.8	202.8	192.4	178.8	161.3	148.5	140.5	136.5	131.7	130.1	133.3
82.5°	139.9	143.4	138.1	129.0	115.9	107.6	102.2	97.6	96.6	96.9	96.9
85°	72.7	71.9	71.1	63.1	59.1	53.5	50.3	49.5	48.7	50.3	51.9
87.5°	29.8	29.9	28.8	25.6	22.9	20.3	18.9	17.5	18.9	20.3	21.6
90°	27.8	25.1	22.5	19.3	15.6	11.9	8.2	4.5	8.2	11.9	15.6
92.5°	56.0	54.1	52.2	49.2	44.9	40.7	36.5	32.3	36.5	40.7	44.9
95°	109.9	107.6	105.2	102.5	99.5	96.5	93.5	90.5	93.5	96.5	99.5
97.5°	175.7	173.0	170.3	167.7	165.3	162.8	160.4	158.0	160.4	162.8	165.3
100°	224.7	221.7	218.6	216.5	215.1	213.8	212.4	211.1	212.4	213.8	215.1
102.5°	275.9	273.1	270.4	268.7	268.2	267.7	267.1	266.6	267.1	267.7	268.2
105°	356.2	354.8	353.5	352.7	352.3	352.0	351.7	351.3	351.7	352.0	352.3
107.5°	442.6	442.4	442.2	441.9	441.5	441.1	440.7	440.3	440.7	441.1	441.5
110°	502.8	503.1	503.5	503.3	502.6	501.9	501.3	500.6	501.3	501.9	502.6



TEST NUMBER: P332860

CATALOG NUMBER: S124DIW-S1195D1560U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	562.4	563.0	563.6	563.9	563.7	563.6	563.5	563.3	563.5	563.6	563.7
115°	655.7	656.4	657.1	657.4	657.4	657.4	657.4	657.4	657.4	657.4	657.4
117.5°	746.1	746.6	747.1	747.2	746.9	746.6	746.3	746.1	746.3	746.6	746.9
120°	808.7	809.7	810.7	810.5	809.2	807.9	806.5	805.2	806.5	807.9	809.2
122.5°	867.9	868.4	868.9	868.8	868.3	867.8	867.2	866.7	867.2	867.8	868.3
125°	956.6	957.0	957.3	957.5	957.5	957.5	957.5	957.5	957.5	957.5	957.5
127.5°	1043.0	1043.5	1044.1	1043.8	1042.8	1041.8	1040.8	1039.8	1040.8	1041.8	1042.8
130°	1102.2	1102.2	1102.2	1101.7	1100.7	1099.7	1098.7	1097.7	1098.7	1099.7	1100.7
132.5°	1159.5	1159.7	1160.0	1159.8	1159.0	1158.3	1157.6	1156.8	1157.6	1158.3	1159.0
135°	1244.0	1244.0	1244.0	1243.0	1241.0	1238.9	1236.9	1234.9	1236.9	1238.9	1241.0
137.5°	1325.5	1325.0	1324.5	1323.7	1322.8	1321.8	1320.9	1320.0	1320.9	1321.8	1322.8
140°	1379.7	1379.7	1379.7	1379.3	1378.7	1378.0	1377.3	1376.7	1377.3	1378.0	1378.7
142.5°	1430.9	1431.1	1431.4	1431.2	1430.5	1429.9	1429.2	1428.5	1429.2	1429.9	1430.5
145°	1507.2	1506.8	1506.5	1505.7	1504.3	1503.0	1501.6	1500.3	1501.6	1503.0	1504.3
147.5°	1578.0	1578.3	1578.6	1577.9	1576.3	1574.7	1573.1	1571.5	1573.1	1574.7	1576.3
150°	1620.9	1620.9	1620.9	1620.3	1618.9	1617.6	1616.2	1614.9	1616.2	1617.6	1618.9
152.5°	1660.2	1659.9	1659.7	1659.1	1658.3	1657.5	1656.7	1655.9	1656.7	1657.5	1658.3
155°	1718.1	1718.4	1718.8	1718.9	1718.9	1718.9	1718.9	1718.9	1718.9	1718.9	1718.9
157.5°	1769.1	1769.2	1769.3	1769.6	1770.2	1770.8	1771.4	1772.0	1771.4	1770.8	1770.2
160°	1801.0	1801.4	1801.7	1802.0	1802.4	1802.7	1803.0	1803.4	1803.0	1802.7	1802.4
162.5°	1827.6	1827.9	1828.2	1828.8	1829.7	1830.6	1831.5	1832.3	1831.5	1830.6	1829.7
165°	1865.0	1865.7	1866.4	1867.2	1868.2	1869.2	1870.2	1871.2	1870.2	1869.2	1868.2
167.5°	1894.9	1894.9	1894.8	1895.5	1896.9	1898.3	1899.7	1901.1	1899.7	1898.3	1896.9
170°	1911.3	1910.9	1910.6	1911.3	1912.9	1914.6	1916.3	1918.0	1916.3	1914.6	1912.9
172.5°	1923.9	1923.8	1923.7	1924.4	1925.8	1927.2	1928.6	1930.0	1928.6	1927.2	1925.8
175°	1938.2	1938.6	1938.9	1939.9	1941.6	1943.3	1944.9	1946.6	1944.9	1943.3	1941.6
177.5°	1946.0	1946.0	1946.0	1946.7	1948.0	1949.4	1950.7	1952.0	1950.7	1949.4	1948.0
180°	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6



TEST NUMBER: P332860

CATALOG NUMBER: S124DIW-S1195D1560U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4
2.5°	1890.3	1884.6	1876.3	1864.8	1855.2	1845.0	1842.4	1838.6	1846.2	1839.9	1837.9
5°	1828.4	1811.6	1790.0	1765.3	1750.9	1730.2	1726.2	1718.2	1710.2	1709.4	1701.4
7.5°	1762.7	1738.1	1709.9	1684.6	1661.3	1638.7	1623.8	1620.6	1608.8	1601.9	1593.9
10°	1720.6	1690.2	1657.5	1633.6	1606.4	1582.5	1565.7	1556.1	1548.1	1539.3	1531.4
12.5°	1670.8	1638.5	1611.5	1585.6	1553.4	1535.2	1507.6	1491.0	1489.4	1489.5	1468.8
15°	1612.8	1580.9	1539.3	1502.6	1485.0	1449.9	1434.7	1415.6	1403.6	1391.6	1382.1
17.5°	1546.5	1506.8	1474.3	1432.2	1398.7	1370.7	1350.8	1339.3	1321.2	1304.3	1292.0
20°	1505.0	1462.7	1428.4	1383.6	1346.9	1312.6	1295.8	1279.9	1266.3	1251.9	1238.3
22.5°	1462.8	1418.6	1376.6	1333.2	1299.0	1262.8	1246.6	1224.9	1212.0	1204.0	1190.4
25°	1396.4	1348.5	1300.6	1259.1	1224.0	1192.0	1170.5	1153.7	1139.3	1132.9	1124.2
27.5°	1324.2	1276.7	1230.4	1183.2	1143.3	1120.2	1102.9	1090.3	1082.0	1073.5	1069.6
30°	1278.3	1228.8	1179.3	1135.3	1098.6	1075.5	1059.5	1050.7	1044.3	1040.3	1036.3
32.5°	1231.6	1182.8	1130.7	1090.6	1057.7	1037.1	1025.0	1016.2	1013.0	1011.6	1010.2
35°	1156.9	1107.4	1059.5	1023.6	992.4	984.4	974.1	969.3	967.7	973.3	975.7
37.5°	1084.6	1038.6	994.5	959.7	939.3	927.6	924.1	924.2	930.0	934.9	940.7
40°	1037.9	993.2	951.7	921.4	902.2	895.0	893.4	897.4	903.8	909.4	915.8
42.5°	992.6	948.5	910.8	882.4	869.0	862.4	863.4	867.4	876.3	883.2	892.8
45°	922.2	885.4	848.7	825.6	814.4	816.0	816.0	823.2	831.9	842.3	852.7
47.5°	855.9	818.9	788.7	769.2	763.4	762.0	766.5	775.9	788.5	801.3	815.8
50°	811.2	776.1	749.7	732.1	725.8	728.2	734.5	743.3	758.5	774.5	789.6
52.5°	765.8	733.9	709.5	693.2	688.7	693.0	699.4	713.3	726.6	743.8	762.2
55°	695.4	668.3	649.1	637.1	635.5	637.9	645.1	660.3	679.4	701.0	718.6
57.5°	625.3	602.6	585.1	576.8	577.6	579.8	591.6	609.7	630.1	653.1	675.8
60°	578.0	557.3	542.9	536.5	537.3	542.1	556.5	573.3	598.8	621.2	645.1
62.5°	533.3	515.1	501.4	495.7	494.5	505.1	518.8	536.2	561.8	586.7	612.5
65°	461.5	447.1	435.9	432.7	435.1	443.1	460.7	483.8	505.4	531.7	558.9
67.5°	391.2	379.4	371.7	373.2	376.1	387.9	402.6	422.5	447.0	474.3	501.1
70°	346.5	335.3	328.9	329.7	334.5	348.9	361.7	381.6	408.0	435.9	458.3
72.5°	300.5	293.2	287.4	290.8	295.6	305.5	321.4	341.4	364.6	390.6	414.2
75°	230.7	230.7	227.5	229.9	237.1	246.7	258.7	279.4	302.6	323.4	342.5
77.5°	171.2	169.4	171.5	174.4	178.5	189.9	203.6	218.4	235.9	256.6	272.4
80°	130.9	131.7	135.7	140.5	142.1	150.9	165.3	178.8	192.4	210.0	225.2
82.5°	98.4	99.2	101.2	107.3	108.9	118.3	127.6	141.2	153.5	165.3	177.9
85°	53.5	53.5	57.5	59.9	63.9	70.3	75.8	83.8	95.0	103.0	115.0
87.5°	24.3	24.9	28.0	29.8	32.3	36.0	37.7	45.1	48.1	51.7	57.7
90°	19.3	22.5	25.1	27.8	30.5	33.2	35.2	37.2	39.2	41.2	42.6
92.5°	49.2	52.2	54.1	56.0	57.8	59.7	60.9	62.1	63.3	64.5	65.3
95°	102.5	105.2	107.6	109.9	112.3	114.6	115.6	116.6	117.6	118.6	119.1
97.5°	167.7	170.3	173.0	175.7	178.5	181.2	182.4	183.7	184.9	186.1	186.7
100°	216.5	218.6	221.7	224.7	227.7	230.7	231.4	232.0	232.7	233.4	233.7
102.5°	268.7	270.4	273.1	275.9	278.6	281.4	282.3	283.2	284.2	285.1	285.7
105°	352.7	353.5	354.8	356.2	357.5	358.9	359.9	360.9	361.9	362.9	363.9
107.5°	441.9	442.2	442.4	442.6	442.8	443.0	443.9	444.9	445.8	446.8	447.2
110°	503.3	503.5	503.1	502.8	502.4	502.1	501.4	500.8	500.1	499.4	499.6



TEST NUMBER: P332860

CATALOG NUMBER: S124DIW-S1195D1560U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	563.9	563.6	563.0	562.4	561.8	561.2	561.1	560.9	560.8	560.7	560.7
115°	657.4	657.1	656.4	655.7	655.1	654.4	654.1	653.7	653.4	653.1	652.7
117.5°	747.2	747.1	746.6	746.1	745.6	745.2	744.0	742.9	741.8	740.6	739.7
120°	810.5	810.7	809.7	808.7	807.7	806.7	805.0	803.3	801.7	800.0	799.5
122.5°	868.8	868.9	868.4	867.9	867.5	867.0	865.9	864.7	863.6	862.5	861.3
125°	957.5	957.3	957.0	956.6	956.3	956.0	955.3	954.6	954.0	953.3	952.6
127.5°	1043.8	1044.1	1043.5	1043.0	1042.5	1041.9	1041.2	1040.6	1039.9	1039.2	1038.6
130°	1101.7	1102.2	1102.2	1102.2	1102.2	1102.2	1101.6	1100.9	1100.2	1099.5	1098.5
132.5°	1159.8	1160.0	1159.7	1159.5	1159.2	1158.9	1158.3	1157.6	1156.9	1156.2	1155.6
135°	1243.0	1244.0	1244.0	1244.0	1244.0	1244.0	1243.3	1242.6	1242.0	1241.3	1240.4
137.5°	1323.7	1324.5	1325.0	1325.5	1326.1	1326.6	1325.7	1324.9	1324.0	1323.1	1322.8
140°	1379.3	1379.7	1379.7	1379.7	1379.7	1379.7	1379.3	1379.0	1378.7	1378.3	1378.0
142.5°	1431.2	1431.4	1431.1	1430.9	1430.6	1430.3	1430.3	1430.2	1430.1	1430.1	1430.0
145°	1505.7	1506.5	1506.8	1507.2	1507.5	1507.8	1507.5	1507.2	1506.8	1506.5	1505.8
147.5°	1577.9	1578.6	1578.3	1578.0	1577.8	1577.5	1577.2	1577.0	1576.7	1576.4	1576.1
150°	1620.3	1620.9	1620.9	1620.9	1620.9	1620.9	1620.9	1620.9	1620.9	1620.9	1620.8
152.5°	1659.1	1659.7	1659.9	1660.2	1660.5	1660.7	1661.5	1662.3	1663.1	1663.9	1663.9
155°	1718.9	1718.8	1718.4	1718.1	1717.8	1717.4	1718.8	1720.1	1721.4	1722.8	1722.8
157.5°	1769.6	1769.3	1769.2	1769.1	1769.1	1769.0	1770.0	1771.0	1772.0	1773.0	1772.9
160°	1802.0	1801.7	1801.4	1801.0	1800.7	1800.4	1801.4	1802.4	1803.4	1804.4	1804.0
162.5°	1828.8	1828.2	1827.9	1827.6	1827.2	1826.9	1828.7	1830.5	1832.3	1834.1	1834.2
165°	1867.2	1866.4	1865.7	1865.0	1864.4	1863.7	1865.7	1867.7	1869.7	1871.7	1872.1
167.5°	1895.5	1894.8	1894.9	1894.9	1895.0	1895.1	1897.1	1899.1	1901.1	1903.1	1903.1
170°	1911.3	1910.6	1910.9	1911.3	1911.6	1911.9	1913.9	1916.0	1918.0	1920.0	1919.8
172.5°	1924.4	1923.7	1923.8	1923.9	1923.9	1924.0	1926.3	1928.6	1930.8	1933.1	1933.1
175°	1939.9	1938.9	1938.6	1938.2	1937.9	1937.6	1939.9	1942.3	1944.6	1947.0	1947.0
177.5°	1946.7	1946.0	1946.0	1946.0	1946.0	1946.0	1947.9	1949.8	1951.6	1953.5	1953.4
180°	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6



TEST NUMBER: P332860

CATALOG NUMBER: S124DIW-S1195D1560U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4
2.5°	1836.7	1835.4	1830.9	1830.3	1830.9	1835.4	1836.7	1837.9	1839.9	1846.2	1838.6
5°	1696.6	1692.6	1690.2	1699.0	1690.2	1692.6	1696.6	1701.4	1709.4	1710.2	1718.2
7.5°	1591.1	1587.9	1580.9	1578.6	1580.9	1587.9	1591.1	1593.9	1601.9	1608.8	1620.6
10°	1523.4	1520.2	1513.8	1512.2	1513.8	1520.2	1523.4	1531.4	1539.3	1548.1	1556.1
12.5°	1458.2	1451.8	1450.6	1452.2	1450.6	1451.8	1458.2	1468.8	1489.5	1489.4	1491.0
15°	1371.7	1368.5	1359.7	1362.1	1359.7	1368.5	1371.7	1382.1	1391.6	1403.6	1415.6
17.5°	1286.4	1282.6	1271.9	1281.3	1271.9	1282.6	1286.4	1292.0	1304.3	1321.2	1339.3
20°	1232.7	1226.4	1220.8	1220.0	1220.8	1226.4	1232.7	1238.3	1251.9	1266.3	1279.9
22.5°	1181.6	1175.9	1175.4	1170.2	1175.4	1175.9	1181.6	1190.4	1204.0	1212.0	1224.9
25°	1117.8	1112.2	1110.6	1106.6	1110.6	1112.2	1117.8	1124.2	1132.9	1139.3	1153.7
27.5°	1068.8	1066.0	1063.2	1064.4	1063.2	1066.0	1068.8	1069.6	1073.5	1082.0	1090.3
30°	1038.7	1037.9	1036.3	1036.3	1036.3	1037.9	1038.7	1036.3	1040.3	1044.3	1050.7
32.5°	1013.8	1013.7	1014.6	1014.6	1014.6	1013.7	1013.8	1010.2	1011.6	1013.0	1016.2
35°	978.9	981.2	982.8	980.4	982.8	981.2	978.9	975.7	973.3	967.7	969.3
37.5°	947.2	949.6	951.9	954.6	951.9	949.6	947.2	940.7	934.9	930.0	924.2
40°	923.0	928.6	930.1	934.1	930.1	928.6	923.0	915.8	909.4	903.8	897.4
42.5°	900.0	906.2	910.3	911.1	910.3	906.2	900.0	892.8	883.2	876.3	867.4
45°	864.7	871.1	876.7	876.7	876.7	871.1	864.7	852.7	842.3	831.9	823.2
47.5°	828.1	837.4	843.0	844.4	843.0	837.4	828.1	815.8	801.3	788.5	775.9
50°	803.2	814.4	820.0	824.0	820.0	814.4	803.2	789.6	774.5	758.5	743.3
52.5°	778.9	790.1	797.6	799.7	797.6	790.1	778.9	762.2	743.8	726.6	713.3
55°	736.9	752.9	761.7	764.9	761.7	752.9	736.9	718.6	701.0	679.4	660.3
57.5°	697.3	712.0	722.2	724.6	722.2	712.0	697.3	675.8	653.1	630.1	609.7
60°	666.7	682.6	695.4	697.8	695.4	682.6	666.7	645.1	621.2	598.8	573.3
62.5°	635.4	652.0	663.5	669.7	663.5	652.0	635.4	612.5	586.7	561.8	536.2
65°	581.2	598.0	609.2	611.6	609.2	598.0	581.2	558.9	531.7	505.4	483.8
67.5°	522.2	538.9	546.3	550.9	546.3	538.9	522.2	501.1	474.3	447.0	422.5
70°	480.6	494.2	502.2	506.2	502.2	494.2	480.6	458.3	435.9	408.0	381.6
72.5°	433.4	447.6	456.9	457.6	456.9	447.6	433.4	414.2	390.6	364.6	341.4
75°	360.9	373.7	378.4	378.4	378.4	373.7	360.9	342.5	323.4	302.6	279.4
77.5°	285.7	292.2	298.3	299.6	298.3	292.2	285.7	272.4	256.6	235.9	218.4
80°	237.1	241.1	245.9	245.9	245.9	241.1	237.1	225.2	210.0	192.4	178.8
82.5°	187.3	190.7	195.5	194.8	195.5	190.7	187.3	177.9	165.3	153.5	141.2
85°	113.4	120.6	119.8	118.2	119.8	120.6	113.4	115.0	103.0	95.0	83.8
87.5°	59.7	60.5	62.6	64.0	62.6	60.5	59.7	57.7	51.7	48.1	45.1
90°	43.2	43.9	44.6	45.2	44.6	43.9	43.2	42.6	41.2	39.2	37.2
92.5°	65.7	66.1	66.5	66.9	66.5	66.1	65.7	65.3	64.5	63.3	62.1
95°	119.1	119.1	119.1	119.1	119.1	119.1	119.1	119.1	118.6	117.6	116.6
97.5°	186.7	186.7	186.7	186.7	186.7	186.7	186.7	186.7	186.1	184.9	183.7
100°	233.7	233.7	233.7	233.7	233.7	233.7	233.7	233.7	233.4	232.7	232.0
102.5°	286.0	286.3	286.5	286.8	286.5	286.3	286.0	285.7	285.1	284.2	283.2
105°	364.9	365.9	366.9	367.9	366.9	365.9	364.9	363.9	362.9	361.9	360.9
107.5°	447.1	447.1	447.0	446.9	447.0	447.1	447.1	447.2	446.8	445.8	444.9
110°	500.6	501.6	502.6	503.6	502.6	501.6	500.6	499.6	499.4	500.1	500.8



TEST NUMBER: P332860

CATALOG NUMBER: S124DIW-S1195D1560U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	560.9	561.1	561.3	561.5	561.3	561.1	560.9	560.7	560.7	560.8	560.9
115°	652.4	652.1	651.7	651.4	651.7	652.1	652.4	652.7	653.1	653.4	653.7
117.5°	739.0	738.4	737.7	737.0	737.7	738.4	739.0	739.7	740.6	741.8	742.9
120°	800.2	800.8	801.5	802.2	801.5	800.8	800.2	799.5	800.0	801.7	803.3
122.5°	860.1	858.9	857.7	856.5	857.7	858.9	860.1	861.3	862.5	863.6	864.7
125°	951.9	951.3	950.6	949.9	950.6	951.3	951.9	952.6	953.3	954.0	954.6
127.5°	1038.1	1037.6	1037.0	1036.5	1037.0	1037.6	1038.1	1038.6	1039.2	1039.9	1040.6
130°	1097.2	1095.9	1094.5	1093.2	1094.5	1095.9	1097.2	1098.5	1099.5	1100.2	1100.9
132.5°	1155.1	1154.6	1154.0	1153.5	1154.0	1154.6	1155.1	1155.6	1156.2	1156.9	1157.6
135°	1239.4	1238.4	1237.4	1236.4	1237.4	1238.4	1239.4	1240.4	1241.3	1242.0	1242.6
137.5°	1323.0	1323.2	1323.4	1323.6	1323.4	1323.2	1323.0	1322.8	1323.1	1324.0	1324.9
140°	1377.7	1377.3	1377.0	1376.7	1377.0	1377.3	1377.7	1378.0	1378.3	1378.7	1379.0
142.5°	1429.9	1429.9	1429.8	1429.7	1429.8	1429.9	1429.9	1430.0	1430.1	1430.1	1430.2
145°	1504.8	1503.8	1502.8	1501.8	1502.8	1503.8	1504.8	1505.8	1506.5	1506.8	1507.2
147.5°	1575.8	1575.5	1575.1	1574.8	1575.1	1575.5	1575.8	1576.1	1576.4	1576.7	1577.0
150°	1620.4	1620.1	1619.8	1619.4	1619.8	1620.1	1620.4	1620.8	1620.9	1620.9	1620.9
152.5°	1663.0	1662.2	1661.3	1660.4	1661.3	1662.2	1663.0	1663.9	1663.9	1663.1	1662.3
155°	1721.4	1720.1	1718.8	1717.4	1718.8	1720.1	1721.4	1722.8	1722.8	1721.4	1720.1
157.5°	1771.8	1770.7	1769.5	1768.4	1769.5	1770.7	1771.8	1772.9	1773.0	1772.0	1771.0
160°	1802.4	1800.7	1799.0	1797.3	1799.0	1800.7	1802.4	1804.0	1804.4	1803.4	1802.4
162.5°	1832.5	1830.9	1829.2	1827.5	1829.2	1830.9	1832.5	1834.2	1834.1	1832.3	1830.5
165°	1870.7	1869.4	1868.0	1866.7	1868.0	1869.4	1870.7	1872.1	1871.7	1869.7	1867.7
167.5°	1901.0	1898.9	1896.8	1894.7	1896.8	1898.9	1901.0	1903.1	1903.1	1901.1	1899.1
170°	1917.5	1915.1	1912.8	1910.4	1912.8	1915.1	1917.5	1919.8	1920.0	1918.0	1916.0
172.5°	1930.7	1928.4	1926.0	1923.7	1926.0	1928.4	1930.7	1933.1	1933.1	1930.8	1928.6
175°	1944.6	1942.3	1939.9	1937.6	1939.9	1942.3	1944.6	1947.0	1947.0	1944.6	1942.3
177.5°	1951.2	1949.1	1947.0	1944.8	1947.0	1949.1	1951.2	1953.4	1953.5	1951.6	1949.8
180°	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6



TEST NUMBER: P332860

CATALOG NUMBER: S124DIW-S1195D1560U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4
2.5°	1842.4	1845.0	1855.2	1864.8	1876.3	1884.6	1890.3	1896.7	1910.1	1921.0	1931.2
5°	1726.2	1730.2	1750.9	1765.3	1790.0	1811.6	1828.4	1846.7	1868.3	1897.8	1925.0
7.5°	1623.8	1638.7	1661.3	1684.6	1709.9	1738.1	1762.7	1790.4	1827.6	1868.1	1910.0
10°	1565.7	1582.5	1606.4	1633.6	1657.5	1690.2	1720.6	1753.3	1795.6	1845.1	1894.6
12.5°	1507.6	1535.2	1553.4	1585.6	1611.5	1638.5	1670.8	1713.7	1763.1	1815.1	1874.8
15°	1434.7	1449.9	1485.0	1502.6	1539.3	1580.9	1612.8	1655.9	1703.8	1772.5	1839.5
17.5°	1350.8	1370.7	1398.7	1432.2	1474.3	1506.8	1546.5	1590.9	1651.3	1719.5	1803.5
20°	1295.8	1312.6	1346.9	1383.6	1428.4	1462.7	1505.0	1548.1	1610.4	1683.1	1770.9
22.5°	1246.6	1262.8	1299.0	1333.2	1376.6	1418.6	1462.8	1513.0	1572.7	1649.2	1738.9
25°	1170.5	1192.0	1224.0	1259.1	1300.6	1348.5	1396.4	1441.1	1505.0	1585.6	1681.5
27.5°	1102.9	1120.2	1143.3	1183.2	1230.4	1276.7	1324.2	1380.5	1441.8	1527.0	1626.5
30°	1059.5	1075.5	1098.6	1135.3	1179.3	1228.8	1278.3	1332.5	1396.4	1481.1	1582.5
32.5°	1025.0	1037.1	1057.7	1090.6	1130.7	1182.8	1231.6	1287.8	1354.9	1438.3	1537.1
35°	974.1	984.4	992.4	1023.6	1059.5	1107.4	1156.9	1216.8	1281.5	1360.5	1459.5
37.5°	924.1	927.6	939.3	959.7	994.5	1038.6	1084.6	1143.5	1209.8	1290.1	1379.3
40°	893.4	895.0	902.2	921.4	951.7	993.2	1037.9	1096.2	1159.3	1235.1	1323.8
42.5°	863.4	862.4	869.0	882.4	910.8	948.5	992.6	1045.8	1108.8	1178.9	1262.4
45°	816.0	816.0	814.4	825.6	848.7	885.4	922.2	973.3	1026.0	1094.6	1164.9
47.5°	766.5	762.0	763.4	769.2	788.7	818.9	855.9	897.7	944.2	1002.3	1064.0
50°	734.5	728.2	725.8	732.1	749.7	776.1	811.2	847.9	891.8	942.9	995.6
52.5°	699.4	693.0	688.7	693.2	709.5	733.9	765.8	798.1	837.5	879.1	924.7
55°	645.1	637.9	635.5	637.1	649.1	668.3	695.4	725.0	754.5	788.8	820.8
57.5°	591.6	579.8	577.6	576.8	585.1	602.6	625.3	650.9	672.4	693.2	727.2
60°	556.5	542.1	537.3	536.5	542.9	557.3	578.0	603.6	618.8	633.1	662.7
62.5°	518.8	505.1	494.5	495.7	501.4	515.1	533.3	551.9	561.9	577.6	597.5
65°	460.7	443.1	435.1	432.7	435.9	447.1	461.5	473.5	484.6	491.0	510.2
67.5°	402.6	387.9	376.1	373.2	371.7	379.4	391.2	398.4	406.4	412.0	423.3
70°	361.7	348.9	334.5	329.7	328.9	335.3	346.5	347.3	358.5	360.9	372.9
72.5°	321.4	305.5	295.6	290.8	287.4	293.2	300.5	302.6	308.7	313.0	319.2
75°	258.7	246.7	237.1	229.9	227.5	230.7	230.7	234.7	238.7	241.1	248.3
77.5°	203.6	189.9	178.5	174.4	171.5	169.4	171.2	173.6	171.7	175.8	177.4
80°	165.3	150.9	142.1	140.5	135.7	131.7	130.9	133.3	130.1	131.7	136.5
82.5°	127.6	118.3	108.9	107.3	101.2	99.2	98.4	96.9	96.9	96.6	97.6
85°	75.8	70.3	63.9	59.9	57.5	53.5	53.5	51.9	50.3	48.7	49.5
87.5°	37.7	36.0	32.3	29.8	28.0	24.9	24.3	21.6	20.3	18.9	17.5
90°	35.2	33.2	30.5	27.8	25.1	22.5	19.3	15.6	11.9	8.2	4.5
92.5°	60.9	59.7	57.8	56.0	54.1	52.2	49.2	44.9	40.7	36.5	32.3
95°	115.6	114.6	112.3	109.9	107.6	105.2	102.5	99.5	96.5	93.5	90.5
97.5°	182.4	181.2	178.5	175.7	173.0	170.3	167.7	165.3	162.8	160.4	158.0
100°	231.4	230.7	227.7	224.7	221.7	218.6	216.5	215.1	213.8	212.4	211.1
102.5°	282.3	281.4	278.6	275.9	273.1	270.4	268.7	268.2	267.7	267.1	266.6
105°	359.9	358.9	357.5	356.2	354.8	353.5	352.7	352.3	352.0	351.7	351.3
107.5°	443.9	443.0	442.8	442.6	442.4	442.2	441.9	441.5	441.1	440.7	440.3
110°	501.4	502.1	502.4	502.8	503.1	503.5	503.3	502.6	501.9	501.3	500.6



TEST NUMBER: P332860

CATALOG NUMBER: S124DIW-S1195D1560U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	561.1	561.2	561.8	562.4	563.0	563.6	563.9	563.7	563.6	563.5	563.3
115°	654.1	654.4	655.1	655.7	656.4	657.1	657.4	657.4	657.4	657.4	657.4
117.5°	744.0	745.2	745.6	746.1	746.6	747.1	747.2	746.9	746.6	746.3	746.1
120°	805.0	806.7	807.7	808.7	809.7	810.7	810.5	809.2	807.9	806.5	805.2
122.5°	865.9	867.0	867.5	867.9	868.4	868.9	868.8	868.3	867.8	867.2	866.7
125°	955.3	956.0	956.3	956.6	957.0	957.3	957.5	957.5	957.5	957.5	957.5
127.5°	1041.2	1041.9	1042.5	1043.0	1043.5	1044.1	1043.8	1042.8	1041.8	1040.8	1039.8
130°	1101.6	1102.2	1102.2	1102.2	1102.2	1102.2	1101.7	1100.7	1099.7	1098.7	1097.7
132.5°	1158.3	1158.9	1159.2	1159.5	1159.7	1160.0	1159.8	1159.0	1158.3	1157.6	1156.8
135°	1243.3	1244.0	1244.0	1244.0	1244.0	1244.0	1243.0	1241.0	1238.9	1236.9	1234.9
137.5°	1325.7	1326.6	1326.1	1325.5	1325.0	1324.5	1323.7	1322.8	1321.8	1320.9	1320.0
140°	1379.3	1379.7	1379.7	1379.7	1379.7	1379.7	1379.3	1378.7	1378.0	1377.3	1376.7
142.5°	1430.3	1430.3	1430.6	1430.9	1431.1	1431.4	1431.2	1430.5	1429.9	1429.2	1428.5
145°	1507.5	1507.8	1507.5	1507.2	1506.8	1506.5	1505.7	1504.3	1503.0	1501.6	1500.3
147.5°	1577.2	1577.5	1577.8	1578.0	1578.3	1578.6	1577.9	1576.3	1574.7	1573.1	1571.5
150°	1620.9	1620.9	1620.9	1620.9	1620.9	1620.9	1620.3	1618.9	1617.6	1616.2	1614.9
152.5°	1661.5	1660.7	1660.5	1660.2	1659.9	1659.7	1659.1	1658.3	1657.5	1656.7	1655.9
155°	1718.8	1717.4	1717.8	1718.1	1718.4	1718.8	1718.9	1718.9	1718.9	1718.9	1718.9
157.5°	1770.0	1769.0	1769.1	1769.1	1769.2	1769.3	1769.6	1770.2	1770.8	1771.4	1772.0
160°	1801.4	1800.4	1800.7	1801.0	1801.4	1801.7	1802.0	1802.4	1802.7	1803.0	1803.4
162.5°	1828.7	1826.9	1827.2	1827.6	1827.9	1828.2	1828.8	1829.7	1830.6	1831.5	1832.3
165°	1865.7	1863.7	1864.4	1865.0	1865.7	1866.4	1867.2	1868.2	1869.2	1870.2	1871.2
167.5°	1897.1	1895.1	1895.0	1894.9	1894.9	1894.8	1895.5	1896.9	1898.3	1899.7	1901.1
170°	1913.9	1911.9	1911.6	1911.3	1910.9	1910.6	1911.3	1912.9	1914.6	1916.3	1918.0
172.5°	1926.3	1924.0	1923.9	1923.9	1923.8	1923.7	1924.4	1925.8	1927.2	1928.6	1930.0
175°	1939.9	1937.6	1937.9	1938.2	1938.6	1938.9	1939.9	1941.6	1943.3	1944.9	1946.6
177.5°	1947.9	1946.0	1946.0	1946.0	1946.0	1946.0	1946.7	1948.0	1949.4	1950.7	1952.0
180°	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6



TEST NUMBER: P332860

CATALOG NUMBER: S124DIW-S1195D1560U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4
2.5°	1940.1	1946.5	1954.8	1968.9	1974.0	1980.4	1989.3	1988.7	1991.2	2000.8	2021.3
5°	1947.3	1972.1	1996.0	2024.8	2055.1	2075.1	2102.2	2119.0	2135.8	2157.3	2194.0
7.5°	1950.2	1989.5	2033.4	2083.9	2128.7	2180.5	2220.9	2258.9	2293.2	2338.7	2382.5
10°	1945.7	1998.4	2055.1	2119.0	2186.8	2244.3	2296.2	2355.3	2405.6	2460.7	2510.2
12.5°	1937.4	2001.0	2076.8	2148.4	2227.7	2312.7	2377.4	2437.1	2504.0	2567.4	2643.7
15°	1918.6	2005.6	2094.2	2188.4	2294.6	2392.8	2486.3	2563.7	2635.6	2730.6	2830.4
17.5°	1894.6	1988.5	2100.3	2214.3	2325.3	2437.6	2553.2	2669.6	2760.3	2878.3	2956.4
20°	1872.3	1980.9	2095.8	2231.6	2342.5	2482.3	2597.2	2709.8	2834.4	2951.7	3045.1
22.5°	1841.0	1959.8	2081.8	2216.9	2363.0	2502.7	2635.6	2757.7	2882.3	3009.9	3123.1
25°	1801.2	1909.0	2053.5	2206.8	2352.1	2503.8	2656.3	2809.6	2943.7	3078.7	3184.1
27.5°	1733.5	1869.6	2004.2	2162.4	2323.9	2495.5	2658.6	2819.0	2959.6	3070.5	3135.8
30°	1699.0	1817.2	1963.3	2122.2	2297.0	2481.5	2651.5	2808.8	2939.8	3028.4	3054.7
32.5°	1647.9	1769.9	1912.8	2077.5	2262.5	2452.1	2629.2	2777.5	2886.7	2933.2	2901.4
35°	1572.1	1682.3	1826.8	1995.2	2187.6	2389.6	2564.5	2689.8	2745.7	2701.8	2592.4
37.5°	1481.1	1590.3	1735.4	1900.9	2100.0	2305.3	2463.4	2553.6	2535.1	2425.9	2262.9
40°	1417.2	1519.4	1657.5	1836.3	2030.4	2236.4	2375.3	2424.0	2372.9	2216.4	2043.1
42.5°	1346.3	1445.9	1584.7	1757.1	1962.7	2152.7	2273.7	2277.7	2192.1	2005.0	1831.1
45°	1238.3	1333.3	1464.3	1643.9	1834.0	2012.8	2092.6	2053.5	1895.4	1715.0	1540.1
47.5°	1131.8	1214.2	1343.2	1513.8	1694.2	1844.8	1884.4	1814.0	1645.5	1470.4	1308.3
50°	1053.9	1136.9	1258.3	1421.2	1595.2	1725.4	1744.5	1651.1	1485.8	1309.4	1182.4
52.5°	979.2	1061.6	1178.5	1329.2	1488.6	1605.9	1606.6	1498.5	1333.8	1176.5	1058.5
55°	869.5	943.7	1049.1	1184.0	1326.2	1418.0	1395.6	1283.8	1140.9	1004.4	901.4
57.5°	763.8	828.4	925.5	1038.1	1163.3	1239.0	1201.9	1094.3	966.7	850.9	772.9
60°	695.4	756.9	839.9	946.1	1051.5	1110.6	1075.5	978.1	860.7	767.3	699.4
62.5°	629.0	680.9	760.7	852.9	950.6	994.3	963.0	866.9	765.5	681.0	626.0
65°	534.9	577.3	641.1	720.2	791.2	828.8	802.4	713.0	635.5	574.9	530.9
67.5°	447.1	480.2	528.5	591.9	652.3	672.6	648.6	586.4	520.7	472.2	441.2
70°	386.4	417.6	458.3	507.0	559.7	581.2	557.3	507.8	454.3	409.6	379.2
72.5°	333.4	357.5	391.9	433.5	474.7	496.3	480.0	432.4	387.2	354.0	328.1
75°	253.9	274.7	298.6	328.1	360.1	374.5	360.1	327.3	296.2	271.5	253.1
77.5°	184.6	195.8	214.3	236.3	256.3	267.3	254.9	232.7	213.7	196.7	187.6
80°	140.5	148.5	161.3	178.8	192.4	202.8	194.8	176.4	161.3	150.1	146.1
82.5°	102.2	107.6	115.9	129.0	138.1	143.4	139.9	126.6	120.4	110.5	106.5
85°	50.3	53.5	59.1	63.1	71.1	71.9	72.7	67.1	61.5	59.1	55.9
87.5°	18.9	20.3	22.9	25.6	28.8	29.9	29.8	30.4	28.4	28.1	26.0
90°	8.2	11.9	15.6	19.3	22.5	25.1	27.8	30.5	33.2	35.2	37.2
92.5°	36.5	40.7	44.9	49.2	52.2	54.1	56.0	57.8	59.7	60.9	62.1
95°	93.5	96.5	99.5	102.5	105.2	107.6	109.9	112.3	114.6	115.6	116.6
97.5°	160.4	162.8	165.3	167.7	170.3	173.0	175.7	178.5	181.2	182.4	183.7
100°	212.4	213.8	215.1	216.5	218.6	221.7	224.7	227.7	230.7	231.4	232.0
102.5°	267.1	267.7	268.2	268.7	270.4	273.1	275.9	278.6	281.4	282.3	283.2
105°	351.7	352.0	352.3	352.7	353.5	354.8	356.2	357.5	358.9	359.9	360.9
107.5°	440.7	441.1	441.5	441.9	442.2	442.4	442.6	442.8	443.0	443.9	444.9
110°	501.3	501.9	502.6	503.3	503.5	503.1	502.8	502.4	502.1	501.4	500.8



TEST NUMBER: P332860

CATALOG NUMBER: S124DIW-S1195D1560U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	563.5	563.6	563.7	563.9	563.6	563.0	562.4	561.8	561.2	561.1	560.9
115°	657.4	657.4	657.4	657.4	657.1	656.4	655.7	655.1	654.4	654.1	653.7
117.5°	746.3	746.6	746.9	747.2	747.1	746.6	746.1	745.6	745.2	744.0	742.9
120°	806.5	807.9	809.2	810.5	810.7	809.7	808.7	807.7	806.7	805.0	803.3
122.5°	867.2	867.8	868.3	868.8	868.9	868.4	867.9	867.5	867.0	865.9	864.7
125°	957.5	957.5	957.5	957.5	957.3	957.0	956.6	956.3	956.0	955.3	954.6
127.5°	1040.8	1041.8	1042.8	1043.8	1044.1	1043.5	1043.0	1042.5	1041.9	1041.2	1040.6
130°	1098.7	1099.7	1100.7	1101.7	1102.2	1102.2	1102.2	1102.2	1102.2	1101.6	1100.9
132.5°	1157.6	1158.3	1159.0	1159.8	1160.0	1159.7	1159.5	1159.2	1158.9	1158.3	1157.6
135°	1236.9	1238.9	1241.0	1243.0	1244.0	1244.0	1244.0	1244.0	1244.0	1243.3	1242.6
137.5°	1320.9	1321.8	1322.8	1323.7	1324.5	1325.0	1325.5	1326.1	1326.6	1325.7	1324.9
140°	1377.3	1378.0	1378.7	1379.3	1379.7	1379.7	1379.7	1379.7	1379.7	1379.3	1379.0
142.5°	1429.2	1429.9	1430.5	1431.2	1431.4	1431.1	1430.9	1430.6	1430.3	1430.3	1430.2
145°	1501.6	1503.0	1504.3	1505.7	1506.5	1506.8	1507.2	1507.5	1507.8	1507.5	1507.2
147.5°	1573.1	1574.7	1576.3	1577.9	1578.6	1578.3	1578.0	1577.8	1577.5	1577.2	1577.0
150°	1616.2	1617.6	1618.9	1620.3	1620.9	1620.9	1620.9	1620.9	1620.9	1620.9	1620.9
152.5°	1656.7	1657.5	1658.3	1659.1	1659.7	1659.9	1660.2	1660.5	1660.7	1661.5	1662.3
155°	1718.9	1718.9	1718.9	1718.9	1718.8	1718.4	1718.1	1717.8	1717.4	1718.8	1720.1
157.5°	1771.4	1770.8	1770.2	1769.6	1769.3	1769.2	1769.1	1769.1	1769.0	1770.0	1771.0
160°	1803.0	1802.7	1802.4	1802.0	1801.7	1801.4	1801.0	1800.7	1800.4	1801.4	1802.4
162.5°	1831.5	1830.6	1829.7	1828.8	1828.2	1827.9	1827.6	1827.2	1826.9	1828.7	1830.5
165°	1870.2	1869.2	1868.2	1867.2	1866.4	1865.7	1865.0	1864.4	1863.7	1865.7	1867.7
167.5°	1899.7	1898.3	1896.9	1895.5	1894.8	1894.9	1894.9	1895.0	1895.1	1897.1	1899.1
170°	1916.3	1914.6	1912.9	1911.3	1910.6	1910.9	1911.3	1911.6	1911.9	1913.9	1916.0
172.5°	1928.6	1927.2	1925.8	1924.4	1923.7	1923.8	1923.9	1923.9	1924.0	1926.3	1928.6
175°	1944.9	1943.3	1941.6	1939.9	1938.9	1938.6	1938.2	1937.9	1937.6	1939.9	1942.3
177.5°	1950.7	1949.4	1948.0	1946.7	1946.0	1946.0	1946.0	1946.0	1946.0	1947.9	1949.8
180°	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6



TEST NUMBER: P332860

CATALOG NUMBER: S124DIW-S1195D1560U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4	1927.4
2.5°	2031.5	2032.8	2038.5	2043.0	2044.3	2050.6	2051.3
5°	2210.0	2223.6	2249.9	2252.3	2256.3	2277.1	2261.1
7.5°	2419.2	2453.7	2476.7	2497.0	2504.3	2513.4	2511.5
10°	2553.3	2604.4	2630.0	2670.7	2672.3	2682.7	2676.3
12.5°	2688.1	2747.5	2794.1	2801.6	2835.8	2841.1	2850.0
15°	2879.1	2942.1	3006.8	3030.0	3077.1	3088.3	3105.8
17.5°	3058.6	3123.1	3168.4	3228.3	3247.6	3273.5	3255.9
20°	3156.9	3227.2	3284.7	3331.8	3351.7	3366.1	3364.5
22.5°	3216.3	3287.2	3333.8	3369.5	3388.1	3394.2	3393.9
25°	3253.5	3294.2	3308.6	3322.2	3301.4	3294.2	3297.4
27.5°	3150.1	3139.5	3102.0	3052.8	3001.7	2961.1	2939.1
30°	3007.6	2945.3	2888.7	2789.6	2738.6	2708.2	2681.1
32.5°	2805.8	2707.1	2598.0	2507.3	2449.2	2404.2	2397.5
35°	2459.9	2311.4	2178.1	2067.1	2009.6	1960.9	1949.7
37.5°	2091.4	1937.1	1817.0	1719.3	1657.5	1623.2	1591.1
40°	1846.7	1714.2	1596.0	1513.0	1465.9	1441.1	1421.2
42.5°	1658.3	1537.3	1419.7	1356.5	1313.9	1298.7	1287.0
45°	1398.0	1285.4	1204.0	1156.1	1131.3	1105.8	1093.8
47.5°	1189.6	1098.0	1044.3	1003.6	977.1	961.9	954.3
50°	1071.5	996.4	948.5	917.4	893.4	881.4	875.1
52.5°	966.7	905.1	864.8	840.1	823.8	815.0	812.5
55°	832.7	785.6	760.1	738.5	726.6	718.6	715.4
57.5°	723.8	687.6	666.8	649.1	644.5	637.8	635.5
60°	652.3	624.4	606.8	594.8	590.8	582.8	584.4
62.5°	589.1	566.2	551.2	544.4	539.1	532.4	534.6
65°	498.2	481.4	473.5	467.1	460.7	456.7	459.9
67.5°	418.0	406.6	395.7	392.0	388.8	388.2	384.8
70°	365.7	356.1	346.5	344.1	344.1	340.9	340.1
72.5°	315.2	308.2	301.8	300.0	297.5	298.8	295.4
75°	243.5	237.9	235.5	233.1	232.3	232.3	229.9
77.5°	180.0	175.8	172.0	172.0	169.1	168.0	167.7
80°	136.5	134.9	131.7	131.7	130.1	130.9	129.3
82.5°	102.7	100.4	99.8	98.5	96.3	96.4	94.9
85°	55.1	52.7	51.9	49.5	47.9	49.5	47.9
87.5°	27.0	26.8	26.4	25.3	24.7	24.9	23.1
90°	39.2	41.2	42.6	43.2	43.9	44.6	45.2
92.5°	63.3	64.5	65.3	65.7	66.1	66.5	66.9
95°	117.6	118.6	119.1	119.1	119.1	119.1	119.1
97.5°	184.9	186.1	186.7	186.7	186.7	186.7	186.7
100°	232.7	233.4	233.7	233.7	233.7	233.7	233.7
102.5°	284.2	285.1	285.7	286.0	286.3	286.5	286.8
105°	361.9	362.9	363.9	364.9	365.9	366.9	367.9
107.5°	445.8	446.8	447.2	447.1	447.1	447.0	446.9
110°	500.1	499.4	499.6	500.6	501.6	502.6	503.6



TEST NUMBER: P332860

CATALOG NUMBER: S124DIW-S1195D1560U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	560.8	560.7	560.7	560.9	561.1	561.3	561.5
115°	653.4	653.1	652.7	652.4	652.1	651.7	651.4
117.5°	741.8	740.6	739.7	739.0	738.4	737.7	737.0
120°	801.7	800.0	799.5	800.2	800.8	801.5	802.2
122.5°	863.6	862.5	861.3	860.1	858.9	857.7	856.5
125°	954.0	953.3	952.6	951.9	951.3	950.6	949.9
127.5°	1039.9	1039.2	1038.6	1038.1	1037.6	1037.0	1036.5
130°	1100.2	1099.5	1098.5	1097.2	1095.9	1094.5	1093.2
132.5°	1156.9	1156.2	1155.6	1155.1	1154.6	1154.0	1153.5
135°	1242.0	1241.3	1240.4	1239.4	1238.4	1237.4	1236.4
137.5°	1324.0	1323.1	1322.8	1323.0	1323.2	1323.4	1323.6
140°	1378.7	1378.3	1378.0	1377.7	1377.3	1377.0	1376.7
142.5°	1430.1	1430.1	1430.0	1429.9	1429.9	1429.8	1429.7
145°	1506.8	1506.5	1505.8	1504.8	1503.8	1502.8	1501.8
147.5°	1576.7	1576.4	1576.1	1575.8	1575.5	1575.1	1574.8
150°	1620.9	1620.9	1620.8	1620.4	1620.1	1619.8	1619.4
152.5°	1663.1	1663.9	1663.9	1663.0	1662.2	1661.3	1660.4
155°	1721.4	1722.8	1722.8	1721.4	1720.1	1718.8	1717.4
157.5°	1772.0	1773.0	1772.9	1771.8	1770.7	1769.5	1768.4
160°	1803.4	1804.4	1804.0	1802.4	1800.7	1799.0	1797.3
162.5°	1832.3	1834.1	1834.2	1832.5	1830.9	1829.2	1827.5
165°	1869.7	1871.7	1872.1	1870.7	1869.4	1868.0	1866.7
167.5°	1901.1	1903.1	1903.1	1901.0	1898.9	1896.8	1894.7
170°	1918.0	1920.0	1919.8	1917.5	1915.1	1912.8	1910.4
172.5°	1930.8	1933.1	1933.1	1930.7	1928.4	1926.0	1923.7
175°	1944.6	1947.0	1947.0	1944.6	1942.3	1939.9	1937.6
177.5°	1951.6	1953.5	1953.4	1951.2	1949.1	1947.0	1944.8
180°	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6	1949.6

(END OF REPORT)