

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332719

Luminaire Tested: **S124DIW-S350D470U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332719  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124DIW-S350D470U835-4F0-1E-UDD-F  
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 470 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3391.9 lumens  
Efficiency: N/A  
Efficacy: 147.5 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 23  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332719

CATALOG NUMBER: S124DIW-S350D470U835-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

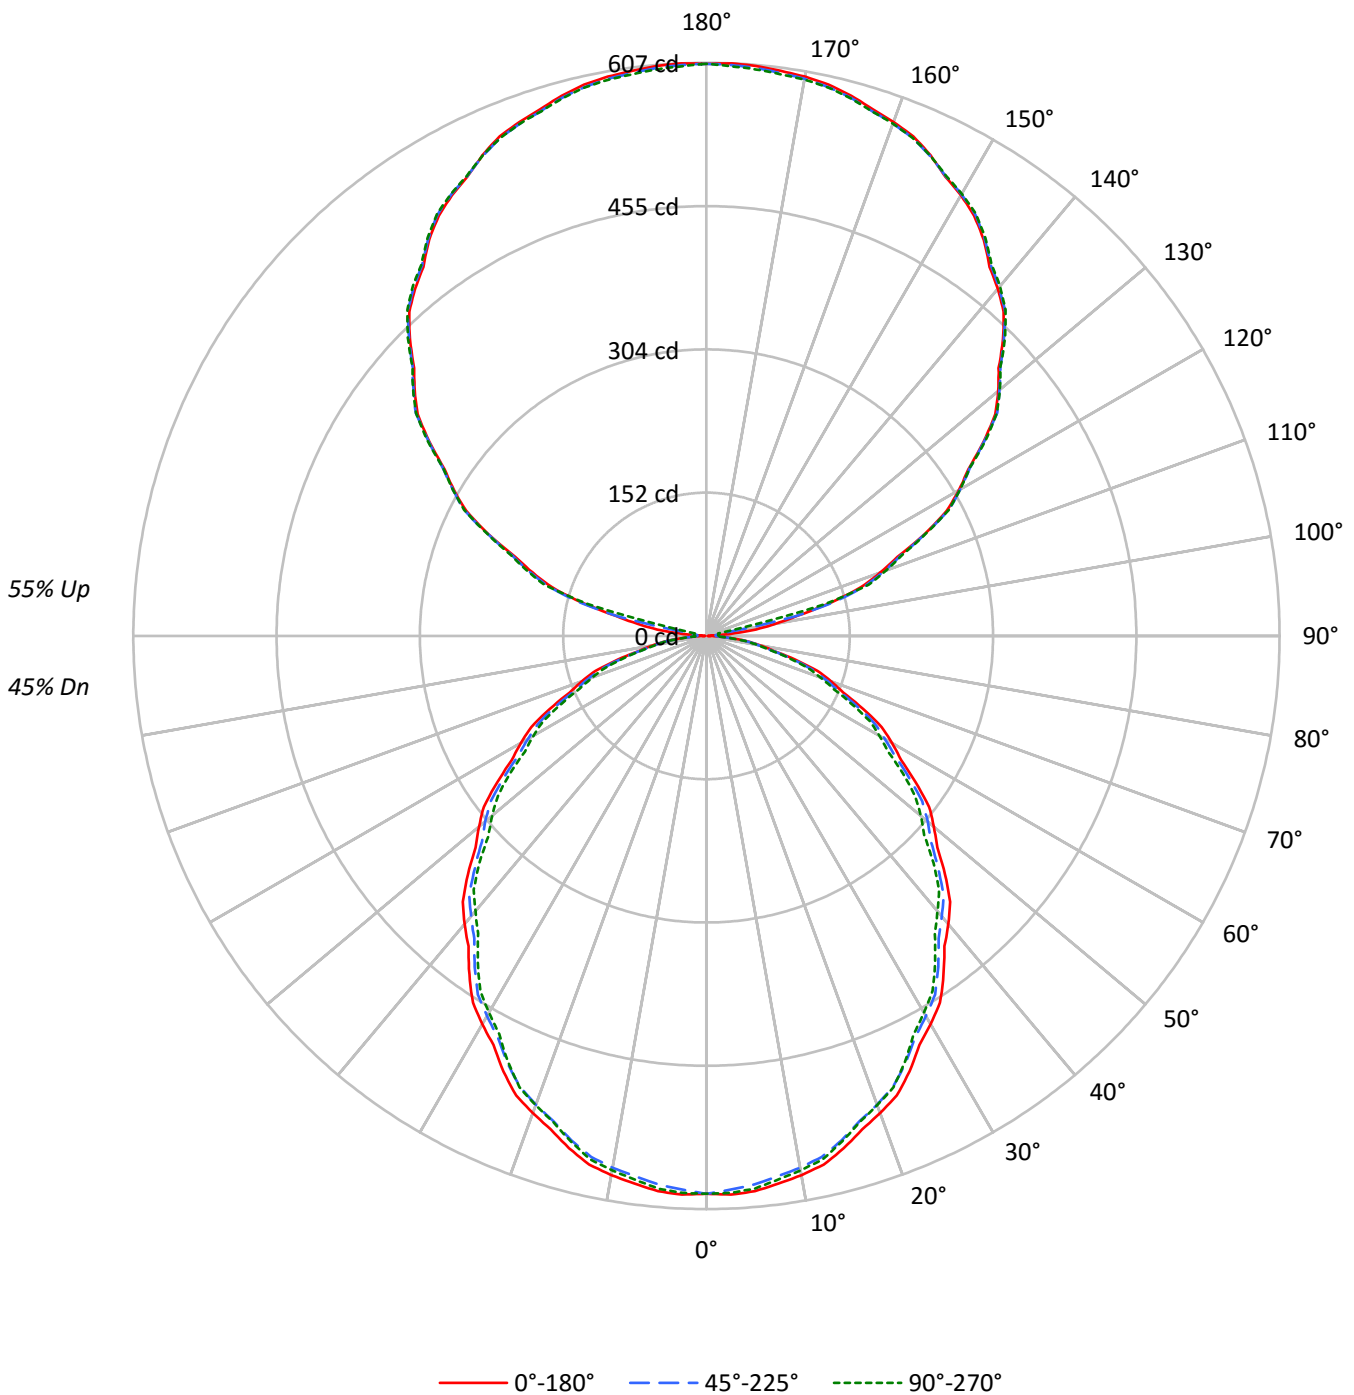



TEST NUMBER: P332719

CATALOG NUMBER: S124DIW-S350D470U835-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	45					45			
1	97	92	88	85	88	85	81	78	70	68	66	57	56	54	45	44	43	38					38			
2	88	81	74	69	80	74	69	64	62	58	55	50	48	45	40	38	36	31					31			
3	80	71	63	58	73	65	59	54	54	50	46	44	41	38	35	33	31	27					27			
4	73	63	55	49	67	58	51	45	48	43	39	40	36	33	32	29	27	23					23			
5	67	56	48	42	61	51	44	39	43	38	34	36	32	28	28	26	23	20					20			
6	62	50	42	36	57	46	39	34	39	33	29	32	28	25	26	23	20	17					17			
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	24	20	18	15					15			
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	16	14					14			
9	49	37	30	25	45	35	28	23	29	24	20	25	20	18	20	17	15	12					12			
10	46	34	27	22	42	32	25	21	27	22	18	23	19	16	18	15	13	11					11			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	4769	4769	4769
5°	4783	4725	4760
10°	4753	4687	4710
15°	4695	4621	4633
20°	4619	4538	4542
25°	4532	4444	4431
30°	4426	4333	4294
35°	4315	4217	4161
40°	4200	4086	4011
45°	4080	3956	3881
50°	3947	3841	3721
55°	3804	3690	3571
60°	3660	3523	3416
65°	3500	3364	3228
70°	3319	3151	3028
75°	3041	2895	2820
80°	2706	2599	2529
85°	2371	2279	2232



TEST NUMBER: P332719

CATALOG NUMBER: S124DIW-S350D470U835-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	55.6	1.6
10°-20°	156.7	4.6
20°-30°	230.7	6.8
30°-40°	268.2	7.9
40°-50°	268.2	7.9
50°-60°	234.6	6.9
60°-70°	174.2	5.1
70°-80°	99.0	2.9
80°-90°	30.3	0.9
90°-100°	20.7	0.6
100°-110°	132.1	3.9
110°-120°	252.8	7.5
120°-130°	320.9	9.5
130°-140°	343.3	10.1
140°-150°	321.0	9.5
150°-160°	258.9	7.6
160°-170°	167.0	4.9
170°-180°	57.6	1.7
0°-30°	443.1	13.1
0°-40°	711.3	21.0
0°-60°	1214.1	35.8
0°-90°	1517.6	44.7
90°-120°	405.6	12.0
90°-150°	1390.9	41.0
90°-180°	1874.0	55.2
0°-180°	3391.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	591	591	591	591	591	
5°	590	588	583	588	587	56
15°	562	560	553	555	554	158
25°	509	505	499	499	498	234
35°	438	434	428	425	422	274
45°	357	354	346	342	340	275
55°	270	269	262	257	254	242
65°	183	181	176	172	169	181
75°	98	95	93	91	90	104
85°	26	26	25	25	24	28
90°	1	6	10	13	14	3
95°	25	10	10	13	13	32
105°	136	139	141	144	129	143
115°	255	256	256	256	256	251
125°	358	360	359	360	361	320
135°	444	444	446	446	447	342
145°	512	513	514	514	515	320
155°	562	562	561	562	561	259
165°	592	590	590	593	590	167
175°	606	603	604	607	602	58
180°	606	606	606	606	606	



TEST NUMBER: P332719

CATALOG NUMBER: S124DIW-S350D470U835-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	590.7	590.7	590.7	590.7	590.7	590.7	590.7	590.7	590.7	590.7	590.7
2.5°	592.2	592.0	591.7	591.5	591.2	590.6	589.7	588.8	587.9	586.9	587.8
5°	590.2	589.8	589.4	589.0	588.6	587.8	586.6	585.5	584.3	583.1	584.3
7.5°	584.8	584.3	583.9	583.5	583.1	582.2	580.9	579.7	578.4	577.1	578.0
10°	579.8	579.4	579.0	578.6	578.2	577.3	575.9	574.5	573.2	571.8	572.6
12.5°	573.4	573.0	572.6	572.1	571.7	570.8	569.3	567.9	566.4	565.0	565.9
15°	561.8	561.4	561.0	560.6	560.2	559.2	557.6	556.0	554.4	552.9	553.5
17.5°	547.9	547.4	546.9	546.4	545.8	544.8	543.3	541.8	540.3	538.8	539.2
20°	537.7	537.2	536.7	536.1	535.6	534.6	533.0	531.4	529.8	528.2	528.6
22.5°	526.7	526.0	525.3	524.6	523.9	522.8	521.2	519.7	518.1	516.5	517.1
25°	508.8	508.1	507.4	506.6	505.9	504.8	503.3	501.8	500.4	498.9	499.0
27.5°	488.4	487.6	486.9	486.1	485.4	484.3	482.9	481.6	480.2	478.8	478.6
30°	474.8	473.9	473.1	472.2	471.4	470.3	468.9	467.5	466.2	464.8	464.4
32.5°	460.4	459.6	458.8	458.1	457.3	456.2	454.8	453.3	451.9	450.4	449.9
35°	437.8	437.1	436.4	435.6	434.9	433.8	432.3	430.8	429.4	427.9	427.2
37.5°	414.1	413.4	412.7	412.1	411.4	410.3	408.7	407.1	405.5	403.9	403.1
40°	398.5	397.7	396.9	396.0	395.2	394.0	392.4	390.8	389.2	387.7	386.6
42.5°	381.9	381.4	380.9	380.4	379.9	378.7	377.0	375.2	373.5	371.8	370.5
45°	357.4	356.6	355.9	355.2	354.4	353.2	351.5	349.8	348.2	346.5	345.3
47.5°	331.7	331.2	330.7	330.2	329.7	328.7	327.1	325.5	324.0	322.4	321.1
50°	314.3	313.9	313.5	313.0	312.6	311.7	310.2	308.7	307.2	305.8	304.3
52.5°	297.3	296.7	296.2	295.7	295.2	294.2	292.6	291.1	289.5	288.0	286.7
55°	270.3	270.0	269.6	269.3	269.0	268.1	266.6	265.2	263.7	262.2	261.0
57.5°	244.5	244.2	243.8	243.5	243.1	242.2	240.7	239.3	237.8	236.4	235.2
60°	226.7	226.2	225.7	225.1	224.6	223.7	222.3	220.9	219.6	218.2	217.3
62.5°	209.3	208.9	208.4	208.0	207.5	206.6	205.1	203.7	202.2	200.8	199.9
65°	183.2	182.7	182.1	181.6	181.1	180.3	179.2	178.2	177.1	176.1	175.0
67.5°	156.9	156.4	155.9	155.4	154.9	154.2	153.2	152.2	151.2	150.1	149.1
70°	140.6	139.8	139.1	138.4	137.6	136.8	136.0	135.2	134.3	133.5	132.6
72.5°	123.2	122.4	121.7	121.0	120.2	119.5	118.8	118.2	117.5	116.8	116.1
75°	97.5	97.0	96.5	95.9	95.4	94.9	94.4	93.8	93.3	92.8	92.4
77.5°	73.0	72.8	72.5	72.3	72.1	71.7	71.3	70.8	70.3	69.9	69.7
80°	58.2	57.9	57.6	57.3	57.0	56.7	56.5	56.3	56.1	55.9	55.6
82.5°	43.8	43.7	43.5	43.4	43.2	43.1	43.1	43.1	43.0	43.0	42.9
85°	25.6	25.6	25.6	25.6	25.6	25.5	25.2	25.0	24.8	24.6	24.6
87.5°	10.1	10.3	10.4	10.5	10.7	10.8	10.9	10.9	11.0	11.1	11.2
90°	1.4	2.5	3.6	4.7	5.8	6.7	7.6	8.4	9.2	10.0	10.6
92.5°	5.7	5.8	5.8	5.9	6.0	6.4	7.2	8.0	8.8	9.6	10.2
95°	24.9	21.5	18.1	14.7	11.2	9.6	9.7	9.8	9.9	10.0	10.6
97.5°	52.9	55.1	57.2	59.3	61.5	56.9	45.7	34.4	23.2	12.0	12.0
100°	74.3	76.1	78.0	79.8	81.6	75.5	61.6	47.7	33.8	19.9	18.2
102.5°	98.3	99.6	100.9	102.2	103.6	103.3	101.5	99.7	97.9	96.1	77.6
105°	136.4	137.0	137.6	138.2	138.8	139.4	139.9	140.4	140.9	141.4	142.3
107.5°	171.9	172.2	172.5	172.8	173.1	173.6	174.2	174.9	175.6	176.3	176.7
110°	195.8	196.1	196.4	196.7	197.0	197.4	198.0	198.7	199.3	199.9	200.1



TEST NUMBER: P332719

CATALOG NUMBER: S124DIW-S350D470U835-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	219.0	219.5	220.1	220.6	221.2	221.6	221.9	222.1	222.4	222.7	222.7
115°	254.7	255.0	255.3	255.6	255.9	256.0	255.9	255.8	255.7	255.6	255.8
117.5°	286.9	287.3	287.7	288.1	288.5	288.8	289.0	289.2	289.5	289.7	289.6
120°	308.6	309.0	309.4	309.8	310.2	310.4	310.3	310.2	310.1	310.0	310.2
122.5°	328.9	329.2	329.4	329.7	329.9	330.1	330.2	330.4	330.5	330.7	330.8
125°	358.0	358.4	358.8	359.2	359.6	359.7	359.5	359.3	359.1	358.9	359.2
127.5°	385.6	385.7	385.8	385.9	386.0	386.3	386.7	387.2	387.7	388.1	388.1
130°	403.3	403.4	403.6	403.7	403.8	404.0	404.3	404.6	404.9	405.2	405.3
132.5°	419.7	419.8	420.0	420.2	420.4	420.7	421.1	421.4	421.8	422.2	422.3
135°	444.1	444.0	443.9	443.8	443.7	443.9	444.3	444.7	445.1	445.5	445.7
137.5°	465.8	465.8	465.9	465.9	466.0	466.2	466.6	467.1	467.5	468.0	468.2
140°	479.9	480.1	480.3	480.5	480.7	480.9	481.1	481.4	481.6	481.8	482.1
142.5°	492.6	493.0	493.4	493.7	494.1	494.3	494.4	494.6	494.7	494.8	495.0
145°	512.1	512.4	512.7	513.0	513.3	513.5	513.5	513.5	513.5	513.5	513.6
147.5°	527.6	528.2	528.7	529.3	529.9	530.1	530.0	529.9	529.8	529.7	529.8
150°	538.9	539.3	539.7	540.1	540.5	540.6	540.5	540.4	540.3	540.2	540.2
152.5°	548.3	548.6	548.9	549.2	549.6	549.6	549.5	549.3	549.1	548.9	549.1
155°	561.5	561.6	561.7	561.8	561.9	561.8	561.5	561.2	560.9	560.6	561.0
157.5°	572.7	572.6	572.5	572.5	572.4	572.2	571.9	571.5	571.2	570.9	571.4
160°	579.2	578.9	578.6	578.3	578.0	577.8	577.7	577.6	577.5	577.4	578.0
162.5°	585.0	584.6	584.2	583.8	583.5	583.2	583.1	583.0	582.9	582.8	583.4
165°	592.3	591.8	591.3	590.8	590.3	590.1	590.1	590.1	590.1	590.1	590.9
167.5°	598.1	597.6	597.1	596.6	596.0	595.7	595.7	595.6	595.6	595.5	596.4
170°	601.4	600.8	600.2	599.6	599.0	598.7	598.8	598.9	599.0	599.1	599.9
172.5°	603.6	603.0	602.4	601.8	601.2	600.9	601.0	601.1	601.2	601.3	602.1
175°	605.9	605.3	604.7	604.1	603.5	603.3	603.4	603.5	603.6	603.7	604.6
177.5°	607.0	606.5	605.9	605.3	604.8	604.6	604.7	604.9	605.0	605.2	605.8
180°	605.9	605.9	605.9	605.9	605.9	605.9	605.9	605.9	605.9	605.9	605.9



TEST NUMBER: P332719

CATALOG NUMBER: S124DIW-S350D470U835-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	590.7	590.7	590.7	590.7	590.7	590.7	590.7	590.7
2.5°	588.6	589.5	590.3	590.7	590.6	590.5	590.4	590.3
5°	585.5	586.6	587.8	588.2	588.0	587.8	587.6	587.4
7.5°	578.9	579.9	580.8	581.2	581.1	580.9	580.8	580.7
10°	573.5	574.3	575.2	575.5	575.3	575.0	574.8	574.6
12.5°	566.8	567.7	568.7	569.0	568.7	568.4	568.1	567.8
15°	554.1	554.7	555.4	555.5	555.2	554.9	554.6	554.3
17.5°	539.6	540.0	540.4	540.5	540.3	540.1	539.9	539.7
20°	528.9	529.2	529.5	529.6	529.3	529.1	528.9	528.7
22.5°	517.6	518.2	518.8	518.9	518.5	518.1	517.7	517.4
25°	499.1	499.2	499.3	499.2	498.7	498.3	497.9	497.5
27.5°	478.3	478.1	477.8	477.4	476.9	476.4	475.8	475.3
30°	464.0	463.6	463.1	462.7	462.1	461.6	461.1	460.6
32.5°	449.4	448.9	448.4	447.9	447.4	446.8	446.3	445.8
35°	426.4	425.7	424.9	424.3	423.8	423.3	422.7	422.2
37.5°	402.3	401.5	400.7	400.0	399.3	398.6	397.9	397.2
40°	385.6	384.5	383.5	382.7	382.1	381.6	381.1	380.6
42.5°	369.3	368.1	366.9	366.1	365.7	365.4	365.0	364.7
45°	344.2	343.0	341.9	341.1	340.8	340.5	340.2	339.9
47.5°	319.8	318.5	317.2	316.2	315.4	314.6	313.8	313.0
50°	302.8	301.4	299.9	298.8	298.2	297.6	296.9	296.3
52.5°	285.4	284.1	282.8	281.7	280.9	280.1	279.3	278.5
55°	259.7	258.4	257.2	256.2	255.6	255.0	254.3	253.7
57.5°	234.0	232.8	231.6	230.7	230.1	229.5	228.9	228.2
60°	216.3	215.4	214.4	213.7	213.2	212.6	212.1	211.6
62.5°	199.1	198.2	197.3	196.6	196.1	195.6	195.1	194.5
65°	174.0	172.9	171.9	171.1	170.6	170.0	169.5	169.0
67.5°	148.1	147.1	146.1	145.5	145.4	145.2	145.1	144.9
70°	131.8	131.0	130.1	129.5	129.2	128.9	128.6	128.3
72.5°	115.5	114.8	114.1	113.6	113.3	113.0	112.7	112.4
75°	91.9	91.5	91.1	90.8	90.7	90.6	90.5	90.4
77.5°	69.6	69.5	69.4	69.2	68.9	68.6	68.3	68.1
80°	55.4	55.2	55.0	54.9	54.7	54.6	54.5	54.4
82.5°	42.7	42.6	42.5	42.4	42.3	42.1	42.0	41.9
85°	24.6	24.6	24.6	24.6	24.5	24.4	24.2	24.1
87.5°	11.3	11.4	11.6	11.6	11.7	11.7	11.8	11.8
90°	11.2	11.8	12.4	12.8	13.0	13.2	13.4	13.6
92.5°	10.8	11.4	12.0	12.3	12.4	12.4	12.5	12.5
95°	11.2	11.8	12.4	12.7	12.8	12.9	13.0	13.1
97.5°	12.1	12.1	12.2	12.3	12.4	12.5	12.6	12.7
100°	16.5	14.8	13.1	12.3	12.4	12.5	12.6	12.7
102.5°	59.1	40.7	22.2	13.0	13.0	13.0	13.0	13.1
105°	143.2	144.1	145.0	143.7	140.0	136.4	132.8	129.2
107.5°	177.2	177.6	178.1	178.5	178.9	179.2	179.6	180.0
110°	200.3	200.5	200.7	200.9	201.2	201.5	201.8	202.1





TEST NUMBER: P332719

CATALOG NUMBER: S124DIW-S350D470U835-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	222.6	222.6	222.5	222.7	223.1	223.5	223.9	224.2
115°	256.0	256.2	256.4	256.5	256.5	256.5	256.5	256.5
117.5°	289.6	289.6	289.5	289.5	289.4	289.4	289.4	289.3
120°	310.4	310.6	310.8	310.8	310.6	310.4	310.2	310.0
122.5°	330.9	331.0	331.1	331.1	330.9	330.7	330.5	330.3
125°	359.5	359.8	360.1	360.3	360.4	360.5	360.6	360.7
127.5°	388.0	387.9	387.9	387.8	387.7	387.6	387.6	387.5
130°	405.4	405.5	405.6	405.6	405.6	405.6	405.6	405.6
132.5°	422.4	422.5	422.6	422.6	422.5	422.5	422.4	422.3
135°	445.9	446.1	446.3	446.5	446.7	446.9	447.1	447.3
137.5°	468.4	468.6	468.9	468.9	468.9	468.8	468.8	468.7
140°	482.4	482.7	483.0	483.2	483.3	483.4	483.5	483.6
142.5°	495.2	495.5	495.7	495.8	495.8	495.9	495.9	495.9
145°	513.7	513.8	513.9	514.0	514.2	514.4	514.6	514.8
147.5°	529.9	529.9	530.0	530.1	530.2	530.3	530.4	530.5
150°	540.2	540.2	540.2	540.3	540.4	540.5	540.6	540.7
152.5°	549.2	549.4	549.6	549.6	549.6	549.5	549.4	549.4
155°	561.4	561.8	562.2	562.3	562.0	561.7	561.4	561.1
157.5°	571.9	572.4	572.9	572.9	572.4	571.9	571.4	570.9
160°	578.6	579.2	579.8	579.8	579.2	578.6	578.0	577.4
162.5°	584.0	584.6	585.2	585.2	584.5	583.8	583.1	582.5
165°	591.7	592.5	593.3	593.2	592.3	591.4	590.5	589.6
167.5°	597.3	598.2	599.1	599.0	598.0	597.0	596.0	595.0
170°	600.7	601.5	602.4	602.3	601.2	600.2	599.2	598.2
172.5°	602.9	603.7	604.5	604.4	603.3	602.2	601.1	600.0
175°	605.5	606.4	607.3	607.1	605.9	604.7	603.5	602.3
177.5°	606.5	607.1	607.8	607.6	606.7	605.7	604.7	603.8
180°	605.9	605.9	605.9	605.9	605.9	605.9	605.9	605.9

(END OF REPORT)