

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332726

Luminaire Tested: **S124DIW-S350D770U835-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332726
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S350D770U835-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 770 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4181.2 lumens
Efficiency: N/A
Efficacy: 137.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 30.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332726

CATALOG NUMBER: S124DIW-S350D770U835-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

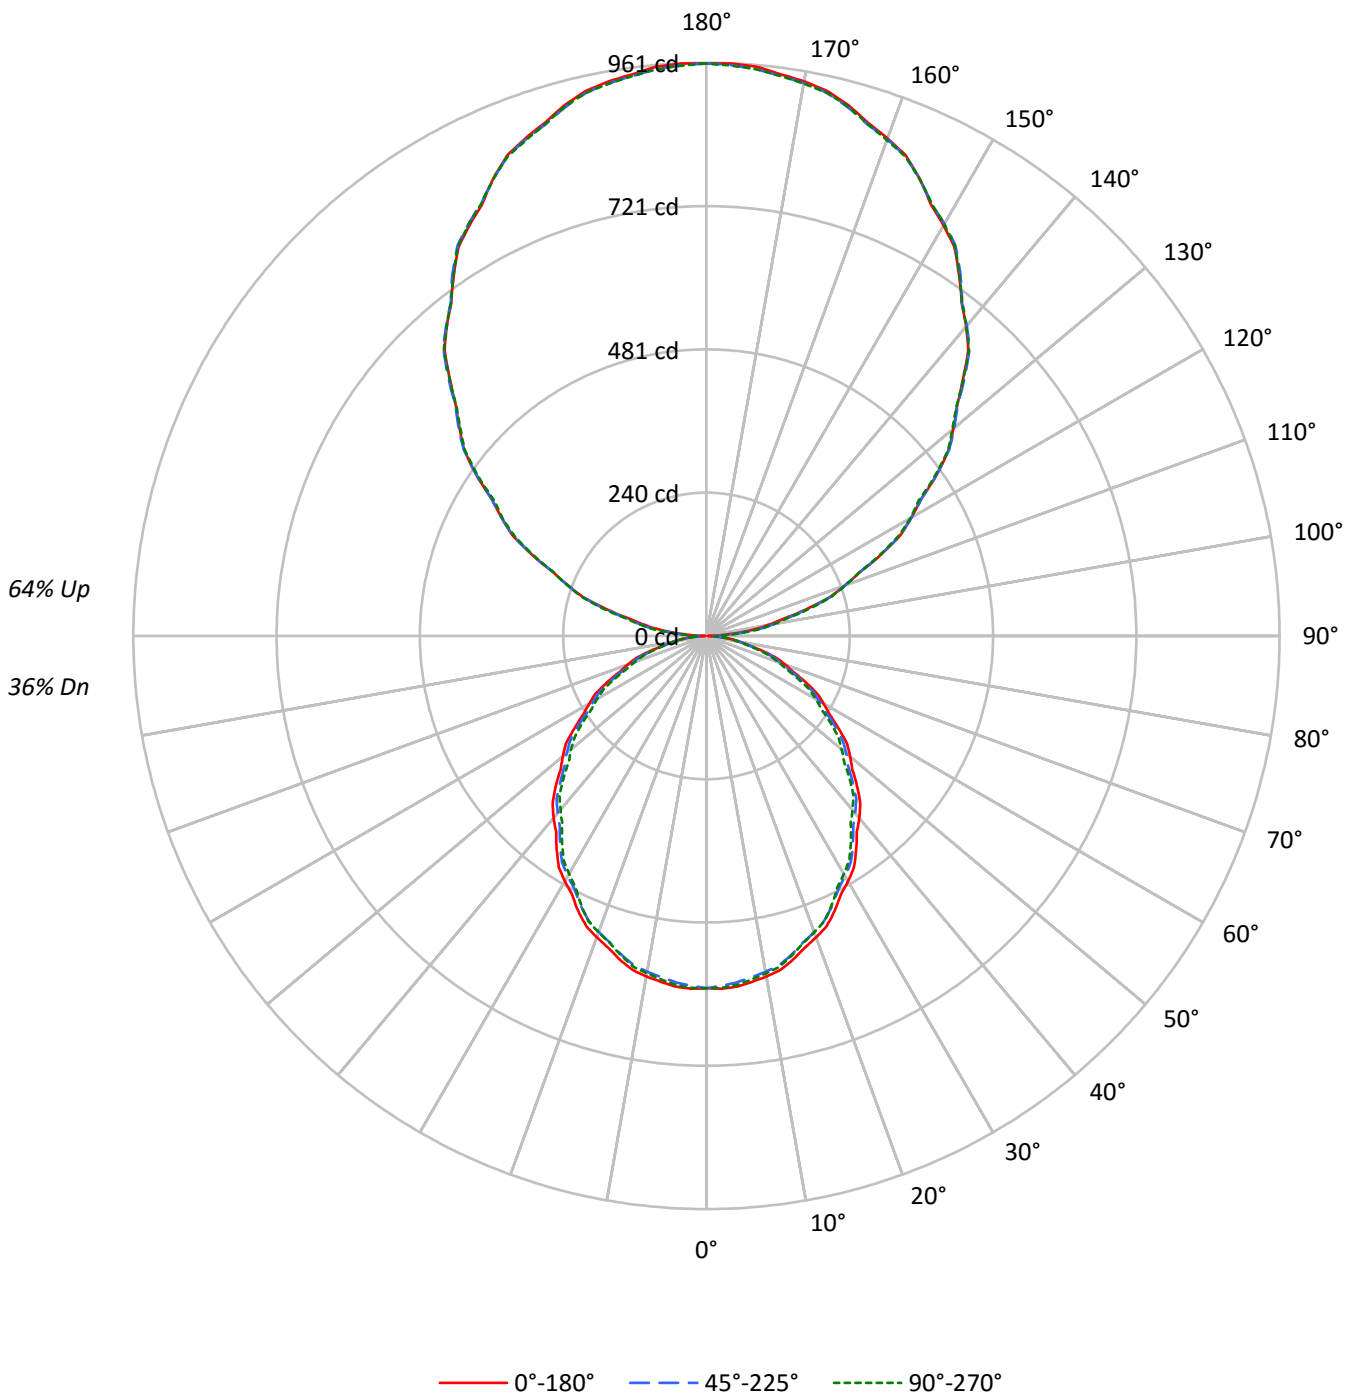



TEST NUMBER: P332726

CATALOG NUMBER: S124DIW-S350D770U835-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	44	44	44	36
1	95	90	87	83	86	82	79	76	66	64	62	52	50	49	38	37	37	30
2	86	79	73	68	78	72	67	62	58	54	51	45	43	41	34	32	31	26
3	79	69	62	56	71	63	57	52	51	47	43	40	37	34	30	28	26	22
4	72	61	54	48	65	56	49	44	45	40	37	36	32	29	27	24	23	19
5	66	54	47	41	59	50	43	38	41	35	31	32	28	25	24	22	20	16
6	61	49	41	35	55	45	38	33	36	31	27	29	25	22	22	19	17	14
7	56	44	36	31	51	40	33	28	33	28	24	26	22	20	20	17	15	13
8	52	40	32	27	47	36	30	25	30	25	21	24	20	17	18	16	14	11
9	48	36	29	24	44	33	27	22	27	22	19	22	18	16	17	14	12	10
10	45	33	26	21	41	30	24	20	25	20	17	20	17	14	16	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4769	4769	4769
5°	4783	4725	4760
10°	4753	4687	4710
15°	4695	4621	4633
20°	4619	4538	4542
25°	4532	4444	4431
30°	4426	4333	4294
35°	4315	4217	4161
40°	4200	4086	4011
45°	4080	3956	3881
50°	3947	3841	3721
55°	3804	3690	3571
60°	3660	3523	3416
65°	3500	3364	3228
70°	3319	3151	3028
75°	3041	2895	2820
80°	2706	2599	2529
85°	2371	2279	2232



TEST NUMBER: P332726

CATALOG NUMBER: S124DIW-S350D770U835-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	55.6	1.3
10°-20°	156.7	3.7
20°-30°	230.7	5.5
30°-40°	268.2	6.4
40°-50°	268.2	6.4
50°-60°	234.6	5.6
60°-70°	174.2	4.2
70°-80°	99.0	2.4
80°-90°	31.4	0.8
90°-100°	63.3	1.5
100°-110°	187.5	4.5
110°-120°	318.2	7.6
120°-130°	419.6	10.0
130°-140°	471.3	11.3
140°-150°	463.1	11.1
150°-160°	389.5	9.3
160°-170°	259.1	6.2
170°-180°	90.7	2.2
0°-30°	443.1	10.6
0°-40°	711.3	17.0
0°-60°	1214.1	29.0
0°-90°	1518.7	36.3
90°-120°	569.0	13.6
90°-150°	1923.1	46.0
90°-180°	2662.0	63.7
0°-180°	4181.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	591	591	591	591	591	
5°	590	588	583	588	587	56
15°	562	560	553	555	554	158
25°	509	505	499	499	498	234
35°	438	434	428	425	422	274
45°	357	354	346	342	340	275
55°	270	269	262	257	254	242
65°	183	181	176	172	169	181
75°	98	95	93	91	90	104
85°	26	26	25	25	24	28
90°	2	10	16	21	22	4
95°	44	51	56	58	59	50
105°	173	174	177	179	181	183
115°	324	324	322	321	321	319
125°	471	471	470	469	468	420
135°	608	612	612	611	609	470
145°	738	741	742	741	739	462
155°	846	846	845	848	845	389
165°	921	919	917	921	919	260
175°	958	955	954	958	954	91
180°	960	960	960	960	960	



TEST NUMBER: P332726

CATALOG NUMBER: S124DIW-S350D770U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	590.7	590.7	590.7	590.7	590.7	590.7	590.7	590.7	590.7	590.7	590.7
2.5°	592.2	592.0	591.7	591.5	591.2	590.6	589.7	588.8	587.9	586.9	587.8
5°	590.2	589.8	589.4	589.0	588.6	587.8	586.6	585.5	584.3	583.1	584.3
7.5°	584.8	584.3	583.9	583.5	583.1	582.2	580.9	579.7	578.4	577.1	578.0
10°	579.8	579.4	579.0	578.6	578.2	577.3	575.9	574.5	573.2	571.8	572.6
12.5°	573.4	573.0	572.6	572.1	571.7	570.8	569.3	567.9	566.4	565.0	565.9
15°	561.8	561.4	561.0	560.6	560.2	559.2	557.6	556.0	554.4	552.9	553.5
17.5°	547.9	547.4	546.9	546.4	545.8	544.8	543.3	541.8	540.3	538.8	539.2
20°	537.7	537.2	536.7	536.1	535.6	534.6	533.0	531.4	529.8	528.2	528.6
22.5°	526.7	526.0	525.3	524.6	523.9	522.8	521.2	519.7	518.1	516.5	517.1
25°	508.8	508.1	507.4	506.6	505.9	504.8	503.3	501.8	500.4	498.9	499.0
27.5°	488.4	487.6	486.9	486.1	485.4	484.3	482.9	481.6	480.2	478.8	478.6
30°	474.8	473.9	473.1	472.2	471.4	470.3	468.9	467.5	466.2	464.8	464.4
32.5°	460.4	459.6	458.8	458.1	457.3	456.2	454.8	453.3	451.9	450.4	449.9
35°	437.8	437.1	436.4	435.6	434.9	433.8	432.3	430.8	429.4	427.9	427.2
37.5°	414.1	413.4	412.7	412.1	411.4	410.3	408.7	407.1	405.5	403.9	403.1
40°	398.5	397.7	396.9	396.0	395.2	394.0	392.4	390.8	389.2	387.7	386.6
42.5°	381.9	381.4	380.9	380.4	379.9	378.7	377.0	375.2	373.5	371.8	370.5
45°	357.4	356.6	355.9	355.2	354.4	353.2	351.5	349.8	348.2	346.5	345.3
47.5°	331.7	331.2	330.7	330.2	329.7	328.7	327.1	325.5	324.0	322.4	321.1
50°	314.3	313.9	313.5	313.0	312.6	311.7	310.2	308.7	307.2	305.8	304.3
52.5°	297.3	296.7	296.2	295.7	295.2	294.2	292.6	291.1	289.5	288.0	286.7
55°	270.3	270.0	269.6	269.3	269.0	268.1	266.6	265.2	263.7	262.2	261.0
57.5°	244.5	244.2	243.8	243.5	243.1	242.2	240.7	239.3	237.8	236.4	235.2
60°	226.7	226.2	225.7	225.1	224.6	223.7	222.3	220.9	219.6	218.2	217.3
62.5°	209.3	208.9	208.4	208.0	207.5	206.6	205.1	203.7	202.2	200.8	199.9
65°	183.2	182.7	182.1	181.6	181.1	180.3	179.2	178.2	177.1	176.1	175.0
67.5°	156.9	156.4	155.9	155.4	154.9	154.2	153.2	152.2	151.2	150.1	149.1
70°	140.6	139.8	139.1	138.4	137.6	136.8	136.0	135.2	134.3	133.5	132.6
72.5°	123.2	122.4	121.7	121.0	120.2	119.5	118.8	118.2	117.5	116.8	116.1
75°	97.5	97.0	96.5	95.9	95.4	94.9	94.4	93.8	93.3	92.8	92.4
77.5°	73.0	72.8	72.5	72.3	72.1	71.7	71.3	70.8	70.3	69.9	69.7
80°	58.2	57.9	57.6	57.3	57.0	56.7	56.5	56.3	56.1	55.9	55.6
82.5°	43.8	43.7	43.5	43.4	43.2	43.1	43.1	43.1	43.0	43.0	42.9
85°	25.6	25.6	25.6	25.6	25.6	25.5	25.2	25.0	24.8	24.6	24.6
87.5°	10.3	10.6	10.8	11.1	11.4	11.6	11.8	12.0	12.2	12.4	12.6
90°	2.2	4.0	5.9	7.7	9.5	11.1	12.4	13.7	15.0	16.3	17.3
92.5°	15.9	18.0	20.0	22.1	24.2	25.7	26.6	27.5	28.5	29.4	30.0
95°	44.5	46.0	47.5	49.0	50.5	51.8	52.9	54.1	55.3	56.4	56.9
97.5°	77.8	79.0	80.2	81.3	82.5	83.8	85.2	86.5	87.9	89.2	89.8
100°	103.9	104.6	105.2	105.9	106.5	107.6	109.1	110.6	112.1	113.6	113.9
102.5°	131.2	131.5	131.7	132.0	132.3	133.1	134.4	135.8	137.1	138.5	139.0
105°	172.9	173.1	173.3	173.4	173.6	174.0	174.7	175.3	176.0	176.6	177.1
107.5°	216.7	216.9	217.1	217.3	217.5	217.7	217.8	217.9	218.0	218.1	218.5
110°	246.4	246.7	247.1	247.4	247.7	247.8	247.6	247.5	247.3	247.1	246.8



TEST NUMBER: P332726

CATALOG NUMBER: S124DIW-S350D770U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	277.3	277.3	277.4	277.5	277.5	277.4	277.1	276.8	276.5	276.2	276.2
115°	323.6	323.6	323.6	323.6	323.6	323.4	323.1	322.8	322.4	322.1	321.9
117.5°	367.2	367.4	367.5	367.6	367.8	367.7	367.5	367.3	367.0	366.8	366.2
120°	396.3	397.0	397.6	398.3	399.0	399.0	398.6	398.1	397.6	397.1	396.2
122.5°	426.6	426.9	427.1	427.4	427.7	427.7	427.5	427.2	427.0	426.8	426.2
125°	471.3	471.3	471.3	471.3	471.3	471.2	471.0	470.9	470.7	470.5	470.2
127.5°	511.8	512.3	512.8	513.3	513.8	513.9	513.6	513.4	513.1	512.9	512.5
130°	540.3	540.8	541.3	541.8	542.3	542.5	542.5	542.5	542.5	542.5	542.2
132.5°	569.4	569.8	570.1	570.5	570.9	571.0	570.8	570.7	570.6	570.4	570.1
135°	607.9	608.8	609.8	610.8	611.8	612.3	612.3	612.3	612.3	612.3	612.0
137.5°	649.7	650.2	650.6	651.1	651.6	651.9	652.2	652.4	652.7	653.0	652.5
140°	677.6	677.9	678.3	678.6	678.9	679.1	679.1	679.1	679.1	679.1	678.9
142.5°	703.1	703.5	703.8	704.1	704.5	704.6	704.4	704.3	704.2	704.0	704.0
145°	738.5	739.1	739.8	740.5	741.1	741.5	741.7	741.9	742.0	742.2	742.0
147.5°	773.5	774.3	775.1	775.9	776.7	777.0	776.9	776.7	776.6	776.5	776.3
150°	794.9	795.5	796.2	796.9	797.5	797.9	797.9	797.9	797.9	797.9	797.9
152.5°	815.1	815.5	815.9	816.3	816.7	816.9	817.0	817.2	817.3	817.4	817.8
155°	846.1	846.1	846.1	846.1	846.1	846.0	845.8	845.7	845.5	845.4	846.0
157.5°	872.2	871.9	871.6	871.3	871.0	870.9	870.8	870.8	870.8	870.7	871.2
160°	887.7	887.5	887.3	887.2	887.0	886.8	886.7	886.5	886.3	886.2	886.7
162.5°	901.9	901.5	901.0	900.6	900.2	899.9	899.7	899.6	899.4	899.2	900.1
165°	921.1	920.6	920.1	919.6	919.1	918.7	918.3	918.0	917.7	917.3	918.3
167.5°	935.7	935.1	934.4	933.7	933.0	932.6	932.7	932.7	932.7	932.8	933.8
170°	944.1	943.2	942.4	941.6	940.8	940.4	940.6	940.8	940.9	941.1	942.1
172.5°	950.0	949.3	948.6	947.9	947.2	946.9	946.9	947.0	947.0	947.0	948.2
175°	958.2	957.3	956.5	955.7	954.9	954.4	954.2	954.0	953.9	953.7	954.9
177.5°	960.8	960.2	959.5	958.9	958.2	957.9	957.9	957.9	957.9	957.9	958.8
180°	959.6	959.6	959.6	959.6	959.6	959.6	959.6	959.6	959.6	959.6	959.6



TEST NUMBER: P332726

CATALOG NUMBER: S124DIW-S350D770U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	590.7	590.7	590.7	590.7	590.7	590.7	590.7	590.7
2.5°	588.6	589.5	590.3	590.7	590.6	590.5	590.4	590.3
5°	585.5	586.6	587.8	588.2	588.0	587.8	587.6	587.4
7.5°	578.9	579.9	580.8	581.2	581.1	580.9	580.8	580.7
10°	573.5	574.3	575.2	575.5	575.3	575.0	574.8	574.6
12.5°	566.8	567.7	568.7	569.0	568.7	568.4	568.1	567.8
15°	554.1	554.7	555.4	555.5	555.2	554.9	554.6	554.3
17.5°	539.6	540.0	540.4	540.5	540.3	540.1	539.9	539.7
20°	528.9	529.2	529.5	529.6	529.3	529.1	528.9	528.7
22.5°	517.6	518.2	518.8	518.9	518.5	518.1	517.7	517.4
25°	499.1	499.2	499.3	499.2	498.7	498.3	497.9	497.5
27.5°	478.3	478.1	477.8	477.4	476.9	476.4	475.8	475.3
30°	464.0	463.6	463.1	462.7	462.1	461.6	461.1	460.6
32.5°	449.4	448.9	448.4	447.9	447.4	446.8	446.3	445.8
35°	426.4	425.7	424.9	424.3	423.8	423.3	422.7	422.2
37.5°	402.3	401.5	400.7	400.0	399.3	398.6	397.9	397.2
40°	385.6	384.5	383.5	382.7	382.1	381.6	381.1	380.6
42.5°	369.3	368.1	366.9	366.1	365.7	365.4	365.0	364.7
45°	344.2	343.0	341.9	341.1	340.8	340.5	340.2	339.9
47.5°	319.8	318.5	317.2	316.2	315.4	314.6	313.8	313.0
50°	302.8	301.4	299.9	298.8	298.2	297.6	296.9	296.3
52.5°	285.4	284.1	282.8	281.7	280.9	280.1	279.3	278.5
55°	259.7	258.4	257.2	256.2	255.6	255.0	254.3	253.7
57.5°	234.0	232.8	231.6	230.7	230.1	229.5	228.9	228.2
60°	216.3	215.4	214.4	213.7	213.2	212.6	212.1	211.6
62.5°	199.1	198.2	197.3	196.6	196.1	195.6	195.1	194.5
65°	174.0	172.9	171.9	171.1	170.6	170.0	169.5	169.0
67.5°	148.1	147.1	146.1	145.5	145.4	145.2	145.1	144.9
70°	131.8	131.0	130.1	129.5	129.2	128.9	128.6	128.3
72.5°	115.5	114.8	114.1	113.6	113.3	113.0	112.7	112.4
75°	91.9	91.5	91.1	90.8	90.7	90.6	90.5	90.4
77.5°	69.6	69.5	69.4	69.2	68.9	68.6	68.3	68.1
80°	55.4	55.2	55.0	54.9	54.7	54.6	54.5	54.4
82.5°	42.7	42.6	42.5	42.4	42.3	42.1	42.0	41.9
85°	24.6	24.6	24.6	24.6	24.5	24.4	24.2	24.1
87.5°	12.7	12.9	13.1	13.3	13.3	13.4	13.5	13.5
90°	18.3	19.3	20.3	20.9	21.3	21.6	21.9	22.3
92.5°	30.6	31.2	31.8	32.2	32.4	32.6	32.8	33.0
95°	57.4	57.9	58.4	58.6	58.6	58.6	58.6	58.6
97.5°	90.4	91.0	91.6	91.9	91.9	91.9	91.9	91.9
100°	114.2	114.5	114.9	115.0	115.0	115.0	115.0	115.0
102.5°	139.4	139.9	140.3	140.6	140.8	140.9	141.0	141.2
105°	177.6	178.1	178.6	179.1	179.6	180.1	180.6	181.1
107.5°	219.0	219.4	219.9	220.1	220.1	220.1	220.0	220.0
110°	246.5	246.2	245.8	245.9	246.4	246.9	247.4	247.9



TEST NUMBER: P332726

CATALOG NUMBER: S124DIW-S350D770U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	276.1	276.0	276.0	276.0	276.1	276.2	276.3	276.4
115°	321.8	321.6	321.4	321.3	321.1	321.0	320.8	320.6
117.5°	365.7	365.1	364.5	364.1	363.8	363.4	363.1	362.8
120°	395.4	394.6	393.8	393.5	393.9	394.2	394.5	394.8
122.5°	425.6	425.1	424.5	423.9	423.3	422.7	422.2	421.6
125°	469.9	469.6	469.2	468.9	468.6	468.2	467.9	467.6
127.5°	512.2	511.9	511.5	511.2	511.0	510.7	510.4	510.2
130°	541.9	541.5	541.2	540.7	540.1	539.4	538.7	538.1
132.5°	569.8	569.5	569.1	568.8	568.6	568.3	568.0	567.8
135°	611.6	611.3	611.0	610.6	610.1	609.6	609.1	608.6
137.5°	652.1	651.7	651.3	651.1	651.2	651.3	651.4	651.5
140°	678.8	678.6	678.4	678.3	678.1	677.9	677.8	677.6
142.5°	704.0	703.9	703.9	703.9	703.8	703.8	703.8	703.7
145°	741.9	741.7	741.5	741.2	740.7	740.2	739.7	739.2
147.5°	776.2	776.1	775.9	775.8	775.6	775.5	775.3	775.1
150°	797.9	797.9	797.9	797.8	797.6	797.4	797.3	797.1
152.5°	818.2	818.6	819.0	819.0	818.6	818.2	817.7	817.3
155°	846.7	847.3	848.0	848.0	847.3	846.7	846.0	845.4
157.5°	871.7	872.2	872.7	872.7	872.1	871.6	871.0	870.4
160°	887.2	887.7	888.2	888.0	887.2	886.3	885.5	884.7
162.5°	901.0	901.9	902.8	902.8	902.0	901.2	900.4	899.5
165°	919.3	920.3	921.3	921.5	920.8	920.1	919.5	918.8
167.5°	934.8	935.7	936.7	936.7	935.7	934.7	933.7	932.6
170°	943.1	944.1	945.1	945.0	943.8	942.7	941.5	940.4
172.5°	949.3	950.4	951.5	951.5	950.3	949.2	948.0	946.9
175°	956.0	957.2	958.3	958.3	957.2	956.0	954.9	953.7
177.5°	959.7	960.6	961.6	961.5	960.4	959.4	958.3	957.3
180°	959.6	959.6	959.6	959.6	959.6	959.6	959.6	959.6

(END OF REPORT)