

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332767

Luminaire Tested: **S124DIW-S575D1340U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332767
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S575D1340U835-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 575 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1340 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7861.4 lumens
Efficiency: N/A
Efficacy: 146.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 53.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332767

CATALOG NUMBER: S124DIW-S575D1340U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

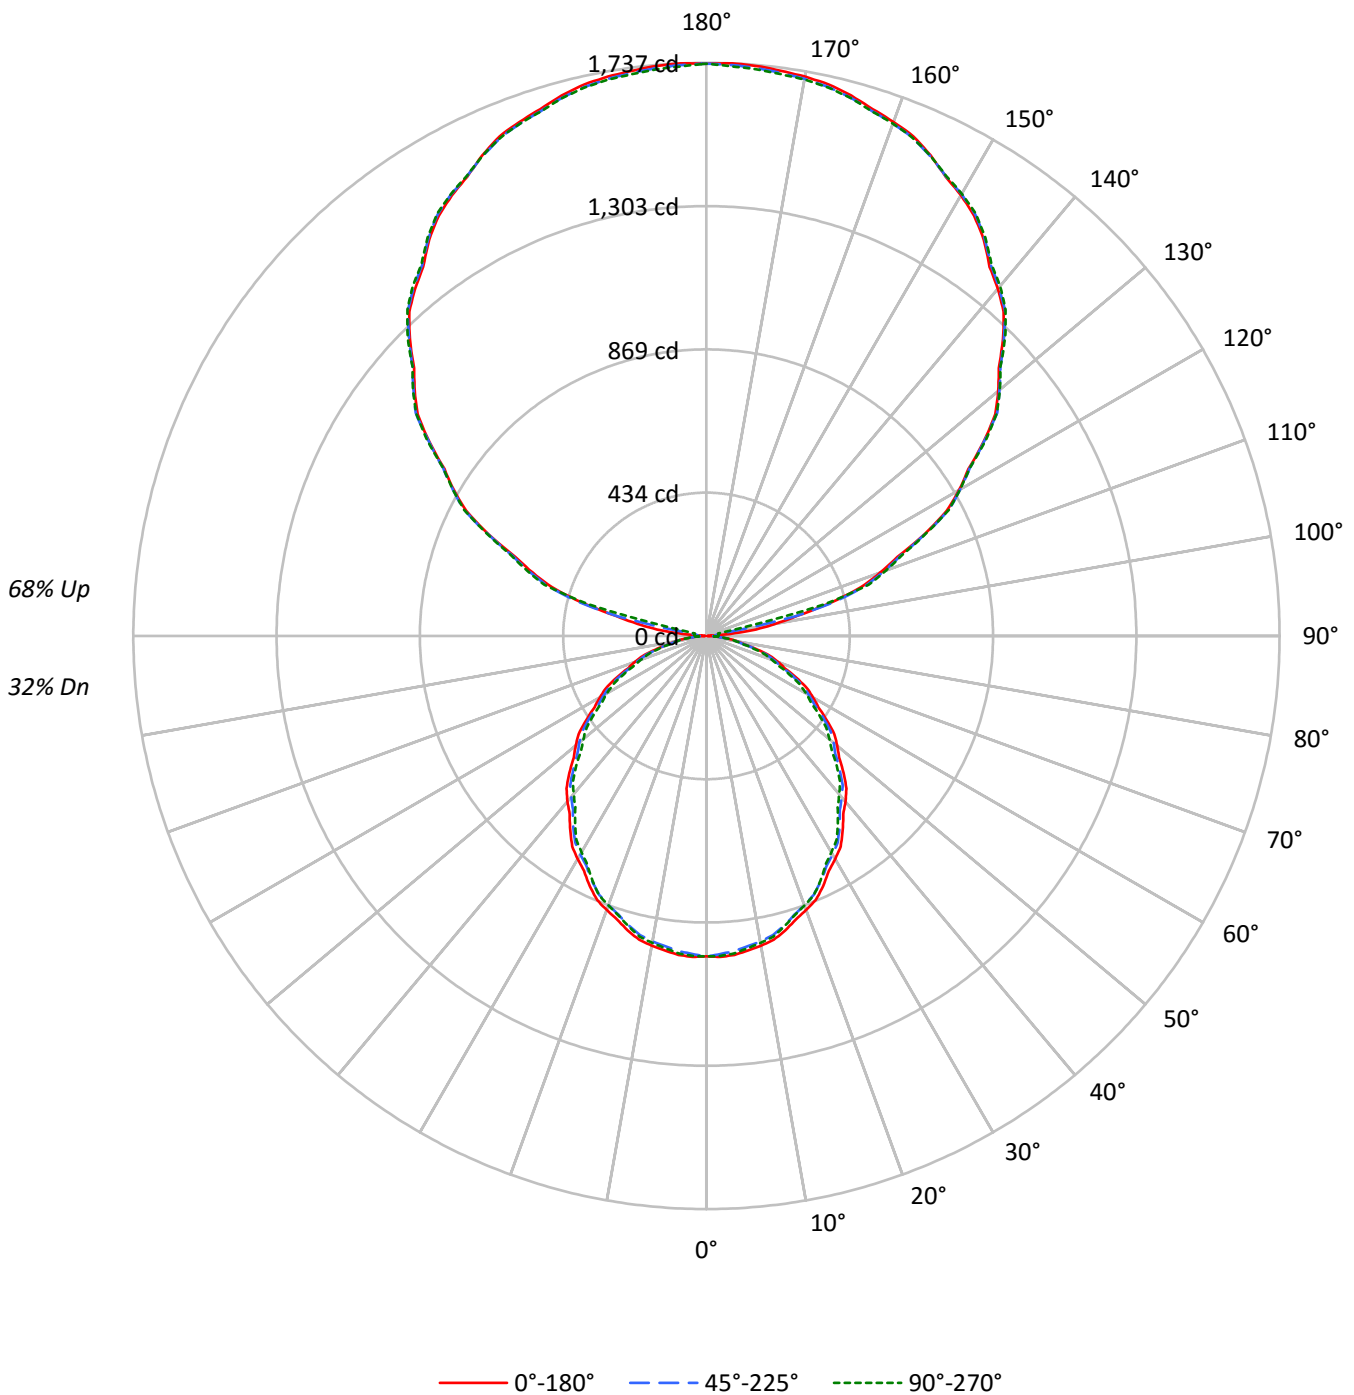



TEST NUMBER: P332767

CATALOG NUMBER: S124DIW-S575D1340U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	92	92	92	92	73	73	73	56	56	56	39	39	39	32
1	94	89	86	82	84	81	77	75	64	62	60	49	47	46	35	34	33	27
2	85	78	72	67	76	70	65	61	56	53	49	43	40	38	31	29	28	22
3	78	69	61	56	70	62	56	51	49	45	42	38	35	32	27	25	24	19
4	71	61	53	47	64	55	48	43	44	39	35	34	30	28	24	22	20	16
5	65	54	46	40	58	49	42	37	39	34	30	30	27	24	22	20	18	14
6	60	48	40	35	54	44	37	32	35	30	26	27	24	21	20	17	16	12
7	55	43	36	30	50	39	33	28	32	27	23	25	21	18	18	16	14	11
8	51	39	32	27	46	36	29	25	29	24	20	22	19	16	16	14	12	10
9	48	36	28	24	43	33	26	22	26	22	18	21	17	15	15	13	11	9
10	44	33	26	21	40	30	24	19	24	20	16	19	16	13	14	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7840	7840	7840
5°	7864	7769	7826
10°	7814	7706	7744
15°	7720	7596	7616
20°	7594	7460	7467
25°	7451	7306	7285
30°	7276	7124	7058
35°	7094	6933	6841
40°	6905	6716	6593
45°	6707	6503	6379
50°	6489	6314	6118
55°	6253	6068	5871
60°	6018	5792	5616
65°	5752	5530	5307
70°	5455	5179	4978
75°	5000	4757	4635
80°	4449	4268	4161
85°	3890	3751	3677



TEST NUMBER: P332767

CATALOG NUMBER: S124DIW-S575D1340U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	91.5	1.2
10°-20°	257.7	3.3
20°-30°	379.3	4.8
30°-40°	440.9	5.6
40°-50°	440.9	5.6
50°-60°	385.7	4.9
60°-70°	286.4	3.6
70°-80°	162.7	2.1
80°-90°	52.0	0.7
90°-100°	59.3	0.8
100°-110°	378.2	4.8
110°-120°	723.4	9.2
120°-130°	918.4	11.7
130°-140°	982.6	12.5
140°-150°	918.8	11.7
150°-160°	741.0	9.4
160°-170°	477.9	6.1
170°-180°	164.7	2.1
0°-30°	728.4	9.3
0°-40°	1169.3	14.9
0°-60°	1996.0	25.4
0°-90°	2497.1	31.8
90°-120°	1160.9	14.8
90°-150°	3980.7	50.6
90°-180°	5364.0	68.2
0°-180°	7861.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	971	971	971	971	971	
5°	970	967	959	967	966	92
15°	924	920	909	913	911	260
25°	836	831	820	821	818	385
35°	720	714	704	698	694	450
45°	588	582	570	561	559	453
55°	444	442	431	422	417	398
65°	301	297	290	282	278	298
75°	160	156	152	150	149	170
85°	42	42	40	40	40	46
90°	4	18	28	36	39	6
95°	71	30	28	36	38	92
105°	390	398	405	413	370	408
115°	729	733	732	734	734	717
125°	1025	1029	1027	1031	1032	914
135°	1271	1270	1275	1278	1280	979
145°	1466	1469	1470	1471	1474	916
155°	1607	1608	1604	1609	1606	741
165°	1695	1689	1689	1698	1688	479
175°	1734	1727	1728	1738	1724	165
180°	1734	1734	1734	1734	1734	



TEST NUMBER: P332767

CATALOG NUMBER: S124DIW-S575D1340U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	971.1	971.1	971.1	971.1	971.1	971.1	971.1	971.1	971.1	971.1	971.1
2.5°	973.6	973.2	972.8	972.4	972.0	971.0	969.5	968.0	966.4	964.9	966.3
5°	970.4	969.7	969.0	968.3	967.6	966.3	964.4	962.5	960.6	958.7	960.6
7.5°	961.3	960.6	960.0	959.3	958.6	957.2	955.1	953.0	950.8	948.7	950.3
10°	953.2	952.6	951.9	951.2	950.5	949.0	946.8	944.5	942.3	940.0	941.4
12.5°	942.7	942.0	941.3	940.6	939.9	938.4	936.0	933.6	931.2	928.8	930.3
15°	923.7	923.0	922.3	921.6	920.9	919.3	916.7	914.1	911.5	908.9	909.9
17.5°	900.8	899.9	899.1	898.2	897.3	895.7	893.2	890.8	888.3	885.9	886.5
20°	884.0	883.1	882.3	881.4	880.5	878.8	876.2	873.6	871.0	868.4	868.9
22.5°	865.9	864.8	863.7	862.5	861.4	859.5	856.9	854.3	851.7	849.1	850.1
25°	836.5	835.3	834.1	832.9	831.7	829.9	827.4	825.0	822.6	820.2	820.4
27.5°	802.9	801.7	800.4	799.2	797.9	796.2	793.9	791.7	789.4	787.2	786.8
30°	780.5	779.1	777.7	776.3	775.0	773.1	770.9	768.6	766.4	764.2	763.5
32.5°	756.8	755.6	754.3	753.1	751.9	750.0	747.7	745.3	742.9	740.5	739.7
35°	719.8	718.6	717.4	716.2	715.0	713.1	710.7	708.3	705.9	703.5	702.2
37.5°	680.7	679.6	678.5	677.4	676.3	674.5	671.9	669.3	666.7	664.1	662.8
40°	655.2	653.8	652.4	651.1	649.7	647.7	645.1	642.5	639.9	637.3	635.6
42.5°	627.8	627.0	626.2	625.3	624.5	622.6	619.8	616.9	614.0	611.2	609.2
45°	587.5	586.3	585.1	583.9	582.7	580.7	577.9	575.1	572.4	569.6	567.7
47.5°	545.3	544.5	543.7	542.8	542.0	540.3	537.8	535.2	532.6	530.1	527.9
50°	516.7	516.0	515.3	514.6	513.9	512.4	510.0	507.5	505.1	502.7	500.3
52.5°	488.7	487.9	487.0	486.2	485.4	483.7	481.1	478.6	476.0	473.4	471.3
55°	444.3	443.8	443.3	442.8	442.3	440.8	438.4	435.9	433.5	431.1	429.0
57.5°	402.0	401.4	400.8	400.2	399.6	398.2	395.8	393.4	391.0	388.6	386.6
60°	372.7	371.9	371.0	370.1	369.3	367.7	365.5	363.2	361.0	358.7	357.2
62.5°	344.1	343.4	342.6	341.9	341.2	339.6	337.3	334.9	332.5	330.1	328.7
65°	301.1	300.3	299.4	298.6	297.7	296.4	294.7	292.9	291.2	289.5	287.7
67.5°	257.9	257.1	256.3	255.5	254.7	253.5	251.8	250.2	248.5	246.8	245.2
70°	231.1	229.9	228.7	227.5	226.3	225.0	223.6	222.2	220.8	219.4	218.1
72.5°	202.5	201.3	200.1	198.8	197.6	196.5	195.4	194.3	193.2	192.0	190.9
75°	160.3	159.4	158.6	157.7	156.8	156.0	155.1	154.2	153.4	152.5	151.8
77.5°	120.0	119.6	119.2	118.9	118.5	117.9	117.1	116.4	115.6	114.9	114.6
80°	95.7	95.2	94.7	94.2	93.6	93.2	92.9	92.5	92.2	91.8	91.5
82.5°	72.1	71.8	71.6	71.3	71.1	70.9	70.9	70.8	70.7	70.7	70.4
85°	42.0	42.0	42.0	42.0	42.0	41.8	41.5	41.2	40.8	40.5	40.5
87.5°	17.0	17.5	18.0	18.5	18.9	19.4	19.7	20.0	20.3	20.6	21.0
90°	3.9	7.1	10.2	13.4	16.6	19.3	21.6	23.9	26.2	28.5	30.3
92.5°	16.3	16.5	16.7	16.9	17.0	18.3	20.6	22.9	25.2	27.5	29.2
95°	71.3	61.5	51.7	41.9	32.1	27.4	27.7	28.0	28.2	28.5	30.3
97.5°	151.5	157.6	163.7	169.8	175.9	162.9	130.7	98.6	66.4	34.2	34.4
100°	212.7	217.9	223.1	228.3	233.5	216.2	176.4	136.6	96.8	57.1	52.2
102.5°	281.2	285.0	288.8	292.6	296.4	295.7	290.5	285.4	280.2	275.0	222.1
105°	390.4	392.1	393.9	395.6	397.3	398.9	400.4	401.8	403.2	404.7	407.3
107.5°	491.8	492.7	493.6	494.4	495.3	496.7	498.7	500.6	502.6	504.6	505.8
110°	560.3	561.2	562.1	562.9	563.8	565.1	566.8	568.5	570.3	572.0	572.6



TEST NUMBER: P332767

CATALOG NUMBER: S124DIW-S575D1340U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	626.7	628.3	629.9	631.4	633.0	634.1	635.0	635.8	636.6	637.4	637.3
115°	728.9	729.8	730.7	731.5	732.4	732.7	732.4	732.1	731.8	731.5	732.1
117.5°	821.0	822.2	823.3	824.5	825.6	826.5	827.2	827.8	828.4	829.1	829.0
120°	883.3	884.4	885.6	886.8	887.9	888.3	888.1	887.8	887.5	887.2	887.8
122.5°	941.4	942.1	942.8	943.5	944.2	944.7	945.1	945.5	945.9	946.3	946.7
125°	1024.7	1025.8	1027.0	1028.1	1029.3	1029.6	1029.0	1028.4	1027.8	1027.3	1028.1
127.5°	1103.5	1103.8	1104.1	1104.4	1104.7	1105.5	1106.8	1108.1	1109.5	1110.8	1110.6
130°	1154.4	1154.7	1155.0	1155.2	1155.5	1156.1	1157.0	1157.8	1158.7	1159.6	1159.9
132.5°	1201.1	1201.6	1202.1	1202.6	1203.1	1204.0	1205.1	1206.1	1207.2	1208.3	1208.6
135°	1271.1	1270.8	1270.5	1270.3	1270.0	1270.4	1271.5	1272.7	1273.9	1275.0	1275.6
137.5°	1333.1	1333.2	1333.3	1333.5	1333.6	1334.3	1335.5	1336.8	1338.1	1339.3	1340.0
140°	1373.6	1374.2	1374.7	1375.3	1375.9	1376.5	1377.0	1377.6	1378.2	1378.8	1379.6
142.5°	1409.9	1410.9	1412.0	1413.0	1414.1	1414.7	1415.1	1415.4	1415.8	1416.1	1416.8
145°	1465.7	1466.5	1467.4	1468.3	1469.1	1469.6	1469.6	1469.6	1469.6	1469.6	1469.9
147.5°	1510.0	1511.6	1513.3	1514.9	1516.5	1517.2	1516.9	1516.6	1516.3	1516.0	1516.2
150°	1542.2	1543.4	1544.5	1545.7	1546.8	1547.2	1547.0	1546.7	1546.4	1546.1	1546.1
152.5°	1569.2	1570.1	1571.0	1571.9	1572.9	1573.1	1572.6	1572.0	1571.5	1571.0	1571.5
155°	1607.1	1607.3	1607.6	1607.9	1608.2	1607.9	1607.1	1606.2	1605.3	1604.5	1605.6
157.5°	1639.0	1638.8	1638.6	1638.4	1638.3	1637.7	1636.7	1635.7	1634.8	1633.8	1635.3
160°	1657.6	1656.8	1655.9	1655.0	1654.2	1653.6	1653.3	1653.0	1652.7	1652.5	1654.2
162.5°	1674.2	1673.1	1672.1	1671.0	1669.9	1669.2	1668.9	1668.6	1668.3	1668.0	1669.7
165°	1695.3	1693.8	1692.4	1690.9	1689.5	1688.8	1688.8	1688.8	1688.8	1688.8	1691.1
167.5°	1711.9	1710.4	1708.9	1707.4	1705.9	1705.0	1704.9	1704.7	1704.5	1704.3	1706.9
170°	1721.2	1719.5	1717.7	1716.0	1714.3	1713.6	1713.8	1714.1	1714.4	1714.7	1717.0
172.5°	1727.4	1725.7	1724.0	1722.2	1720.5	1719.8	1720.1	1720.4	1720.6	1720.9	1723.2
175°	1734.2	1732.4	1730.7	1729.0	1727.2	1726.5	1726.8	1727.1	1727.4	1727.7	1730.3
177.5°	1737.3	1735.7	1734.0	1732.4	1730.8	1730.2	1730.7	1731.2	1731.6	1732.1	1733.9
180°	1734.2	1734.2	1734.2	1734.2	1734.2	1734.2	1734.2	1734.2	1734.2	1734.2	1734.2



TEST NUMBER: P332767

CATALOG NUMBER: S124DIW-S575D1340U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	971.1	971.1	971.1	971.1	971.1	971.1	971.1	971.1
2.5°	967.7	969.1	970.5	971.1	970.9	970.8	970.7	970.5
5°	962.5	964.4	966.3	967.1	966.7	966.4	966.0	965.7
7.5°	951.8	953.3	954.8	955.5	955.3	955.1	954.9	954.6
10°	942.8	944.2	945.6	946.1	945.7	945.4	945.0	944.7
12.5°	931.9	933.4	934.9	935.4	934.9	934.4	934.0	933.5
15°	911.0	912.0	913.0	913.3	912.8	912.3	911.7	911.2
17.5°	887.2	887.8	888.5	888.6	888.3	887.9	887.6	887.3
20°	869.5	870.0	870.5	870.6	870.2	869.9	869.6	869.2
22.5°	851.0	851.9	852.9	853.0	852.4	851.8	851.2	850.5
25°	820.5	820.7	820.9	820.6	819.9	819.2	818.5	817.8
27.5°	786.4	785.9	785.5	784.9	784.0	783.2	782.3	781.4
30°	762.8	762.1	761.4	760.6	759.7	758.9	758.0	757.1
32.5°	738.8	738.0	737.2	736.3	735.5	734.6	733.7	732.9
35°	701.0	699.8	698.6	697.6	696.7	695.8	695.0	694.1
37.5°	661.5	660.1	658.8	657.6	656.5	655.3	654.2	653.0
40°	633.9	632.1	630.4	629.1	628.2	627.4	626.5	625.6
42.5°	607.2	605.1	603.1	601.8	601.3	600.7	600.1	599.5
45°	565.8	563.9	562.0	560.8	560.3	559.8	559.2	558.7
47.5°	525.8	523.6	521.5	519.8	518.5	517.1	515.8	514.5
50°	497.8	495.4	493.0	491.3	490.2	489.2	488.2	487.1
52.5°	469.1	467.0	464.9	463.1	461.8	460.5	459.2	457.9
55°	427.0	424.9	422.8	421.2	420.2	419.2	418.1	417.1
57.5°	384.7	382.7	380.7	379.2	378.2	377.2	376.2	375.2
60°	355.6	354.1	352.5	351.3	350.4	349.6	348.7	347.8
62.5°	327.3	325.8	324.4	323.3	322.4	321.6	320.7	319.8
65°	286.0	284.3	282.6	281.3	280.4	279.5	278.7	277.8
67.5°	243.5	241.9	240.2	239.2	239.0	238.8	238.5	238.3
70°	216.7	215.3	213.9	213.0	212.4	211.9	211.4	210.9
72.5°	189.8	188.7	187.6	186.8	186.3	185.8	185.3	184.7
75°	151.1	150.4	149.8	149.3	149.1	149.0	148.8	148.6
77.5°	114.4	114.2	114.0	113.7	113.2	112.8	112.3	111.9
80°	91.1	90.8	90.4	90.2	90.0	89.8	89.7	89.5
82.5°	70.2	70.0	69.8	69.6	69.5	69.3	69.1	68.9
85°	40.5	40.5	40.5	40.4	40.2	40.0	39.9	39.7
87.5°	21.3	21.7	22.0	22.3	22.4	22.5	22.6	22.7
90°	32.0	33.7	35.5	36.6	37.2	37.8	38.3	38.9
92.5°	31.0	32.7	34.4	35.3	35.5	35.6	35.7	35.8
95°	32.0	33.7	35.5	36.5	36.7	37.0	37.3	37.6
97.5°	34.6	34.8	34.9	35.2	35.5	35.7	36.0	36.3
100°	47.3	42.4	37.5	35.2	35.5	35.7	36.0	36.3
102.5°	169.3	116.4	63.5	37.1	37.2	37.2	37.3	37.4
105°	409.9	412.5	415.1	411.2	400.8	390.4	380.0	369.7
107.5°	507.1	508.4	509.6	510.8	511.9	513.0	514.1	515.2
110°	573.2	573.7	574.3	575.0	575.9	576.8	577.6	578.5



TEST NUMBER: P332767

CATALOG NUMBER: S124DIW-S575D1340U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	637.1	637.0	636.9	637.4	638.5	639.6	640.7	641.8
115°	732.7	733.3	733.8	734.1	734.1	734.1	734.1	734.1
117.5°	828.8	828.7	828.6	828.5	828.4	828.3	828.2	828.0
120°	888.3	888.9	889.5	889.5	888.9	888.3	887.8	887.2
122.5°	947.0	947.4	947.7	947.6	947.0	946.4	945.9	945.3
125°	1029.0	1029.9	1030.7	1031.3	1031.6	1031.9	1032.2	1032.5
127.5°	1110.5	1110.3	1110.1	1109.9	1109.7	1109.4	1109.2	1109.0
130°	1160.1	1160.4	1160.7	1160.9	1160.9	1160.9	1160.9	1160.9
132.5°	1208.9	1209.2	1209.5	1209.5	1209.3	1209.1	1208.8	1208.6
135°	1276.2	1276.7	1277.3	1277.9	1278.5	1279.0	1279.6	1280.2
137.5°	1340.6	1341.2	1341.9	1342.1	1341.9	1341.8	1341.6	1341.4
140°	1380.5	1381.4	1382.2	1382.8	1383.1	1383.4	1383.7	1384.0
142.5°	1417.4	1418.0	1418.7	1419.0	1419.1	1419.1	1419.2	1419.2
145°	1470.1	1470.4	1470.7	1471.2	1471.7	1472.3	1472.9	1473.5
147.5°	1516.5	1516.7	1516.9	1517.2	1517.5	1517.8	1518.0	1518.3
150°	1546.1	1546.1	1546.1	1546.2	1546.5	1546.8	1547.1	1547.4
152.5°	1571.9	1572.4	1572.8	1573.0	1572.8	1572.6	1572.5	1572.3
155°	1606.8	1607.9	1609.1	1609.2	1608.4	1607.5	1606.6	1605.8
157.5°	1636.8	1638.3	1639.8	1639.8	1638.3	1636.8	1635.3	1633.8
160°	1655.9	1657.6	1659.4	1659.4	1657.6	1655.9	1654.2	1652.5
162.5°	1671.5	1673.2	1674.9	1674.8	1672.9	1670.9	1668.9	1667.0
165°	1693.4	1695.7	1698.0	1697.8	1695.3	1692.7	1690.1	1687.5
167.5°	1709.4	1711.9	1714.5	1714.3	1711.4	1708.5	1705.7	1702.8
170°	1719.3	1721.6	1723.9	1723.6	1720.8	1717.9	1715.0	1712.1
172.5°	1725.5	1727.9	1730.2	1729.8	1726.6	1723.5	1720.4	1717.3
175°	1732.9	1735.5	1738.1	1737.6	1734.2	1730.7	1727.2	1723.8
177.5°	1735.8	1737.6	1739.5	1739.0	1736.2	1733.5	1730.7	1727.9
180°	1734.2	1734.2	1734.2	1734.2	1734.2	1734.2	1734.2	1734.2

(END OF REPORT)