

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332791

Luminaire Tested: **S124DIW-S795D1050U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332791
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S795D1050U835-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1050 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7600.6 lumens
Efficiency: N/A
Efficacy: 144.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 52.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332791

CATALOG NUMBER: S124DIW-S795D1050U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

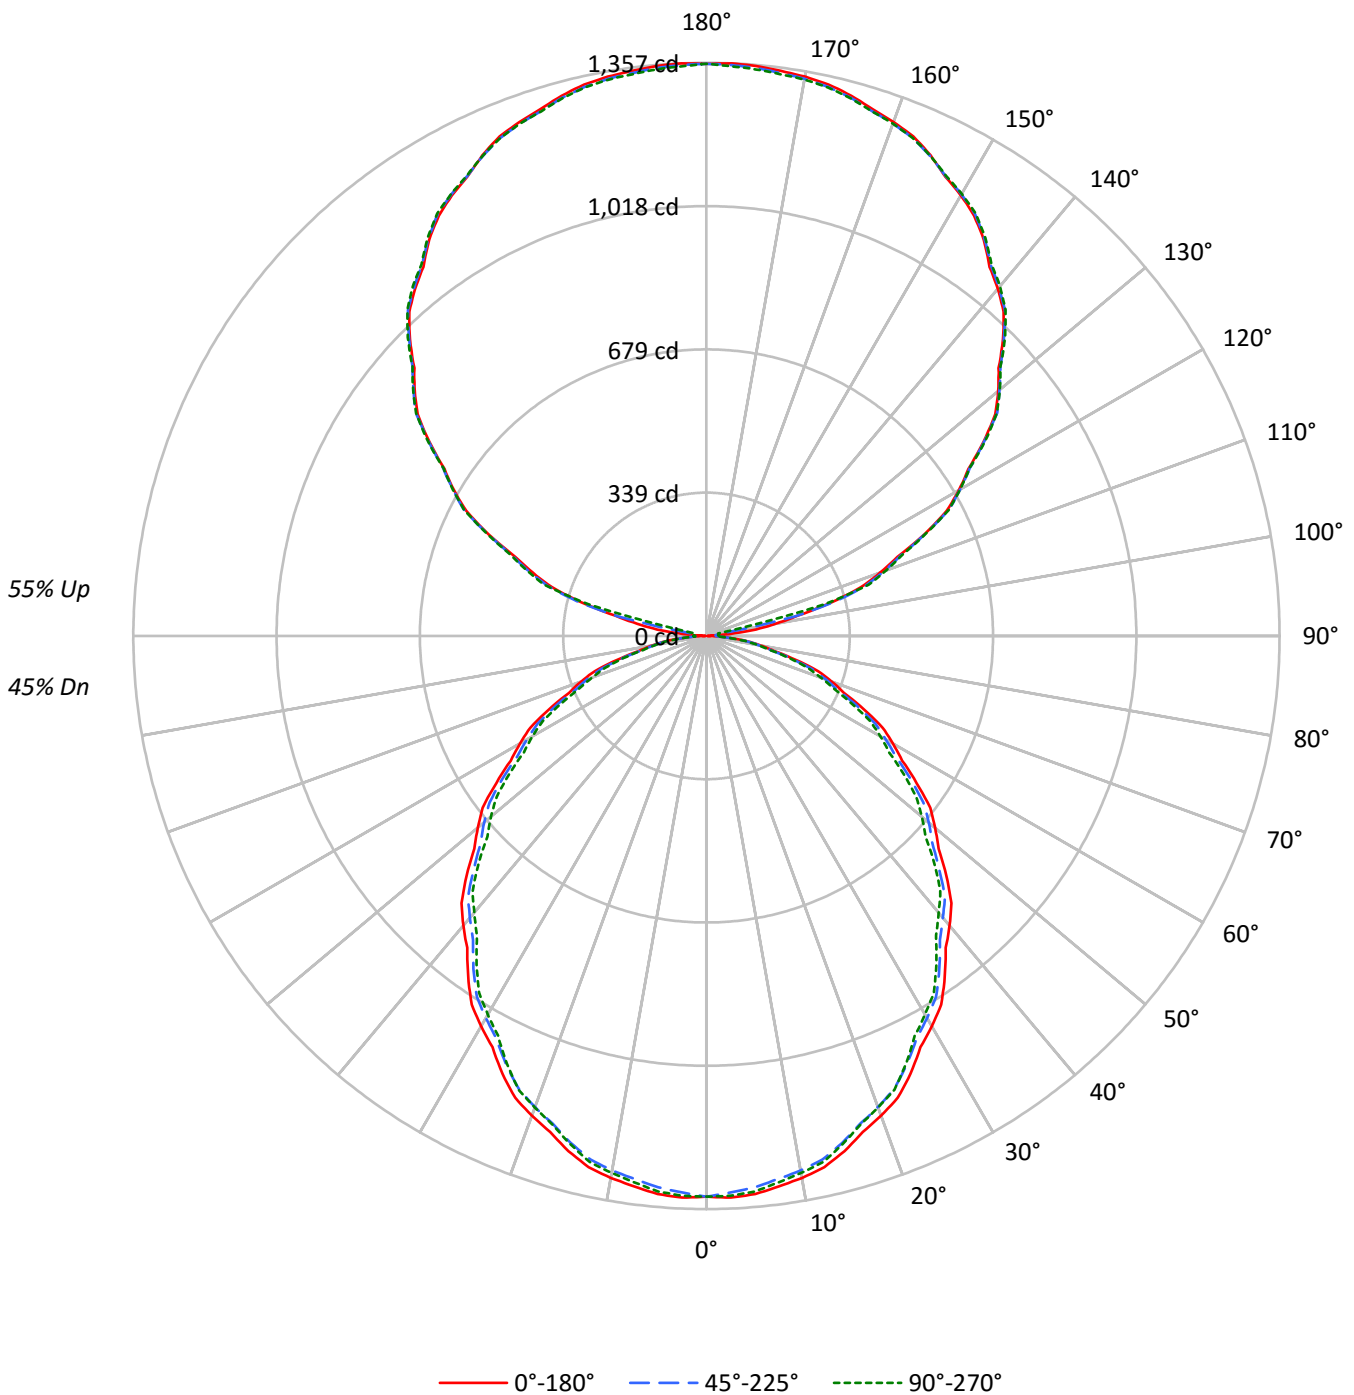



TEST NUMBER: P332791

CATALOG NUMBER: S124DIW-S795D1050U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	45
1	97	92	88	85	88	85	81	78	70	68	66	57	56	54	45	44	43	38
2	88	81	74	69	80	74	69	64	62	58	55	50	48	45	40	38	36	32
3	80	71	64	58	73	65	59	54	54	50	46	45	41	38	35	33	31	27
4	73	63	55	49	67	58	51	45	48	43	39	40	36	33	32	29	27	23
5	67	56	48	42	61	51	44	39	43	38	34	36	32	28	28	26	23	20
6	62	50	42	36	57	46	39	34	39	33	29	32	28	25	26	23	20	17
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	24	21	18	16
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	16	14
9	49	37	30	25	45	35	28	23	29	24	20	25	20	18	20	17	15	13
10	46	34	27	22	42	32	25	21	27	22	18	23	19	16	19	16	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10717	10717	10717
5°	10749	10619	10697
10°	10681	10533	10585
15°	10552	10384	10410
20°	10381	10198	10207
25°	10185	9986	9958
30°	9945	9737	9648
35°	9697	9477	9351
40°	9438	9180	9013
45°	9169	8889	8719
50°	8871	8629	8363
55°	8549	8294	8024
60°	8226	7918	7677
65°	7862	7559	7253
70°	7456	7081	6805
75°	6834	6503	6338
80°	6081	5835	5686
85°	5317	5122	5020



TEST NUMBER: P332791

CATALOG NUMBER: S124DIW-S795D1050U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	125.0	1.6
10°-20°	352.2	4.6
20°-30°	518.4	6.8
30°-40°	602.7	7.9
40°-50°	602.7	7.9
50°-60°	527.2	6.9
60°-70°	391.5	5.2
70°-80°	222.4	2.9
80°-90°	68.1	0.9
90°-100°	46.3	0.6
100°-110°	295.4	3.9
110°-120°	565.1	7.4
120°-130°	717.4	9.4
130°-140°	767.5	10.1
140°-150°	717.7	9.4
150°-160°	578.8	7.6
160°-170°	373.3	4.9
170°-180°	128.7	1.7
0°-30°	995.7	13.1
0°-40°	1598.4	21.0
0°-60°	2728.3	35.9
0°-90°	3410.4	44.9
90°-120°	906.8	11.9
90°-150°	3109.5	40.9
90°-180°	4190.0	55.1
0°-180°	7600.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1328	1328	1328	1328	1328	
5°	1326	1322	1310	1321	1320	126
15°	1263	1258	1242	1248	1246	356
25°	1143	1136	1121	1122	1118	526
35°	984	976	962	954	949	615
45°	803	795	779	767	764	619
55°	607	604	589	577	570	544
65°	412	406	396	385	380	407
75°	219	214	208	204	203	233
85°	57	57	55	55	54	63
90°	3	14	22	28	30	6
95°	56	23	22	28	29	72
105°	305	311	316	323	289	319
115°	569	572	571	573	574	560
125°	800	804	802	805	806	714
135°	993	992	996	998	1000	765
145°	1145	1148	1148	1149	1151	715
155°	1255	1256	1253	1257	1254	579
165°	1324	1319	1319	1326	1318	374
175°	1355	1349	1350	1358	1346	129
180°	1355	1355	1355	1355	1355	



TEST NUMBER: P332791

CATALOG NUMBER: S124DIW-S795D1050U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5
2.5°	1330.9	1330.3	1329.7	1329.2	1328.6	1327.3	1325.2	1323.1	1321.0	1319.0	1320.8
5°	1326.4	1325.5	1324.5	1323.6	1322.6	1320.8	1318.2	1315.6	1313.0	1310.4	1313.0
7.5°	1314.1	1313.1	1312.2	1311.2	1310.3	1308.4	1305.5	1302.6	1299.7	1296.8	1298.9
10°	1303.0	1302.1	1301.1	1300.2	1299.2	1297.2	1294.1	1291.1	1288.0	1284.9	1286.8
12.5°	1288.5	1287.6	1286.6	1285.7	1284.8	1282.6	1279.4	1276.1	1272.9	1269.6	1271.7
15°	1262.6	1261.6	1260.7	1259.7	1258.8	1256.6	1253.0	1249.5	1245.9	1242.4	1243.8
17.5°	1231.3	1230.1	1228.9	1227.8	1226.6	1224.3	1221.0	1217.6	1214.2	1210.9	1211.8
20°	1208.3	1207.1	1206.0	1204.8	1203.6	1201.2	1197.7	1194.1	1190.6	1187.1	1187.8
22.5°	1183.7	1182.1	1180.5	1179.0	1177.4	1174.9	1171.3	1167.8	1164.2	1160.7	1162.0
25°	1143.4	1141.8	1140.1	1138.5	1136.8	1134.3	1131.0	1127.7	1124.4	1121.1	1121.3
27.5°	1097.5	1095.8	1094.1	1092.4	1090.7	1088.3	1085.2	1082.2	1079.1	1076.0	1075.4
30°	1066.9	1065.0	1063.1	1061.2	1059.3	1056.8	1053.7	1050.7	1047.6	1044.5	1043.6
32.5°	1034.5	1032.8	1031.1	1029.4	1027.7	1025.2	1022.0	1018.7	1015.5	1012.2	1011.1
35°	983.9	982.2	980.6	978.9	977.3	974.8	971.5	968.2	964.9	961.6	959.9
37.5°	930.5	929.0	927.5	926.0	924.4	921.9	918.4	914.8	911.3	907.7	905.9
40°	895.6	893.7	891.8	889.9	888.0	885.3	881.8	878.2	874.7	871.1	868.8
42.5°	858.2	857.0	855.9	854.8	853.6	851.1	847.2	843.3	839.3	835.4	832.7
45°	803.1	801.4	799.8	798.1	796.5	793.7	790.0	786.2	782.4	778.6	776.0
47.5°	745.4	744.3	743.2	742.0	740.9	738.6	735.1	731.6	728.1	724.6	721.6
50°	706.3	705.3	704.4	703.4	702.5	700.4	697.1	693.8	690.4	687.1	683.8
52.5°	668.0	666.9	665.7	664.6	663.4	661.1	657.6	654.1	650.6	647.1	644.2
55°	607.4	606.6	605.9	605.2	604.5	602.5	599.2	595.9	592.6	589.3	586.4
57.5°	549.5	548.7	547.9	547.1	546.3	544.2	541.0	537.7	534.5	531.2	528.5
60°	509.5	508.3	507.1	506.0	504.8	502.6	499.6	496.5	493.4	490.4	488.2
62.5°	470.4	469.4	468.4	467.4	466.4	464.3	461.0	457.7	454.5	451.2	449.3
65°	411.6	410.5	409.3	408.1	406.9	405.1	402.8	400.4	398.0	395.7	393.3
67.5°	352.5	351.4	350.3	349.2	348.2	346.5	344.2	341.9	339.7	337.4	335.1
70°	315.9	314.3	312.6	310.9	309.3	307.5	305.6	303.7	301.8	300.0	298.1
72.5°	276.8	275.1	273.5	271.8	270.1	268.6	267.1	265.5	264.0	262.5	261.0
75°	219.1	217.9	216.8	215.6	214.4	213.2	212.0	210.8	209.7	208.5	207.5
77.5°	164.0	163.5	163.0	162.5	161.9	161.2	160.1	159.1	158.0	157.0	156.7
80°	130.8	130.1	129.4	128.7	128.0	127.4	126.9	126.5	126.0	125.5	125.0
82.5°	98.5	98.2	97.8	97.5	97.2	97.0	96.9	96.8	96.7	96.6	96.3
85°	57.4	57.4	57.4	57.4	57.4	57.2	56.7	56.3	55.8	55.3	55.3
87.5°	22.7	23.0	23.3	23.7	24.0	24.2	24.4	24.5	24.7	24.9	25.2
90°	3.0	5.5	8.0	10.5	12.9	15.1	16.9	18.7	20.5	22.3	23.6
92.5°	12.8	12.9	13.0	13.2	13.3	14.3	16.1	17.9	19.7	21.5	22.8
95°	55.7	48.1	40.4	32.8	25.1	21.4	21.6	21.8	22.1	22.3	23.6
97.5°	118.3	123.1	127.9	132.7	137.4	127.3	102.1	77.0	51.9	26.7	26.9
100°	166.2	170.2	174.3	178.3	182.4	168.9	137.8	106.7	75.7	44.6	40.8
102.5°	219.7	222.6	225.6	228.6	231.5	231.0	227.0	222.9	218.8	214.8	173.5
105°	305.0	306.3	307.7	309.0	310.4	311.6	312.7	313.9	315.0	316.1	318.1
107.5°	384.2	384.9	385.5	386.2	386.9	388.0	389.5	391.1	392.6	394.1	395.1
110°	437.7	438.4	439.0	439.7	440.4	441.4	442.8	444.1	445.5	446.8	447.3



TEST NUMBER: P332791

CATALOG NUMBER: S124DIW-S795D1050U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	489.6	490.8	492.0	493.2	494.4	495.4	496.0	496.6	497.2	497.9	497.8
115°	569.4	570.1	570.8	571.4	572.1	572.3	572.1	571.9	571.7	571.4	571.9
117.5°	641.3	642.2	643.1	644.0	644.9	645.6	646.1	646.6	647.1	647.6	647.5
120°	690.0	690.9	691.8	692.7	693.6	693.9	693.7	693.5	693.2	693.0	693.5
122.5°	735.4	735.9	736.4	737.0	737.5	738.0	738.3	738.6	738.9	739.2	739.5
125°	800.4	801.3	802.2	803.1	804.0	804.2	803.8	803.3	802.9	802.4	803.1
127.5°	862.0	862.2	862.5	862.7	862.9	863.5	864.6	865.6	866.6	867.7	867.6
130°	901.7	902.0	902.2	902.4	902.6	903.1	903.8	904.4	905.1	905.8	906.0
132.5°	938.2	938.6	939.0	939.4	939.8	940.5	941.3	942.2	943.0	943.9	944.1
135°	992.9	992.7	992.5	992.2	992.0	992.4	993.3	994.2	995.1	996.0	996.4
137.5°	1041.3	1041.4	1041.5	1041.6	1041.7	1042.2	1043.2	1044.2	1045.2	1046.2	1046.7
140°	1073.0	1073.4	1073.9	1074.3	1074.8	1075.2	1075.7	1076.1	1076.6	1077.0	1077.7
142.5°	1101.3	1102.1	1102.9	1103.8	1104.6	1105.1	1105.4	1105.6	1105.9	1106.2	1106.7
145°	1144.9	1145.6	1146.2	1146.9	1147.6	1147.9	1147.9	1147.9	1147.9	1147.9	1148.2
147.5°	1179.5	1180.8	1182.1	1183.3	1184.6	1185.1	1184.9	1184.7	1184.4	1184.2	1184.4
150°	1204.7	1205.6	1206.5	1207.4	1208.3	1208.6	1208.4	1208.2	1207.9	1207.7	1207.7
152.5°	1225.7	1226.5	1227.2	1227.9	1228.6	1228.8	1228.4	1228.0	1227.6	1227.2	1227.5
155°	1255.3	1255.6	1255.8	1256.0	1256.2	1256.0	1255.3	1254.7	1254.0	1253.3	1254.2
157.5°	1280.3	1280.1	1280.0	1279.8	1279.7	1279.3	1278.5	1277.7	1277.0	1276.2	1277.4
160°	1294.8	1294.2	1293.5	1292.8	1292.1	1291.7	1291.5	1291.2	1291.0	1290.8	1292.1
162.5°	1307.8	1307.0	1306.1	1305.2	1304.4	1303.8	1303.6	1303.4	1303.2	1302.9	1304.3
165°	1324.2	1323.1	1322.0	1320.8	1319.7	1319.2	1319.2	1319.2	1319.2	1319.2	1321.0
167.5°	1337.2	1336.0	1334.9	1333.7	1332.5	1331.9	1331.7	1331.6	1331.5	1331.3	1333.3
170°	1344.5	1343.1	1341.8	1340.4	1339.1	1338.5	1338.7	1339.0	1339.2	1339.4	1341.2
172.5°	1349.3	1348.0	1346.6	1345.3	1343.9	1343.4	1343.6	1343.8	1344.1	1344.3	1346.1
175°	1354.6	1353.3	1351.9	1350.6	1349.2	1348.7	1348.9	1349.1	1349.3	1349.6	1351.6
177.5°	1357.0	1355.8	1354.5	1353.3	1352.0	1351.6	1351.9	1352.3	1352.6	1353.0	1354.4
180°	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6



TEST NUMBER: P332791

CATALOG NUMBER: S124DIW-S795D1050U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5
2.5°	1322.7	1324.6	1326.5	1327.4	1327.2	1327.0	1326.8	1326.6
5°	1315.6	1318.2	1320.8	1321.9	1321.4	1321.0	1320.5	1320.0
7.5°	1301.0	1303.1	1305.1	1306.0	1305.8	1305.5	1305.2	1304.9
10°	1288.7	1290.6	1292.5	1293.2	1292.7	1292.2	1291.8	1291.3
12.5°	1273.8	1275.8	1277.9	1278.6	1278.0	1277.3	1276.6	1276.0
15°	1245.2	1246.6	1248.0	1248.4	1247.7	1247.0	1246.3	1245.6
17.5°	1212.7	1213.6	1214.5	1214.7	1214.2	1213.7	1213.3	1212.8
20°	1188.5	1189.2	1189.9	1190.0	1189.5	1189.1	1188.6	1188.1
22.5°	1163.2	1164.5	1165.8	1166.0	1165.1	1164.3	1163.4	1162.6
25°	1121.6	1121.8	1122.1	1121.7	1120.8	1119.8	1118.9	1117.9
27.5°	1074.9	1074.3	1073.7	1072.9	1071.7	1070.5	1069.3	1068.1
30°	1042.6	1041.7	1040.7	1039.7	1038.5	1037.3	1036.1	1035.0
32.5°	1009.9	1008.8	1007.7	1006.5	1005.3	1004.1	1002.9	1001.8
35°	958.3	956.6	954.9	953.5	952.3	951.2	950.0	948.8
37.5°	904.1	902.3	900.6	898.9	897.3	895.8	894.2	892.6
40°	866.4	864.1	861.7	859.9	858.7	857.6	856.4	855.2
42.5°	829.9	827.2	824.4	822.7	821.9	821.1	820.3	819.5
45°	773.4	770.8	768.2	766.6	765.8	765.1	764.4	763.7
47.5°	718.7	715.8	712.8	710.5	708.7	706.9	705.1	703.3
50°	680.5	677.2	673.9	671.5	670.1	668.7	667.3	665.9
52.5°	641.3	638.3	635.4	633.1	631.3	629.5	627.7	625.9
55°	583.6	580.8	577.9	575.8	574.4	573.0	571.5	570.1
57.5°	525.8	523.1	520.4	518.4	517.0	515.6	514.3	512.9
60°	486.1	484.0	481.8	480.2	479.0	477.8	476.6	475.5
62.5°	447.3	445.4	443.5	441.9	440.7	439.5	438.4	437.2
65°	391.0	388.6	386.2	384.5	383.3	382.1	380.9	379.7
67.5°	332.9	330.6	328.3	327.0	326.7	326.4	326.0	325.7
70°	296.2	294.3	292.4	291.1	290.4	289.7	289.0	288.3
72.5°	259.5	258.0	256.5	255.4	254.6	253.9	253.2	252.5
75°	206.6	205.6	204.7	204.1	203.9	203.6	203.4	203.2
77.5°	156.4	156.1	155.9	155.4	154.8	154.2	153.6	153.0
80°	124.6	124.1	123.6	123.3	123.0	122.8	122.6	122.3
82.5°	96.0	95.7	95.4	95.2	95.0	94.7	94.5	94.2
85°	55.3	55.3	55.3	55.2	55.0	54.7	54.5	54.2
87.5°	25.4	25.7	26.0	26.1	26.2	26.3	26.4	26.5
90°	25.0	26.3	27.7	28.6	29.0	29.5	29.9	30.4
92.5°	24.2	25.5	26.9	27.6	27.7	27.8	27.9	28.0
95°	25.0	26.3	27.7	28.5	28.7	28.9	29.2	29.4
97.5°	27.0	27.2	27.3	27.5	27.7	27.9	28.1	28.4
100°	36.9	33.1	29.3	27.5	27.7	27.9	28.1	28.4
102.5°	132.2	90.9	49.6	29.0	29.0	29.1	29.1	29.2
105°	320.2	322.2	324.2	321.2	313.1	305.0	296.9	288.8
107.5°	396.1	397.1	398.1	399.0	399.9	400.7	401.6	402.4
110°	447.7	448.2	448.6	449.2	449.9	450.5	451.2	451.9



TEST NUMBER: P332791

CATALOG NUMBER: S124DIW-S795D1050U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	497.7	497.6	497.5	497.9	498.8	499.6	500.5	501.3
115°	572.3	572.8	573.2	573.5	573.5	573.5	573.5	573.5
117.5°	647.4	647.4	647.3	647.2	647.1	647.0	646.9	646.8
120°	693.9	694.4	694.8	694.8	694.4	693.9	693.5	693.0
122.5°	739.8	740.0	740.3	740.2	739.8	739.3	738.9	738.4
125°	803.8	804.5	805.1	805.6	805.8	806.0	806.3	806.5
127.5°	867.4	867.3	867.1	867.0	866.8	866.6	866.4	866.3
130°	906.2	906.5	906.7	906.8	906.8	906.8	906.8	906.8
132.5°	944.3	944.6	944.8	944.8	944.6	944.4	944.3	944.1
135°	996.9	997.3	997.8	998.2	998.7	999.1	999.6	1000.0
137.5°	1047.2	1047.7	1048.2	1048.4	1048.2	1048.1	1048.0	1047.8
140°	1078.4	1079.0	1079.7	1080.2	1080.4	1080.6	1080.8	1081.1
142.5°	1107.2	1107.7	1108.2	1108.4	1108.5	1108.5	1108.6	1108.6
145°	1148.4	1148.6	1148.8	1149.2	1149.6	1150.1	1150.5	1151.0
147.5°	1184.6	1184.7	1184.9	1185.1	1185.4	1185.6	1185.8	1186.0
150°	1207.7	1207.7	1207.7	1207.8	1208.0	1208.3	1208.5	1208.7
152.5°	1227.9	1228.2	1228.6	1228.7	1228.6	1228.4	1228.3	1228.2
155°	1255.1	1256.0	1256.9	1257.0	1256.3	1255.7	1255.0	1254.3
157.5°	1278.5	1279.7	1280.9	1280.9	1279.7	1278.5	1277.4	1276.2
160°	1293.5	1294.8	1296.2	1296.2	1294.8	1293.5	1292.1	1290.8
162.5°	1305.6	1307.0	1308.3	1308.3	1306.7	1305.2	1303.7	1302.1
165°	1322.8	1324.6	1326.4	1326.2	1324.2	1322.2	1320.2	1318.1
167.5°	1335.3	1337.3	1339.2	1339.1	1336.9	1334.6	1332.4	1330.1
170°	1343.0	1344.8	1346.6	1346.4	1344.1	1341.9	1339.6	1337.4
172.5°	1347.9	1349.7	1351.5	1351.2	1348.7	1346.3	1343.9	1341.4
175°	1353.6	1355.6	1357.7	1357.3	1354.6	1351.9	1349.2	1346.5
177.5°	1355.9	1357.3	1358.8	1358.4	1356.2	1354.1	1351.9	1349.8
180°	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6

(END OF REPORT)