

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332779

Luminaire Tested: **S124DIW-S795D470U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332779
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S795D470U835-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 470 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5282.5 lumens
Efficiency: N/A
Efficacy: 140.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 37.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332779

CATALOG NUMBER: S124DIW-S795D470U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

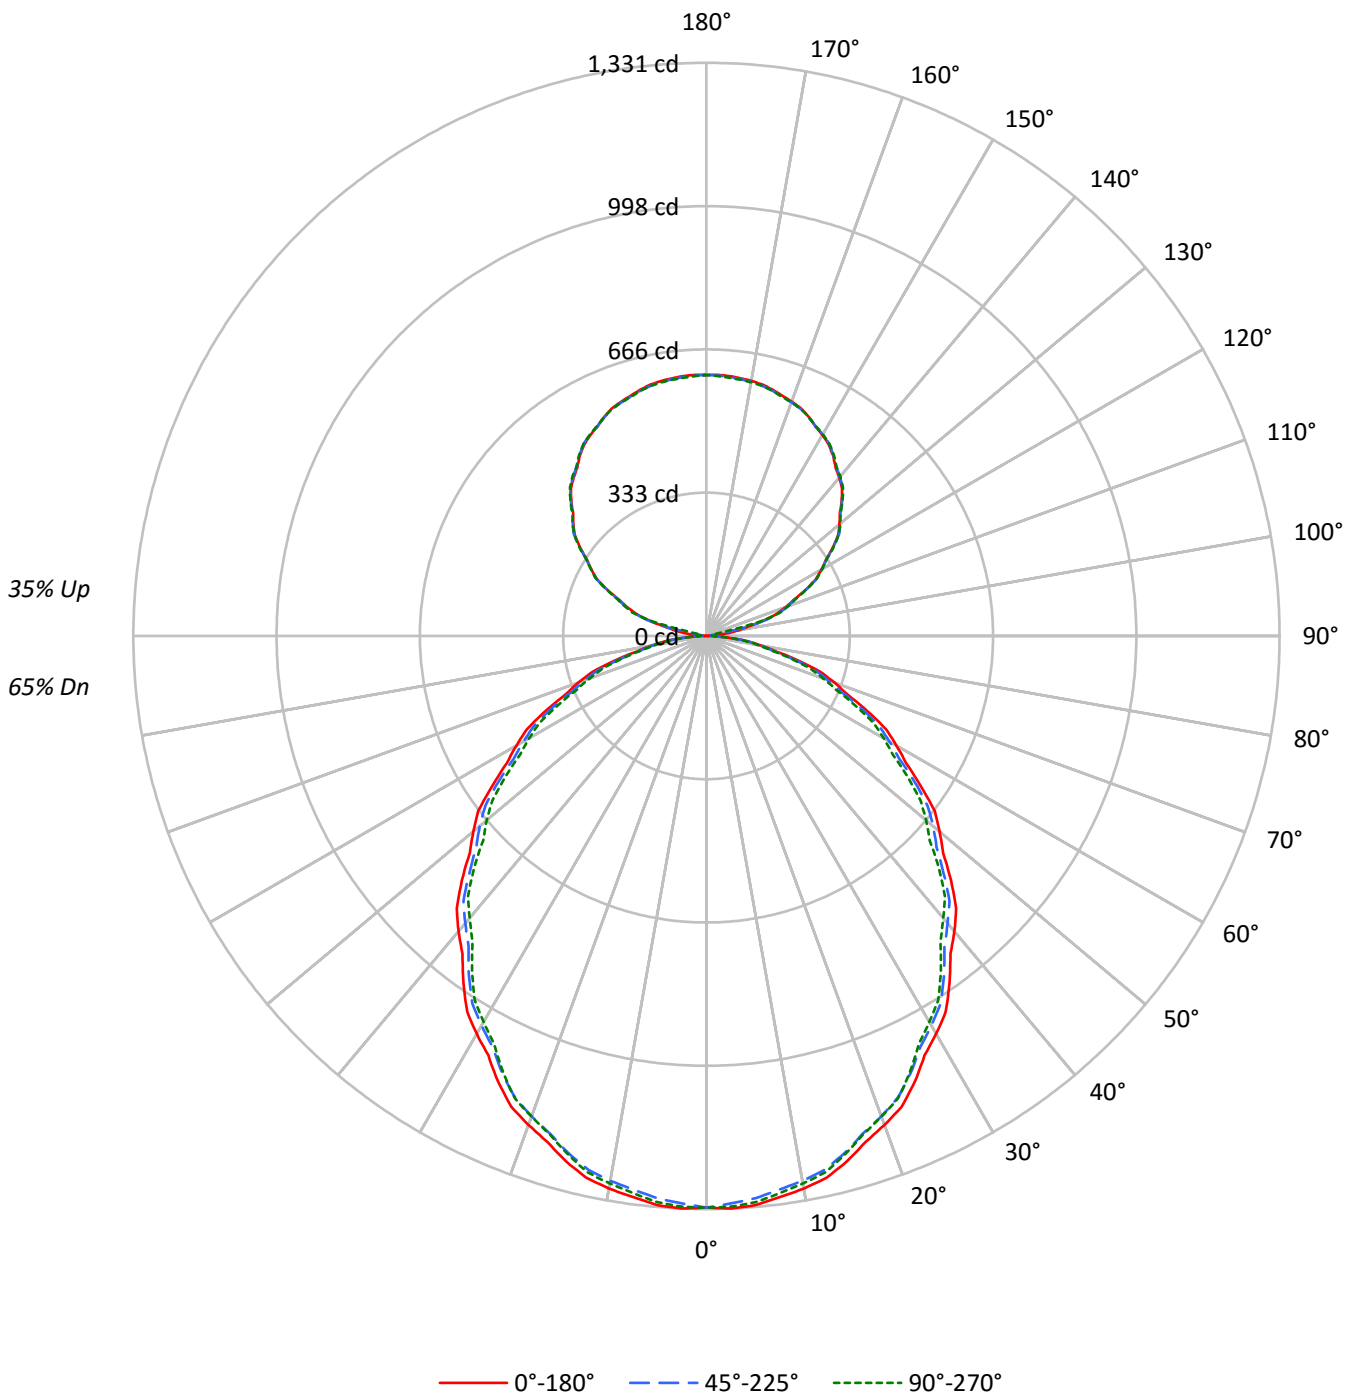



TEST NUMBER: P332779

CATALOG NUMBER: S124DIW-S795D470U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	104	104	104	104	91	91	91	80	80	80	69	69	69	65
1	101	97	93	89	95	91	87	84	80	78	75	70	68	67	61	60	59	54
2	92	84	78	73	86	79	74	69	70	66	62	62	59	56	54	52	49	45
3	84	74	67	61	79	70	63	58	62	57	52	55	51	47	48	45	42	38
4	77	66	58	51	72	62	55	49	55	49	45	49	44	40	43	39	36	33
5	71	59	50	44	66	55	48	42	49	43	39	44	39	35	39	35	32	29
6	65	53	44	38	61	50	42	37	45	38	34	40	35	31	35	31	28	25
7	60	48	39	34	56	45	38	32	40	34	30	36	31	27	32	28	25	22
8	56	43	35	30	53	41	34	29	37	31	27	33	28	24	29	25	22	20
9	52	40	32	27	49	38	31	26	34	28	24	30	26	22	27	23	20	18
10	49	36	29	24	46	35	28	23	31	26	22	28	23	20	25	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10717	10717	10717
5°	10749	10619	10697
10°	10681	10533	10585
15°	10552	10384	10410
20°	10381	10198	10207
25°	10185	9986	9958
30°	9945	9737	9648
35°	9697	9477	9351
40°	9438	9180	9013
45°	9169	8889	8719
50°	8871	8629	8363
55°	8549	8294	8024
60°	8226	7918	7677
65°	7862	7559	7253
70°	7456	7081	6805
75°	6834	6503	6338
80°	6081	5835	5686
85°	5317	5122	5020



TEST NUMBER: P332779

CATALOG NUMBER: S124DIW-S795D470U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	125.0	2.4
10°-20°	352.2	6.7
20°-30°	518.4	9.8
30°-40°	602.7	11.4
40°-50°	602.7	11.4
50°-60°	527.2	10.0
60°-70°	391.5	7.4
70°-80°	222.4	4.2
80°-90°	66.0	1.2
90°-100°	20.7	0.4
100°-110°	132.1	2.5
110°-120°	252.8	4.8
120°-130°	320.9	6.1
130°-140°	343.3	6.5
140°-150°	321.0	6.1
150°-160°	258.9	4.9
160°-170°	167.0	3.2
170°-180°	57.6	1.1
0°-30°	995.7	18.8
0°-40°	1598.4	30.3
0°-60°	2728.3	51.6
0°-90°	3408.2	64.5
90°-120°	405.6	7.7
90°-150°	1390.9	26.3
90°-180°	1874.0	35.5
0°-180°	5282.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1328	1328	1328	1328	1328	
5°	1326	1322	1310	1321	1320	126
15°	1263	1258	1242	1248	1246	356
25°	1143	1136	1121	1122	1118	526
35°	984	976	962	954	949	615
45°	803	795	779	767	764	619
55°	607	604	589	577	570	544
65°	412	406	396	385	380	407
75°	219	214	208	204	203	233
85°	57	57	55	55	54	63
90°	1	6	10	13	14	4
95°	25	10	10	13	13	32
105°	136	139	141	144	129	143
115°	255	256	256	256	256	251
125°	358	360	359	360	361	320
135°	444	444	446	446	447	342
145°	512	513	514	514	515	320
155°	562	562	561	562	561	259
165°	592	590	590	593	590	167
175°	606	603	604	607	602	58
180°	606	606	606	606	606	



TEST NUMBER: P332779

CATALOG NUMBER: S124DIW-S795D470U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5
2.5°	1330.9	1330.3	1329.7	1329.2	1328.6	1327.3	1325.2	1323.1	1321.0	1319.0	1320.8
5°	1326.4	1325.5	1324.5	1323.6	1322.6	1320.8	1318.2	1315.6	1313.0	1310.4	1313.0
7.5°	1314.1	1313.1	1312.2	1311.2	1310.3	1308.4	1305.5	1302.6	1299.7	1296.8	1298.9
10°	1303.0	1302.1	1301.1	1300.2	1299.2	1297.2	1294.1	1291.1	1288.0	1284.9	1286.8
12.5°	1288.5	1287.6	1286.6	1285.7	1284.8	1282.6	1279.4	1276.1	1272.9	1269.6	1271.7
15°	1262.6	1261.6	1260.7	1259.7	1258.8	1256.6	1253.0	1249.5	1245.9	1242.4	1243.8
17.5°	1231.3	1230.1	1228.9	1227.8	1226.6	1224.3	1221.0	1217.6	1214.2	1210.9	1211.8
20°	1208.3	1207.1	1206.0	1204.8	1203.6	1201.2	1197.7	1194.1	1190.6	1187.1	1187.8
22.5°	1183.7	1182.1	1180.5	1179.0	1177.4	1174.9	1171.3	1167.8	1164.2	1160.7	1162.0
25°	1143.4	1141.8	1140.1	1138.5	1136.8	1134.3	1131.0	1127.7	1124.4	1121.1	1121.3
27.5°	1097.5	1095.8	1094.1	1092.4	1090.7	1088.3	1085.2	1082.2	1079.1	1076.0	1075.4
30°	1066.9	1065.0	1063.1	1061.2	1059.3	1056.8	1053.7	1050.7	1047.6	1044.5	1043.6
32.5°	1034.5	1032.8	1031.1	1029.4	1027.7	1025.2	1022.0	1018.7	1015.5	1012.2	1011.1
35°	983.9	982.2	980.6	978.9	977.3	974.8	971.5	968.2	964.9	961.6	959.9
37.5°	930.5	929.0	927.5	926.0	924.4	921.9	918.4	914.8	911.3	907.7	905.9
40°	895.6	893.7	891.8	889.9	888.0	885.3	881.8	878.2	874.7	871.1	868.8
42.5°	858.2	857.0	855.9	854.8	853.6	851.1	847.2	843.3	839.3	835.4	832.7
45°	803.1	801.4	799.8	798.1	796.5	793.7	790.0	786.2	782.4	778.6	776.0
47.5°	745.4	744.3	743.2	742.0	740.9	738.6	735.1	731.6	728.1	724.6	721.6
50°	706.3	705.3	704.4	703.4	702.5	700.4	697.1	693.8	690.4	687.1	683.8
52.5°	668.0	666.9	665.7	664.6	663.4	661.1	657.6	654.1	650.6	647.1	644.2
55°	607.4	606.6	605.9	605.2	604.5	602.5	599.2	595.9	592.6	589.3	586.4
57.5°	549.5	548.7	547.9	547.1	546.3	544.2	541.0	537.7	534.5	531.2	528.5
60°	509.5	508.3	507.1	506.0	504.8	502.6	499.6	496.5	493.4	490.4	488.2
62.5°	470.4	469.4	468.4	467.4	466.4	464.3	461.0	457.7	454.5	451.2	449.3
65°	411.6	410.5	409.3	408.1	406.9	405.1	402.8	400.4	398.0	395.7	393.3
67.5°	352.5	351.4	350.3	349.2	348.2	346.5	344.2	341.9	339.7	337.4	335.1
70°	315.9	314.3	312.6	310.9	309.3	307.5	305.6	303.7	301.8	300.0	298.1
72.5°	276.8	275.1	273.5	271.8	270.1	268.6	267.1	265.5	264.0	262.5	261.0
75°	219.1	217.9	216.8	215.6	214.4	213.2	212.0	210.8	209.7	208.5	207.5
77.5°	164.0	163.5	163.0	162.5	161.9	161.2	160.1	159.1	158.0	157.0	156.7
80°	130.8	130.1	129.4	128.7	128.0	127.4	126.9	126.5	126.0	125.5	125.0
82.5°	98.5	98.2	97.8	97.5	97.2	97.0	96.9	96.8	96.7	96.6	96.3
85°	57.4	57.4	57.4	57.4	57.4	57.2	56.7	56.3	55.8	55.3	55.3
87.5°	22.4	22.4	22.5	22.5	22.5	22.5	22.5	22.5	22.4	22.4	22.5
90°	1.4	2.5	3.6	4.7	5.8	6.7	7.6	8.4	9.2	10.0	10.6
92.5°	5.7	5.8	5.8	5.9	6.0	6.4	7.2	8.0	8.8	9.6	10.2
95°	24.9	21.5	18.1	14.7	11.2	9.6	9.7	9.8	9.9	10.0	10.6
97.5°	52.9	55.1	57.2	59.3	61.5	56.9	45.7	34.4	23.2	12.0	12.0
100°	74.3	76.1	78.0	79.8	81.6	75.5	61.6	47.7	33.8	19.9	18.2
102.5°	98.3	99.6	100.9	102.2	103.6	103.3	101.5	99.7	97.9	96.1	77.6
105°	136.4	137.0	137.6	138.2	138.8	139.4	139.9	140.4	140.9	141.4	142.3
107.5°	171.9	172.2	172.5	172.8	173.1	173.6	174.2	174.9	175.6	176.3	176.7
110°	195.8	196.1	196.4	196.7	197.0	197.4	198.0	198.7	199.3	199.9	200.1



TEST NUMBER: P332779

CATALOG NUMBER: S124DIW-S795D470U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	219.0	219.5	220.1	220.6	221.2	221.6	221.9	222.1	222.4	222.7	222.7
115°	254.7	255.0	255.3	255.6	255.9	256.0	255.9	255.8	255.7	255.6	255.8
117.5°	286.9	287.3	287.7	288.1	288.5	288.8	289.0	289.2	289.5	289.7	289.6
120°	308.6	309.0	309.4	309.8	310.2	310.4	310.3	310.2	310.1	310.0	310.2
122.5°	328.9	329.2	329.4	329.7	329.9	330.1	330.2	330.4	330.5	330.7	330.8
125°	358.0	358.4	358.8	359.2	359.6	359.7	359.5	359.3	359.1	358.9	359.2
127.5°	385.6	385.7	385.8	385.9	386.0	386.3	386.7	387.2	387.7	388.1	388.1
130°	403.3	403.4	403.6	403.7	403.8	404.0	404.3	404.6	404.9	405.2	405.3
132.5°	419.7	419.8	420.0	420.2	420.4	420.7	421.1	421.4	421.8	422.2	422.3
135°	444.1	444.0	443.9	443.8	443.7	443.9	444.3	444.7	445.1	445.5	445.7
137.5°	465.8	465.8	465.9	465.9	466.0	466.2	466.6	467.1	467.5	468.0	468.2
140°	479.9	480.1	480.3	480.5	480.7	480.9	481.1	481.4	481.6	481.8	482.1
142.5°	492.6	493.0	493.4	493.7	494.1	494.3	494.4	494.6	494.7	494.8	495.0
145°	512.1	512.4	512.7	513.0	513.3	513.5	513.5	513.5	513.5	513.5	513.6
147.5°	527.6	528.2	528.7	529.3	529.9	530.1	530.0	529.9	529.8	529.7	529.8
150°	538.9	539.3	539.7	540.1	540.5	540.6	540.5	540.4	540.3	540.2	540.2
152.5°	548.3	548.6	548.9	549.2	549.6	549.6	549.5	549.3	549.1	548.9	549.1
155°	561.5	561.6	561.7	561.8	561.9	561.8	561.5	561.2	560.9	560.6	561.0
157.5°	572.7	572.6	572.5	572.5	572.4	572.2	571.9	571.5	571.2	570.9	571.4
160°	579.2	578.9	578.6	578.3	578.0	577.8	577.7	577.6	577.5	577.4	578.0
162.5°	585.0	584.6	584.2	583.8	583.5	583.2	583.1	583.0	582.9	582.8	583.4
165°	592.3	591.8	591.3	590.8	590.3	590.1	590.1	590.1	590.1	590.1	590.9
167.5°	598.1	597.6	597.1	596.6	596.0	595.7	595.7	595.6	595.6	595.5	596.4
170°	601.4	600.8	600.2	599.6	599.0	598.7	598.8	598.9	599.0	599.1	599.9
172.5°	603.6	603.0	602.4	601.8	601.2	600.9	601.0	601.1	601.2	601.3	602.1
175°	605.9	605.3	604.7	604.1	603.5	603.3	603.4	603.5	603.6	603.7	604.6
177.5°	607.0	606.5	605.9	605.3	604.8	604.6	604.7	604.9	605.0	605.2	605.8
180°	605.9	605.9	605.9	605.9	605.9	605.9	605.9	605.9	605.9	605.9	605.9



TEST NUMBER: P332779

CATALOG NUMBER: S124DIW-S795D470U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5	1327.5
2.5°	1322.7	1324.6	1326.5	1327.4	1327.2	1327.0	1326.8	1326.6
5°	1315.6	1318.2	1320.8	1321.9	1321.4	1321.0	1320.5	1320.0
7.5°	1301.0	1303.1	1305.1	1306.0	1305.8	1305.5	1305.2	1304.9
10°	1288.7	1290.6	1292.5	1293.2	1292.7	1292.2	1291.8	1291.3
12.5°	1273.8	1275.8	1277.9	1278.6	1278.0	1277.3	1276.6	1276.0
15°	1245.2	1246.6	1248.0	1248.4	1247.7	1247.0	1246.3	1245.6
17.5°	1212.7	1213.6	1214.5	1214.7	1214.2	1213.7	1213.3	1212.8
20°	1188.5	1189.2	1189.9	1190.0	1189.5	1189.1	1188.6	1188.1
22.5°	1163.2	1164.5	1165.8	1166.0	1165.1	1164.3	1163.4	1162.6
25°	1121.6	1121.8	1122.1	1121.7	1120.8	1119.8	1118.9	1117.9
27.5°	1074.9	1074.3	1073.7	1072.9	1071.7	1070.5	1069.3	1068.1
30°	1042.6	1041.7	1040.7	1039.7	1038.5	1037.3	1036.1	1035.0
32.5°	1009.9	1008.8	1007.7	1006.5	1005.3	1004.1	1002.9	1001.8
35°	958.3	956.6	954.9	953.5	952.3	951.2	950.0	948.8
37.5°	904.1	902.3	900.6	898.9	897.3	895.8	894.2	892.6
40°	866.4	864.1	861.7	859.9	858.7	857.6	856.4	855.2
42.5°	829.9	827.2	824.4	822.7	821.9	821.1	820.3	819.5
45°	773.4	770.8	768.2	766.6	765.8	765.1	764.4	763.7
47.5°	718.7	715.8	712.8	710.5	708.7	706.9	705.1	703.3
50°	680.5	677.2	673.9	671.5	670.1	668.7	667.3	665.9
52.5°	641.3	638.3	635.4	633.1	631.3	629.5	627.7	625.9
55°	583.6	580.8	577.9	575.8	574.4	573.0	571.5	570.1
57.5°	525.8	523.1	520.4	518.4	517.0	515.6	514.3	512.9
60°	486.1	484.0	481.8	480.2	479.0	477.8	476.6	475.5
62.5°	447.3	445.4	443.5	441.9	440.7	439.5	438.4	437.2
65°	391.0	388.6	386.2	384.5	383.3	382.1	380.9	379.7
67.5°	332.9	330.6	328.3	327.0	326.7	326.4	326.0	325.7
70°	296.2	294.3	292.4	291.1	290.4	289.7	289.0	288.3
72.5°	259.5	258.0	256.5	255.4	254.6	253.9	253.2	252.5
75°	206.6	205.6	204.7	204.1	203.9	203.6	203.4	203.2
77.5°	156.4	156.1	155.9	155.4	154.8	154.2	153.6	153.0
80°	124.6	124.1	123.6	123.3	123.0	122.8	122.6	122.3
82.5°	96.0	95.7	95.4	95.2	95.0	94.7	94.5	94.2
85°	55.3	55.3	55.3	55.2	55.0	54.7	54.5	54.2
87.5°	22.7	22.8	22.9	23.0	23.0	23.1	23.1	23.1
90°	11.2	11.8	12.4	12.8	13.0	13.2	13.4	13.6
92.5°	10.8	11.4	12.0	12.3	12.4	12.4	12.5	12.5
95°	11.2	11.8	12.4	12.7	12.8	12.9	13.0	13.1
97.5°	12.1	12.1	12.2	12.3	12.4	12.5	12.6	12.7
100°	16.5	14.8	13.1	12.3	12.4	12.5	12.6	12.7
102.5°	59.1	40.7	22.2	13.0	13.0	13.0	13.0	13.1
105°	143.2	144.1	145.0	143.7	140.0	136.4	132.8	129.2
107.5°	177.2	177.6	178.1	178.5	178.9	179.2	179.6	180.0
110°	200.3	200.5	200.7	200.9	201.2	201.5	201.8	202.1



TEST NUMBER: P332779

CATALOG NUMBER: S124DIW-S795D470U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	222.6	222.6	222.5	222.7	223.1	223.5	223.9	224.2
115°	256.0	256.2	256.4	256.5	256.5	256.5	256.5	256.5
117.5°	289.6	289.6	289.5	289.5	289.4	289.4	289.4	289.3
120°	310.4	310.6	310.8	310.8	310.6	310.4	310.2	310.0
122.5°	330.9	331.0	331.1	331.1	330.9	330.7	330.5	330.3
125°	359.5	359.8	360.1	360.3	360.4	360.5	360.6	360.7
127.5°	388.0	387.9	387.9	387.8	387.7	387.6	387.6	387.5
130°	405.4	405.5	405.6	405.6	405.6	405.6	405.6	405.6
132.5°	422.4	422.5	422.6	422.6	422.5	422.5	422.4	422.3
135°	445.9	446.1	446.3	446.5	446.7	446.9	447.1	447.3
137.5°	468.4	468.6	468.9	468.9	468.9	468.8	468.8	468.7
140°	482.4	482.7	483.0	483.2	483.3	483.4	483.5	483.6
142.5°	495.2	495.5	495.7	495.8	495.8	495.9	495.9	495.9
145°	513.7	513.8	513.9	514.0	514.2	514.4	514.6	514.8
147.5°	529.9	529.9	530.0	530.1	530.2	530.3	530.4	530.5
150°	540.2	540.2	540.2	540.3	540.4	540.5	540.6	540.7
152.5°	549.2	549.4	549.6	549.6	549.6	549.5	549.4	549.4
155°	561.4	561.8	562.2	562.3	562.0	561.7	561.4	561.1
157.5°	571.9	572.4	572.9	572.9	572.4	571.9	571.4	570.9
160°	578.6	579.2	579.8	579.8	579.2	578.6	578.0	577.4
162.5°	584.0	584.6	585.2	585.2	584.5	583.8	583.1	582.5
165°	591.7	592.5	593.3	593.2	592.3	591.4	590.5	589.6
167.5°	597.3	598.2	599.1	599.0	598.0	597.0	596.0	595.0
170°	600.7	601.5	602.4	602.3	601.2	600.2	599.2	598.2
172.5°	602.9	603.7	604.5	604.4	603.3	602.2	601.1	600.0
175°	605.5	606.4	607.3	607.1	605.9	604.7	603.5	602.3
177.5°	606.5	607.1	607.8	607.6	606.7	605.7	604.7	603.8
180°	605.9	605.9	605.9	605.9	605.9	605.9	605.9	605.9

(END OF REPORT)