

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333083

Luminaire Tested: **S124RDIW-S1020D1050U835-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333083
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIW-S1020D1050U835-4F0-1E-UDD-A
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 1050 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8531.4 lumens
Efficiency: N/A
Efficacy: 139.4 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.23 / 1.39
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 61.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333083

CATALOG NUMBER: S124RDIW-S1020D1050U835-4F0-1E-UDD-A

Luminous Intensity Polar Plot

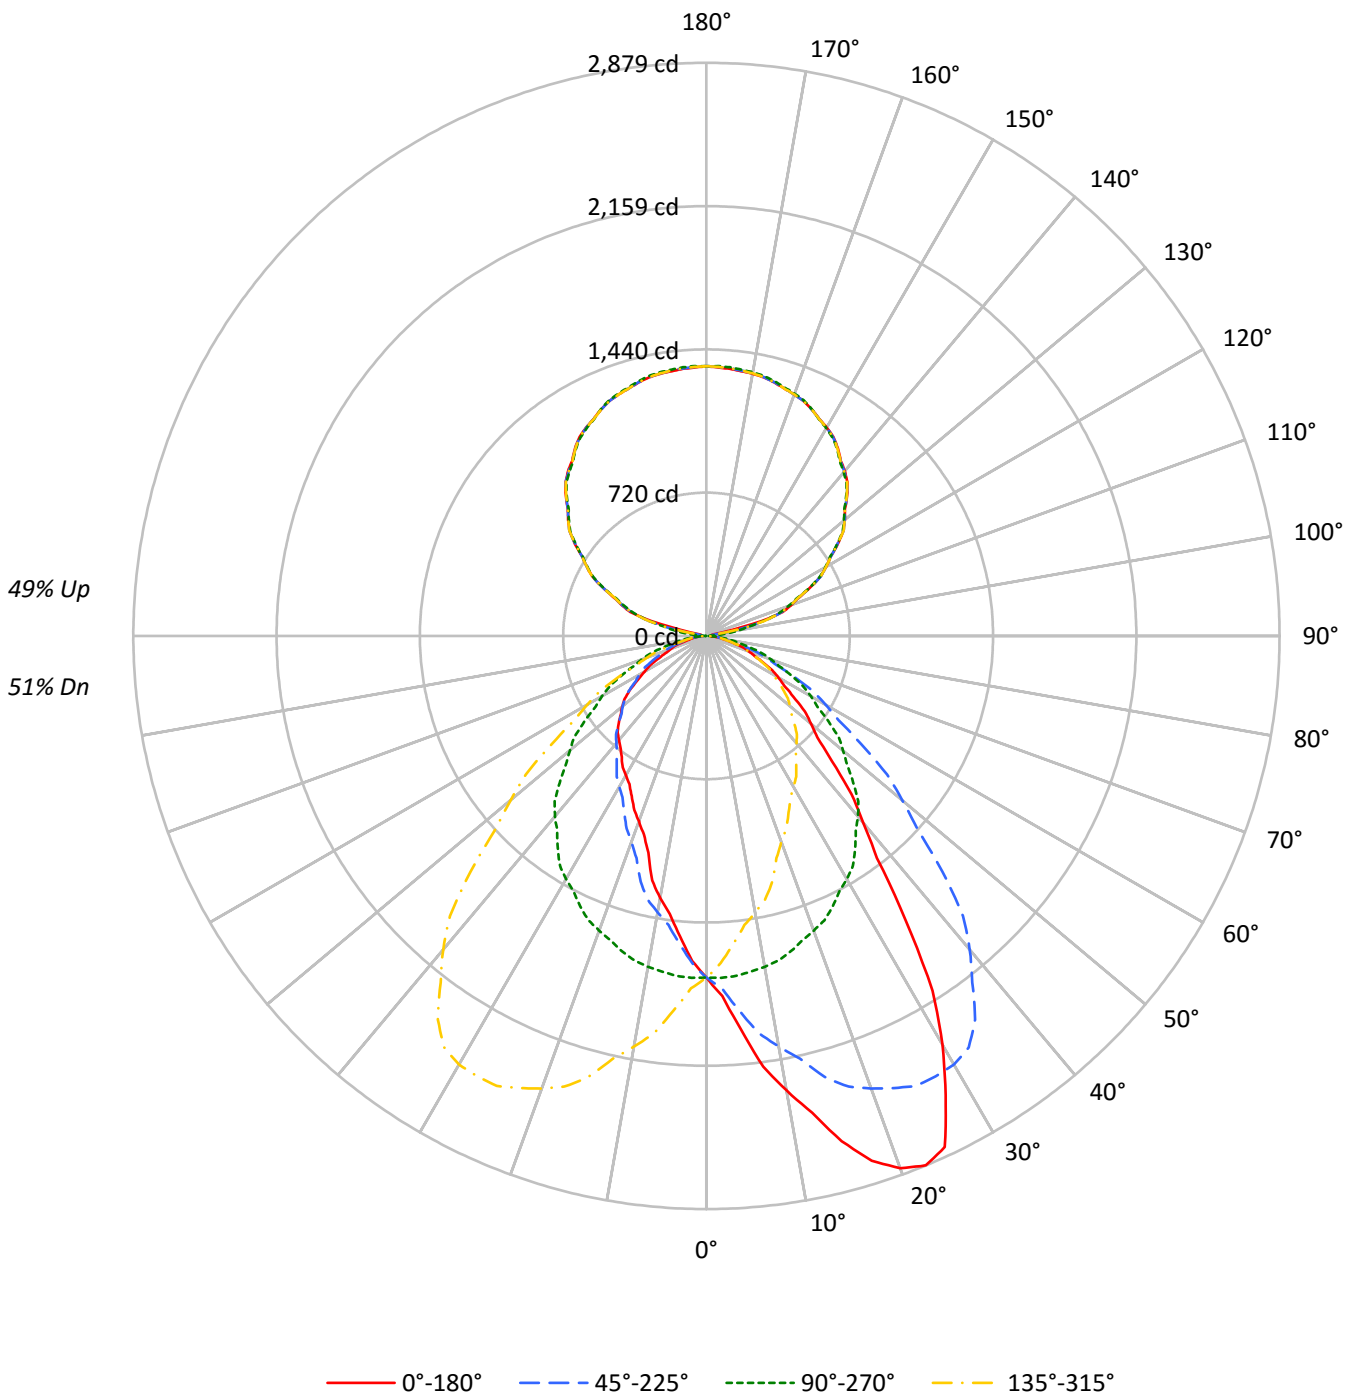



TEST NUMBER: P333083

CATALOG NUMBER: S124RDIW-S1020D1050U835-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51
1	98	94	91	87	91	87	84	81	74	72	70	62	61	59	51	50	49	44
2	90	83	77	72	83	77	72	67	66	62	59	55	52	50	45	44	42	37
3	82	73	66	60	76	68	62	57	58	54	50	49	46	43	41	38	36	32
4	76	65	57	52	70	61	54	49	52	47	43	44	40	37	37	34	32	28
5	70	58	50	44	64	54	47	42	47	41	37	40	36	32	33	30	28	25
6	64	52	44	39	59	49	42	37	42	37	33	36	32	29	30	27	25	22
7	59	47	40	34	55	44	37	32	38	33	29	33	29	25	28	24	22	19
8	55	43	35	30	51	40	33	29	35	30	26	30	26	23	25	22	20	17
9	51	39	32	27	48	37	30	26	32	27	23	28	24	20	24	20	18	16
10	48	36	29	24	44	34	27	23	30	24	21	26	21	19	22	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	13852	13852	13852	13852
5°	16067	13893	12280	13893
10°	19007	13833	10960	13833
15°	21956	13705	9417	13705
20°	24445	13529	8516	13529
25°	25235	13356	7906	13356
30°	22091	13147	7539	13147
35°	17196	12835	7318	12835
40°	12895	12480	7198	12480
45°	10182	11910	7134	11910
50°	8596	11252	6929	11252
55°	7492	10528	6557	10528
60°	6741	9778	5804	9778
65°	5943	8967	4991	8967
70°	5351	8127	4504	8127
75°	4485	7202	3840	7202
80°	3794	6137	3598	6137
85°	3205	4798	3205	4798



TEST NUMBER: P333083

CATALOG NUMBER: S124RDIW-S1020D1050U835-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	166.3	1.9
10°-20°	501.5	5.9
20°-30°	784.4	9.2
30°-40°	872.0	10.2
40°-50°	773.6	9.1
50°-60°	602.8	7.1
60°-70°	394.7	4.6
70°-80°	194.1	2.3
80°-90°	51.8	0.6
90°-100°	46.3	0.5
100°-110°	295.4	3.5
110°-120°	565.1	6.6
120°-130°	717.4	8.4
130°-140°	767.5	9.0
140°-150°	717.7	8.4
150°-160°	578.8	6.8
160°-170°	373.3	4.4
170°-180°	128.7	1.5
0°-30°	1452.1	17.0
0°-40°	2324.1	27.2
0°-60°	3700.5	43.4
0°-90°	4341.1	50.9
90°-120°	906.8	10.6
90°-150°	3109.5	36.4
90°-180°	4190.0	49.1
0°-180°	8531.4	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1716	1716	1716	1716	1716	
5°	1983	1714	1515	1714	1983	201
15°	2627	1640	1127	1640	2627	747
25°	2833	1499	888	1499	2833	1257
35°	1745	1302	742	1302	1745	1094
45°	892	1043	625	1043	892	706
55°	532	748	466	748	532	484
65°	311	469	261	469	311	313
75°	144	231	123	231	144	158
85°	35	52	35	52	35	40
90°	30	3	30	3	30	15
95°	29	56	29	56	29	23
105°	289	305	289	305	289	252
115°	574	569	574	569	574	568
125°	806	800	806	800	806	718
135°	1000	993	1000	993	1000	770
145°	1151	1145	1151	1145	1151	719
155°	1254	1255	1254	1255	1254	578
165°	1318	1324	1318	1324	1318	372
175°	1346	1355	1346	1355	1346	128
180°	1355	1355	1355	1355	1355	



TEST NUMBER: P333083

CATALOG NUMBER: S124RDIW-S1020D1050U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8
2.5°	1809.8	1814.8	1809.8	1809.3	1803.8	1802.1	1799.9	1792.7	1779.4	1771.7	1773.3
5°	1982.7	1999.9	1990.3	1988.9	1973.7	1958.5	1948.8	1926.7	1903.2	1887.3	1874.1
7.5°	2182.6	2192.5	2186.5	2176.8	2152.2	2138.2	2115.8	2086.6	2044.5	2012.2	1982.8
10°	2318.6	2326.9	2324.2	2306.2	2288.2	2251.6	2230.8	2190.1	2136.8	2094.7	2055.2
12.5°	2452.5	2461.3	2437.0	2437.8	2403.8	2374.9	2342.0	2290.7	2229.2	2174.8	2125.5
15°	2627.0	2615.9	2615.9	2602.1	2564.0	2524.0	2490.1	2436.2	2358.7	2293.7	2225.3
17.5°	2763.6	2767.4	2761.8	2729.1	2699.3	2657.8	2595.7	2532.8	2460.9	2373.7	2303.7
20°	2845.4	2845.4	2839.2	2817.1	2778.4	2734.1	2667.1	2598.6	2507.4	2419.6	2340.8
22.5°	2878.6	2880.8	2873.5	2855.2	2820.4	2777.2	2720.1	2650.6	2556.6	2457.7	2360.1
25°	2833.0	2846.1	2847.5	2842.6	2832.3	2806.0	2756.9	2685.7	2601.4	2494.2	2389.1
27.5°	2601.0	2617.6	2632.1	2656.0	2687.8	2704.4	2706.6	2670.4	2596.8	2493.7	2387.9
30°	2369.8	2383.6	2428.6	2487.3	2532.9	2574.4	2610.4	2620.0	2578.6	2485.9	2374.6
32.5°	2113.2	2132.0	2176.9	2240.1	2316.1	2386.4	2467.1	2508.3	2507.2	2451.6	2348.6
35°	1744.9	1758.7	1800.2	1866.5	1957.8	2062.2	2190.1	2289.6	2357.3	2352.5	2289.6
37.5°	1407.2	1422.8	1464.7	1519.8	1608.3	1737.5	1861.3	1998.4	2123.7	2194.1	2173.0
40°	1223.6	1224.3	1265.1	1321.8	1404.7	1517.4	1652.2	1804.3	1943.9	2058.0	2080.1
42.5°	1078.7	1078.8	1105.8	1166.9	1226.7	1332.7	1461.4	1612.4	1775.8	1907.6	1966.2
45°	891.8	898.0	920.1	956.8	1003.8	1093.6	1196.6	1337.0	1520.2	1676.4	1773.9
47.5°	755.2	764.3	778.4	808.3	845.7	905.6	990.8	1116.9	1265.9	1437.8	1576.5
50°	684.4	685.8	703.7	720.3	752.8	800.5	875.2	980.3	1117.1	1282.4	1436.5
52.5°	623.6	623.3	634.1	655.1	681.5	718.7	779.0	874.6	996.0	1144.1	1303.2
55°	532.3	535.8	544.1	560.6	580.7	607.0	654.7	726.6	822.0	948.5	1093.0
57.5°	462.9	464.7	471.2	478.2	496.6	515.7	551.5	601.4	681.9	785.5	920.1
60°	417.5	418.2	420.3	430.7	445.2	463.2	487.4	529.5	597.3	692.0	798.5
62.5°	373.3	374.5	377.7	385.3	396.5	409.0	434.3	468.2	524.3	605.2	701.1
65°	311.1	311.8	316.6	319.4	328.4	339.4	358.1	380.9	419.6	487.4	560.0
67.5°	259.9	259.9	260.2	263.9	270.2	277.5	288.7	306.9	336.1	377.7	441.7
70°	226.7	226.7	228.1	230.2	233.7	239.9	246.1	259.9	281.4	315.2	364.3
72.5°	195.8	196.3	197.7	198.1	199.9	205.0	209.6	218.5	234.4	259.9	299.6
75°	143.8	145.9	149.3	152.1	155.5	154.9	159.7	165.2	170.1	185.3	208.1
77.5°	107.0	105.9	106.3	108.7	109.1	109.8	113.2	117.5	121.1	128.3	136.5
80°	81.6	81.6	83.6	84.3	83.6	84.3	87.8	89.9	91.3	94.0	101.6
82.5°	61.7	62.8	62.1	62.8	63.2	63.9	66.8	67.2	68.6	69.7	72.9
85°	34.6	35.3	35.9	34.6	34.6	34.6	35.9	36.6	38.0	37.3	38.7
87.5°	18.2	17.6	18.1	18.0	18.4	17.7	18.0	18.8	17.4	17.7	17.4
90°	30.4	29.9	29.5	29.0	28.6	27.7	26.3	25.0	23.6	22.3	20.5
92.5°	28.0	27.9	27.8	27.7	27.6	26.9	25.5	24.2	22.8	21.5	19.7
95°	29.4	29.2	28.9	28.7	28.5	27.7	26.3	25.0	23.6	22.3	22.1
97.5°	28.4	28.1	27.9	27.7	27.5	27.3	27.2	27.0	26.9	26.7	51.9
100°	28.4	28.1	27.9	27.7	27.5	29.3	33.1	36.9	40.8	44.6	75.7
102.5°	29.2	29.1	29.1	29.0	29.0	49.6	90.9	132.2	173.5	214.8	218.8
105°	288.8	296.9	305.0	313.1	321.2	324.2	322.2	320.2	318.1	316.1	315.0
107.5°	402.4	401.6	400.7	399.9	399.0	398.1	397.1	396.1	395.1	394.1	392.6
110°	451.9	451.2	450.5	449.9	449.2	448.6	448.2	447.7	447.3	446.8	445.5



TEST NUMBER: P333083

CATALOG NUMBER: S124RDIW-S1020D1050U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	501.3	500.5	499.6	498.8	497.9	497.5	497.6	497.7	497.8	497.9	497.2
115°	573.5	573.5	573.5	573.5	573.5	573.2	572.8	572.3	571.9	571.4	571.7
117.5°	646.8	646.9	647.0	647.1	647.2	647.3	647.4	647.4	647.5	647.6	647.1
120°	693.0	693.5	693.9	694.4	694.8	694.8	694.4	693.9	693.5	693.0	693.2
122.5°	738.4	738.9	739.3	739.8	740.2	740.3	740.0	739.8	739.5	739.2	738.9
125°	806.5	806.3	806.0	805.8	805.6	805.1	804.5	803.8	803.1	802.4	802.9
127.5°	866.3	866.4	866.6	866.8	867.0	867.1	867.3	867.4	867.6	867.7	866.6
130°	906.8	906.8	906.8	906.8	906.8	906.7	906.5	906.2	906.0	905.8	905.1
132.5°	944.1	944.3	944.4	944.6	944.8	944.8	944.6	944.3	944.1	943.9	943.0
135°	1000.0	999.6	999.1	998.7	998.2	997.8	997.3	996.9	996.4	996.0	995.1
137.5°	1047.8	1048.0	1048.1	1048.2	1048.4	1048.2	1047.7	1047.2	1046.7	1046.2	1045.2
140°	1081.1	1080.8	1080.6	1080.4	1080.2	1079.7	1079.0	1078.4	1077.7	1077.0	1076.6
142.5°	1108.6	1108.6	1108.5	1108.5	1108.4	1108.2	1107.7	1107.2	1106.7	1106.2	1105.9
145°	1151.0	1150.5	1150.1	1149.6	1149.2	1148.8	1148.6	1148.4	1148.2	1147.9	1147.9
147.5°	1186.0	1185.8	1185.6	1185.4	1185.1	1184.9	1184.7	1184.6	1184.4	1184.2	1184.4
150°	1208.7	1208.5	1208.3	1208.0	1207.8	1207.7	1207.7	1207.7	1207.7	1207.7	1207.9
152.5°	1228.2	1228.3	1228.4	1228.6	1228.7	1228.6	1228.2	1227.9	1227.5	1227.2	1227.6
155°	1254.3	1255.0	1255.7	1256.3	1257.0	1256.9	1256.0	1255.1	1254.2	1253.3	1254.0
157.5°	1276.2	1277.4	1278.5	1279.7	1280.9	1280.9	1279.7	1278.5	1277.4	1276.2	1277.0
160°	1290.8	1292.1	1293.5	1294.8	1296.2	1296.2	1294.8	1293.5	1292.1	1290.8	1291.0
162.5°	1302.1	1303.7	1305.2	1306.7	1308.3	1308.3	1307.0	1305.6	1304.3	1302.9	1303.2
165°	1318.1	1320.2	1322.2	1324.2	1326.2	1326.4	1324.6	1322.8	1321.0	1319.2	1319.2
167.5°	1330.1	1332.4	1334.6	1336.9	1339.1	1339.2	1337.3	1335.3	1333.3	1331.3	1331.5
170°	1337.4	1339.6	1341.9	1344.1	1346.4	1346.6	1344.8	1343.0	1341.2	1339.4	1339.2
172.5°	1341.4	1343.9	1346.3	1348.7	1351.2	1351.5	1349.7	1347.9	1346.1	1344.3	1344.1
175°	1346.5	1349.2	1351.9	1354.6	1357.3	1357.7	1355.6	1353.6	1351.6	1349.6	1349.3
177.5°	1349.8	1351.9	1354.1	1356.2	1358.4	1358.8	1357.3	1355.9	1354.4	1353.0	1352.6
180°	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6



TEST NUMBER: P333083

CATALOG NUMBER: S124RDIW-S1020D1050U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8
2.5°	1767.8	1760.1	1756.2	1747.3	1736.8	1731.3	1726.3	1719.1	1709.7	1699.8	1692.6
5°	1857.5	1840.9	1820.2	1795.3	1773.2	1751.8	1733.1	1714.4	1693.0	1670.9	1648.8
7.5°	1949.6	1917.0	1881.7	1840.9	1801.3	1765.2	1732.0	1700.2	1664.2	1632.0	1602.7
10°	2013.8	1969.5	1920.4	1868.6	1816.7	1771.8	1727.6	1687.5	1643.2	1603.8	1570.6
12.5°	2065.8	2013.8	1954.7	1890.2	1827.8	1773.5	1722.6	1670.3	1620.0	1577.3	1533.0
15°	2152.0	2080.8	2001.3	1923.9	1843.0	1769.0	1700.6	1639.8	1582.4	1522.3	1480.1
17.5°	2211.3	2126.9	2030.2	1937.2	1841.6	1754.4	1675.4	1603.0	1536.8	1475.4	1425.2
20°	2246.7	2153.4	2046.3	1940.5	1833.3	1740.0	1655.0	1574.8	1506.4	1440.0	1388.1
22.5°	2266.6	2163.4	2046.3	1935.5	1824.5	1723.4	1630.1	1546.6	1472.1	1405.7	1348.3
25°	2273.0	2162.4	2042.8	1915.6	1793.9	1686.8	1590.0	1499.4	1416.5	1350.1	1289.3
27.5°	2264.2	2133.9	2011.4	1880.9	1755.4	1642.4	1540.8	1445.7	1362.6	1291.4	1229.0
30°	2250.9	2111.2	1979.9	1844.4	1717.2	1608.7	1501.5	1410.3	1323.8	1249.9	1187.0
32.5°	2222.1	2083.6	1942.3	1803.5	1674.6	1562.8	1461.1	1369.3	1284.6	1209.0	1142.2
35°	2165.2	2024.8	1871.4	1729.0	1602.4	1486.3	1390.9	1302.4	1221.5	1140.7	1070.1
37.5°	2090.1	1946.7	1794.1	1638.1	1511.5	1401.8	1314.3	1231.2	1152.3	1078.4	1000.3
40°	2019.3	1888.6	1731.0	1576.2	1446.2	1340.4	1259.6	1184.2	1104.7	1031.4	953.3
42.5°	1933.6	1822.3	1663.0	1507.6	1379.3	1277.4	1202.0	1128.3	1056.0	985.0	903.5
45°	1790.5	1706.1	1556.8	1407.5	1278.2	1177.3	1108.2	1043.2	979.6	911.8	835.1
47.5°	1626.5	1569.4	1440.5	1287.6	1168.0	1077.2	1010.4	957.3	903.5	835.8	768.5
50°	1512.6	1475.9	1351.5	1211.9	1097.8	1014.1	945.7	895.9	851.0	786.0	725.9
52.5°	1390.9	1371.4	1266.3	1132.8	1022.6	940.6	882.1	837.3	791.8	737.9	681.6
55°	1205.6	1216.0	1126.8	1011.4	907.7	838.6	785.3	748.0	709.3	663.7	620.1
57.5°	1016.2	1054.1	994.2	892.9	795.7	731.8	691.7	660.3	627.8	590.0	552.8
60°	902.8	934.6	900.8	811.6	726.6	667.1	629.8	605.6	573.1	538.5	510.2
62.5°	792.2	826.2	806.2	734.2	655.2	604.1	571.2	548.6	524.4	494.3	464.8
65°	653.3	675.4	665.7	616.0	560.0	516.4	486.0	469.4	447.3	425.2	398.9
67.5°	500.4	543.1	537.4	511.0	462.6	428.6	408.7	394.0	373.9	357.4	339.6
70°	411.3	450.7	450.0	428.6	402.3	370.5	356.7	344.3	326.3	310.4	295.9
72.5°	336.7	372.8	378.1	361.7	343.7	319.7	306.4	297.8	280.4	269.5	257.7
75°	235.7	262.0	268.9	268.9	260.6	248.2	236.4	230.9	218.5	208.8	201.9
77.5°	154.6	171.2	182.0	184.4	185.7	181.5	171.9	168.0	158.4	155.0	148.4
80°	109.2	120.3	132.7	136.9	140.3	139.0	134.8	132.0	123.1	119.6	116.8
82.5°	75.5	81.6	91.8	100.9	100.0	103.6	100.0	97.8	91.0	89.7	87.0
85°	39.4	40.1	41.5	47.7	51.2	52.5	53.2	51.8	49.8	49.8	44.9
87.5°	17.0	16.1	16.8	16.4	16.5	18.2	19.4	19.4	18.2	17.1	15.9
90°	18.7	16.9	15.1	12.9	10.5	8.0	5.5	3.0	5.5	8.0	10.5
92.5°	17.9	16.1	14.3	13.3	13.2	13.0	12.9	12.8	12.9	13.0	13.2
95°	21.8	21.6	21.4	25.1	32.8	40.4	48.1	55.7	48.1	40.4	32.8
97.5°	77.0	102.1	127.3	137.4	132.7	127.9	123.1	118.3	123.1	127.9	132.7
100°	106.7	137.8	168.9	182.4	178.3	174.3	170.2	166.2	170.2	174.3	178.3
102.5°	222.9	227.0	231.0	231.5	228.6	225.6	222.6	219.7	222.6	225.6	228.6
105°	313.9	312.7	311.6	310.4	309.0	307.7	306.3	305.0	306.3	307.7	309.0
107.5°	391.1	389.5	388.0	386.9	386.2	385.5	384.9	384.2	384.9	385.5	386.2
110°	444.1	442.8	441.4	440.4	439.7	439.0	438.4	437.7	438.4	439.0	439.7



TEST NUMBER: P333083

CATALOG NUMBER: S124RDIW-S1020D1050U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	496.6	496.0	495.4	494.4	493.2	492.0	490.8	489.6	490.8	492.0	493.2
115°	571.9	572.1	572.3	572.1	571.4	570.8	570.1	569.4	570.1	570.8	571.4
117.5°	646.6	646.1	645.6	644.9	644.0	643.1	642.2	641.3	642.2	643.1	644.0
120°	693.5	693.7	693.9	693.6	692.7	691.8	690.9	690.0	690.9	691.8	692.7
122.5°	738.6	738.3	738.0	737.5	737.0	736.4	735.9	735.4	735.9	736.4	737.0
125°	803.3	803.8	804.2	804.0	803.1	802.2	801.3	800.4	801.3	802.2	803.1
127.5°	865.6	864.6	863.5	862.9	862.7	862.5	862.2	862.0	862.2	862.5	862.7
130°	904.4	903.8	903.1	902.6	902.4	902.2	902.0	901.7	902.0	902.2	902.4
132.5°	942.2	941.3	940.5	939.8	939.4	939.0	938.6	938.2	938.6	939.0	939.4
135°	994.2	993.3	992.4	992.0	992.2	992.5	992.7	992.9	992.7	992.5	992.2
137.5°	1044.2	1043.2	1042.2	1041.7	1041.6	1041.5	1041.4	1041.3	1041.4	1041.5	1041.6
140°	1076.1	1075.7	1075.2	1074.8	1074.3	1073.9	1073.4	1073.0	1073.4	1073.9	1074.3
142.5°	1105.6	1105.4	1105.1	1104.6	1103.8	1102.9	1102.1	1101.3	1102.1	1102.9	1103.8
145°	1147.9	1147.9	1147.9	1147.6	1146.9	1146.2	1145.6	1144.9	1145.6	1146.2	1146.9
147.5°	1184.7	1184.9	1185.1	1184.6	1183.3	1182.1	1180.8	1179.5	1180.8	1182.1	1183.3
150°	1208.2	1208.4	1208.6	1208.3	1207.4	1206.5	1205.6	1204.7	1205.6	1206.5	1207.4
152.5°	1228.0	1228.4	1228.8	1228.6	1227.9	1227.2	1226.5	1225.7	1226.5	1227.2	1227.9
155°	1254.7	1255.3	1256.0	1256.2	1256.0	1255.8	1255.6	1255.3	1255.6	1255.8	1256.0
157.5°	1277.7	1278.5	1279.3	1279.7	1279.8	1280.0	1280.1	1280.3	1280.1	1280.0	1279.8
160°	1291.2	1291.5	1291.7	1292.1	1292.8	1293.5	1294.2	1294.8	1294.2	1293.5	1292.8
162.5°	1303.4	1303.6	1303.8	1304.4	1305.2	1306.1	1307.0	1307.8	1307.0	1306.1	1305.2
165°	1319.2	1319.2	1319.2	1319.7	1320.8	1322.0	1323.1	1324.2	1323.1	1322.0	1320.8
167.5°	1331.6	1331.7	1331.9	1332.5	1333.7	1334.9	1336.0	1337.2	1336.0	1334.9	1333.7
170°	1339.0	1338.7	1338.5	1339.1	1340.4	1341.8	1343.1	1344.5	1343.1	1341.8	1340.4
172.5°	1343.8	1343.6	1343.4	1343.9	1345.3	1346.6	1348.0	1349.3	1348.0	1346.6	1345.3
175°	1349.1	1348.9	1348.7	1349.2	1350.6	1351.9	1353.3	1354.6	1353.3	1351.9	1350.6
177.5°	1352.3	1351.9	1351.6	1352.0	1353.3	1354.5	1355.8	1357.0	1355.8	1354.5	1353.3
180°	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6



TEST NUMBER: P333083

CATALOG NUMBER: S124RDIW-S1020D1050U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8
2.5°	1684.8	1679.3	1672.1	1663.8	1653.9	1645.0	1641.2	1644.5	1646.1	1641.7	1641.2
5°	1633.6	1616.3	1602.4	1581.7	1565.1	1551.3	1541.6	1537.5	1538.8	1527.8	1525.0
7.5°	1575.9	1555.4	1532.8	1508.1	1485.2	1464.9	1454.2	1448.4	1436.7	1431.7	1423.3
10°	1538.8	1511.2	1489.1	1460.0	1433.8	1409.6	1397.8	1388.1	1376.4	1370.9	1359.1
12.5°	1500.7	1468.6	1444.3	1414.1	1387.3	1358.1	1346.9	1329.0	1310.6	1299.0	1283.9
15°	1446.9	1408.2	1378.5	1342.5	1310.7	1277.5	1247.8	1214.6	1202.2	1175.9	1160.7
17.5°	1384.0	1344.7	1307.9	1259.7	1210.6	1169.4	1137.7	1105.9	1086.9	1070.1	1062.4
20°	1342.5	1306.6	1255.4	1199.4	1144.8	1099.2	1073.6	1052.9	1032.1	1020.4	1012.1
22.5°	1303.2	1257.3	1197.9	1137.5	1082.9	1047.2	1025.5	1004.2	987.3	976.1	965.1
25°	1237.4	1177.3	1114.4	1045.3	1007.9	976.8	953.3	936.0	925.7	911.1	905.6
27.5°	1169.8	1097.0	1027.6	981.1	942.2	913.8	893.3	880.3	867.2	857.9	850.7
30°	1117.8	1043.9	981.7	937.4	898.0	874.5	857.9	842.7	832.3	824.7	819.2
32.5°	1066.4	992.4	940.2	892.6	861.5	838.6	820.9	809.5	801.4	791.5	788.2
35°	992.0	926.3	880.7	837.9	806.1	785.3	771.5	759.7	752.8	750.1	748.0
37.5°	920.5	866.8	817.7	782.6	754.2	737.9	721.6	715.8	711.1	706.1	708.3
40°	875.2	824.7	781.2	743.8	721.0	703.1	693.4	686.5	682.3	682.3	682.3
42.5°	835.9	786.6	744.1	710.7	687.8	672.6	661.9	656.0	654.7	654.1	657.4
45°	775.0	729.3	686.5	658.8	639.5	624.2	618.0	613.2	613.2	616.0	616.6
47.5°	714.5	671.8	637.4	606.4	588.7	579.2	573.8	571.3	571.6	574.3	577.5
50°	677.5	635.3	601.4	573.8	557.2	548.2	543.4	542.0	543.4	543.4	548.2
52.5°	637.1	599.4	566.0	542.8	524.0	515.6	512.9	511.0	511.8	514.1	516.1
55°	577.9	544.1	512.3	490.1	476.3	470.8	464.6	465.2	463.9	465.2	465.2
57.5°	518.6	488.2	458.6	441.1	428.9	420.9	414.1	416.0	414.0	413.7	412.6
60°	480.5	447.3	423.8	407.9	394.0	387.1	380.9	382.3	380.2	378.8	376.1
62.5°	439.0	411.3	388.9	373.6	362.5	354.5	348.3	346.9	342.1	337.4	331.3
65°	378.8	356.0	336.0	321.5	311.1	304.9	300.0	295.9	285.5	274.4	268.9
67.5°	320.4	303.9	285.2	272.9	264.5	256.3	247.1	240.0	230.3	224.3	220.8
70°	282.7	266.8	250.9	239.2	230.2	222.6	212.2	207.4	200.5	197.7	194.3
72.5°	246.8	232.0	217.2	206.6	197.0	191.1	182.9	178.1	175.0	173.9	170.5
75°	192.2	180.4	169.4	159.7	152.1	147.9	144.5	141.0	139.6	133.4	130.0
77.5°	140.2	132.5	125.5	118.6	113.2	110.5	103.8	99.8	97.5	94.6	93.9
80°	109.2	103.7	96.8	92.6	85.0	82.3	79.5	78.8	78.1	77.4	76.7
82.5°	82.1	76.6	69.7	67.2	65.1	63.5	61.8	61.1	60.4	60.8	60.7
85°	41.5	38.7	38.7	38.0	37.3	36.6	35.9	35.9	35.3	35.9	35.3
87.5°	16.4	16.3	16.7	15.9	16.8	17.2	16.9	17.2	18.0	17.2	17.3
90°	12.9	15.1	16.9	18.7	20.5	22.3	23.6	25.0	26.3	27.7	28.6
92.5°	13.3	14.3	16.1	17.9	19.7	21.5	22.8	24.2	25.5	26.9	27.6
95°	25.1	21.4	21.6	21.8	22.1	22.3	23.6	25.0	26.3	27.7	28.5
97.5°	137.4	127.3	102.1	77.0	51.9	26.7	26.9	27.0	27.2	27.3	27.5
100°	182.4	168.9	137.8	106.7	75.7	44.6	40.8	36.9	33.1	29.3	27.5
102.5°	231.5	231.0	227.0	222.9	218.8	214.8	173.5	132.2	90.9	49.6	29.0
105°	310.4	311.6	312.7	313.9	315.0	316.1	318.1	320.2	322.2	324.2	321.2
107.5°	386.9	388.0	389.5	391.1	392.6	394.1	395.1	396.1	397.1	398.1	399.0
110°	440.4	441.4	442.8	444.1	445.5	446.8	447.3	447.7	448.2	448.6	449.2



TEST NUMBER: P333083

CATALOG NUMBER: S124RDIW-S1020D1050U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	494.4	495.4	496.0	496.6	497.2	497.9	497.8	497.7	497.6	497.5	497.9
115°	572.1	572.3	572.1	571.9	571.7	571.4	571.9	572.3	572.8	573.2	573.5
117.5°	644.9	645.6	646.1	646.6	647.1	647.6	647.5	647.4	647.4	647.3	647.2
120°	693.6	693.9	693.7	693.5	693.2	693.0	693.5	693.9	694.4	694.8	694.8
122.5°	737.5	738.0	738.3	738.6	738.9	739.2	739.5	739.8	740.0	740.3	740.2
125°	804.0	804.2	803.8	803.3	802.9	802.4	803.1	803.8	804.5	805.1	805.6
127.5°	862.9	863.5	864.6	865.6	866.6	867.7	867.6	867.4	867.3	867.1	867.0
130°	902.6	903.1	903.8	904.4	905.1	905.8	906.0	906.2	906.5	906.7	906.8
132.5°	939.8	940.5	941.3	942.2	943.0	943.9	944.1	944.3	944.6	944.8	944.8
135°	992.0	992.4	993.3	994.2	995.1	996.0	996.4	996.9	997.3	997.8	998.2
137.5°	1041.7	1042.2	1043.2	1044.2	1045.2	1046.2	1046.7	1047.2	1047.7	1048.2	1048.4
140°	1074.8	1075.2	1075.7	1076.1	1076.6	1077.0	1077.7	1078.4	1079.0	1079.7	1080.2
142.5°	1104.6	1105.1	1105.4	1105.6	1105.9	1106.2	1106.7	1107.2	1107.7	1108.2	1108.4
145°	1147.6	1147.9	1147.9	1147.9	1147.9	1147.9	1148.2	1148.4	1148.6	1148.8	1149.2
147.5°	1184.6	1185.1	1184.9	1184.7	1184.4	1184.2	1184.4	1184.6	1184.7	1184.9	1185.1
150°	1208.3	1208.6	1208.4	1208.2	1207.9	1207.7	1207.7	1207.7	1207.7	1207.7	1207.8
152.5°	1228.6	1228.8	1228.4	1228.0	1227.6	1227.2	1227.5	1227.9	1228.2	1228.6	1228.7
155°	1256.2	1256.0	1255.3	1254.7	1254.0	1253.3	1254.2	1255.1	1256.0	1256.9	1257.0
157.5°	1279.7	1279.3	1278.5	1277.7	1277.0	1276.2	1277.4	1278.5	1279.7	1280.9	1280.9
160°	1292.1	1291.7	1291.5	1291.2	1291.0	1290.8	1292.1	1293.5	1294.8	1296.2	1296.2
162.5°	1304.4	1303.8	1303.6	1303.4	1303.2	1302.9	1304.3	1305.6	1307.0	1308.3	1308.3
165°	1319.7	1319.2	1319.2	1319.2	1319.2	1319.2	1321.0	1322.8	1324.6	1326.4	1326.2
167.5°	1332.5	1331.9	1331.7	1331.6	1331.5	1331.3	1333.3	1335.3	1337.3	1339.2	1339.1
170°	1339.1	1338.5	1338.7	1339.0	1339.2	1339.4	1341.2	1343.0	1344.8	1346.6	1346.4
172.5°	1343.9	1343.4	1343.6	1343.8	1344.1	1344.3	1346.1	1347.9	1349.7	1351.5	1351.2
175°	1349.2	1348.7	1348.9	1349.1	1349.3	1349.6	1351.6	1353.6	1355.6	1357.7	1357.3
177.5°	1352.0	1351.6	1351.9	1352.3	1352.6	1353.0	1354.4	1355.9	1357.3	1358.8	1358.4
180°	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6



TEST NUMBER: P333083

CATALOG NUMBER: S124RDIW-S1020D1050U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8
2.5°	1637.8	1638.9	1635.1	1634.0	1635.1	1638.9	1637.8	1641.2	1641.7	1646.1	1644.5
5°	1519.5	1518.1	1514.6	1515.3	1514.6	1518.1	1519.5	1525.0	1527.8	1538.8	1537.5
7.5°	1418.3	1412.9	1414.4	1408.9	1414.4	1412.9	1418.3	1423.3	1431.7	1436.7	1448.4
10°	1356.3	1348.7	1342.5	1337.0	1342.5	1348.7	1356.3	1359.1	1370.9	1376.4	1388.1
12.5°	1271.7	1265.2	1256.8	1258.5	1256.8	1265.2	1271.7	1283.9	1299.0	1310.6	1329.0
15°	1151.7	1141.3	1124.8	1126.8	1124.8	1141.3	1151.7	1160.7	1175.9	1202.2	1214.6
17.5°	1050.1	1050.2	1042.6	1044.4	1042.6	1050.2	1050.1	1062.4	1070.1	1086.9	1105.9
20°	997.6	992.7	993.4	991.3	993.4	992.7	997.6	1012.1	1020.4	1032.1	1052.9
22.5°	961.1	955.1	950.3	946.0	950.3	955.1	961.1	965.1	976.1	987.3	1004.2
25°	899.4	895.2	889.0	887.6	889.0	895.2	899.4	905.6	911.1	925.7	936.0
27.5°	845.2	844.4	841.9	838.7	841.9	844.4	845.2	850.7	857.9	867.2	880.3
30°	813.7	812.3	810.9	808.8	810.9	812.3	813.7	819.2	824.7	832.3	842.7
32.5°	785.5	784.6	783.2	783.4	783.2	784.6	785.5	788.2	791.5	801.4	809.5
35°	745.2	744.5	743.2	742.5	743.2	744.5	745.2	748.0	750.1	752.8	759.7
37.5°	707.6	709.4	708.6	708.4	708.6	709.4	707.6	708.3	706.1	711.1	715.8
40°	681.6	682.3	683.7	683.0	683.7	682.3	681.6	682.3	682.3	682.3	686.5
42.5°	660.1	660.2	662.1	659.8	662.1	660.2	660.1	657.4	654.1	654.7	656.0
45°	621.5	625.6	624.9	624.9	624.9	625.6	621.5	616.6	616.0	613.2	613.2
47.5°	579.3	582.9	583.9	583.7	583.9	582.9	579.3	577.5	574.3	571.6	571.3
50°	551.7	550.3	552.4	551.7	552.4	550.3	551.7	548.2	543.4	543.4	542.0
52.5°	517.9	518.2	518.1	517.4	518.1	518.2	517.9	516.1	514.1	511.8	511.0
55°	465.9	466.6	465.2	465.9	465.2	466.6	465.9	465.2	465.2	463.9	465.2
57.5°	409.5	406.2	407.6	405.9	407.6	406.2	409.5	412.6	413.7	414.0	416.0
60°	369.2	363.6	362.2	359.5	362.2	363.6	369.2	376.1	378.8	380.2	382.3
62.5°	323.8	319.9	315.2	317.4	315.2	319.9	323.8	331.3	337.4	342.1	346.9
65°	263.4	260.6	258.5	261.3	258.5	260.6	263.4	268.9	274.4	285.5	295.9
67.5°	218.0	216.5	216.5	215.1	216.5	216.5	218.0	220.8	224.3	230.3	240.0
70°	194.3	192.2	192.2	190.8	192.2	192.2	194.3	194.3	197.7	200.5	207.4
72.5°	169.9	167.8	168.4	167.6	168.4	167.8	169.9	170.5	173.9	175.0	178.1
75°	125.8	122.4	122.4	123.1	122.4	122.4	125.8	130.0	133.4	139.6	141.0
77.5°	93.9	93.2	94.2	92.9	94.2	93.2	93.9	93.9	94.6	97.5	99.8
80°	76.7	76.0	75.4	77.4	75.4	76.0	76.7	76.7	77.4	78.1	78.8
82.5°	59.6	59.5	59.3	61.9	59.3	59.5	59.6	60.7	60.8	60.4	61.1
85°	35.9	34.6	35.9	34.6	35.9	34.6	35.9	35.3	35.9	35.3	35.9
87.5°	18.5	18.1	17.6	18.2	17.6	18.1	18.5	17.3	17.2	18.0	17.2
90°	29.0	29.5	29.9	30.4	29.9	29.5	29.0	28.6	27.7	26.3	25.0
92.5°	27.7	27.8	27.9	28.0	27.9	27.8	27.7	27.6	26.9	25.5	24.2
95°	28.7	28.9	29.2	29.4	29.2	28.9	28.7	28.5	27.7	26.3	25.0
97.5°	27.7	27.9	28.1	28.4	28.1	27.9	27.7	27.5	27.3	27.2	27.0
100°	27.7	27.9	28.1	28.4	28.1	27.9	27.7	27.5	29.3	33.1	36.9
102.5°	29.0	29.1	29.1	29.2	29.1	29.1	29.0	29.0	49.6	90.9	132.2
105°	313.1	305.0	296.9	288.8	296.9	305.0	313.1	321.2	324.2	322.2	320.2
107.5°	399.9	400.7	401.6	402.4	401.6	400.7	399.9	399.0	398.1	397.1	396.1
110°	449.9	450.5	451.2	451.9	451.2	450.5	449.9	449.2	448.6	448.2	447.7



TEST NUMBER: P333083

CATALOG NUMBER: S124RDIW-S1020D1050U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	498.8	499.6	500.5	501.3	500.5	499.6	498.8	497.9	497.5	497.6	497.7
115°	573.5	573.5	573.5	573.5	573.5	573.5	573.5	573.5	573.2	572.8	572.3
117.5°	647.1	647.0	646.9	646.8	646.9	647.0	647.1	647.2	647.3	647.4	647.4
120°	694.4	693.9	693.5	693.0	693.5	693.9	694.4	694.8	694.8	694.4	693.9
122.5°	739.8	739.3	738.9	738.4	738.9	739.3	739.8	740.2	740.3	740.0	739.8
125°	805.8	806.0	806.3	806.5	806.3	806.0	805.8	805.6	805.1	804.5	803.8
127.5°	866.8	866.6	866.4	866.3	866.4	866.6	866.8	867.0	867.1	867.3	867.4
130°	906.8	906.8	906.8	906.8	906.8	906.8	906.8	906.8	906.7	906.5	906.2
132.5°	944.6	944.4	944.3	944.1	944.3	944.4	944.6	944.8	944.8	944.6	944.3
135°	998.7	999.1	999.6	1000.0	999.6	999.1	998.7	998.2	997.8	997.3	996.9
137.5°	1048.2	1048.1	1048.0	1047.8	1048.0	1048.1	1048.2	1048.4	1048.2	1047.7	1047.2
140°	1080.4	1080.6	1080.8	1081.1	1080.8	1080.6	1080.4	1080.2	1079.7	1079.0	1078.4
142.5°	1108.5	1108.5	1108.6	1108.6	1108.6	1108.5	1108.5	1108.4	1108.2	1107.7	1107.2
145°	1149.6	1150.1	1150.5	1151.0	1150.5	1150.1	1149.6	1149.2	1148.8	1148.6	1148.4
147.5°	1185.4	1185.6	1185.8	1186.0	1185.8	1185.6	1185.4	1185.1	1184.9	1184.7	1184.6
150°	1208.0	1208.3	1208.5	1208.7	1208.5	1208.3	1208.0	1207.8	1207.7	1207.7	1207.7
152.5°	1228.6	1228.4	1228.3	1228.2	1228.3	1228.4	1228.6	1228.7	1228.6	1228.2	1227.9
155°	1256.3	1255.7	1255.0	1254.3	1255.0	1255.7	1256.3	1257.0	1256.9	1256.0	1255.1
157.5°	1279.7	1278.5	1277.4	1276.2	1277.4	1278.5	1279.7	1280.9	1280.9	1279.7	1278.5
160°	1294.8	1293.5	1292.1	1290.8	1292.1	1293.5	1294.8	1296.2	1296.2	1294.8	1293.5
162.5°	1306.7	1305.2	1303.7	1302.1	1303.7	1305.2	1306.7	1308.3	1308.3	1307.0	1305.6
165°	1324.2	1322.2	1320.2	1318.1	1320.2	1322.2	1324.2	1326.2	1326.4	1324.6	1322.8
167.5°	1336.9	1334.6	1332.4	1330.1	1332.4	1334.6	1336.9	1339.1	1339.2	1337.3	1335.3
170°	1344.1	1341.9	1339.6	1337.4	1339.6	1341.9	1344.1	1346.4	1346.6	1344.8	1343.0
172.5°	1348.7	1346.3	1343.9	1341.4	1343.9	1346.3	1348.7	1351.2	1351.5	1349.7	1347.9
175°	1354.6	1351.9	1349.2	1346.5	1349.2	1351.9	1354.6	1357.3	1357.7	1355.6	1353.6
177.5°	1356.2	1354.1	1351.9	1349.8	1351.9	1354.1	1356.2	1358.4	1358.8	1357.3	1355.9
180°	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6



TEST NUMBER: P333083

CATALOG NUMBER: S124RDIW-S1020D1050U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8
2.5°	1641.2	1645.0	1653.9	1663.8	1672.1	1679.3	1684.8	1692.6	1699.8	1709.7	1719.1
5°	1541.6	1551.3	1565.1	1581.7	1602.4	1616.3	1633.6	1648.8	1670.9	1693.0	1714.4
7.5°	1454.2	1464.9	1485.2	1508.1	1532.8	1555.4	1575.9	1602.7	1632.0	1664.2	1700.2
10°	1397.8	1409.6	1433.8	1460.0	1489.1	1511.2	1538.8	1570.6	1603.8	1643.2	1687.5
12.5°	1346.9	1358.1	1387.3	1414.1	1444.3	1468.6	1500.7	1533.0	1577.3	1620.0	1670.3
15°	1247.8	1277.5	1310.7	1342.5	1378.5	1408.2	1446.9	1480.1	1522.3	1582.4	1639.8
17.5°	1137.7	1169.4	1210.6	1259.7	1307.9	1344.7	1384.0	1425.2	1475.4	1536.8	1603.0
20°	1073.6	1099.2	1144.8	1199.4	1255.4	1306.6	1342.5	1388.1	1440.0	1506.4	1574.8
22.5°	1025.5	1047.2	1082.9	1137.5	1197.9	1257.3	1303.2	1348.3	1405.7	1472.1	1546.6
25°	953.3	976.8	1007.9	1045.3	1114.4	1177.3	1237.4	1289.3	1350.1	1416.5	1499.4
27.5°	893.3	913.8	942.2	981.1	1027.6	1097.0	1169.8	1229.0	1291.4	1362.6	1445.7
30°	857.9	874.5	898.0	937.4	981.7	1043.9	1117.8	1187.0	1249.9	1323.8	1410.3
32.5°	820.9	838.6	861.5	892.6	940.2	992.4	1066.4	1142.2	1209.0	1284.6	1369.3
35°	771.5	785.3	806.1	837.9	880.7	926.3	992.0	1070.1	1140.7	1221.5	1302.4
37.5°	721.6	737.9	754.2	782.6	817.7	866.8	920.5	1000.3	1078.4	1152.3	1231.2
40°	693.4	703.1	721.0	743.8	781.2	824.7	875.2	953.3	1031.4	1104.7	1184.2
42.5°	661.9	672.6	687.8	710.7	744.1	786.6	835.9	903.5	985.0	1056.0	1128.3
45°	618.0	624.2	639.5	658.8	686.5	729.3	775.0	835.1	911.8	979.6	1043.2
47.5°	573.8	579.2	588.7	606.4	637.4	671.8	714.5	768.5	835.8	903.5	957.3
50°	543.4	548.2	557.2	573.8	601.4	635.3	677.5	725.9	786.0	851.0	895.9
52.5°	512.9	515.6	524.0	542.8	566.0	599.4	637.1	681.6	737.9	791.8	837.3
55°	464.6	470.8	476.3	490.1	512.3	544.1	577.9	620.1	663.7	709.3	748.0
57.5°	414.1	420.9	428.9	441.1	458.6	488.2	518.6	552.8	590.0	627.8	660.3
60°	380.9	387.1	394.0	407.9	423.8	447.3	480.5	510.2	538.5	573.1	605.6
62.5°	348.3	354.5	362.5	373.6	388.9	411.3	439.0	464.8	494.3	524.4	548.6
65°	300.0	304.9	311.1	321.5	336.0	356.0	378.8	398.9	425.2	447.3	469.4
67.5°	247.1	256.3	264.5	272.9	285.2	303.9	320.4	339.6	357.4	373.9	394.0
70°	212.2	222.6	230.2	239.2	250.9	266.8	282.7	295.9	310.4	326.3	344.3
72.5°	182.9	191.1	197.0	206.6	217.2	232.0	246.8	257.7	269.5	280.4	297.8
75°	144.5	147.9	152.1	159.7	169.4	180.4	192.2	201.9	208.8	218.5	230.9
77.5°	103.8	110.5	113.2	118.6	125.5	132.5	140.2	148.4	155.0	158.4	168.0
80°	79.5	82.3	85.0	92.6	96.8	103.7	109.2	116.8	119.6	123.1	132.0
82.5°	61.8	63.5	65.1	67.2	69.7	76.6	82.1	87.0	89.7	91.0	97.8
85°	35.9	36.6	37.3	38.0	38.7	38.7	41.5	44.9	49.8	49.8	51.8
87.5°	16.9	17.2	16.8	15.9	16.7	16.3	16.4	15.9	17.1	18.2	19.4
90°	23.6	22.3	20.5	18.7	16.9	15.1	12.9	10.5	8.0	5.5	3.0
92.5°	22.8	21.5	19.7	17.9	16.1	14.3	13.3	13.2	13.0	12.9	12.8
95°	23.6	22.3	22.1	21.8	21.6	21.4	25.1	32.8	40.4	48.1	55.7
97.5°	26.9	26.7	51.9	77.0	102.1	127.3	137.4	132.7	127.9	123.1	118.3
100°	40.8	44.6	75.7	106.7	137.8	168.9	182.4	178.3	174.3	170.2	166.2
102.5°	173.5	214.8	218.8	222.9	227.0	231.0	231.5	228.6	225.6	222.6	219.7
105°	318.1	316.1	315.0	313.9	312.7	311.6	310.4	309.0	307.7	306.3	305.0
107.5°	395.1	394.1	392.6	391.1	389.5	388.0	386.9	386.2	385.5	384.9	384.2
110°	447.3	446.8	445.5	444.1	442.8	441.4	440.4	439.7	439.0	438.4	437.7



TEST NUMBER: P333083

CATALOG NUMBER: S124RDIW-S1020D1050U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	497.8	497.9	497.2	496.6	496.0	495.4	494.4	493.2	492.0	490.8	489.6
115°	571.9	571.4	571.7	571.9	572.1	572.3	572.1	571.4	570.8	570.1	569.4
117.5°	647.5	647.6	647.1	646.6	646.1	645.6	644.9	644.0	643.1	642.2	641.3
120°	693.5	693.0	693.2	693.5	693.7	693.9	693.6	692.7	691.8	690.9	690.0
122.5°	739.5	739.2	738.9	738.6	738.3	738.0	737.5	737.0	736.4	735.9	735.4
125°	803.1	802.4	802.9	803.3	803.8	804.2	804.0	803.1	802.2	801.3	800.4
127.5°	867.6	867.7	866.6	865.6	864.6	863.5	862.9	862.7	862.5	862.2	862.0
130°	906.0	905.8	905.1	904.4	903.8	903.1	902.6	902.4	902.2	902.0	901.7
132.5°	944.1	943.9	943.0	942.2	941.3	940.5	939.8	939.4	939.0	938.6	938.2
135°	996.4	996.0	995.1	994.2	993.3	992.4	992.0	992.2	992.5	992.7	992.9
137.5°	1046.7	1046.2	1045.2	1044.2	1043.2	1042.2	1041.7	1041.6	1041.5	1041.4	1041.3
140°	1077.7	1077.0	1076.6	1076.1	1075.7	1075.2	1074.8	1074.3	1073.9	1073.4	1073.0
142.5°	1106.7	1106.2	1105.9	1105.6	1105.4	1105.1	1104.6	1103.8	1102.9	1102.1	1101.3
145°	1148.2	1147.9	1147.9	1147.9	1147.9	1147.9	1147.6	1146.9	1146.2	1145.6	1144.9
147.5°	1184.4	1184.2	1184.4	1184.7	1184.9	1185.1	1184.6	1183.3	1182.1	1180.8	1179.5
150°	1207.7	1207.7	1207.9	1208.2	1208.4	1208.6	1208.3	1207.4	1206.5	1205.6	1204.7
152.5°	1227.5	1227.2	1227.6	1228.0	1228.4	1228.8	1228.6	1227.9	1227.2	1226.5	1225.7
155°	1254.2	1253.3	1254.0	1254.7	1255.3	1256.0	1256.2	1256.0	1255.8	1255.6	1255.3
157.5°	1277.4	1276.2	1277.0	1277.7	1278.5	1279.3	1279.7	1279.8	1280.0	1280.1	1280.3
160°	1292.1	1290.8	1291.0	1291.2	1291.5	1291.7	1292.1	1292.8	1293.5	1294.2	1294.8
162.5°	1304.3	1302.9	1303.2	1303.4	1303.6	1303.8	1304.4	1305.2	1306.1	1307.0	1307.8
165°	1321.0	1319.2	1319.2	1319.2	1319.2	1319.2	1319.7	1320.8	1322.0	1323.1	1324.2
167.5°	1333.3	1331.3	1331.5	1331.6	1331.7	1331.9	1332.5	1333.7	1334.9	1336.0	1337.2
170°	1341.2	1339.4	1339.2	1339.0	1338.7	1338.5	1339.1	1340.4	1341.8	1343.1	1344.5
172.5°	1346.1	1344.3	1344.1	1343.8	1343.6	1343.4	1343.9	1345.3	1346.6	1348.0	1349.3
175°	1351.6	1349.6	1349.3	1349.1	1348.9	1348.7	1349.2	1350.6	1351.9	1353.3	1354.6
177.5°	1354.4	1353.0	1352.6	1352.3	1351.9	1351.6	1352.0	1353.3	1354.5	1355.8	1357.0
180°	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6



TEST NUMBER: P333083

CATALOG NUMBER: S124RDIW-S1020D1050U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8
2.5°	1726.3	1731.3	1736.8	1747.3	1756.2	1760.1	1767.8	1773.3	1771.7	1779.4	1792.7
5°	1733.1	1751.8	1773.2	1795.3	1820.2	1840.9	1857.5	1874.1	1887.3	1903.2	1926.7
7.5°	1732.0	1765.2	1801.3	1840.9	1881.7	1917.0	1949.6	1982.8	2012.2	2044.5	2086.6
10°	1727.6	1771.8	1816.7	1868.6	1920.4	1969.5	2013.8	2055.2	2094.7	2136.8	2190.1
12.5°	1722.6	1773.5	1827.8	1890.2	1954.7	2013.8	2065.8	2125.5	2174.8	2229.2	2290.7
15°	1700.6	1769.0	1843.0	1923.9	2001.3	2080.8	2152.0	2225.3	2293.7	2358.7	2436.2
17.5°	1675.4	1754.4	1841.6	1937.2	2030.2	2126.9	2211.3	2303.7	2373.7	2460.9	2532.8
20°	1655.0	1740.0	1833.3	1940.5	2046.3	2153.4	2246.7	2340.8	2419.6	2507.4	2598.6
22.5°	1630.1	1723.4	1824.5	1935.5	2046.3	2163.4	2266.6	2360.1	2457.7	2556.6	2650.6
25°	1590.0	1686.8	1793.9	1915.6	2042.8	2162.4	2273.0	2389.1	2494.2	2601.4	2685.7
27.5°	1540.8	1642.4	1755.4	1880.9	2011.4	2133.9	2264.2	2387.9	2493.7	2596.8	2670.4
30°	1501.5	1608.7	1717.2	1844.4	1979.9	2111.2	2250.9	2374.6	2485.9	2578.6	2620.0
32.5°	1461.1	1562.8	1674.6	1803.5	1942.3	2083.6	2222.1	2348.6	2451.6	2507.2	2508.3
35°	1390.9	1486.3	1602.4	1729.0	1871.4	2024.8	2165.2	2289.6	2352.5	2357.3	2289.6
37.5°	1314.3	1401.8	1511.5	1638.1	1794.1	1946.7	2090.1	2173.0	2194.1	2123.7	1998.4
40°	1259.6	1340.4	1446.2	1576.2	1731.0	1888.6	2019.3	2080.1	2058.0	1943.9	1804.3
42.5°	1202.0	1277.4	1379.3	1507.6	1663.0	1822.3	1933.6	1966.2	1907.6	1775.8	1612.4
45°	1108.2	1177.3	1278.2	1407.5	1556.8	1706.1	1790.5	1773.9	1676.4	1520.2	1337.0
47.5°	1010.4	1077.2	1168.0	1287.6	1440.5	1569.4	1626.5	1576.5	1437.8	1265.9	1116.9
50°	945.7	1014.1	1097.8	1211.9	1351.5	1475.9	1512.6	1436.5	1282.4	1117.1	980.3
52.5°	882.1	940.6	1022.6	1132.8	1266.3	1371.4	1390.9	1303.2	1144.1	996.0	874.6
55°	785.3	838.6	907.7	1011.4	1126.8	1216.0	1205.6	1093.0	948.5	822.0	726.6
57.5°	691.7	731.8	795.7	892.9	994.2	1054.1	1016.2	920.1	785.5	681.9	601.4
60°	629.8	667.1	726.6	811.6	900.8	934.6	902.8	798.5	692.0	597.3	529.5
62.5°	571.2	604.1	655.2	734.2	806.2	826.2	792.2	701.1	605.2	524.3	468.2
65°	486.0	516.4	560.0	616.0	665.7	675.4	653.3	560.0	487.4	419.6	380.9
67.5°	408.7	428.6	462.6	511.0	537.4	543.1	500.4	441.7	377.7	336.1	306.9
70°	356.7	370.5	402.3	428.6	450.0	450.7	411.3	364.3	315.2	281.4	259.9
72.5°	306.4	319.7	343.7	361.7	378.1	372.8	336.7	299.6	259.9	234.4	218.5
75°	236.4	248.2	260.6	268.9	268.9	262.0	235.7	208.1	185.3	170.1	165.2
77.5°	171.9	181.5	185.7	184.4	182.0	171.2	154.6	136.5	128.3	121.1	117.5
80°	134.8	139.0	140.3	136.9	132.7	120.3	109.2	101.6	94.0	91.3	89.9
82.5°	100.0	103.6	100.0	100.9	91.8	81.6	75.5	72.9	69.7	68.6	67.2
85°	53.2	52.5	51.2	47.7	41.5	40.1	39.4	38.7	37.3	38.0	36.6
87.5°	19.4	18.2	16.5	16.4	16.8	16.1	17.0	17.4	17.7	17.4	18.8
90°	5.5	8.0	10.5	12.9	15.1	16.9	18.7	20.5	22.3	23.6	25.0
92.5°	12.9	13.0	13.2	13.3	14.3	16.1	17.9	19.7	21.5	22.8	24.2
95°	48.1	40.4	32.8	25.1	21.4	21.6	21.8	22.1	22.3	23.6	25.0
97.5°	123.1	127.9	132.7	137.4	127.3	102.1	77.0	51.9	26.7	26.9	27.0
100°	170.2	174.3	178.3	182.4	168.9	137.8	106.7	75.7	44.6	40.8	36.9
102.5°	222.6	225.6	228.6	231.5	231.0	227.0	222.9	218.8	214.8	173.5	132.2
105°	306.3	307.7	309.0	310.4	311.6	312.7	313.9	315.0	316.1	318.1	320.2
107.5°	384.9	385.5	386.2	386.9	388.0	389.5	391.1	392.6	394.1	395.1	396.1
110°	438.4	439.0	439.7	440.4	441.4	442.8	444.1	445.5	446.8	447.3	447.7



TEST NUMBER: P333083

CATALOG NUMBER: S124RDIW-S1020D1050U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	490.8	492.0	493.2	494.4	495.4	496.0	496.6	497.2	497.9	497.8	497.7
115°	570.1	570.8	571.4	572.1	572.3	572.1	571.9	571.7	571.4	571.9	572.3
117.5°	642.2	643.1	644.0	644.9	645.6	646.1	646.6	647.1	647.6	647.5	647.4
120°	690.9	691.8	692.7	693.6	693.9	693.7	693.5	693.2	693.0	693.5	693.9
122.5°	735.9	736.4	737.0	737.5	738.0	738.3	738.6	738.9	739.2	739.5	739.8
125°	801.3	802.2	803.1	804.0	804.2	803.8	803.3	802.9	802.4	803.1	803.8
127.5°	862.2	862.5	862.7	862.9	863.5	864.6	865.6	866.6	867.7	867.6	867.4
130°	902.0	902.2	902.4	902.6	903.1	903.8	904.4	905.1	905.8	906.0	906.2
132.5°	938.6	939.0	939.4	939.8	940.5	941.3	942.2	943.0	943.9	944.1	944.3
135°	992.7	992.5	992.2	992.0	992.4	993.3	994.2	995.1	996.0	996.4	996.9
137.5°	1041.4	1041.5	1041.6	1041.7	1042.2	1043.2	1044.2	1045.2	1046.2	1046.7	1047.2
140°	1073.4	1073.9	1074.3	1074.8	1075.2	1075.7	1076.1	1076.6	1077.0	1077.7	1078.4
142.5°	1102.1	1102.9	1103.8	1104.6	1105.1	1105.4	1105.6	1105.9	1106.2	1106.7	1107.2
145°	1145.6	1146.2	1146.9	1147.6	1147.9	1147.9	1147.9	1147.9	1147.9	1148.2	1148.4
147.5°	1180.8	1182.1	1183.3	1184.6	1185.1	1184.9	1184.7	1184.4	1184.2	1184.4	1184.6
150°	1205.6	1206.5	1207.4	1208.3	1208.6	1208.4	1208.2	1207.9	1207.7	1207.7	1207.7
152.5°	1226.5	1227.2	1227.9	1228.6	1228.8	1228.4	1228.0	1227.6	1227.2	1227.5	1227.9
155°	1255.6	1255.8	1256.0	1256.2	1256.0	1255.3	1254.7	1254.0	1253.3	1254.2	1255.1
157.5°	1280.1	1280.0	1279.8	1279.7	1279.3	1278.5	1277.7	1277.0	1276.2	1277.4	1278.5
160°	1294.2	1293.5	1292.8	1292.1	1291.7	1291.5	1291.2	1291.0	1290.8	1292.1	1293.5
162.5°	1307.0	1306.1	1305.2	1304.4	1303.8	1303.6	1303.4	1303.2	1302.9	1304.3	1305.6
165°	1323.1	1322.0	1320.8	1319.7	1319.2	1319.2	1319.2	1319.2	1319.2	1321.0	1322.8
167.5°	1336.0	1334.9	1333.7	1332.5	1331.9	1331.7	1331.6	1331.5	1331.3	1333.3	1335.3
170°	1343.1	1341.8	1340.4	1339.1	1338.5	1338.7	1339.0	1339.2	1339.4	1341.2	1343.0
172.5°	1348.0	1346.6	1345.3	1343.9	1343.4	1343.6	1343.8	1344.1	1344.3	1346.1	1347.9
175°	1353.3	1351.9	1350.6	1349.2	1348.7	1348.9	1349.1	1349.3	1349.6	1351.6	1353.6
177.5°	1355.8	1354.5	1353.3	1352.0	1351.6	1351.9	1352.3	1352.6	1353.0	1354.4	1355.9
180°	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6



TEST NUMBER: P333083

CATALOG NUMBER: S124RDIW-S1020D1050U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8	1715.8
2.5°	1799.9	1802.1	1803.8	1809.3	1809.8	1814.8	1809.8
5°	1948.8	1958.5	1973.7	1988.9	1990.3	1999.9	1982.7
7.5°	2115.8	2138.2	2152.2	2176.8	2186.5	2192.5	2182.6
10°	2230.8	2251.6	2288.2	2306.2	2324.2	2326.9	2318.6
12.5°	2342.0	2374.9	2403.8	2437.8	2437.0	2461.3	2452.5
15°	2490.1	2524.0	2564.0	2602.1	2615.9	2615.9	2627.0
17.5°	2595.7	2657.8	2699.3	2729.1	2761.8	2767.4	2763.6
20°	2667.1	2734.1	2778.4	2817.1	2839.2	2845.4	2845.4
22.5°	2720.1	2777.2	2820.4	2855.2	2873.5	2880.8	2878.6
25°	2756.9	2806.0	2832.3	2842.6	2847.5	2846.1	2833.0
27.5°	2706.6	2704.4	2687.8	2656.0	2632.1	2617.6	2601.0
30°	2610.4	2574.4	2532.9	2487.3	2428.6	2383.6	2369.8
32.5°	2467.1	2386.4	2316.1	2240.1	2176.9	2132.0	2113.2
35°	2190.1	2062.2	1957.8	1866.5	1800.2	1758.7	1744.9
37.5°	1861.3	1737.5	1608.3	1519.8	1464.7	1422.8	1407.2
40°	1652.2	1517.4	1404.7	1321.8	1265.1	1224.3	1223.6
42.5°	1461.4	1332.7	1226.7	1166.9	1105.8	1078.8	1078.7
45°	1196.6	1093.6	1003.8	956.8	920.1	898.0	891.8
47.5°	990.8	905.6	845.7	808.3	778.4	764.3	755.2
50°	875.2	800.5	752.8	720.3	703.7	685.8	684.4
52.5°	779.0	718.7	681.5	655.1	634.1	623.3	623.6
55°	654.7	607.0	580.7	560.6	544.1	535.8	532.3
57.5°	551.5	515.7	496.6	478.2	471.2	464.7	462.9
60°	487.4	463.2	445.2	430.7	420.3	418.2	417.5
62.5°	434.3	409.0	396.5	385.3	377.7	374.5	373.3
65°	358.1	339.4	328.4	319.4	316.6	311.8	311.1
67.5°	288.7	277.5	270.2	263.9	260.2	259.9	259.9
70°	246.1	239.9	233.7	230.2	228.1	226.7	226.7
72.5°	209.6	205.0	199.9	198.1	197.7	196.3	195.8
75°	159.7	154.9	155.5	152.1	149.3	145.9	143.8
77.5°	113.2	109.8	109.1	108.7	106.3	105.9	107.0
80°	87.8	84.3	83.6	84.3	83.6	81.6	81.6
82.5°	66.8	63.9	63.2	62.8	62.1	62.8	61.7
85°	35.9	34.6	34.6	34.6	35.9	35.3	34.6
87.5°	18.0	17.7	18.4	18.0	18.1	17.6	18.2
90°	26.3	27.7	28.6	29.0	29.5	29.9	30.4
92.5°	25.5	26.9	27.6	27.7	27.8	27.9	28.0
95°	26.3	27.7	28.5	28.7	28.9	29.2	29.4
97.5°	27.2	27.3	27.5	27.7	27.9	28.1	28.4
100°	33.1	29.3	27.5	27.7	27.9	28.1	28.4
102.5°	90.9	49.6	29.0	29.0	29.1	29.1	29.2
105°	322.2	324.2	321.2	313.1	305.0	296.9	288.8
107.5°	397.1	398.1	399.0	399.9	400.7	401.6	402.4
110°	448.2	448.6	449.2	449.9	450.5	451.2	451.9



TEST NUMBER: P333083

CATALOG NUMBER: S124RDIW-S1020D1050U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	497.6	497.5	497.9	498.8	499.6	500.5	501.3
115°	572.8	573.2	573.5	573.5	573.5	573.5	573.5
117.5°	647.4	647.3	647.2	647.1	647.0	646.9	646.8
120°	694.4	694.8	694.8	694.4	693.9	693.5	693.0
122.5°	740.0	740.3	740.2	739.8	739.3	738.9	738.4
125°	804.5	805.1	805.6	805.8	806.0	806.3	806.5
127.5°	867.3	867.1	867.0	866.8	866.6	866.4	866.3
130°	906.5	906.7	906.8	906.8	906.8	906.8	906.8
132.5°	944.6	944.8	944.8	944.6	944.4	944.3	944.1
135°	997.3	997.8	998.2	998.7	999.1	999.6	1000.0
137.5°	1047.7	1048.2	1048.4	1048.2	1048.1	1048.0	1047.8
140°	1079.0	1079.7	1080.2	1080.4	1080.6	1080.8	1081.1
142.5°	1107.7	1108.2	1108.4	1108.5	1108.5	1108.6	1108.6
145°	1148.6	1148.8	1149.2	1149.6	1150.1	1150.5	1151.0
147.5°	1184.7	1184.9	1185.1	1185.4	1185.6	1185.8	1186.0
150°	1207.7	1207.7	1207.8	1208.0	1208.3	1208.5	1208.7
152.5°	1228.2	1228.6	1228.7	1228.6	1228.4	1228.3	1228.2
155°	1256.0	1256.9	1257.0	1256.3	1255.7	1255.0	1254.3
157.5°	1279.7	1280.9	1280.9	1279.7	1278.5	1277.4	1276.2
160°	1294.8	1296.2	1296.2	1294.8	1293.5	1292.1	1290.8
162.5°	1307.0	1308.3	1308.3	1306.7	1305.2	1303.7	1302.1
165°	1324.6	1326.4	1326.2	1324.2	1322.2	1320.2	1318.1
167.5°	1337.3	1339.2	1339.1	1336.9	1334.6	1332.4	1330.1
170°	1344.8	1346.6	1346.4	1344.1	1341.9	1339.6	1337.4
172.5°	1349.7	1351.5	1351.2	1348.7	1346.3	1343.9	1341.4
175°	1355.6	1357.7	1357.3	1354.6	1351.9	1349.2	1346.5
177.5°	1357.3	1358.8	1358.4	1356.2	1354.1	1351.9	1349.8
180°	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6

(END OF REPORT)