

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: NEO-RAY

Report Number: P333065

Luminaire Tested: **S124RDIW-S795D1050U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333065
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIW-S795D1050U835-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1050 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7403.7 lumens
Efficiency: N/A
Efficacy: 140.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 52.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333065

CATALOG NUMBER: S124RDIW-S795D1050U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

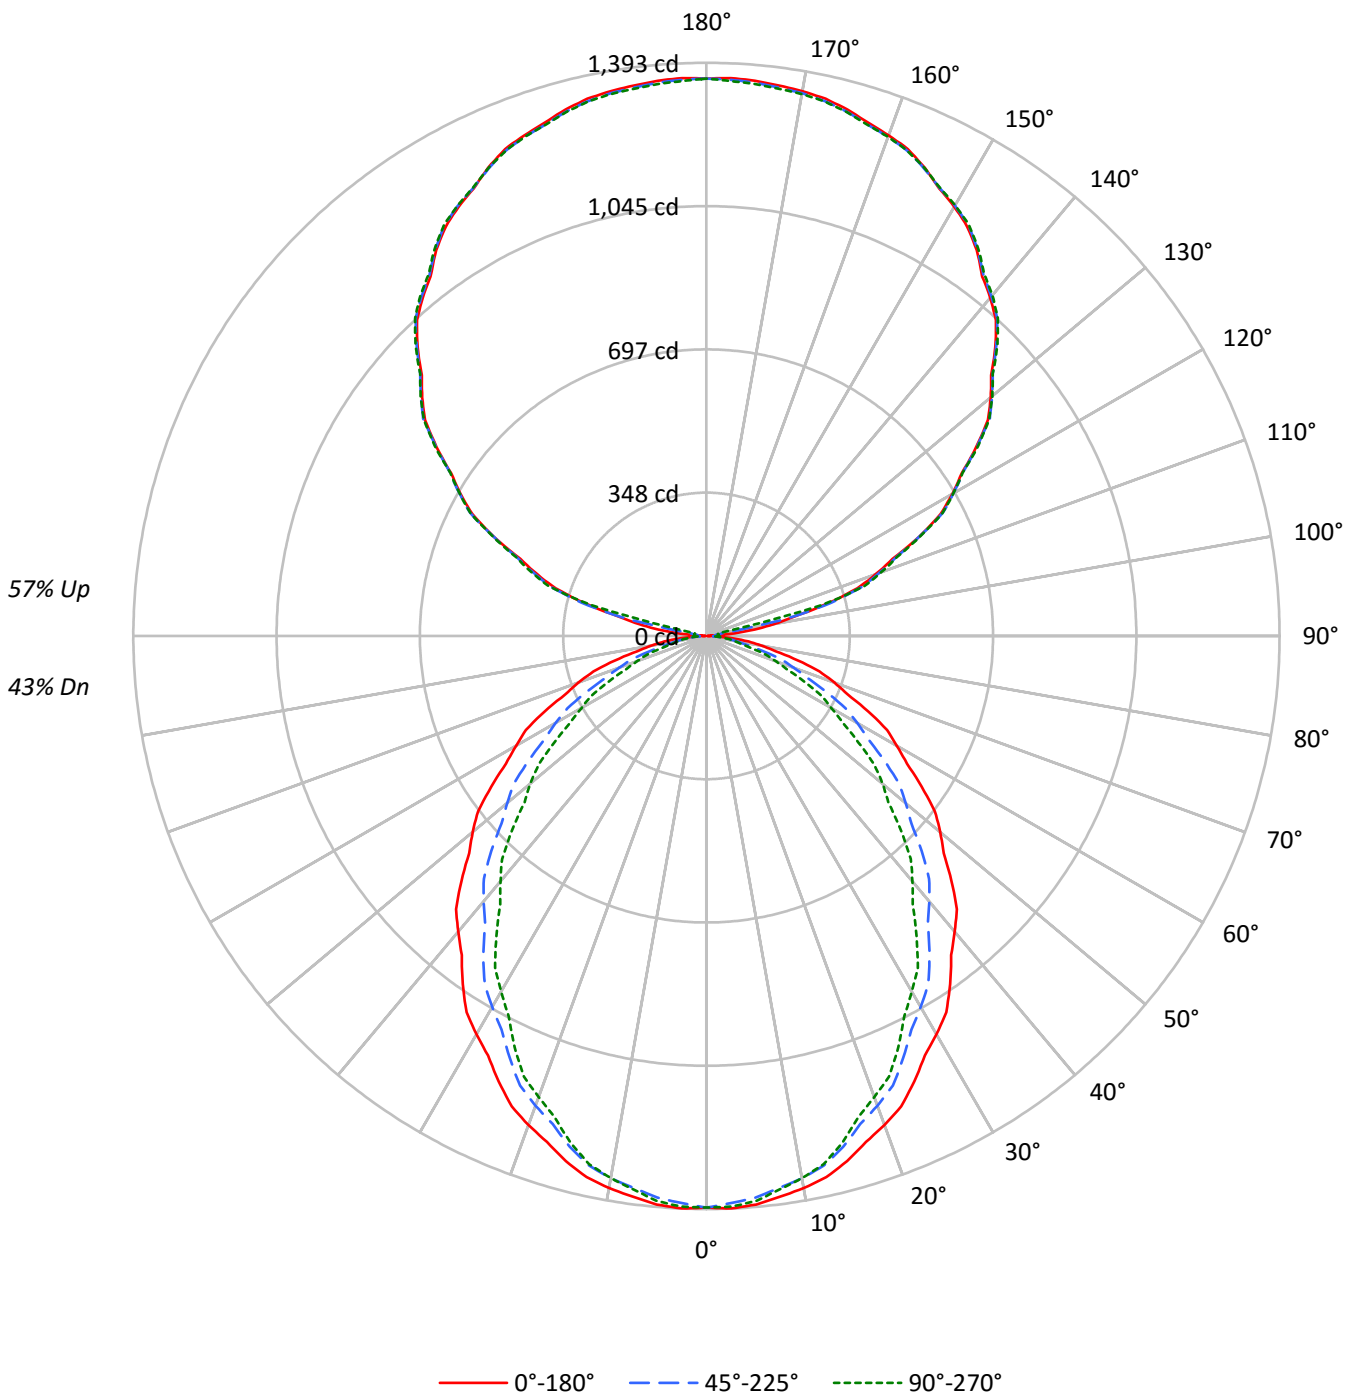



TEST NUMBER: P333065

CATALOG NUMBER: S124RDIW-S795D1050U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	64	64	64	50	50	50	43
1	97	92	89	85	88	85	81	79	70	68	66	57	55	54	45	44	43	37
2	88	81	75	70	80	74	69	65	62	58	55	50	48	45	40	38	36	31
3	80	71	64	58	73	65	59	54	55	50	46	45	41	39	35	33	31	27
4	74	63	55	50	67	58	51	46	49	44	40	40	36	33	32	29	27	23
5	68	56	48	43	62	52	45	40	44	38	34	36	32	29	29	26	24	20
6	62	51	43	37	57	47	40	35	39	34	30	32	28	25	26	23	21	18
7	58	46	38	32	53	42	35	30	36	30	26	29	25	22	24	21	19	16
8	53	41	34	29	49	38	32	27	33	27	23	27	23	20	22	19	17	14
9	50	38	30	26	46	35	29	24	30	25	21	25	21	18	20	17	15	13
10	47	35	28	23	43	32	26	22	27	22	19	23	19	16	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11215	11215	11215
5°	11240	11102	11171
10°	11170	10969	10969
15°	11041	10739	10659
20°	10865	10436	10244
25°	10640	10081	9825
30°	10421	9707	9300
35°	10178	9319	8774
40°	9887	8878	8205
45°	9618	8440	7626
50°	9311	7935	7013
55°	8983	7410	6348
60°	8622	6835	5667
65°	8290	6117	4999
70°	7808	5323	4244
75°	7199	4414	3450
80°	6281	3361	3166
85°	5317	3057	2853



TEST NUMBER: P333065

CATALOG NUMBER: S124RDIW-S795D1050U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	130.5	1.8
10°-20°	363.9	4.9
20°-30°	525.5	7.1
30°-40°	595.6	8.0
40°-50°	575.2	7.8
50°-60°	478.3	6.5
60°-70°	330.3	4.5
70°-80°	167.4	2.3
80°-90°	46.9	0.6
90°-100°	46.3	0.6
100°-110°	295.4	4.0
110°-120°	565.1	7.6
120°-130°	717.4	9.7
130°-140°	767.5	10.4
140°-150°	717.7	9.7
150°-160°	578.8	7.8
160°-170°	373.3	5.0
170°-180°	128.7	1.7
0°-30°	1019.8	13.8
0°-40°	1615.5	21.8
0°-60°	2668.9	36.0
0°-90°	3213.4	43.4
90°-120°	906.8	12.2
90°-150°	3109.5	42.0
90°-180°	4190.0	56.6
0°-180°	7403.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1389	1389	1389	1389	1389	
5°	1387	1382	1370	1380	1378	132
15°	1321	1311	1285	1282	1275	372
25°	1194	1174	1132	1114	1103	550
35°	1033	998	946	910	890	645
45°	842	802	739	689	668	649
55°	638	594	526	473	451	571
65°	434	387	320	276	262	428
75°	231	191	142	118	111	244
85°	57	37	33	31	31	65
90°	3	14	22	28	30	5
95°	56	23	22	28	29	72
105°	305	311	316	323	289	319
115°	569	572	571	573	574	560
125°	800	804	802	805	806	714
135°	993	992	996	998	1000	765
145°	1145	1148	1148	1149	1151	715
155°	1255	1256	1253	1257	1254	579
165°	1324	1319	1319	1326	1318	374
175°	1355	1349	1350	1358	1346	129
180°	1355	1355	1355	1355	1355	



TEST NUMBER: P333065

CATALOG NUMBER: S124RDIW-S795D1050U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2
2.5°	1392.6	1391.8	1391.0	1390.3	1389.5	1388.1	1386.0	1384.0	1381.9	1379.8	1381.9
5°	1387.0	1386.1	1385.1	1384.2	1383.2	1381.4	1378.5	1375.7	1372.8	1370.0	1372.4
7.5°	1374.5	1373.5	1372.5	1371.5	1370.5	1368.2	1364.5	1360.8	1357.1	1353.4	1354.9
10°	1362.6	1361.4	1360.2	1359.0	1357.8	1355.1	1350.9	1346.6	1342.4	1338.1	1339.0
12.5°	1347.2	1345.9	1344.5	1343.1	1341.8	1338.6	1333.6	1328.5	1323.5	1318.5	1319.1
15°	1321.1	1319.0	1316.8	1314.7	1312.6	1308.6	1302.6	1296.7	1290.8	1284.9	1284.4
17.5°	1289.4	1286.3	1283.2	1280.2	1277.1	1272.0	1264.9	1257.8	1250.7	1243.6	1242.3
20°	1264.7	1261.6	1258.6	1255.5	1252.4	1246.9	1238.8	1230.8	1222.7	1214.7	1212.8
22.5°	1237.5	1234.0	1230.6	1227.1	1223.7	1217.6	1209.0	1200.4	1191.8	1183.2	1180.4
25°	1194.5	1190.2	1186.0	1181.7	1177.5	1170.5	1160.8	1151.1	1141.4	1131.7	1127.7
27.5°	1149.4	1144.1	1138.7	1133.4	1128.0	1120.2	1109.8	1099.5	1089.1	1078.8	1073.8
30°	1117.9	1112.0	1106.1	1100.2	1094.3	1085.8	1074.7	1063.6	1052.4	1041.3	1035.4
32.5°	1084.7	1078.1	1071.4	1064.7	1058.1	1049.0	1037.5	1026.0	1014.5	1003.0	996.2
35°	1032.8	1025.3	1017.7	1010.1	1002.6	992.9	981.1	969.2	957.4	945.6	937.6
37.5°	977.3	969.5	961.7	953.9	946.1	935.7	922.6	909.5	896.4	883.3	874.3
40°	938.2	930.4	922.6	914.8	907.0	896.3	882.8	869.4	855.9	842.4	832.5
42.5°	900.7	892.5	884.4	876.2	868.0	856.9	842.9	828.8	814.8	800.7	790.6
45°	842.4	833.7	824.9	816.2	807.4	796.0	781.8	767.6	753.4	739.3	727.7
47.5°	782.2	773.2	764.2	755.1	746.1	734.2	719.5	704.7	690.0	675.2	663.2
50°	741.4	732.2	722.9	713.7	704.5	692.3	677.2	662.1	646.9	631.8	620.0
52.5°	699.7	690.7	681.6	672.6	663.6	651.3	635.8	620.3	604.8	589.3	577.3
55°	638.2	628.7	619.3	609.8	600.4	588.0	572.6	557.2	541.9	526.5	514.2
57.5°	577.4	567.5	557.7	547.9	538.0	525.5	510.4	495.3	480.2	465.0	452.6
60°	534.0	524.5	515.1	505.6	496.1	483.9	468.7	453.6	438.5	423.3	411.0
62.5°	494.8	485.0	475.2	465.3	455.5	442.8	427.3	411.8	396.3	380.8	369.4
65°	434.0	423.8	413.6	403.5	393.3	380.7	365.5	350.4	335.3	320.2	310.0
67.5°	370.8	361.1	351.3	341.6	331.8	320.0	305.9	291.9	277.8	263.8	255.0
70°	330.8	320.9	310.9	301.0	291.1	279.4	265.9	252.4	239.0	225.5	217.7
72.5°	288.3	279.3	270.3	261.3	252.3	241.5	228.8	216.0	203.3	190.6	183.9
75°	230.8	222.1	213.3	204.6	195.8	185.9	174.8	163.7	152.6	141.5	136.0
77.5°	172.5	165.1	157.7	150.3	142.8	134.6	125.7	116.7	107.7	98.7	95.5
80°	135.1	128.2	121.4	114.5	107.7	100.7	93.6	86.5	79.4	72.3	71.6
82.5°	102.8	96.5	90.2	83.9	77.6	72.4	68.4	64.3	60.2	56.2	55.6
85°	57.4	52.7	48.0	43.3	38.5	35.8	35.1	34.4	33.7	33.0	32.5
87.5°	20.2	19.2	18.1	17.1	16.1	15.7	15.9	16.0	16.2	16.4	16.5
90°	3.0	5.5	8.0	10.5	12.9	15.1	16.9	18.7	20.5	22.3	23.6
92.5°	12.8	12.9	13.0	13.2	13.3	14.3	16.1	17.9	19.7	21.5	22.8
95°	55.7	48.1	40.4	32.8	25.1	21.4	21.6	21.8	22.1	22.3	23.6
97.5°	118.3	123.1	127.9	132.7	137.4	127.3	102.1	77.0	51.9	26.7	26.9
100°	166.2	170.2	174.3	178.3	182.4	168.9	137.8	106.7	75.7	44.6	40.8
102.5°	219.7	222.6	225.6	228.6	231.5	231.0	227.0	222.9	218.8	214.8	173.5
105°	305.0	306.3	307.7	309.0	310.4	311.6	312.7	313.9	315.0	316.1	318.1
107.5°	384.2	384.9	385.5	386.2	386.9	388.0	389.5	391.1	392.6	394.1	395.1
110°	437.7	438.4	439.0	439.7	440.4	441.4	442.8	444.1	445.5	446.8	447.3



TEST NUMBER: P333065

CATALOG NUMBER: S124RDIW-S795D1050U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	489.6	490.8	492.0	493.2	494.4	495.4	496.0	496.6	497.2	497.9	497.8
115°	569.4	570.1	570.8	571.4	572.1	572.3	572.1	571.9	571.7	571.4	571.9
117.5°	641.3	642.2	643.1	644.0	644.9	645.6	646.1	646.6	647.1	647.6	647.5
120°	690.0	690.9	691.8	692.7	693.6	693.9	693.7	693.5	693.2	693.0	693.5
122.5°	735.4	735.9	736.4	737.0	737.5	738.0	738.3	738.6	738.9	739.2	739.5
125°	800.4	801.3	802.2	803.1	804.0	804.2	803.8	803.3	802.9	802.4	803.1
127.5°	862.0	862.2	862.5	862.7	862.9	863.5	864.6	865.6	866.6	867.7	867.6
130°	901.7	902.0	902.2	902.4	902.6	903.1	903.8	904.4	905.1	905.8	906.0
132.5°	938.2	938.6	939.0	939.4	939.8	940.5	941.3	942.2	943.0	943.9	944.1
135°	992.9	992.7	992.5	992.2	992.0	992.4	993.3	994.2	995.1	996.0	996.4
137.5°	1041.3	1041.4	1041.5	1041.6	1041.7	1042.2	1043.2	1044.2	1045.2	1046.2	1046.7
140°	1073.0	1073.4	1073.9	1074.3	1074.8	1075.2	1075.7	1076.1	1076.6	1077.0	1077.7
142.5°	1101.3	1102.1	1102.9	1103.8	1104.6	1105.1	1105.4	1105.6	1105.9	1106.2	1106.7
145°	1144.9	1145.6	1146.2	1146.9	1147.6	1147.9	1147.9	1147.9	1147.9	1147.9	1148.2
147.5°	1179.5	1180.8	1182.1	1183.3	1184.6	1185.1	1184.9	1184.7	1184.4	1184.2	1184.4
150°	1204.7	1205.6	1206.5	1207.4	1208.3	1208.6	1208.4	1208.2	1207.9	1207.7	1207.7
152.5°	1225.7	1226.5	1227.2	1227.9	1228.6	1228.8	1228.4	1228.0	1227.6	1227.2	1227.5
155°	1255.3	1255.6	1255.8	1256.0	1256.2	1256.0	1255.3	1254.7	1254.0	1253.3	1254.2
157.5°	1280.3	1280.1	1280.0	1279.8	1279.7	1279.3	1278.5	1277.7	1277.0	1276.2	1277.4
160°	1294.8	1294.2	1293.5	1292.8	1292.1	1291.7	1291.5	1291.2	1291.0	1290.8	1292.1
162.5°	1307.8	1307.0	1306.1	1305.2	1304.4	1303.8	1303.6	1303.4	1303.2	1302.9	1304.3
165°	1324.2	1323.1	1322.0	1320.8	1319.7	1319.2	1319.2	1319.2	1319.2	1319.2	1321.0
167.5°	1337.2	1336.0	1334.9	1333.7	1332.5	1331.9	1331.7	1331.6	1331.5	1331.3	1333.3
170°	1344.5	1343.1	1341.8	1340.4	1339.1	1338.5	1338.7	1339.0	1339.2	1339.4	1341.2
172.5°	1349.3	1348.0	1346.6	1345.3	1343.9	1343.4	1343.6	1343.8	1344.1	1344.3	1346.1
175°	1354.6	1353.3	1351.9	1350.6	1349.2	1348.7	1348.9	1349.1	1349.3	1349.6	1351.6
177.5°	1357.0	1355.8	1354.5	1353.3	1352.0	1351.6	1351.9	1352.3	1352.6	1353.0	1354.4
180°	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6



TEST NUMBER: P333065

CATALOG NUMBER: S124RDIW-S795D1050U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2	1389.2
2.5°	1384.0	1386.0	1388.1	1389.1	1388.9	1388.7	1388.5	1388.3
5°	1374.7	1377.1	1379.5	1380.4	1379.9	1379.5	1379.0	1378.5
7.5°	1356.4	1358.0	1359.5	1359.8	1359.1	1358.3	1357.6	1356.8
10°	1340.0	1340.9	1341.9	1341.9	1340.9	1340.0	1339.0	1338.1
12.5°	1319.7	1320.2	1320.8	1320.4	1319.1	1317.8	1316.4	1315.1
15°	1284.0	1283.5	1283.0	1282.0	1280.3	1278.6	1277.0	1275.3
17.5°	1241.0	1239.7	1238.3	1236.4	1233.9	1231.4	1228.9	1226.4
20°	1210.9	1209.0	1207.1	1204.7	1201.6	1198.5	1195.4	1192.4
22.5°	1177.6	1174.7	1171.9	1169.2	1166.7	1164.2	1161.7	1159.2
25°	1123.7	1119.7	1115.7	1112.5	1110.1	1107.8	1105.4	1103.0
27.5°	1068.8	1063.9	1058.9	1054.7	1051.3	1047.9	1044.5	1041.1
30°	1029.5	1023.6	1017.7	1012.8	1009.1	1005.3	1001.5	997.7
32.5°	989.3	982.5	975.6	970.4	966.8	963.2	959.6	956.0
35°	929.5	921.5	913.5	907.3	903.1	898.8	894.5	890.3
37.5°	865.3	856.3	847.3	840.7	836.5	832.2	828.0	823.7
40°	822.6	812.6	802.7	795.6	791.4	787.1	782.9	778.6
42.5°	780.5	770.4	760.3	753.0	748.5	744.1	739.7	735.2
45°	716.1	704.5	692.9	685.0	680.7	676.5	672.2	668.0
47.5°	651.2	639.2	627.2	618.8	614.2	609.5	604.8	600.1
50°	608.2	596.4	584.5	576.4	571.9	567.4	562.9	558.4
52.5°	565.3	553.3	541.2	532.9	528.2	523.5	518.9	514.2
55°	501.9	489.6	477.4	469.0	464.5	460.0	455.5	451.0
57.5°	440.1	427.6	415.1	407.2	403.8	400.4	397.0	393.6
60°	398.8	386.5	374.2	366.1	362.4	358.6	354.8	351.0
62.5°	358.1	346.8	335.4	328.2	325.2	322.2	319.1	316.1
65°	299.8	289.7	279.5	273.0	270.2	267.3	264.5	261.7
67.5°	246.3	237.6	228.8	222.9	219.8	216.6	213.5	210.4
70°	209.9	202.1	194.3	189.2	186.9	184.5	182.1	179.8
72.5°	177.3	170.6	163.9	159.5	157.4	155.2	153.0	150.8
75°	130.6	125.2	119.7	116.3	114.9	113.5	112.0	110.6
77.5°	92.4	89.2	86.0	84.2	83.8	83.4	83.0	82.5
80°	70.9	70.2	69.5	69.0	68.8	68.5	68.3	68.1
82.5°	55.1	54.6	54.1	53.7	53.5	53.2	53.0	52.8
85°	32.0	31.6	31.1	30.8	30.8	30.8	30.8	30.8
87.5°	16.5	16.6	16.7	16.9	17.2	17.4	17.7	18.0
90°	25.0	26.3	27.7	28.6	29.0	29.5	29.9	30.4
92.5°	24.2	25.5	26.9	27.6	27.7	27.8	27.9	28.0
95°	25.0	26.3	27.7	28.5	28.7	28.9	29.2	29.4
97.5°	27.0	27.2	27.3	27.5	27.7	27.9	28.1	28.4
100°	36.9	33.1	29.3	27.5	27.7	27.9	28.1	28.4
102.5°	132.2	90.9	49.6	29.0	29.0	29.1	29.1	29.2
105°	320.2	322.2	324.2	321.2	313.1	305.0	296.9	288.8
107.5°	396.1	397.1	398.1	399.0	399.9	400.7	401.6	402.4
110°	447.7	448.2	448.6	449.2	449.9	450.5	451.2	451.9



TEST NUMBER: P333065

CATALOG NUMBER: S124RDIW-S795D1050U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	497.7	497.6	497.5	497.9	498.8	499.6	500.5	501.3
115°	572.3	572.8	573.2	573.5	573.5	573.5	573.5	573.5
117.5°	647.4	647.4	647.3	647.2	647.1	647.0	646.9	646.8
120°	693.9	694.4	694.8	694.8	694.4	693.9	693.5	693.0
122.5°	739.8	740.0	740.3	740.2	739.8	739.3	738.9	738.4
125°	803.8	804.5	805.1	805.6	805.8	806.0	806.3	806.5
127.5°	867.4	867.3	867.1	867.0	866.8	866.6	866.4	866.3
130°	906.2	906.5	906.7	906.8	906.8	906.8	906.8	906.8
132.5°	944.3	944.6	944.8	944.8	944.6	944.4	944.3	944.1
135°	996.9	997.3	997.8	998.2	998.7	999.1	999.6	1000.0
137.5°	1047.2	1047.7	1048.2	1048.4	1048.2	1048.1	1048.0	1047.8
140°	1078.4	1079.0	1079.7	1080.2	1080.4	1080.6	1080.8	1081.1
142.5°	1107.2	1107.7	1108.2	1108.4	1108.5	1108.5	1108.6	1108.6
145°	1148.4	1148.6	1148.8	1149.2	1149.6	1150.1	1150.5	1151.0
147.5°	1184.6	1184.7	1184.9	1185.1	1185.4	1185.6	1185.8	1186.0
150°	1207.7	1207.7	1207.7	1207.8	1208.0	1208.3	1208.5	1208.7
152.5°	1227.9	1228.2	1228.6	1228.7	1228.6	1228.4	1228.3	1228.2
155°	1255.1	1256.0	1256.9	1257.0	1256.3	1255.7	1255.0	1254.3
157.5°	1278.5	1279.7	1280.9	1280.9	1279.7	1278.5	1277.4	1276.2
160°	1293.5	1294.8	1296.2	1296.2	1294.8	1293.5	1292.1	1290.8
162.5°	1305.6	1307.0	1308.3	1308.3	1306.7	1305.2	1303.7	1302.1
165°	1322.8	1324.6	1326.4	1326.2	1324.2	1322.2	1320.2	1318.1
167.5°	1335.3	1337.3	1339.2	1339.1	1336.9	1334.6	1332.4	1330.1
170°	1343.0	1344.8	1346.6	1346.4	1344.1	1341.9	1339.6	1337.4
172.5°	1347.9	1349.7	1351.5	1351.2	1348.7	1346.3	1343.9	1341.4
175°	1353.6	1355.6	1357.7	1357.3	1354.6	1351.9	1349.2	1346.5
177.5°	1355.9	1357.3	1358.8	1358.4	1356.2	1354.1	1351.9	1349.8
180°	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6	1354.6

(END OF REPORT)