

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332731-935

Luminaire Tested: **S124DIW-S350D1050U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332731-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S350D1050U935-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1050 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4916.4 lumens
Efficiency: N/A
Efficacy: 129.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 38
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332731-935

CATALOG NUMBER: S124DIW-S350D1050U935-4F0-1E-UDD-F

Luminous Intensity Polar Plot

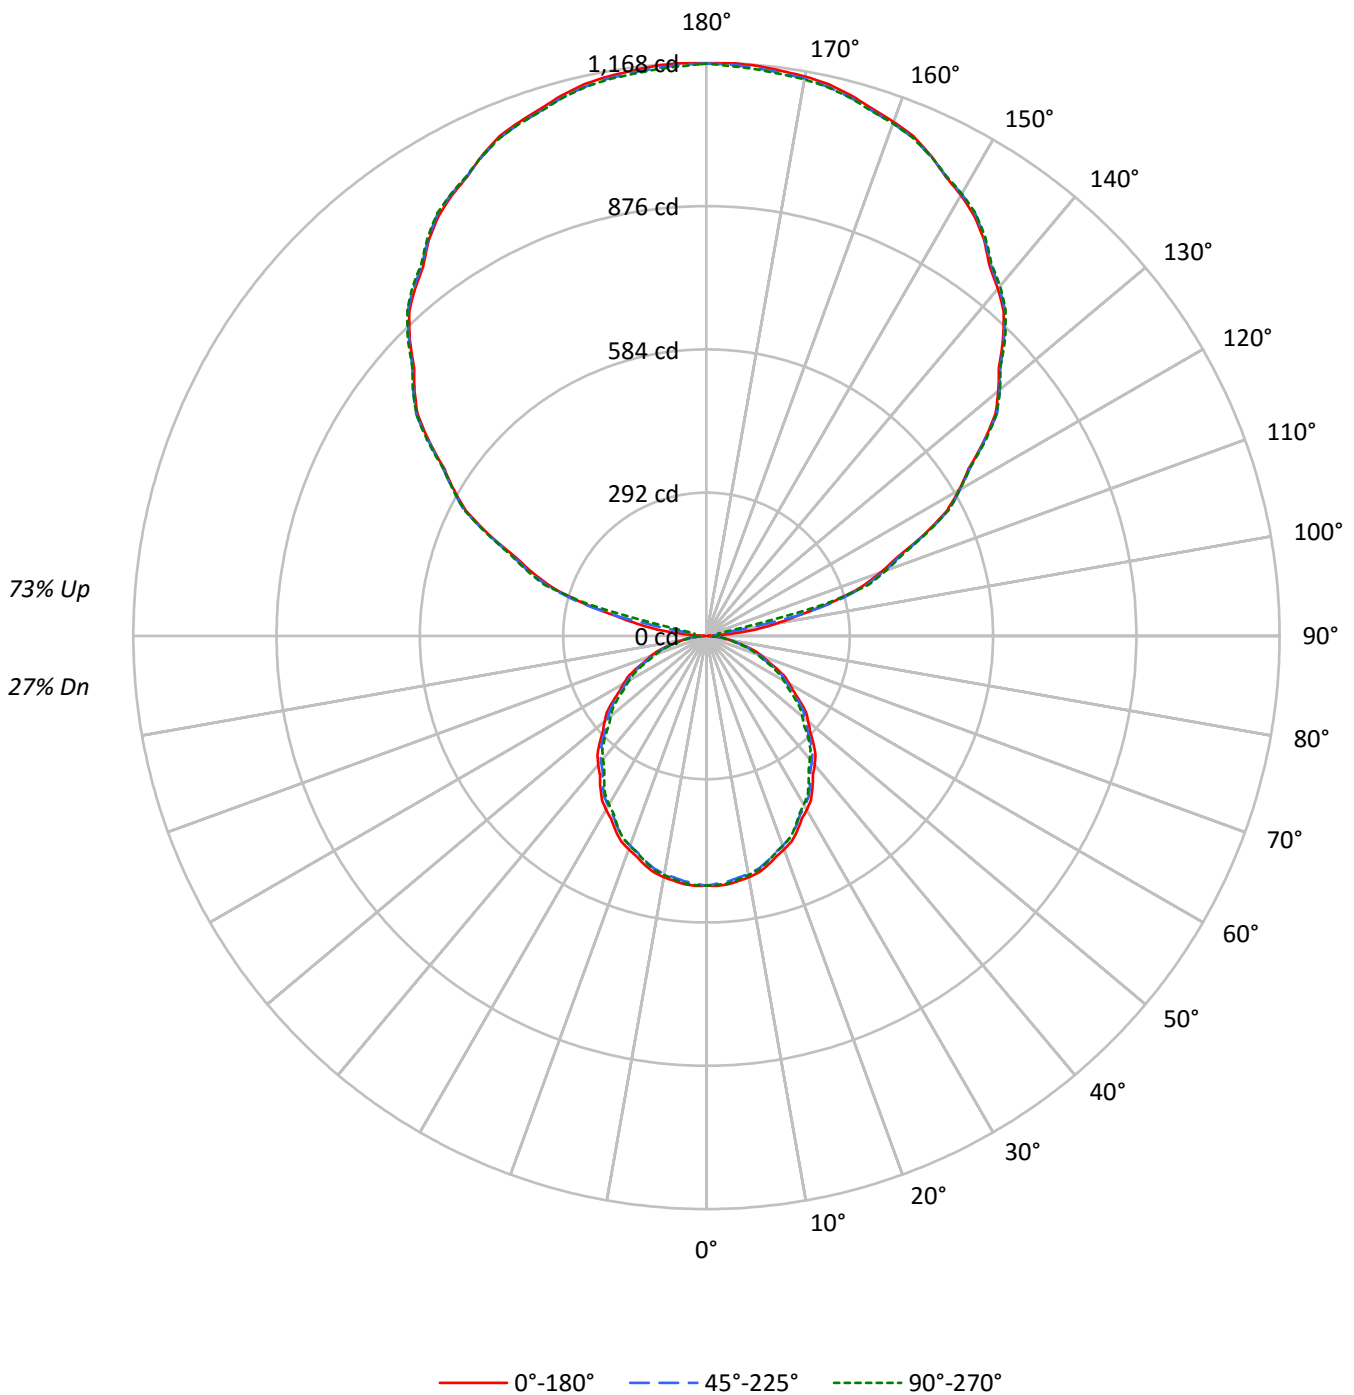



TEST NUMBER: P332731-935

CATALOG NUMBER: S124DIW-S350D1050U935-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	70	70	70	52	52	52	35	35	35	27
1	93	88	85	81	82	79	76	73	61	59	57	45	44	43	31	30	29	22
2	84	77	71	66	75	69	64	60	54	50	47	40	38	36	27	26	24	19
3	77	68	61	55	68	61	55	50	47	43	40	35	32	30	24	22	21	16
4	70	60	52	46	62	54	47	42	42	37	34	31	28	26	21	19	18	14
5	64	53	45	40	57	48	41	36	37	33	29	28	25	22	19	17	16	12
6	59	47	40	34	52	43	36	31	34	29	25	25	22	19	17	15	14	10
7	54	43	35	30	48	38	32	27	30	26	22	23	20	17	16	14	12	9
8	50	39	31	26	45	35	28	24	28	23	19	21	18	15	14	12	11	8
9	47	35	28	23	42	32	25	21	25	21	17	19	16	13	13	11	10	7
10	44	32	25	20	39	29	23	19	23	19	15	18	14	12	12	10	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4106	4106	4106
5°	4118	4068	4099
10°	4092	4036	4055
15°	4043	3978	3989
20°	3978	3907	3911
25°	3902	3827	3815
30°	3811	3731	3697
35°	3714	3631	3582
40°	3616	3518	3453
45°	3513	3406	3342
50°	3399	3307	3204
55°	3275	3178	3074
60°	3152	3034	2942
65°	3012	2896	2779
70°	2858	2712	2608
75°	2617	2492	2427
80°	2329	2236	2176
85°	2038	1964	1927



TEST NUMBER: P332731-935

CATALOG NUMBER: S124DIW-S350D1050U935-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	47.9	1.0
10°-20°	135.0	2.7
20°-30°	198.6	4.0
30°-40°	230.9	4.7
40°-50°	230.9	4.7
50°-60°	202.0	4.1
60°-70°	150.0	3.1
70°-80°	85.2	1.7
80°-90°	28.0	0.6
90°-100°	39.9	0.8
100°-110°	254.3	5.2
110°-120°	486.6	9.9
120°-130°	617.7	12.6
130°-140°	660.8	13.4
140°-150°	618.0	12.6
150°-160°	498.3	10.1
160°-170°	321.4	6.5
170°-180°	110.8	2.3
0°-30°	381.5	7.8
0°-40°	612.4	12.5
0°-60°	1045.3	21.3
0°-90°	1308.5	26.6
90°-120°	780.8	15.9
90°-150°	2677.3	54.5
90°-180°	3608.0	73.4
0°-180°	4916.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	509	509	509	509	509	
5°	508	506	502	506	506	48
15°	484	482	476	478	477	136
25°	438	435	430	430	428	201
35°	377	374	368	366	364	236
45°	308	305	298	294	293	237
55°	233	231	226	221	218	208
65°	158	156	152	148	146	156
75°	84	82	80	78	78	89
85°	22	22	21	21	21	24
90°	3	12	19	24	26	3
95°	48	20	19	24	25	62
105°	263	268	272	278	249	275
115°	490	493	492	494	494	482
125°	689	692	691	693	694	615
135°	855	854	858	859	861	658
145°	986	988	988	989	991	616
155°	1081	1082	1079	1082	1080	498
165°	1140	1136	1136	1142	1135	322
175°	1166	1161	1162	1169	1159	111
180°	1166	1166	1166	1166	1166	



TEST NUMBER: P332731-935

CATALOG NUMBER: S124DIW-S350D1050U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	508.6	508.6	508.6	508.6	508.6	508.6	508.6	508.6	508.6	508.6	508.6
2.5°	509.9	509.7	509.5	509.3	509.0	508.5	507.7	507.0	506.2	505.3	506.1
5°	508.2	507.8	507.5	507.1	506.8	506.1	505.1	504.1	503.1	502.0	503.1
7.5°	503.5	503.1	502.7	502.4	502.0	501.3	500.2	499.1	498.0	496.9	497.7
10°	499.2	498.9	498.5	498.2	497.8	497.1	495.8	494.6	493.5	492.3	493.0
12.5°	493.7	493.4	493.0	492.6	492.2	491.5	490.2	489.0	487.7	486.5	487.2
15°	483.7	483.4	483.0	482.7	482.3	481.5	480.1	478.7	477.3	476.0	476.6
17.5°	471.7	471.3	470.9	470.5	469.9	469.1	467.8	466.5	465.2	463.9	464.3
20°	463.0	462.5	462.1	461.6	461.2	460.3	458.9	457.5	456.2	454.8	455.1
22.5°	453.5	452.9	452.3	451.7	451.1	450.1	448.8	447.5	446.1	444.7	445.2
25°	438.1	437.5	436.9	436.2	435.6	434.6	433.3	432.0	430.8	429.6	429.6
27.5°	420.5	419.8	419.2	418.5	417.9	417.0	415.8	414.7	413.5	412.2	412.1
30°	408.8	408.0	407.3	406.6	405.9	404.9	403.7	402.5	401.4	400.2	399.8
32.5°	396.4	395.7	395.0	394.4	393.7	392.8	391.6	390.3	389.1	387.8	387.4
35°	376.9	376.3	375.7	375.1	374.4	373.5	372.2	370.9	369.7	368.4	367.8
37.5°	356.5	355.9	355.3	354.8	354.2	353.3	351.9	350.5	349.1	347.8	347.1
40°	343.1	342.4	341.7	341.0	340.3	339.2	337.9	336.5	335.1	333.8	332.9
42.5°	328.8	328.4	328.0	327.5	327.1	326.1	324.6	323.0	321.6	320.1	319.0
45°	307.7	307.0	306.4	305.8	305.1	304.1	302.6	301.2	299.8	298.3	297.3
47.5°	285.6	285.2	284.7	284.3	283.9	283.0	281.6	280.3	279.0	277.6	276.5
50°	270.6	270.3	269.9	269.5	269.1	268.4	267.1	265.8	264.5	263.3	262.0
52.5°	256.0	255.5	255.0	254.6	254.2	253.3	251.9	250.6	249.3	248.0	246.8
55°	232.7	232.5	232.1	231.9	231.6	230.8	229.5	228.3	227.0	225.8	224.7
57.5°	210.5	210.3	209.9	209.7	209.3	208.5	207.2	206.0	204.7	203.5	202.5
60°	195.2	194.8	194.3	193.8	193.4	192.6	191.4	190.2	189.1	187.9	187.1
62.5°	180.2	179.9	179.4	179.1	178.7	177.9	176.6	175.4	174.1	172.9	172.1
65°	157.7	157.3	156.8	156.4	155.9	155.2	154.3	153.4	152.5	151.6	150.7
67.5°	135.1	134.7	134.2	133.8	133.4	132.8	131.9	131.0	130.2	129.2	128.4
70°	121.1	120.4	119.8	119.2	118.5	117.8	117.1	116.4	115.6	114.9	114.2
72.5°	106.1	105.4	104.8	104.2	103.5	102.9	102.3	101.8	101.2	100.6	100.0
75°	83.9	83.5	83.1	82.6	82.1	81.7	81.3	80.8	80.3	79.9	79.6
77.5°	62.9	62.7	62.4	62.3	62.1	61.7	61.4	61.0	60.5	60.2	60.0
80°	50.1	49.9	49.6	49.3	49.1	48.8	48.6	48.5	48.3	48.1	47.9
82.5°	37.7	37.6	37.5	37.4	37.2	37.1	37.1	37.1	37.0	37.0	36.9
85°	22.0	22.0	22.0	22.0	22.0	22.0	21.7	21.5	21.4	21.2	21.2
87.5°	9.0	9.4	9.7	10.1	10.4	10.7	10.9	11.2	11.5	11.6	11.9
90°	2.6	4.7	6.9	9.0	11.1	13.0	14.6	16.1	17.7	19.2	20.3
92.5°	11.0	11.1	11.2	11.4	11.5	12.3	13.9	15.4	17.0	18.5	19.6
95°	48.0	41.4	34.8	28.2	21.6	18.4	18.6	18.8	19.0	19.2	20.3
97.5°	101.9	106.0	110.1	114.3	118.3	109.6	87.9	66.3	44.7	23.0	23.2
100°	143.1	146.5	150.1	153.5	157.0	145.4	118.6	91.9	65.2	38.4	35.1
102.5°	189.2	191.7	194.2	196.8	199.3	198.9	195.4	191.9	188.4	184.9	149.4
105°	262.6	263.7	264.9	266.0	267.3	268.3	269.2	270.3	271.2	272.2	273.9
107.5°	330.8	331.4	331.9	332.5	333.1	334.1	335.4	336.7	338.0	339.3	340.2
110°	376.9	377.5	378.0	378.6	379.2	380.0	381.3	382.4	383.6	384.7	385.1



TEST NUMBER: P332731-935

CATALOG NUMBER: S124DIW-S350D1050U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	421.5	422.6	423.6	424.6	425.7	426.5	427.1	427.6	428.1	428.7	428.6
115°	490.3	490.9	491.5	492.0	492.6	492.8	492.6	492.4	492.2	492.0	492.4
117.5°	552.2	552.9	553.7	554.5	555.3	555.9	556.3	556.7	557.2	557.6	557.5
120°	594.1	594.9	595.6	596.4	597.2	597.4	597.3	597.1	596.8	596.7	597.1
122.5°	633.2	633.6	634.0	634.6	635.0	635.4	635.7	635.9	636.2	636.5	636.7
125°	689.1	689.9	690.7	691.5	692.2	692.4	692.1	691.6	691.3	690.9	691.5
127.5°	742.2	742.4	742.6	742.8	743.0	743.5	744.4	745.3	746.1	747.1	747.0
130°	776.4	776.6	776.8	777.0	777.1	777.6	778.2	778.7	779.3	779.9	780.1
132.5°	807.8	808.1	808.5	808.8	809.2	809.8	810.5	811.2	811.9	812.7	812.9
135°	854.9	854.7	854.5	854.3	854.1	854.5	855.2	856.0	856.8	857.6	857.9
137.5°	896.6	896.6	896.7	896.8	896.9	897.3	898.2	899.1	899.9	900.8	901.2
140°	923.9	924.2	924.6	925.0	925.4	925.7	926.2	926.5	927.0	927.3	927.9
142.5°	948.2	948.9	949.6	950.4	951.1	951.5	951.7	951.9	952.2	952.4	952.9
145°	985.8	986.4	986.9	987.5	988.1	988.3	988.3	988.3	988.3	988.3	988.6
147.5°	1015.5	1016.7	1017.8	1018.8	1019.9	1020.4	1020.2	1020.0	1019.8	1019.6	1019.8
150°	1037.2	1038.0	1038.8	1039.6	1040.3	1040.6	1040.4	1040.3	1040.0	1039.8	1039.8
152.5°	1055.3	1056.0	1056.6	1057.2	1057.8	1058.0	1057.7	1057.3	1057.0	1056.6	1056.9
155°	1080.8	1081.1	1081.2	1081.4	1081.6	1081.4	1080.8	1080.3	1079.7	1079.1	1079.9
157.5°	1102.3	1102.2	1102.1	1101.9	1101.8	1101.5	1100.8	1100.1	1099.5	1098.8	1099.8
160°	1114.8	1114.3	1113.7	1113.1	1112.5	1112.2	1112.0	1111.7	1111.6	1111.4	1112.5
162.5°	1126.0	1125.3	1124.6	1123.8	1123.1	1122.6	1122.4	1122.2	1122.1	1121.8	1123.0
165°	1140.1	1139.2	1138.2	1137.2	1136.3	1135.8	1135.8	1135.8	1135.8	1135.8	1137.4
167.5°	1151.3	1150.3	1149.3	1148.3	1147.3	1146.8	1146.6	1146.5	1146.4	1146.2	1148.0
170°	1157.6	1156.4	1155.3	1154.1	1153.0	1152.4	1152.6	1152.9	1153.1	1153.2	1154.8
172.5°	1161.7	1160.6	1159.4	1158.3	1157.1	1156.7	1156.8	1157.0	1157.3	1157.4	1159.0
175°	1166.3	1165.2	1164.0	1162.9	1161.7	1161.2	1161.4	1161.6	1161.7	1162.0	1163.7
177.5°	1168.4	1167.3	1166.2	1165.2	1164.1	1163.7	1164.0	1164.3	1164.6	1164.9	1166.1
180°	1166.3	1166.3	1166.3	1166.3	1166.3	1166.3	1166.3	1166.3	1166.3	1166.3	1166.3



TEST NUMBER: P332731-935

CATALOG NUMBER: S124DIW-S350D1050U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	508.6	508.6	508.6	508.6	508.6	508.6	508.6	508.6
2.5°	506.8	507.6	508.2	508.6	508.5	508.4	508.3	508.2
5°	504.1	505.1	506.1	506.4	506.3	506.1	505.9	505.8
7.5°	498.4	499.3	500.1	500.4	500.3	500.2	500.1	500.0
10°	493.8	494.5	495.2	495.5	495.3	495.1	494.9	494.7
12.5°	488.0	488.8	489.7	489.9	489.7	489.4	489.1	488.9
15°	477.1	477.6	478.2	478.3	478.0	477.8	477.5	477.3
17.5°	464.6	464.9	465.3	465.4	465.2	465.0	464.9	464.7
20°	455.4	455.6	455.9	456.0	455.7	455.6	455.4	455.2
22.5°	445.7	446.2	446.7	446.8	446.4	446.1	445.7	445.5
25°	429.7	429.8	429.9	429.8	429.4	429.0	428.7	428.3
27.5°	411.8	411.6	411.4	411.0	410.6	410.2	409.7	409.2
30°	399.5	399.2	398.7	398.4	397.9	397.4	397.0	396.6
32.5°	386.9	386.5	386.1	385.6	385.2	384.7	384.3	383.8
35°	367.1	366.5	365.8	365.3	364.9	364.5	363.9	363.5
37.5°	346.4	345.7	345.0	344.4	343.8	343.2	342.6	342.0
40°	332.0	331.1	330.2	329.5	329.0	328.6	328.1	327.7
42.5°	318.0	316.9	315.9	315.2	314.9	314.6	314.3	314.0
45°	296.4	295.3	294.4	293.7	293.4	293.2	292.9	292.7
47.5°	275.3	274.2	273.1	272.2	271.6	270.9	270.2	269.5
50°	260.7	259.5	258.2	257.3	256.8	256.2	255.6	255.1
52.5°	245.7	244.6	243.5	242.5	241.9	241.2	240.5	239.8
55°	223.6	222.5	221.4	220.6	220.1	219.6	219.0	218.4
57.5°	201.5	200.4	199.4	198.6	198.1	197.6	197.1	196.5
60°	186.2	185.5	184.6	184.0	183.6	183.0	182.6	182.2
62.5°	171.4	170.7	169.9	169.3	168.8	168.4	168.0	167.5
65°	149.8	148.9	148.0	147.3	146.9	146.4	145.9	145.5
67.5°	127.5	126.7	125.8	125.3	125.2	125.0	124.9	124.8
70°	113.5	112.8	112.0	111.5	111.2	111.0	110.7	110.5
72.5°	99.4	98.8	98.2	97.8	97.6	97.3	97.0	96.8
75°	79.1	78.8	78.4	78.2	78.1	78.0	77.9	77.8
77.5°	59.9	59.8	59.8	59.6	59.3	59.1	58.8	58.6
80°	47.7	47.5	47.4	47.3	47.1	47.0	46.9	46.8
82.5°	36.8	36.7	36.6	36.5	36.4	36.2	36.2	36.1
85°	21.2	21.2	21.2	21.2	21.1	21.0	20.8	20.8
87.5°	12.1	12.4	12.6	12.7	12.8	12.9	13.0	13.1
90°	21.5	22.6	23.8	24.6	25.0	25.4	25.7	26.2
92.5°	20.8	22.0	23.2	23.8	23.8	23.9	24.0	24.1
95°	21.5	22.6	23.8	24.5	24.7	24.9	25.1	25.3
97.5°	23.2	23.4	23.5	23.7	23.8	24.0	24.2	24.5
100°	31.8	28.5	25.2	23.7	23.8	24.0	24.2	24.5
102.5°	113.8	78.3	42.7	25.0	25.0	25.1	25.1	25.1
105°	275.7	277.4	279.1	276.6	269.6	262.6	255.6	248.7
107.5°	341.0	341.9	342.8	343.5	344.3	345.0	345.8	346.5
110°	385.5	385.9	386.2	386.8	387.4	387.9	388.5	389.1



TEST NUMBER: P332731-935

CATALOG NUMBER: S124DIW-S350D1050U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	428.5	428.4	428.3	428.7	429.5	430.2	430.9	431.6
115°	492.8	493.2	493.5	493.8	493.8	493.8	493.8	493.8
117.5°	557.4	557.4	557.3	557.2	557.2	557.1	557.0	556.9
120°	597.4	597.9	598.2	598.2	597.9	597.4	597.1	596.7
122.5°	637.0	637.1	637.4	637.3	637.0	636.5	636.2	635.8
125°	692.1	692.7	693.2	693.6	693.8	694.0	694.2	694.4
127.5°	746.8	746.7	746.6	746.5	746.3	746.1	746.0	745.9
130°	780.2	780.5	780.7	780.8	780.8	780.8	780.8	780.8
132.5°	813.0	813.3	813.5	813.5	813.3	813.1	813.0	812.9
135°	858.3	858.7	859.1	859.5	859.9	860.2	860.7	861.0
137.5°	901.6	902.1	902.5	902.7	902.5	902.4	902.3	902.2
140°	928.5	929.0	929.6	930.1	930.2	930.4	930.6	930.8
142.5°	953.3	953.7	954.2	954.3	954.4	954.4	954.5	954.5
145°	988.8	988.9	989.1	989.5	989.8	990.2	990.6	991.0
147.5°	1019.9	1020.0	1020.2	1020.4	1020.6	1020.8	1021.0	1021.1
150°	1039.8	1039.8	1039.8	1039.9	1040.1	1040.3	1040.5	1040.7
152.5°	1057.2	1057.5	1057.8	1057.9	1057.8	1057.7	1057.6	1057.5
155°	1080.6	1081.4	1082.2	1082.3	1081.7	1081.2	1080.6	1080.0
157.5°	1100.8	1101.8	1102.9	1102.9	1101.8	1100.8	1099.8	1098.8
160°	1113.7	1114.8	1116.0	1116.0	1114.8	1113.7	1112.5	1111.4
162.5°	1124.1	1125.3	1126.4	1126.4	1125.1	1123.8	1122.5	1121.1
165°	1138.9	1140.5	1142.0	1141.9	1140.1	1138.4	1136.7	1134.9
167.5°	1149.7	1151.4	1153.1	1153.0	1151.1	1149.1	1147.2	1145.2
170°	1156.3	1157.9	1159.4	1159.3	1157.3	1155.4	1153.4	1151.5
172.5°	1160.5	1162.1	1163.6	1163.4	1161.2	1159.2	1157.1	1154.9
175°	1165.4	1167.2	1169.0	1168.6	1166.3	1164.0	1161.7	1159.3
177.5°	1167.4	1168.6	1169.9	1169.6	1167.7	1165.9	1164.0	1162.2
180°	1166.3	1166.3	1166.3	1166.3	1166.3	1166.3	1166.3	1166.3

(END OF REPORT)