

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332726-935

Luminaire Tested: **S124DIW-S350D770U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332726-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124DIW-S350D770U935-4F0-1E-UDD-F1  
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 770 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3600.0 lumens  
Efficiency: N/A  
Efficacy: 118.4 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 30.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332726-935

CATALOG NUMBER: S124DIW-S350D770U935-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

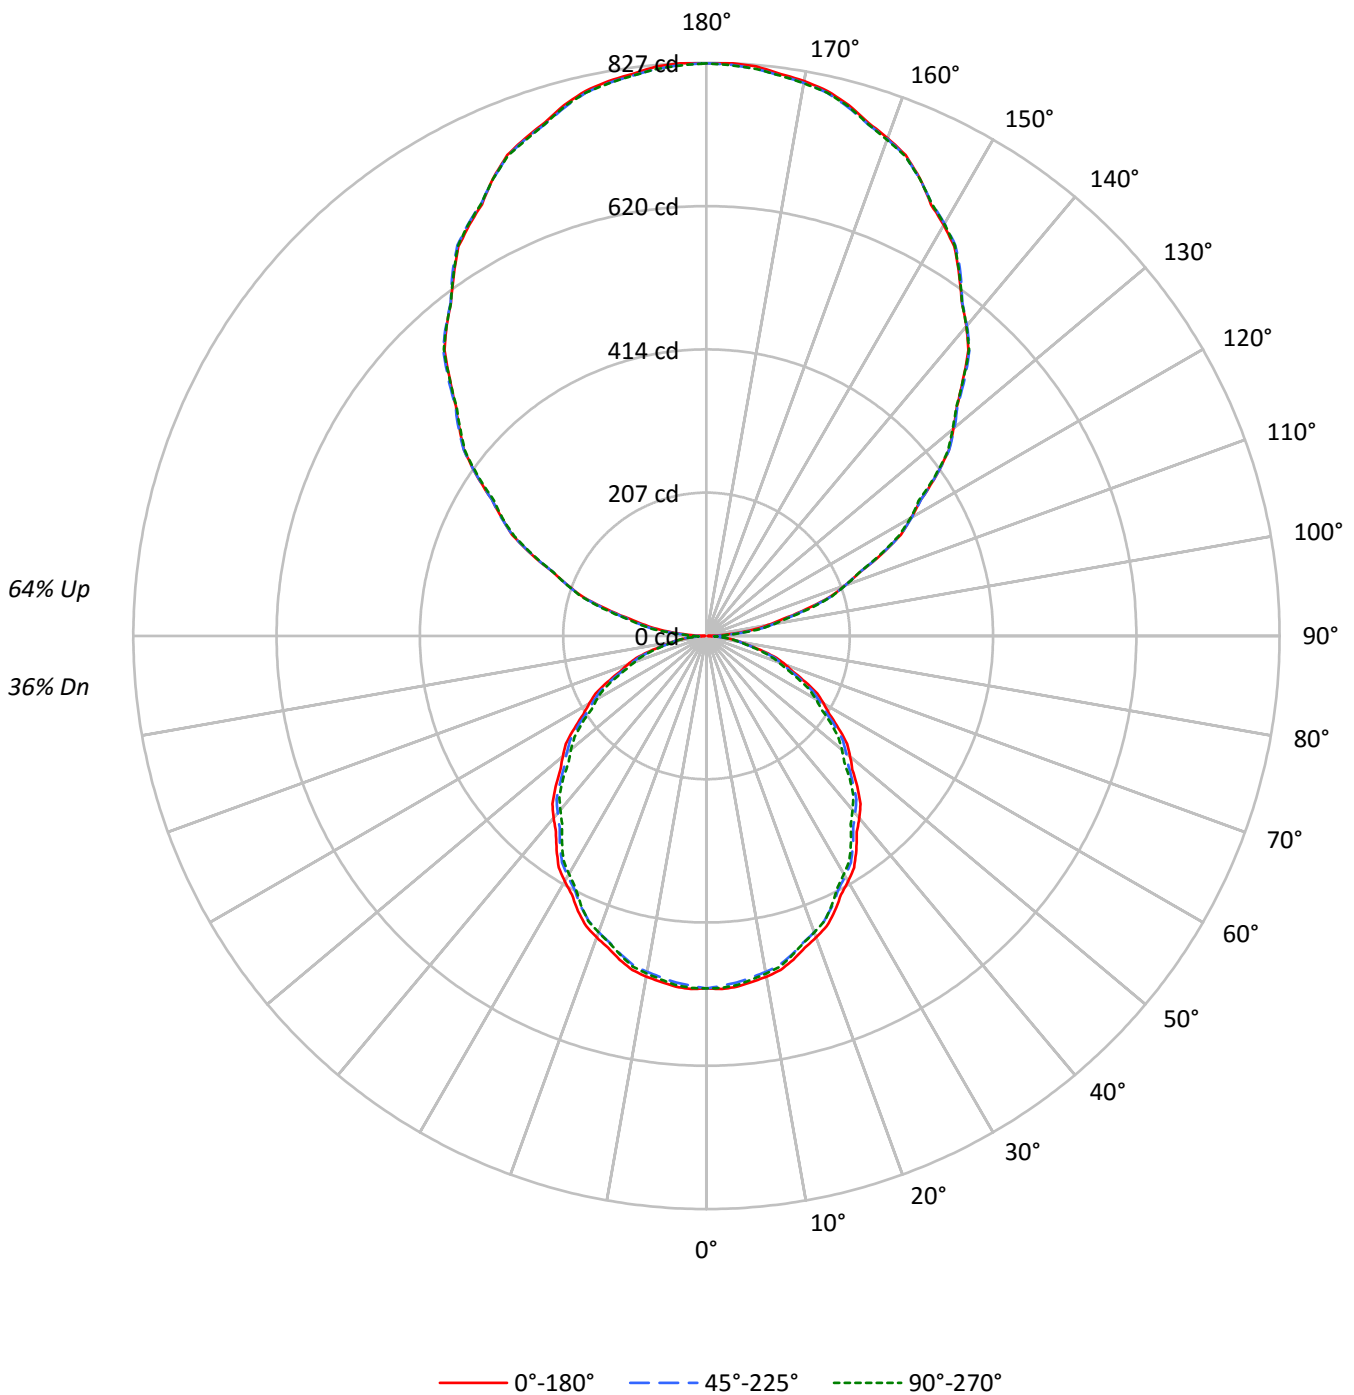



TEST NUMBER: P332726-935

CATALOG NUMBER: S124DIW-S350D770U935-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	104	104	104	104	94	94	94	94	76	76	76		59	59	59		44	44	44	36
1	95	90	87	83	86	82	79	76	66	64	62		52	50	49		38	37	37	30
2	86	79	73	68	78	72	67	62	58	54	51		45	43	41		34	32	31	26
3	79	69	62	56	71	63	57	52	51	47	43		40	37	34		30	28	26	22
4	72	61	54	48	65	56	49	44	45	40	37		36	32	29		27	24	23	19
5	66	54	47	41	59	50	43	38	41	35	31		32	28	25		24	22	20	16
6	61	49	41	35	55	45	38	33	36	31	27		29	25	22		22	19	17	14
7	56	44	36	31	51	40	33	28	33	28	24		26	22	20		20	17	15	13
8	52	40	32	27	47	36	30	25	30	25	21		24	20	17		18	16	14	11
9	48	36	29	24	44	33	27	22	27	22	19		22	18	16		17	14	12	10
10	45	33	26	21	41	30	24	20	25	20	17		20	17	14		16	13	11	9

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	4106	4106	4106
5°	4118	4068	4099
10°	4092	4036	4055
15°	4043	3978	3989
20°	3978	3907	3911
25°	3902	3827	3815
30°	3811	3731	3697
35°	3714	3631	3582
40°	3616	3518	3453
45°	3513	3406	3342
50°	3399	3307	3204
55°	3275	3178	3074
60°	3152	3034	2942
65°	3012	2896	2779
70°	2858	2712	2608
75°	2617	2492	2427
80°	2329	2236	2176
85°	2038	1964	1927



TEST NUMBER: P332726-935

CATALOG NUMBER: S124DIW-S350D770U935-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	47.9	1.3
10°-20°	135.0	3.7
20°-30°	198.6	5.5
30°-40°	230.9	6.4
40°-50°	230.9	6.4
50°-60°	202.0	5.6
60°-70°	150.0	4.2
70°-80°	85.2	2.4
80°-90°	27.1	0.8
90°-100°	54.5	1.5
100°-110°	161.4	4.5
110°-120°	274.0	7.6
120°-130°	361.3	10.0
130°-140°	405.8	11.3
140°-150°	398.7	11.1
150°-160°	335.4	9.3
160°-170°	223.1	6.2
170°-180°	78.1	2.2
0°-30°	381.5	10.6
0°-40°	612.4	17.0
0°-60°	1045.3	29.0
0°-90°	1307.6	36.3
90°-120°	489.9	13.6
90°-150°	1655.8	46.0
90°-180°	2292.0	63.7
0°-180°	3600.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	509	509	509	509	509	
5°	508	506	502	506	506	48
15°	484	482	476	478	477	136
25°	438	435	430	430	428	201
35°	377	374	368	366	364	236
45°	308	305	298	294	293	237
55°	233	231	226	221	218	208
65°	158	156	152	148	146	156
75°	84	82	80	78	78	89
85°	22	22	21	21	21	24
90°	2	9	14	18	19	4
95°	38	44	49	50	50	43
105°	149	150	152	154	156	158
115°	279	278	277	277	276	275
125°	406	406	405	404	403	362
135°	523	527	527	526	524	405
145°	636	638	639	638	636	398
155°	728	728	728	730	728	335
165°	793	791	790	793	791	223
175°	825	822	821	825	821	78
180°	826	826	826	826	826	



TEST NUMBER: P332726-935

CATALOG NUMBER: S124DIW-S350D770U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	508.6	508.6	508.6	508.6	508.6	508.6	508.6	508.6	508.6	508.6	508.6
2.5°	509.9	509.7	509.5	509.3	509.0	508.5	507.7	507.0	506.2	505.3	506.1
5°	508.2	507.8	507.5	507.1	506.8	506.1	505.1	504.1	503.1	502.0	503.1
7.5°	503.5	503.1	502.7	502.4	502.0	501.3	500.2	499.1	498.0	496.9	497.7
10°	499.2	498.9	498.5	498.2	497.8	497.1	495.8	494.6	493.5	492.3	493.0
12.5°	493.7	493.4	493.0	492.6	492.2	491.5	490.2	489.0	487.7	486.5	487.2
15°	483.7	483.4	483.0	482.7	482.3	481.5	480.1	478.7	477.3	476.0	476.6
17.5°	471.7	471.3	470.9	470.5	469.9	469.1	467.8	466.5	465.2	463.9	464.3
20°	463.0	462.5	462.1	461.6	461.2	460.3	458.9	457.5	456.2	454.8	455.1
22.5°	453.5	452.9	452.3	451.7	451.1	450.1	448.8	447.5	446.1	444.7	445.2
25°	438.1	437.5	436.9	436.2	435.6	434.6	433.3	432.0	430.8	429.6	429.6
27.5°	420.5	419.8	419.2	418.5	417.9	417.0	415.8	414.7	413.5	412.2	412.1
30°	408.8	408.0	407.3	406.6	405.9	404.9	403.7	402.5	401.4	400.2	399.8
32.5°	396.4	395.7	395.0	394.4	393.7	392.8	391.6	390.3	389.1	387.8	387.4
35°	376.9	376.3	375.7	375.1	374.4	373.5	372.2	370.9	369.7	368.4	367.8
37.5°	356.5	355.9	355.3	354.8	354.2	353.3	351.9	350.5	349.1	347.8	347.1
40°	343.1	342.4	341.7	341.0	340.3	339.2	337.9	336.5	335.1	333.8	332.9
42.5°	328.8	328.4	328.0	327.5	327.1	326.1	324.6	323.0	321.6	320.1	319.0
45°	307.7	307.0	306.4	305.8	305.1	304.1	302.6	301.2	299.8	298.3	297.3
47.5°	285.6	285.2	284.7	284.3	283.9	283.0	281.6	280.3	279.0	277.6	276.5
50°	270.6	270.3	269.9	269.5	269.1	268.4	267.1	265.8	264.5	263.3	262.0
52.5°	256.0	255.5	255.0	254.6	254.2	253.3	251.9	250.6	249.3	248.0	246.8
55°	232.7	232.5	232.1	231.9	231.6	230.8	229.5	228.3	227.0	225.8	224.7
57.5°	210.5	210.3	209.9	209.7	209.3	208.5	207.2	206.0	204.7	203.5	202.5
60°	195.2	194.8	194.3	193.8	193.4	192.6	191.4	190.2	189.1	187.9	187.1
62.5°	180.2	179.9	179.4	179.1	178.7	177.9	176.6	175.4	174.1	172.9	172.1
65°	157.7	157.3	156.8	156.4	155.9	155.2	154.3	153.4	152.5	151.6	150.7
67.5°	135.1	134.7	134.2	133.8	133.4	132.8	131.9	131.0	130.2	129.2	128.4
70°	121.1	120.4	119.8	119.2	118.5	117.8	117.1	116.4	115.6	114.9	114.2
72.5°	106.1	105.4	104.8	104.2	103.5	102.9	102.3	101.8	101.2	100.6	100.0
75°	83.9	83.5	83.1	82.6	82.1	81.7	81.3	80.8	80.3	79.9	79.6
77.5°	62.9	62.7	62.4	62.3	62.1	61.7	61.4	61.0	60.5	60.2	60.0
80°	50.1	49.9	49.6	49.3	49.1	48.8	48.6	48.5	48.3	48.1	47.9
82.5°	37.7	37.6	37.5	37.4	37.2	37.1	37.1	37.1	37.0	37.0	36.9
85°	22.0	22.0	22.0	22.0	22.0	22.0	21.7	21.5	21.4	21.2	21.2
87.5°	8.9	9.1	9.3	9.6	9.8	10.0	10.2	10.3	10.5	10.7	10.8
90°	1.9	3.4	5.1	6.6	8.2	9.6	10.7	11.8	12.9	14.0	14.9
92.5°	13.7	15.5	17.2	19.0	20.8	22.1	22.9	23.7	24.5	25.3	25.8
95°	38.3	39.6	40.9	42.2	43.5	44.6	45.5	46.6	47.6	48.6	49.0
97.5°	67.0	68.0	69.1	70.0	71.0	72.2	73.4	74.5	75.7	76.8	77.3
100°	89.5	90.1	90.6	91.2	91.7	92.6	93.9	95.2	96.5	97.8	98.1
102.5°	113.0	113.2	113.4	113.7	113.9	114.6	115.7	116.9	118.0	119.2	119.7
105°	148.9	149.0	149.2	149.3	149.5	149.8	150.4	150.9	151.5	152.1	152.5
107.5°	186.6	186.8	186.9	187.1	187.3	187.4	187.5	187.6	187.7	187.8	188.1
110°	212.2	212.4	212.8	213.0	213.3	213.4	213.2	213.1	212.9	212.8	212.5



TEST NUMBER: P332726-935

CATALOG NUMBER: S124DIW-S350D770U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	238.8	238.8	238.8	238.9	238.9	238.8	238.6	238.3	238.1	237.8	237.8
115°	278.6	278.6	278.6	278.6	278.6	278.4	278.2	277.9	277.6	277.3	277.2
117.5°	316.2	316.3	316.4	316.5	316.7	316.6	316.4	316.2	316.0	315.8	315.3
120°	341.2	341.8	342.3	342.9	343.5	343.5	343.2	342.8	342.3	341.9	341.1
122.5°	367.3	367.6	367.7	368.0	368.2	368.2	368.1	367.8	367.6	367.5	367.0
125°	405.8	405.8	405.8	405.8	405.8	405.7	405.5	405.4	405.3	405.1	404.8
127.5°	440.7	441.1	441.5	442.0	442.4	442.5	442.2	442.0	441.8	441.6	441.3
130°	465.2	465.6	466.1	466.5	466.9	467.1	467.1	467.1	467.1	467.1	466.8
132.5°	490.3	490.6	490.9	491.2	491.5	491.6	491.5	491.4	491.3	491.1	490.9
135°	523.4	524.2	525.0	525.9	526.8	527.2	527.2	527.2	527.2	527.2	526.9
137.5°	559.4	559.8	560.2	560.6	561.0	561.3	561.5	561.7	562.0	562.2	561.8
140°	583.4	583.7	584.0	584.3	584.5	584.7	584.7	584.7	584.7	584.7	584.5
142.5°	605.4	605.7	606.0	606.2	606.6	606.7	606.5	606.4	606.3	606.1	606.1
145°	635.8	636.4	637.0	637.6	638.1	638.4	638.6	638.8	638.9	639.0	638.9
147.5°	666.0	666.7	667.4	668.0	668.7	669.0	668.9	668.7	668.7	668.6	668.4
150°	684.4	684.9	685.5	686.1	686.6	687.0	687.0	687.0	687.0	687.0	687.0
152.5°	701.8	702.1	702.5	702.8	703.2	703.4	703.4	703.6	703.7	703.8	704.1
155°	728.5	728.5	728.5	728.5	728.5	728.4	728.2	728.1	728.0	727.9	728.4
157.5°	751.0	750.7	750.4	750.2	749.9	749.8	749.8	749.8	749.8	749.7	750.1
160°	764.3	764.1	764.0	763.9	763.7	763.5	763.4	763.3	763.1	763.0	763.4
162.5°	776.5	776.2	775.8	775.4	775.1	774.8	774.6	774.6	774.4	774.2	775.0
165°	793.1	792.6	792.2	791.8	791.3	791.0	790.7	790.4	790.1	789.8	790.7
167.5°	805.6	805.1	804.5	803.9	803.3	803.0	803.1	803.1	803.1	803.1	804.0
170°	812.9	812.1	811.4	810.7	810.0	809.7	809.9	810.0	810.1	810.3	811.1
172.5°	817.9	817.3	816.7	816.1	815.5	815.3	815.3	815.4	815.4	815.4	816.4
175°	825.0	824.2	823.5	822.9	822.2	821.7	821.6	821.4	821.3	821.1	822.2
177.5°	827.2	826.7	826.1	825.6	825.0	824.8	824.8	824.8	824.8	824.8	825.5
180°	826.2	826.2	826.2	826.2	826.2	826.2	826.2	826.2	826.2	826.2	826.2



TEST NUMBER: P332726-935

CATALOG NUMBER: S124DIW-S350D770U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	508.6	508.6	508.6	508.6	508.6	508.6	508.6	508.6
2.5°	506.8	507.6	508.2	508.6	508.5	508.4	508.3	508.2
5°	504.1	505.1	506.1	506.4	506.3	506.1	505.9	505.8
7.5°	498.4	499.3	500.1	500.4	500.3	500.2	500.1	500.0
10°	493.8	494.5	495.2	495.5	495.3	495.1	494.9	494.7
12.5°	488.0	488.8	489.7	489.9	489.7	489.4	489.1	488.9
15°	477.1	477.6	478.2	478.3	478.0	477.8	477.5	477.3
17.5°	464.6	464.9	465.3	465.4	465.2	465.0	464.9	464.7
20°	455.4	455.6	455.9	456.0	455.7	455.6	455.4	455.2
22.5°	445.7	446.2	446.7	446.8	446.4	446.1	445.7	445.5
25°	429.7	429.8	429.9	429.8	429.4	429.0	428.7	428.3
27.5°	411.8	411.6	411.4	411.0	410.6	410.2	409.7	409.2
30°	399.5	399.2	398.7	398.4	397.9	397.4	397.0	396.6
32.5°	386.9	386.5	386.1	385.6	385.2	384.7	384.3	383.8
35°	367.1	366.5	365.8	365.3	364.9	364.5	363.9	363.5
37.5°	346.4	345.7	345.0	344.4	343.8	343.2	342.6	342.0
40°	332.0	331.1	330.2	329.5	329.0	328.6	328.1	327.7
42.5°	318.0	316.9	315.9	315.2	314.9	314.6	314.3	314.0
45°	296.4	295.3	294.4	293.7	293.4	293.2	292.9	292.7
47.5°	275.3	274.2	273.1	272.2	271.6	270.9	270.2	269.5
50°	260.7	259.5	258.2	257.3	256.8	256.2	255.6	255.1
52.5°	245.7	244.6	243.5	242.5	241.9	241.2	240.5	239.8
55°	223.6	222.5	221.4	220.6	220.1	219.6	219.0	218.4
57.5°	201.5	200.4	199.4	198.6	198.1	197.6	197.1	196.5
60°	186.2	185.5	184.6	184.0	183.6	183.0	182.6	182.2
62.5°	171.4	170.7	169.9	169.3	168.8	168.4	168.0	167.5
65°	149.8	148.9	148.0	147.3	146.9	146.4	145.9	145.5
67.5°	127.5	126.7	125.8	125.3	125.2	125.0	124.9	124.8
70°	113.5	112.8	112.0	111.5	111.2	111.0	110.7	110.5
72.5°	99.4	98.8	98.2	97.8	97.6	97.3	97.0	96.8
75°	79.1	78.8	78.4	78.2	78.1	78.0	77.9	77.8
77.5°	59.9	59.8	59.8	59.6	59.3	59.1	58.8	58.6
80°	47.7	47.5	47.4	47.3	47.1	47.0	46.9	46.8
82.5°	36.8	36.7	36.6	36.5	36.4	36.2	36.2	36.1
85°	21.2	21.2	21.2	21.2	21.1	21.0	20.8	20.8
87.5°	10.9	11.1	11.3	11.5	11.5	11.5	11.6	11.6
90°	15.8	16.6	17.5	18.0	18.3	18.6	18.9	19.2
92.5°	26.3	26.9	27.4	27.7	27.9	28.1	28.2	28.4
95°	49.4	49.9	50.3	50.5	50.5	50.5	50.5	50.5
97.5°	77.8	78.4	78.9	79.1	79.1	79.1	79.1	79.1
100°	98.3	98.6	98.9	99.0	99.0	99.0	99.0	99.0
102.5°	120.0	120.5	120.8	121.1	121.2	121.3	121.4	121.6
105°	152.9	153.3	153.8	154.2	154.6	155.1	155.5	155.9
107.5°	188.6	188.9	189.3	189.5	189.5	189.5	189.4	189.4
110°	212.2	212.0	211.6	211.7	212.2	212.6	213.0	213.4





TEST NUMBER: P332726-935

CATALOG NUMBER: S124DIW-S350D770U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	237.7	237.6	237.6	237.6	237.7	237.8	237.9	238.0
115°	277.1	276.9	276.7	276.6	276.5	276.4	276.2	276.0
117.5°	314.9	314.4	313.8	313.5	313.2	312.9	312.6	312.4
120°	340.4	339.8	339.1	338.8	339.1	339.4	339.7	339.9
122.5°	366.4	366.0	365.5	365.0	364.5	363.9	363.5	363.0
125°	404.6	404.3	404.0	403.7	403.5	403.1	402.9	402.6
127.5°	441.0	440.7	440.4	440.1	440.0	439.7	439.5	439.3
130°	466.6	466.2	466.0	465.5	465.0	464.4	463.8	463.3
132.5°	490.6	490.3	490.0	489.7	489.6	489.3	489.0	488.9
135°	526.6	526.3	526.1	525.7	525.3	524.9	524.4	524.0
137.5°	561.5	561.1	560.8	560.6	560.7	560.8	560.9	560.9
140°	584.4	584.3	584.1	584.0	583.8	583.7	583.6	583.4
142.5°	606.1	606.1	606.1	606.1	606.0	606.0	606.0	605.9
145°	638.8	638.6	638.4	638.2	637.7	637.3	636.9	636.5
147.5°	668.3	668.2	668.0	668.0	667.8	667.7	667.5	667.4
150°	687.0	687.0	687.0	686.9	686.7	686.6	686.5	686.3
152.5°	704.5	704.8	705.2	705.2	704.8	704.5	704.0	703.7
155°	729.0	729.5	730.1	730.1	729.5	729.0	728.4	727.9
157.5°	750.5	751.0	751.4	751.4	750.9	750.4	749.9	749.4
160°	763.9	764.3	764.7	764.6	763.9	763.1	762.4	761.7
162.5°	775.8	776.5	777.3	777.3	776.6	775.9	775.2	774.5
165°	791.5	792.4	793.2	793.4	792.8	792.2	791.7	791.1
167.5°	804.9	805.6	806.5	806.5	805.6	804.8	803.9	803.0
170°	812.0	812.9	813.7	813.6	812.6	811.7	810.6	809.7
172.5°	817.3	818.3	819.2	819.2	818.2	817.3	816.2	815.3
175°	823.1	824.1	825.1	825.1	824.1	823.1	822.2	821.1
177.5°	826.3	827.1	827.9	827.9	826.9	826.0	825.1	824.2
180°	826.2	826.2	826.2	826.2	826.2	826.2	826.2	826.2

(END OF REPORT)