

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332750-935

Luminaire Tested: **S124DIW-S575D470U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332750-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S575D470U935-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 575 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 470 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3546.8 lumens
Efficiency: N/A
Efficacy: 117.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 30.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332750-935

CATALOG NUMBER: S124DIW-S575D470U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

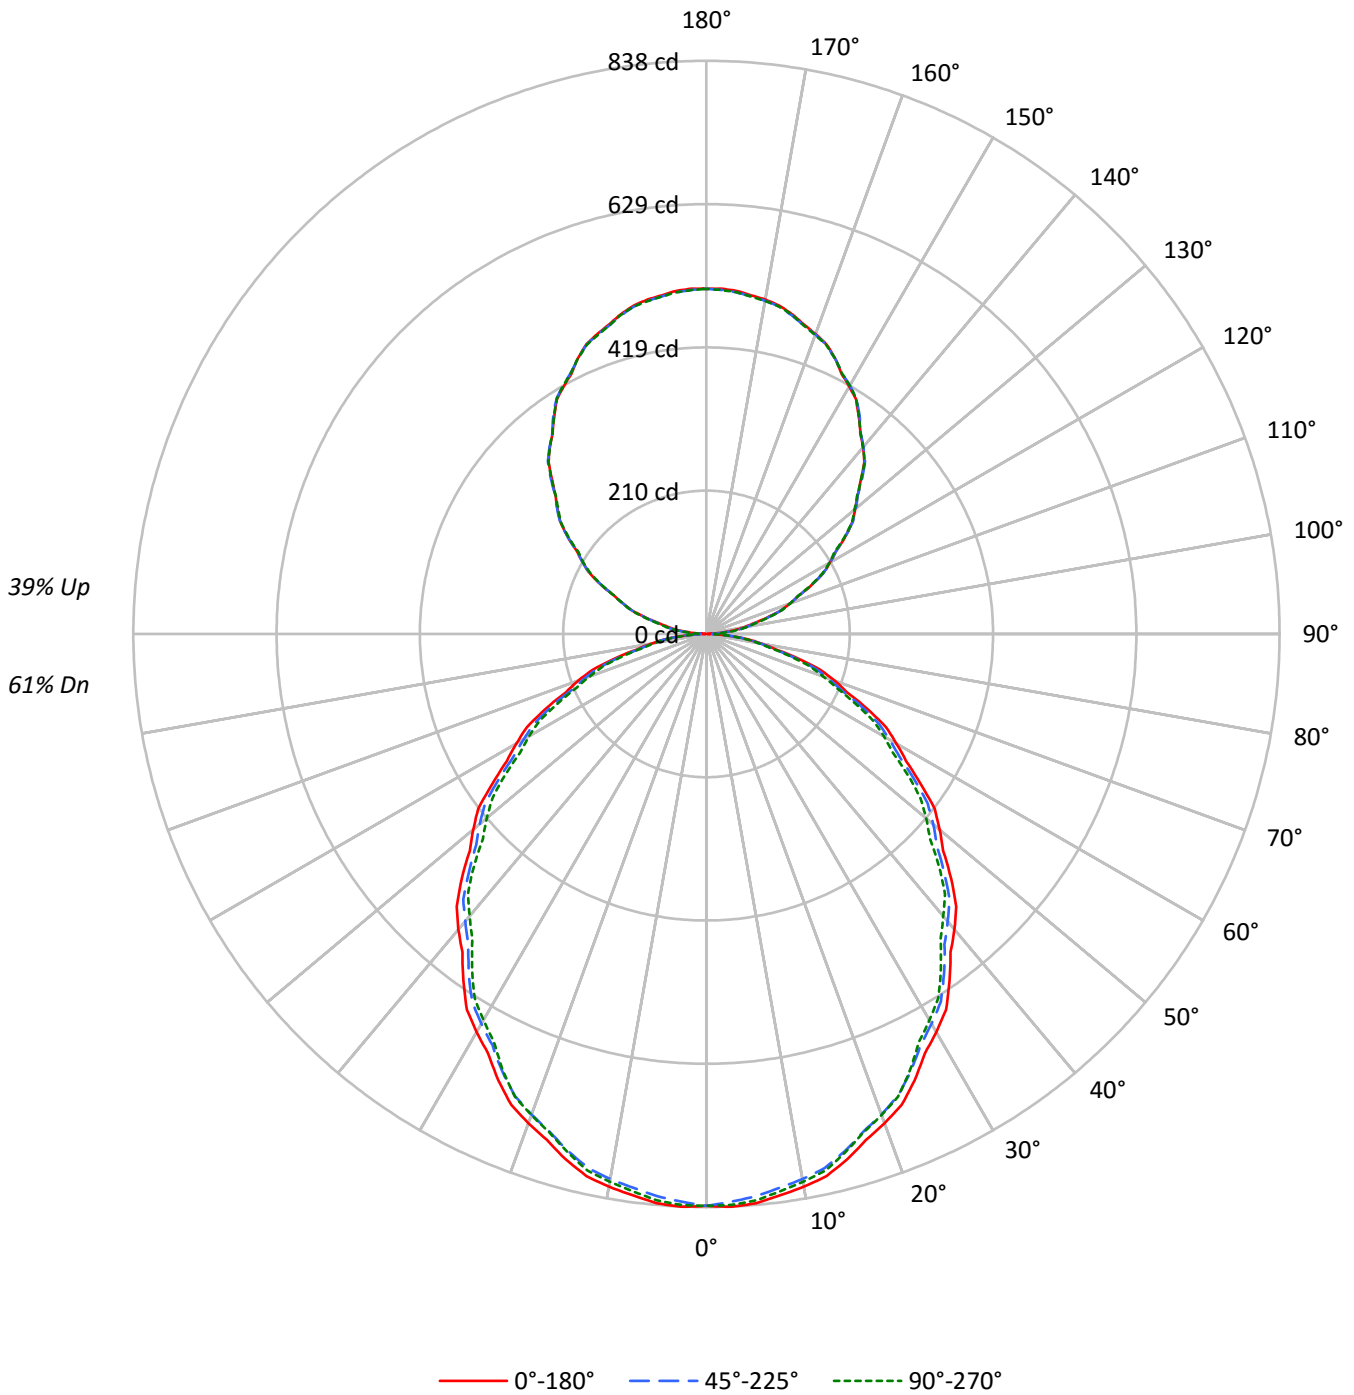



TEST NUMBER: P332750-935

CATALOG NUMBER: S124DIW-S575D470U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66	61
1	100	96	92	88	93	90	86	83	78	76	73	68	66	64	58	57	55	51
2	91	84	77	72	85	78	73	68	69	64	61	59	56	54	51	49	47	43
3	83	73	66	60	77	69	62	57	60	55	51	53	49	45	45	42	40	36
4	76	65	57	51	71	61	54	48	54	48	44	47	42	39	40	37	34	31
5	70	58	50	44	65	55	47	42	48	42	38	42	37	34	36	33	30	27
6	64	52	44	38	60	49	42	36	43	37	33	38	33	30	33	29	26	24
7	60	47	39	33	56	44	37	32	39	33	29	35	30	26	30	26	23	21
8	55	43	35	30	52	41	33	28	36	30	26	32	27	23	28	24	21	19
9	52	39	32	26	48	37	30	25	33	27	23	29	24	21	26	22	19	17
10	48	36	29	24	45	34	27	23	31	25	21	27	22	19	24	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6750	6750	6750
5°	6771	6689	6738
10°	6728	6634	6668
15°	6647	6541	6557
20°	6539	6424	6430
25°	6415	6290	6272
30°	6264	6134	6077
35°	6107	5969	5889
40°	5945	5782	5676
45°	5775	5599	5492
50°	5588	5436	5267
55°	5384	5225	5054
60°	5181	4986	4836
65°	4951	4762	4569
70°	4697	4459	4286
75°	4304	4095	3989
80°	3831	3673	3584
85°	3353	3233	3168



TEST NUMBER: P332750-935

CATALOG NUMBER: S124DIW-S575D470U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	78.7	2.2
10°-20°	221.9	6.3
20°-30°	326.6	9.2
30°-40°	379.6	10.7
40°-50°	379.6	10.7
50°-60°	332.1	9.4
60°-70°	246.6	7.0
70°-80°	140.1	4.0
80°-90°	42.0	1.2
90°-100°	33.3	0.9
100°-110°	98.6	2.8
110°-120°	167.3	4.7
120°-130°	220.6	6.2
130°-140°	247.7	7.0
140°-150°	243.4	6.9
150°-160°	204.8	5.8
160°-170°	136.2	3.8
170°-180°	47.7	1.3
0°-30°	627.2	17.7
0°-40°	1006.8	28.4
0°-60°	1718.5	48.5
0°-90°	2147.2	60.5
90°-120°	299.1	8.4
90°-150°	1010.9	28.5
90°-180°	1400.0	39.5
0°-180°	3546.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	836	836	836	836	836	
5°	836	833	825	832	832	79
15°	795	792	783	786	784	224
25°	720	715	706	707	704	331
35°	620	615	606	601	598	387
45°	506	501	490	483	481	390
55°	382	380	371	363	359	343
65°	259	256	249	243	239	257
75°	138	135	131	129	128	147
85°	36	36	35	35	34	40
90°	1	5	9	11	12	3
95°	23	27	30	31	31	26
105°	91	91	93	94	95	96
115°	170	170	169	169	169	168
125°	248	248	247	247	246	221
135°	320	322	322	321	320	247
145°	388	390	390	390	389	243
155°	445	445	444	446	444	205
165°	484	483	482	484	483	136
175°	504	502	501	504	501	48
180°	504	504	504	504	504	



TEST NUMBER: P332750-935

CATALOG NUMBER: S124DIW-S575D470U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	836.1	836.1	836.1	836.1	836.1	836.1	836.1	836.1	836.1	836.1	836.1
2.5°	838.3	837.9	837.6	837.2	836.9	836.0	834.7	833.4	832.1	830.8	832.0
5°	835.5	834.9	834.3	833.7	833.1	832.0	830.3	828.7	827.1	825.4	827.1
7.5°	827.7	827.1	826.6	826.0	825.4	824.1	822.3	820.5	818.6	816.8	818.2
10°	820.7	820.2	819.6	819.0	818.4	817.1	815.2	813.2	811.3	809.3	810.5
12.5°	811.7	811.1	810.5	809.9	809.3	808.0	805.9	803.8	801.8	799.7	801.0
15°	795.3	794.7	794.1	793.5	792.9	791.5	789.3	787.0	784.8	782.6	783.4
17.5°	775.6	774.8	774.1	773.4	772.6	771.2	769.0	767.0	764.8	762.8	763.3
20°	761.1	760.3	759.7	758.9	758.1	756.6	754.4	752.2	749.9	747.7	748.1
22.5°	745.5	744.6	743.6	742.6	741.7	740.0	737.8	735.6	733.3	731.1	731.9
25°	720.2	719.2	718.2	717.1	716.1	714.5	712.4	710.3	708.3	706.2	706.4
27.5°	691.3	690.3	689.1	688.1	687.0	685.5	683.5	681.7	679.7	677.8	677.4
30°	672.0	670.8	669.6	668.4	667.3	665.6	663.7	661.8	659.9	658.0	657.4
32.5°	651.6	650.6	649.5	648.4	647.4	645.8	643.8	641.7	639.6	637.6	636.9
35°	619.7	618.7	617.7	616.6	615.6	614.0	611.9	609.8	607.8	605.7	604.6
37.5°	586.1	585.1	584.2	583.2	582.3	580.7	578.5	576.3	574.0	571.8	570.7
40°	564.1	562.9	561.7	560.6	559.4	557.7	555.4	553.2	551.0	548.7	547.3
42.5°	540.5	539.8	539.2	538.4	537.7	536.1	533.6	531.2	528.7	526.2	524.5
45°	505.8	504.8	503.8	502.7	501.7	500.0	497.6	495.2	492.8	490.4	488.8
47.5°	469.5	468.8	468.1	467.4	466.7	465.2	463.0	460.8	458.6	456.4	454.5
50°	444.9	444.3	443.7	443.1	442.5	441.2	439.1	437.0	434.9	432.8	430.8
52.5°	420.8	420.1	419.3	418.6	417.9	416.5	414.2	412.1	409.8	407.6	405.8
55°	382.5	382.1	381.7	381.3	380.8	379.5	377.5	375.3	373.2	371.2	369.4
57.5°	346.1	345.6	345.1	344.6	344.1	342.9	340.8	338.7	336.7	334.6	332.9
60°	320.9	320.2	319.4	318.7	318.0	316.6	314.7	312.7	310.8	308.8	307.5
62.5°	296.3	295.7	295.0	294.4	293.8	292.4	290.4	288.3	286.3	284.2	283.0
65°	259.2	258.6	257.8	257.1	256.3	255.2	253.7	252.2	250.7	249.3	247.7
67.5°	222.1	221.4	220.7	220.0	219.3	218.3	216.8	215.4	214.0	212.5	211.1
70°	199.0	197.9	196.9	195.9	194.8	193.7	192.5	191.3	190.1	188.9	187.8
72.5°	174.4	173.3	172.3	171.2	170.1	169.2	168.2	167.3	166.3	165.3	164.4
75°	138.0	137.2	136.6	135.8	135.0	134.3	133.5	132.8	132.1	131.3	130.7
77.5°	103.3	103.0	102.6	102.4	102.0	101.5	100.8	100.2	99.5	98.9	98.7
80°	82.4	82.0	81.5	81.1	80.6	80.2	80.0	79.6	79.4	79.0	78.8
82.5°	62.1	61.8	61.6	61.4	61.2	61.0	61.0	61.0	60.9	60.9	60.6
85°	36.2	36.2	36.2	36.2	36.2	36.0	35.7	35.5	35.1	34.9	34.9
87.5°	14.2	14.2	14.3	14.4	14.5	14.5	14.6	14.6	14.6	14.6	14.7
90°	1.2	2.2	3.1	4.0	5.0	5.8	6.5	7.2	7.9	8.6	9.1
92.5°	8.4	9.5	10.5	11.6	12.7	13.5	14.0	14.5	15.0	15.4	15.8
95°	23.4	24.2	25.0	25.7	26.5	27.2	27.8	28.4	29.0	29.6	29.9
97.5°	40.9	41.5	42.1	42.8	43.4	44.1	44.8	45.5	46.1	46.9	47.2
100°	54.6	54.9	55.3	55.6	56.1	56.6	57.3	58.1	58.9	59.7	59.8
102.5°	69.0	69.1	69.2	69.4	69.6	70.0	70.7	71.4	72.1	72.8	73.0
105°	90.9	91.0	91.1	91.2	91.3	91.4	91.8	92.1	92.5	92.8	93.1
107.5°	113.9	114.0	114.2	114.3	114.3	114.4	114.5	114.5	114.6	114.6	114.9
110°	129.5	129.7	129.8	130.0	130.2	130.3	130.2	130.1	130.0	129.9	129.8



TEST NUMBER: P332750-935

CATALOG NUMBER: S124DIW-S575D470U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	145.8	145.8	145.9	145.9	145.9	145.9	145.7	145.5	145.3	145.3	145.2
115°	170.1	170.1	170.1	170.1	170.1	170.0	169.9	169.7	169.5	169.4	169.3
117.5°	193.0	193.1	193.2	193.3	193.3	193.3	193.2	193.0	193.0	192.8	192.5
120°	208.4	208.7	209.1	209.4	209.7	209.7	209.5	209.2	209.0	208.7	208.3
122.5°	224.3	224.4	224.5	224.6	224.8	224.8	224.7	224.5	224.5	224.4	224.0
125°	247.7	247.7	247.7	247.7	247.7	247.7	247.6	247.5	247.5	247.4	247.2
127.5°	269.1	269.3	269.6	269.8	270.1	270.2	270.0	269.8	269.8	269.6	269.4
130°	284.0	284.3	284.6	284.8	285.1	285.2	285.2	285.2	285.2	285.2	285.0
132.5°	299.3	299.5	299.7	299.9	300.1	300.1	300.1	300.0	300.0	299.9	299.7
135°	319.5	320.0	320.6	321.1	321.6	321.8	321.8	321.8	321.8	321.8	321.7
137.5°	341.6	341.8	342.0	342.2	342.5	342.7	342.9	343.0	343.1	343.3	343.0
140°	356.2	356.4	356.5	356.7	356.9	357.0	357.0	357.0	357.0	357.0	356.9
142.5°	369.6	369.8	370.0	370.1	370.3	370.4	370.3	370.2	370.1	370.1	370.1
145°	388.2	388.6	388.9	389.3	389.6	389.8	389.9	389.9	390.0	390.1	390.0
147.5°	406.7	407.0	407.4	407.9	408.3	408.5	408.4	408.3	408.3	408.2	408.1
150°	417.8	418.2	418.5	418.9	419.2	419.4	419.4	419.4	419.4	419.4	419.4
152.5°	428.4	428.7	428.9	429.1	429.3	429.5	429.5	429.6	429.6	429.7	429.9
155°	444.8	444.8	444.8	444.8	444.8	444.7	444.6	444.5	444.4	444.4	444.7
157.5°	458.5	458.3	458.2	458.1	457.9	457.8	457.8	457.8	457.7	457.7	458.0
160°	466.7	466.6	466.5	466.4	466.3	466.2	466.1	466.1	466.0	465.9	466.1
162.5°	474.2	473.9	473.6	473.5	473.2	473.0	472.9	472.9	472.8	472.7	473.2
165°	484.1	483.9	483.6	483.4	483.1	482.9	482.8	482.6	482.4	482.2	482.8
167.5°	491.9	491.5	491.2	490.9	490.4	490.3	490.3	490.3	490.3	490.3	490.9
170°	496.3	495.8	495.4	495.0	494.6	494.4	494.5	494.6	494.6	494.7	495.2
172.5°	499.4	499.0	498.7	498.3	497.9	497.7	497.7	497.8	497.8	497.8	498.4
175°	503.7	503.3	502.8	502.4	502.0	501.7	501.6	501.5	501.4	501.4	502.0
177.5°	505.1	504.7	504.4	504.0	503.7	503.5	503.5	503.5	503.5	503.5	504.0
180°	504.5	504.5	504.5	504.5	504.5	504.5	504.5	504.5	504.5	504.5	504.5



TEST NUMBER: P332750-935

CATALOG NUMBER: S124DIW-S575D470U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	836.1	836.1	836.1	836.1	836.1	836.1	836.1	836.1
2.5°	833.2	834.4	835.6	836.1	835.9	835.9	835.8	835.6
5°	828.7	830.3	832.0	832.7	832.3	832.1	831.7	831.5
7.5°	819.5	820.8	822.1	822.7	822.5	822.3	822.2	821.9
10°	811.8	813.0	814.2	814.6	814.2	814.0	813.6	813.4
12.5°	802.4	803.7	804.9	805.4	804.9	804.5	804.2	803.7
15°	784.4	785.2	786.1	786.4	785.9	785.5	785.0	784.5
17.5°	763.9	764.4	765.0	765.1	764.8	764.5	764.2	764.0
20°	748.6	749.1	749.5	749.6	749.2	749.0	748.7	748.4
22.5°	732.7	733.5	734.3	734.4	733.9	733.4	732.9	732.3
25°	706.5	706.6	706.8	706.5	705.9	705.3	704.7	704.1
27.5°	677.1	676.7	676.3	675.8	675.0	674.3	673.6	672.8
30°	656.8	656.2	655.6	654.9	654.1	653.4	652.6	651.9
32.5°	636.1	635.4	634.7	634.0	633.3	632.5	631.7	631.0
35°	603.6	602.5	601.5	600.6	599.9	599.1	598.4	597.6
37.5°	569.6	568.3	567.2	566.2	565.2	564.2	563.3	562.2
40°	545.8	544.2	542.8	541.7	540.9	540.2	539.4	538.6
42.5°	522.8	521.0	519.3	518.1	517.7	517.2	516.7	516.2
45°	487.2	485.5	483.9	482.8	482.4	482.0	481.5	481.0
47.5°	452.7	450.8	449.0	447.5	446.4	445.2	444.1	443.0
50°	428.6	426.5	424.5	423.0	422.1	421.2	420.3	419.4
52.5°	403.9	402.1	400.3	398.7	397.6	396.5	395.4	394.3
55°	367.6	365.8	364.0	362.7	361.8	360.9	360.0	359.1
57.5°	331.2	329.5	327.8	326.5	325.6	324.8	323.9	323.0
60°	306.2	304.9	303.5	302.5	301.7	301.0	300.2	299.5
62.5°	281.8	280.5	279.3	278.4	277.6	276.9	276.1	275.3
65°	246.2	244.8	243.3	242.2	241.4	240.6	240.0	239.2
67.5°	209.7	208.3	206.8	206.0	205.8	205.6	205.3	205.2
70°	186.6	185.4	184.2	183.4	182.9	182.4	182.0	181.6
72.5°	163.4	162.5	161.5	160.8	160.4	160.0	159.5	159.0
75°	130.1	129.5	129.0	128.5	128.4	128.3	128.1	127.9
77.5°	98.5	98.3	98.2	97.9	97.5	97.1	96.7	96.3
80°	78.4	78.2	77.8	77.7	77.5	77.3	77.2	77.1
82.5°	60.4	60.3	60.1	59.9	59.8	59.7	59.5	59.3
85°	34.9	34.9	34.9	34.8	34.6	34.4	34.4	34.2
87.5°	14.8	14.9	15.0	15.1	15.1	15.2	15.2	15.2
90°	9.6	10.2	10.7	11.0	11.2	11.4	11.5	11.7
92.5°	16.1	16.4	16.7	16.9	17.0	17.1	17.2	17.3
95°	30.1	30.4	30.7	30.8	30.8	30.8	30.8	30.8
97.5°	47.5	47.9	48.1	48.3	48.3	48.3	48.3	48.3
100°	60.0	60.2	60.4	60.4	60.4	60.4	60.4	60.4
102.5°	73.3	73.5	73.8	74.0	74.0	74.0	74.1	74.2
105°	93.4	93.7	93.9	94.2	94.5	94.7	95.0	95.2
107.5°	115.1	115.4	115.6	115.7	115.7	115.7	115.6	115.6
110°	129.6	129.4	129.2	129.2	129.5	129.8	130.0	130.3



TEST NUMBER: P332750-935

CATALOG NUMBER: S124DIW-S575D470U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	145.2	145.1	145.1	145.1	145.2	145.2	145.3	145.3
115°	169.2	169.1	169.0	168.9	168.8	168.8	168.7	168.6
117.5°	192.3	191.9	191.7	191.4	191.2	191.1	190.9	190.7
120°	207.8	207.4	207.0	206.9	207.1	207.2	207.4	207.6
122.5°	223.8	223.4	223.2	222.8	222.6	222.2	221.9	221.6
125°	247.0	246.8	246.7	246.5	246.3	246.2	246.0	245.8
127.5°	269.2	269.1	268.9	268.7	268.6	268.5	268.4	268.2
130°	284.8	284.6	284.5	284.2	283.9	283.5	283.2	282.8
132.5°	299.5	299.4	299.2	299.0	298.9	298.8	298.6	298.5
135°	321.5	321.3	321.2	321.0	320.7	320.5	320.2	319.9
137.5°	342.8	342.6	342.3	342.2	342.3	342.3	342.4	342.5
140°	356.8	356.7	356.6	356.5	356.5	356.4	356.3	356.2
142.5°	370.1	370.1	370.1	370.0	370.0	370.0	370.0	370.0
145°	389.9	389.9	389.8	389.6	389.3	389.1	388.8	388.6
147.5°	408.0	407.9	407.9	407.9	407.8	407.7	407.6	407.5
150°	419.4	419.4	419.4	419.4	419.3	419.2	419.1	419.0
152.5°	430.2	430.3	430.6	430.5	430.3	430.1	429.9	429.6
155°	445.1	445.4	445.7	445.7	445.4	445.1	444.7	444.4
157.5°	458.2	458.5	458.7	458.7	458.5	458.1	457.9	457.5
160°	466.4	466.7	466.9	466.8	466.4	466.0	465.5	465.0
162.5°	473.6	474.2	474.6	474.6	474.2	473.7	473.3	472.9
165°	483.3	483.8	484.3	484.4	484.1	483.7	483.4	483.0
167.5°	491.4	491.9	492.4	492.4	491.9	491.4	490.8	490.3
170°	495.8	496.3	496.8	496.7	496.1	495.5	494.9	494.3
172.5°	499.0	499.6	500.2	500.2	499.6	498.9	498.3	497.7
175°	502.6	503.2	503.8	503.8	503.2	502.6	502.0	501.4
177.5°	504.5	505.0	505.5	505.4	504.9	504.4	503.8	503.3
180°	504.5	504.5	504.5	504.5	504.5	504.5	504.5	504.5

(END OF REPORT)