

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332797-935

Luminaire Tested: **S124DIW-S795D1340U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332797-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S795D1340U935-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1340 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7555.9 lumens
Efficiency: N/A
Efficacy: 123.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 61.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332797-935

CATALOG NUMBER: S124DIW-S795D1340U935-4F0-1E-UDD-F

Luminous Intensity Polar Plot

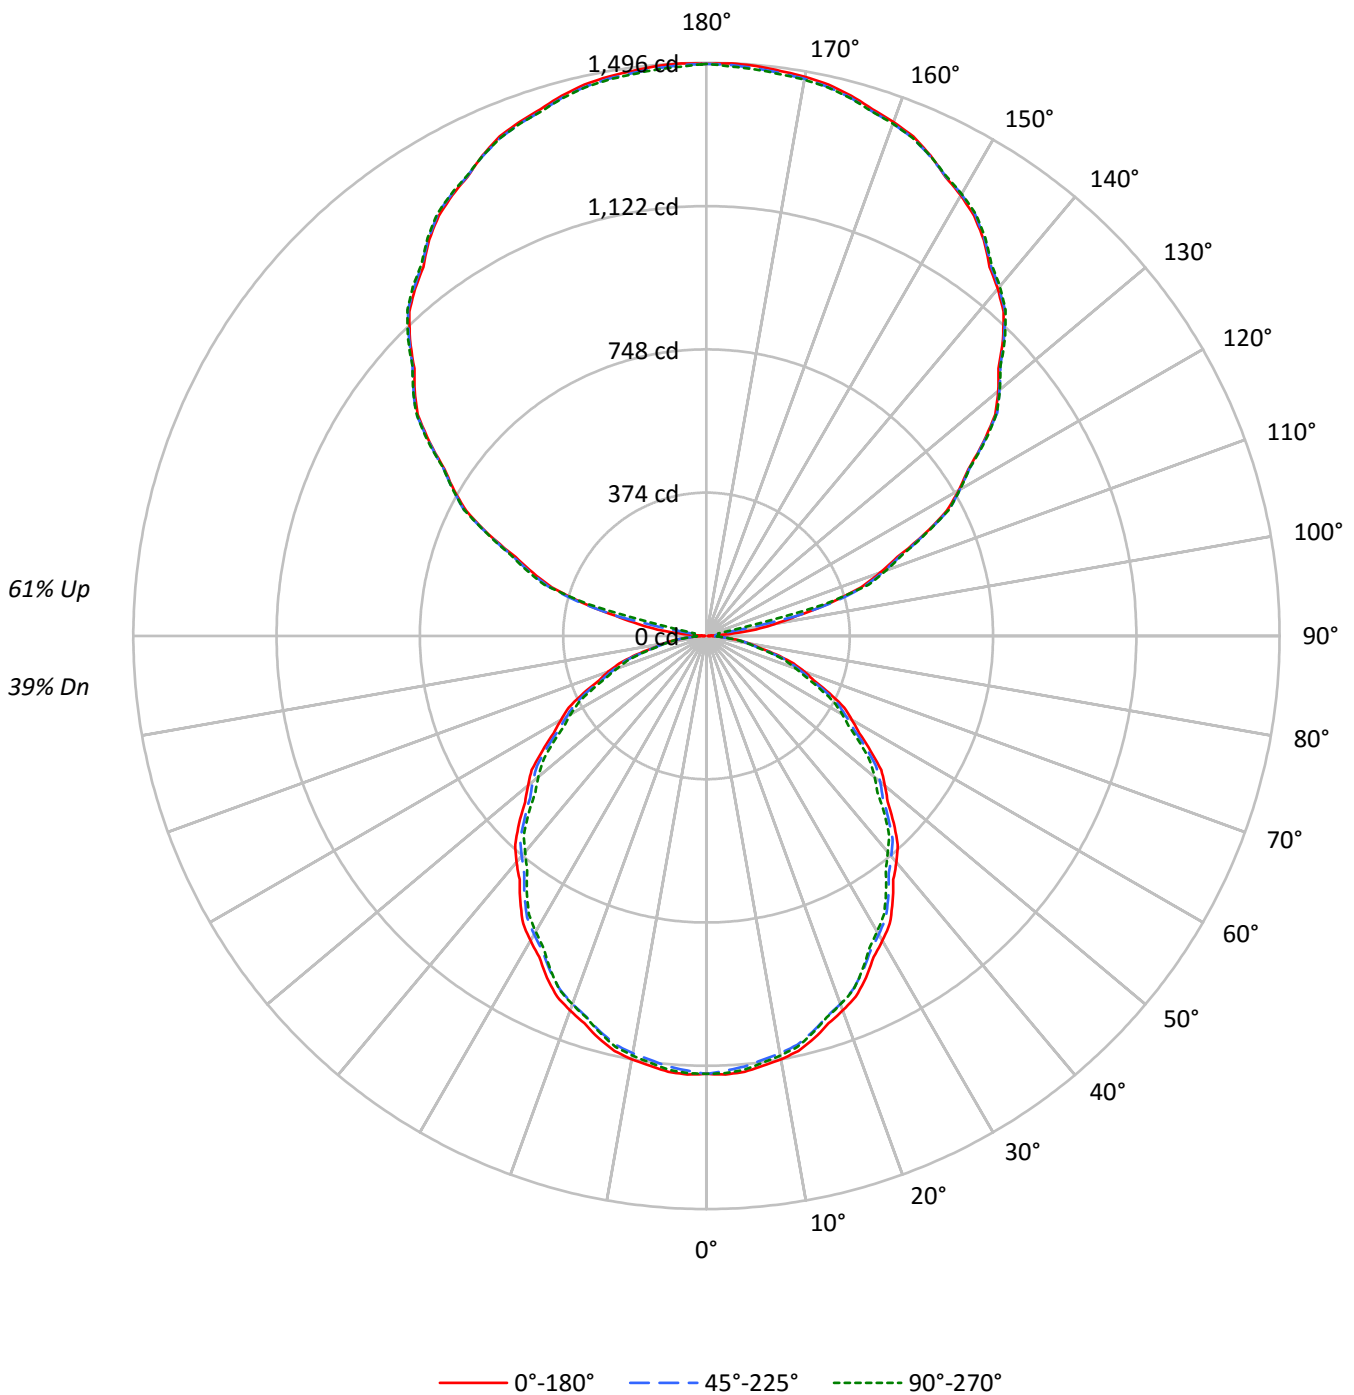



TEST NUMBER: P332797-935

CATALOG NUMBER: S124DIW-S795D1340U935-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	95	95	95	95	77	77	77	61	61	61	46	46	46	39
1	95	91	87	84	86	83	80	77	67	65	63	53	52	51	40	40	39	33
2	87	79	73	68	79	72	67	63	59	55	52	47	44	42	36	34	33	27
3	79	70	63	57	72	64	57	52	52	48	44	41	38	36	32	29	28	23
4	72	62	54	48	65	56	50	44	46	41	37	37	33	30	28	26	24	20
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	23	21	17
6	61	49	41	35	55	45	38	33	37	32	28	30	26	23	23	20	18	15
7	56	44	36	31	51	41	34	29	34	28	25	27	23	20	21	18	16	13
8	52	40	33	27	47	37	30	25	31	25	22	25	21	18	19	17	15	12
9	49	37	29	24	44	34	27	23	28	23	19	23	19	16	18	15	13	11
10	45	33	26	22	41	31	25	20	26	21	17	21	17	15	16	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9227	9227	9227
5°	9255	9143	9210
10°	9197	9069	9114
15°	9086	8940	8964
20°	8937	8781	8789
25°	8769	8598	8573
30°	8563	8383	8307
35°	8348	8159	8051
40°	8126	7904	7759
45°	7895	7654	7507
50°	7637	7430	7200
55°	7361	7142	6909
60°	7083	6817	6610
65°	6770	6508	6245
70°	6420	6097	5858
75°	5883	5599	5459
80°	5235	5026	4895
85°	4576	4409	4326



TEST NUMBER: P332797-935

CATALOG NUMBER: S124DIW-S795D1340U935-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	107.6	1.4
10°-20°	303.3	4.0
20°-30°	446.4	5.9
30°-40°	518.9	6.9
40°-50°	518.9	6.9
50°-60°	453.9	6.0
60°-70°	337.1	4.5
70°-80°	191.5	2.5
80°-90°	59.6	0.8
90°-100°	51.1	0.7
100°-110°	325.6	4.3
110°-120°	622.9	8.2
120°-130°	790.7	10.5
130°-140°	846.0	11.2
140°-150°	791.1	10.5
150°-160°	638.0	8.4
160°-170°	411.5	5.4
170°-180°	141.8	1.9
0°-30°	857.3	11.3
0°-40°	1376.2	18.2
0°-60°	2349.1	31.1
0°-90°	2937.3	38.9
90°-120°	999.5	13.2
90°-150°	3427.4	45.4
90°-180°	4619.0	61.1
0°-180°	7555.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1143	1143	1143	1143	1143	
5°	1142	1138	1128	1138	1136	108
15°	1087	1083	1070	1075	1072	306
25°	984	978	965	966	962	453
35°	847	840	828	822	817	529
45°	692	685	670	661	658	533
55°	523	520	507	497	491	468
65°	354	350	341	332	327	351
75°	189	184	180	176	175	200
85°	49	49	48	48	47	54
90°	3	15	24	31	34	6
95°	61	26	24	31	32	79
105°	336	343	348	356	318	352
115°	628	631	630	632	632	617
125°	882	886	884	888	889	787
135°	1094	1094	1098	1100	1102	843
145°	1262	1265	1265	1266	1269	788
155°	1384	1385	1382	1385	1383	638
165°	1460	1454	1454	1462	1453	412
175°	1493	1487	1488	1496	1484	142
180°	1493	1493	1493	1493	1493	



TEST NUMBER: P332797-935

CATALOG NUMBER: S124DIW-S795D1340U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0
2.5°	1145.9	1145.4	1144.9	1144.4	1143.9	1142.8	1141.0	1139.2	1137.4	1135.7	1137.2
5°	1142.0	1141.3	1140.4	1139.6	1138.8	1137.2	1135.0	1132.7	1130.5	1128.3	1130.5
7.5°	1131.4	1130.6	1129.8	1128.9	1128.2	1126.5	1124.0	1121.5	1119.0	1116.5	1118.4
10°	1121.9	1121.1	1120.2	1119.5	1118.6	1116.9	1114.2	1111.6	1109.0	1106.3	1107.9
12.5°	1109.4	1108.6	1107.8	1107.0	1106.2	1104.3	1101.6	1098.7	1096.0	1093.1	1094.9
15°	1087.1	1086.2	1085.5	1084.6	1083.8	1081.9	1078.8	1075.8	1072.7	1069.7	1070.9
17.5°	1060.1	1059.1	1058.1	1057.1	1056.1	1054.1	1051.3	1048.4	1045.4	1042.6	1043.4
20°	1040.3	1039.3	1038.4	1037.3	1036.3	1034.2	1031.2	1028.1	1025.1	1022.1	1022.7
22.5°	1019.2	1017.8	1016.4	1015.1	1013.7	1011.6	1008.5	1005.5	1002.4	999.4	1000.5
25°	984.5	983.1	981.6	980.2	978.8	976.6	973.8	970.9	968.1	965.3	965.4
27.5°	944.9	943.5	942.0	940.6	939.1	937.0	934.4	931.8	929.1	926.4	925.9
30°	918.6	917.0	915.3	913.7	912.1	909.9	907.2	904.7	902.0	899.3	898.5
32.5°	890.7	889.2	887.8	886.3	884.8	882.7	879.9	877.1	874.3	871.5	870.6
35°	847.1	845.7	844.3	842.8	841.5	839.3	836.5	833.6	830.8	827.9	826.5
37.5°	801.2	799.9	798.6	797.3	795.9	793.8	790.7	787.6	784.6	781.5	780.0
40°	771.1	769.5	767.8	766.2	764.6	762.2	759.2	756.1	753.1	750.0	748.0
42.5°	738.9	737.9	736.9	736.0	734.9	732.8	729.4	726.1	722.6	719.3	717.0
45°	691.5	690.0	688.6	687.2	685.8	683.4	680.2	676.9	673.6	670.4	668.1
47.5°	641.8	640.8	639.9	638.9	637.9	635.9	632.9	629.9	626.9	623.9	621.3
50°	608.1	607.3	606.5	605.6	604.9	603.0	600.2	597.4	594.4	591.6	588.8
52.5°	575.1	574.2	573.2	572.2	571.2	569.2	566.2	563.2	560.2	557.2	554.7
55°	523.0	522.3	521.7	521.1	520.5	518.8	515.9	513.1	510.2	507.4	504.9
57.5°	473.1	472.4	471.7	471.1	470.4	468.6	465.8	463.0	460.2	457.4	455.0
60°	438.7	437.6	436.6	435.7	434.6	432.7	430.2	427.5	424.8	422.2	420.3
62.5°	405.0	404.2	403.3	402.4	401.6	399.8	396.9	394.1	391.3	388.5	386.8
65°	354.4	353.4	352.4	351.4	350.3	348.8	346.8	344.7	342.7	340.7	338.6
67.5°	303.5	302.6	301.6	300.7	299.8	298.3	296.4	294.4	292.5	290.5	288.5
70°	272.0	270.6	269.1	267.7	266.3	264.8	263.1	261.5	259.8	258.3	256.7
72.5°	238.3	236.9	235.5	234.0	232.6	231.3	230.0	228.6	227.3	226.0	224.7
75°	188.6	187.6	186.7	185.6	184.6	183.6	182.5	181.5	180.6	179.5	178.7
77.5°	141.2	140.8	140.3	139.9	139.4	138.8	137.8	137.0	136.0	135.2	134.9
80°	112.6	112.0	111.4	110.8	110.2	109.7	109.3	108.9	108.5	108.1	107.6
82.5°	84.8	84.6	84.2	83.9	83.7	83.5	83.4	83.3	83.3	83.2	82.9
85°	49.4	49.4	49.4	49.4	49.4	49.2	48.8	48.5	48.0	47.6	47.6
87.5°	19.7	20.1	20.5	20.8	21.3	21.5	21.8	22.0	22.3	22.5	22.8
90°	3.4	6.1	8.8	11.5	14.3	16.6	18.6	20.6	22.6	24.5	26.1
92.5°	14.0	14.2	14.4	14.6	14.6	15.8	17.7	19.7	21.7	23.7	25.1
95°	61.4	53.0	44.5	36.1	27.6	23.6	23.8	24.1	24.3	24.5	26.1
97.5°	130.4	135.7	140.9	146.2	151.4	140.3	112.5	84.9	57.2	29.4	29.6
100°	183.1	187.6	192.1	196.6	201.0	186.1	151.9	117.6	83.3	49.2	44.9
102.5°	242.1	245.4	248.7	251.9	255.2	254.6	250.1	245.7	241.3	236.8	191.2
105°	336.1	337.6	339.1	340.6	342.1	343.5	344.7	345.9	347.2	348.4	350.7
107.5°	423.4	424.2	425.0	425.7	426.5	427.7	429.4	431.0	432.7	434.5	435.5
110°	482.4	483.2	484.0	484.7	485.4	486.6	488.0	489.5	491.0	492.5	493.0



TEST NUMBER: P332797-935

CATALOG NUMBER: S124DIW-S795D1340U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	539.6	541.0	542.3	543.6	545.0	546.0	546.7	547.4	548.1	548.8	548.7
115°	627.6	628.4	629.1	629.8	630.6	630.9	630.6	630.3	630.1	629.8	630.3
117.5°	706.9	707.9	708.9	709.9	710.8	711.6	712.2	712.7	713.3	713.9	713.8
120°	760.5	761.5	762.5	763.5	764.5	764.8	764.7	764.4	764.1	763.9	764.4
122.5°	810.5	811.1	811.8	812.4	813.0	813.4	813.7	814.1	814.4	814.8	815.1
125°	882.3	883.2	884.2	885.2	886.2	886.5	886.0	885.5	884.9	884.5	885.2
127.5°	950.1	950.4	950.6	950.9	951.1	951.8	953.0	954.1	955.3	956.4	956.2
130°	993.9	994.2	994.5	994.6	994.9	995.4	996.2	996.9	997.6	998.4	998.7
132.5°	1034.1	1034.6	1035.0	1035.4	1035.9	1036.6	1037.6	1038.5	1039.4	1040.3	1040.6
135°	1094.4	1094.2	1093.9	1093.7	1093.5	1093.8	1094.8	1095.8	1096.8	1097.8	1098.3
137.5°	1147.8	1147.9	1148.0	1148.1	1148.2	1148.8	1149.9	1151.0	1152.1	1153.1	1153.7
140°	1182.7	1183.2	1183.6	1184.1	1184.6	1185.2	1185.6	1186.1	1186.6	1187.1	1187.8
142.5°	1213.9	1214.8	1215.7	1216.6	1217.5	1218.1	1218.4	1218.7	1219.0	1219.3	1219.9
145°	1262.0	1262.7	1263.4	1264.2	1264.9	1265.3	1265.3	1265.3	1265.3	1265.3	1265.6
147.5°	1300.1	1301.5	1303.0	1304.3	1305.7	1306.3	1306.1	1305.8	1305.5	1305.3	1305.4
150°	1327.8	1328.9	1329.8	1330.8	1331.8	1332.1	1332.0	1331.7	1331.5	1331.2	1331.2
152.5°	1351.1	1351.9	1352.6	1353.4	1354.3	1354.4	1354.0	1353.5	1353.1	1352.6	1353.1
155°	1383.7	1383.9	1384.1	1384.4	1384.7	1384.4	1383.7	1382.9	1382.2	1381.5	1382.4
157.5°	1411.2	1411.0	1410.8	1410.7	1410.6	1410.1	1409.2	1408.3	1407.6	1406.7	1408.0
160°	1427.2	1426.5	1425.7	1425.0	1424.3	1423.7	1423.5	1423.2	1423.0	1422.8	1424.3
162.5°	1441.5	1440.5	1439.7	1438.7	1437.8	1437.2	1436.9	1436.7	1436.4	1436.1	1437.6
165°	1459.7	1458.4	1457.2	1455.9	1454.7	1454.1	1454.1	1454.1	1454.1	1454.1	1456.0
167.5°	1473.9	1472.7	1471.4	1470.1	1468.8	1468.0	1467.9	1467.7	1467.6	1467.4	1469.6
170°	1482.0	1480.5	1478.9	1477.5	1476.0	1475.4	1475.6	1475.8	1476.1	1476.4	1478.3
172.5°	1487.3	1485.8	1484.4	1482.8	1481.4	1480.7	1481.0	1481.3	1481.4	1481.7	1483.7
175°	1493.1	1491.6	1490.1	1488.7	1487.1	1486.5	1486.8	1487.0	1487.3	1487.5	1489.8
177.5°	1495.8	1494.4	1493.0	1491.6	1490.2	1489.7	1490.1	1490.6	1490.9	1491.3	1492.9
180°	1493.1	1493.1	1493.1	1493.1	1493.1	1493.1	1493.1	1493.1	1493.1	1493.1	1493.1



TEST NUMBER: P332797-935

CATALOG NUMBER: S124DIW-S795D1340U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0
2.5°	1138.8	1140.5	1142.1	1142.9	1142.7	1142.5	1142.4	1142.2
5°	1132.7	1135.0	1137.2	1138.2	1137.7	1137.4	1137.0	1136.5
7.5°	1120.2	1122.0	1123.7	1124.5	1124.3	1124.0	1123.8	1123.5
10°	1109.6	1111.2	1112.8	1113.4	1113.0	1112.6	1112.2	1111.8
12.5°	1096.7	1098.5	1100.3	1100.9	1100.4	1099.8	1099.2	1098.6
15°	1072.1	1073.3	1074.5	1074.9	1074.3	1073.7	1073.1	1072.5
17.5°	1044.1	1044.9	1045.7	1045.9	1045.4	1045.0	1044.7	1044.2
20°	1023.3	1023.9	1024.5	1024.6	1024.2	1023.8	1023.4	1023.0
22.5°	1001.5	1002.6	1003.8	1003.9	1003.2	1002.5	1001.7	1001.0
25°	965.7	965.9	966.1	965.8	965.0	964.1	963.4	962.5
27.5°	925.5	925.0	924.5	923.8	922.7	921.7	920.7	919.6
30°	897.7	896.9	896.0	895.2	894.1	893.1	892.1	891.1
32.5°	869.5	868.6	867.6	866.6	865.6	864.5	863.5	862.5
35°	825.1	823.6	822.2	821.0	819.9	819.0	817.9	816.9
37.5°	778.4	776.9	775.4	774.0	772.6	771.3	769.9	768.5
40°	746.0	744.0	741.9	740.4	739.3	738.4	737.4	736.3
42.5°	714.5	712.2	709.8	708.3	707.7	707.0	706.3	705.6
45°	665.9	663.7	661.4	660.0	659.4	658.8	658.1	657.5
47.5°	618.8	616.3	613.7	611.7	610.2	608.6	607.1	605.5
50°	585.9	583.1	580.2	578.2	577.0	575.8	574.5	573.3
52.5°	552.2	549.6	547.1	545.1	543.5	542.0	540.4	538.9
55°	502.5	500.1	497.6	495.8	494.6	493.4	492.1	490.9
57.5°	452.7	450.4	448.1	446.3	445.1	443.9	442.8	441.6
60°	418.5	416.7	414.8	413.5	412.4	411.4	410.4	409.4
62.5°	385.1	383.5	381.9	380.5	379.4	378.4	377.5	376.4
65°	336.7	334.6	332.5	331.1	330.0	329.0	328.0	326.9
67.5°	286.6	284.6	282.7	281.5	281.3	281.0	280.7	280.4
70°	255.0	253.4	251.8	250.6	250.0	249.4	248.8	248.2
72.5°	223.4	222.1	220.8	219.9	219.2	218.6	218.0	217.4
75°	177.9	177.0	176.2	175.7	175.6	175.3	175.1	175.0
77.5°	134.7	134.4	134.2	133.8	133.3	132.8	132.2	131.7
80°	107.3	106.9	106.4	106.2	105.9	105.7	105.6	105.3
82.5°	82.7	82.4	82.1	82.0	81.8	81.5	81.4	81.1
85°	47.6	47.6	47.6	47.5	47.4	47.1	46.9	46.7
87.5°	23.1	23.4	23.7	23.8	24.0	24.1	24.2	24.3
90°	27.6	29.0	30.6	31.5	32.0	32.5	33.0	33.5
92.5°	26.7	28.2	29.6	30.4	30.6	30.7	30.7	30.8
95°	27.6	29.0	30.6	31.4	31.6	31.9	32.1	32.4
97.5°	29.8	30.0	30.0	30.3	30.6	30.7	31.0	31.3
100°	40.7	36.5	32.3	30.3	30.6	30.7	31.0	31.3
102.5°	145.8	100.2	54.7	31.9	32.0	32.0	32.1	32.2
105°	352.9	355.2	357.4	354.0	345.1	336.1	327.2	318.3
107.5°	436.6	437.7	438.8	439.8	440.7	441.7	442.6	443.6
110°	493.5	494.0	494.5	495.1	495.8	496.6	497.3	498.1



TEST NUMBER: P332797-935

CATALOG NUMBER: S124DIW-S795D1340U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	548.5	548.5	548.4	548.8	549.7	550.7	551.6	552.6
115°	630.9	631.4	631.8	632.1	632.1	632.1	632.1	632.1
117.5°	713.6	713.5	713.4	713.3	713.3	713.2	713.1	712.9
120°	764.8	765.3	765.9	765.9	765.3	764.8	764.4	763.9
122.5°	815.4	815.7	816.0	815.9	815.4	814.9	814.4	813.9
125°	886.0	886.7	887.4	887.9	888.2	888.5	888.7	889.0
127.5°	956.1	956.0	955.8	955.6	955.5	955.2	955.0	954.8
130°	998.8	999.1	999.4	999.5	999.5	999.5	999.5	999.5
132.5°	1040.9	1041.1	1041.4	1041.4	1041.2	1041.0	1040.8	1040.6
135°	1098.8	1099.2	1099.8	1100.3	1100.8	1101.2	1101.7	1102.3
137.5°	1154.3	1154.8	1155.4	1155.5	1155.4	1155.3	1155.1	1154.9
140°	1188.6	1189.4	1190.1	1190.6	1190.8	1191.1	1191.4	1191.6
142.5°	1220.4	1220.9	1221.5	1221.8	1221.8	1221.8	1221.9	1221.9
145°	1265.8	1266.0	1266.3	1266.7	1267.1	1267.7	1268.2	1268.7
147.5°	1305.7	1305.9	1306.1	1306.3	1306.6	1306.8	1307.0	1307.3
150°	1331.2	1331.2	1331.2	1331.3	1331.5	1331.8	1332.1	1332.3
152.5°	1353.4	1353.8	1354.2	1354.4	1354.2	1354.0	1353.9	1353.8
155°	1383.5	1384.4	1385.4	1385.5	1384.8	1384.1	1383.3	1382.6
157.5°	1409.3	1410.6	1411.9	1411.9	1410.6	1409.3	1408.0	1406.7
160°	1425.7	1427.2	1428.7	1428.7	1427.2	1425.7	1424.3	1422.8
162.5°	1439.2	1440.6	1442.1	1442.0	1440.4	1438.6	1436.9	1435.3
165°	1458.0	1460.0	1462.0	1461.8	1459.7	1457.4	1455.2	1452.9
167.5°	1471.8	1473.9	1476.2	1476.0	1473.5	1471.0	1468.6	1466.1
170°	1480.3	1482.3	1484.3	1484.0	1481.6	1479.1	1476.6	1474.1
172.5°	1485.7	1487.7	1489.7	1489.4	1486.6	1483.9	1481.3	1478.6
175°	1492.0	1494.3	1496.5	1496.1	1493.1	1490.1	1487.1	1484.2
177.5°	1494.5	1496.1	1497.7	1497.3	1494.9	1492.5	1490.1	1487.7
180°	1493.1	1493.1	1493.1	1493.1	1493.1	1493.1	1493.1	1493.1

(END OF REPORT)