

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332786-935

Luminaire Tested: **S124DIW-S795D770U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332786-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S795D770U935-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 770 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5227.8 lumens
Efficiency: N/A
Efficacy: 116.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 45
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332786-935

CATALOG NUMBER: S124DIW-S795D770U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

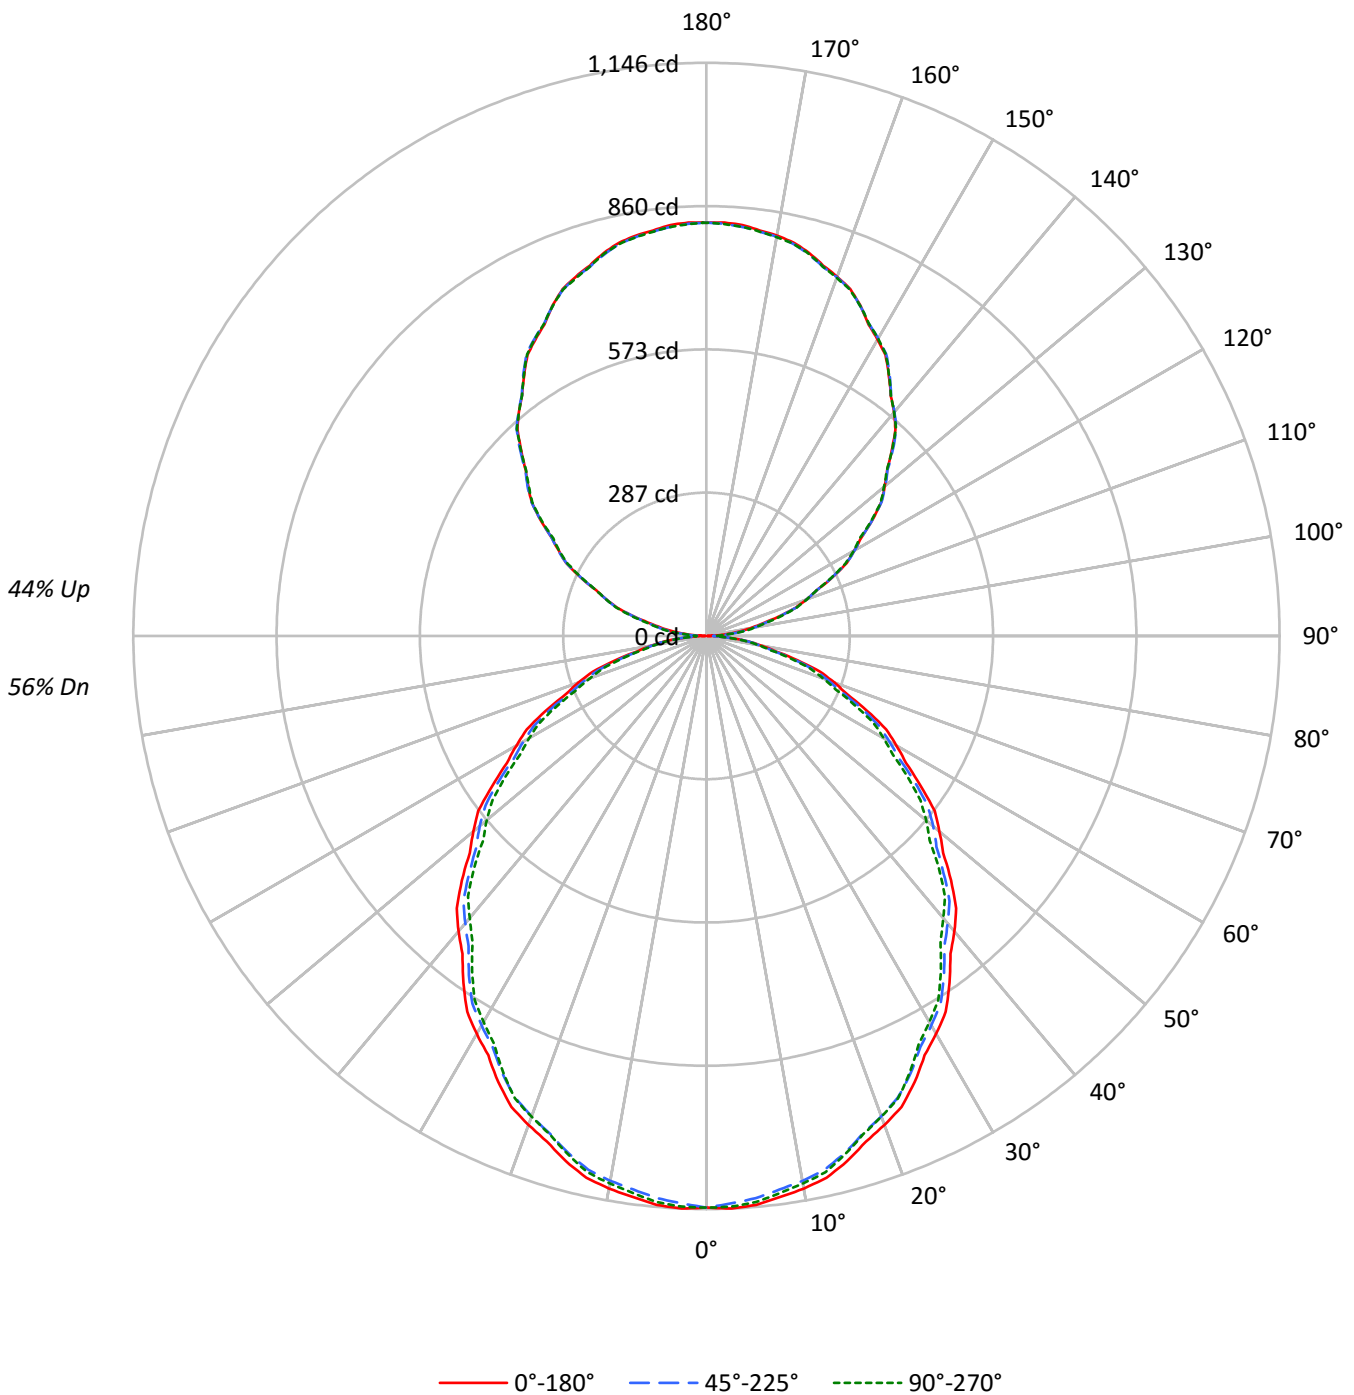



TEST NUMBER: P332786-935

CATALOG NUMBER: S124DIW-S795D770U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	56
1	99	95	91	87	92	88	85	82	76	74	71	65	63	61	55	53	52	47
2	90	83	76	71	84	77	72	67	67	62	59	57	54	51	48	46	44	40
3	82	73	65	59	76	68	61	56	59	54	50	50	47	43	43	40	37	33
4	75	64	56	50	70	60	53	48	52	47	42	45	41	37	38	35	32	29
5	69	57	49	43	64	54	46	41	47	41	36	40	36	32	34	31	28	25
6	64	52	43	37	59	48	41	36	42	36	32	36	32	28	31	27	25	22
7	59	47	38	33	55	44	36	31	38	32	28	33	28	25	28	25	22	19
8	55	42	34	29	51	40	33	28	35	29	25	30	26	22	26	22	20	17
9	51	39	31	26	47	36	29	25	32	26	22	28	23	20	24	20	18	16
10	48	35	28	23	44	33	27	22	30	24	20	26	21	18	22	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9227	9227	9227
5°	9255	9143	9210
10°	9197	9069	9114
15°	9086	8940	8964
20°	8937	8781	8789
25°	8769	8598	8573
30°	8563	8383	8307
35°	8348	8159	8051
40°	8126	7904	7759
45°	7895	7654	7507
50°	7637	7430	7200
55°	7361	7142	6909
60°	7083	6817	6610
65°	6770	6508	6245
70°	6420	6097	5858
75°	5883	5599	5459
80°	5235	5026	4895
85°	4576	4409	4326



TEST NUMBER: P332786-935

CATALOG NUMBER: S124DIW-S795D770U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	107.6	2.1
10°-20°	303.3	5.8
20°-30°	446.4	8.5
30°-40°	518.9	9.9
40°-50°	518.9	9.9
50°-60°	453.9	8.7
60°-70°	337.1	6.4
70°-80°	191.5	3.7
80°-90°	57.7	1.1
90°-100°	54.5	1.0
100°-110°	161.4	3.1
110°-120°	274.0	5.2
120°-130°	361.3	6.9
130°-140°	405.8	7.8
140°-150°	398.7	7.6
150°-160°	335.4	6.4
160°-170°	223.1	4.3
170°-180°	78.1	1.5
0°-30°	857.3	16.4
0°-40°	1376.2	26.3
0°-60°	2349.1	44.9
0°-90°	2935.4	56.2
90°-120°	489.9	9.4
90°-150°	1655.8	31.7
90°-180°	2292.0	43.8
0°-180°	5227.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1143	1143	1143	1143	1143	
5°	1142	1138	1128	1138	1136	108
15°	1087	1083	1070	1075	1072	306
25°	984	978	965	966	962	453
35°	847	840	828	822	817	529
45°	692	685	670	661	658	533
55°	523	520	507	497	491	468
65°	354	350	341	332	327	351
75°	189	184	180	176	175	200
85°	49	49	48	48	47	54
90°	2	9	14	18	19	5
95°	38	44	49	50	50	43
105°	149	150	152	154	156	158
115°	279	278	277	277	276	275
125°	406	406	405	404	403	362
135°	523	527	527	526	524	405
145°	636	638	639	638	636	398
155°	728	728	728	730	728	335
165°	793	791	790	793	791	223
175°	825	822	821	825	821	78
180°	826	826	826	826	826	



TEST NUMBER: P332786-935

CATALOG NUMBER: S124DIW-S795D770U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0
2.5°	1145.9	1145.4	1144.9	1144.4	1143.9	1142.8	1141.0	1139.2	1137.4	1135.7	1137.2
5°	1142.0	1141.3	1140.4	1139.6	1138.8	1137.2	1135.0	1132.7	1130.5	1128.3	1130.5
7.5°	1131.4	1130.6	1129.8	1128.9	1128.2	1126.5	1124.0	1121.5	1119.0	1116.5	1118.4
10°	1121.9	1121.1	1120.2	1119.5	1118.6	1116.9	1114.2	1111.6	1109.0	1106.3	1107.9
12.5°	1109.4	1108.6	1107.8	1107.0	1106.2	1104.3	1101.6	1098.7	1096.0	1093.1	1094.9
15°	1087.1	1086.2	1085.5	1084.6	1083.8	1081.9	1078.8	1075.8	1072.7	1069.7	1070.9
17.5°	1060.1	1059.1	1058.1	1057.1	1056.1	1054.1	1051.3	1048.4	1045.4	1042.6	1043.4
20°	1040.3	1039.3	1038.4	1037.3	1036.3	1034.2	1031.2	1028.1	1025.1	1022.1	1022.7
22.5°	1019.2	1017.8	1016.4	1015.1	1013.7	1011.6	1008.5	1005.5	1002.4	999.4	1000.5
25°	984.5	983.1	981.6	980.2	978.8	976.6	973.8	970.9	968.1	965.3	965.4
27.5°	944.9	943.5	942.0	940.6	939.1	937.0	934.4	931.8	929.1	926.4	925.9
30°	918.6	917.0	915.3	913.7	912.1	909.9	907.2	904.7	902.0	899.3	898.5
32.5°	890.7	889.2	887.8	886.3	884.8	882.7	879.9	877.1	874.3	871.5	870.6
35°	847.1	845.7	844.3	842.8	841.5	839.3	836.5	833.6	830.8	827.9	826.5
37.5°	801.2	799.9	798.6	797.3	795.9	793.8	790.7	787.6	784.6	781.5	780.0
40°	771.1	769.5	767.8	766.2	764.6	762.2	759.2	756.1	753.1	750.0	748.0
42.5°	738.9	737.9	736.9	736.0	734.9	732.8	729.4	726.1	722.6	719.3	717.0
45°	691.5	690.0	688.6	687.2	685.8	683.4	680.2	676.9	673.6	670.4	668.1
47.5°	641.8	640.8	639.9	638.9	637.9	635.9	632.9	629.9	626.9	623.9	621.3
50°	608.1	607.3	606.5	605.6	604.9	603.0	600.2	597.4	594.4	591.6	588.8
52.5°	575.1	574.2	573.2	572.2	571.2	569.2	566.2	563.2	560.2	557.2	554.7
55°	523.0	522.3	521.7	521.1	520.5	518.8	515.9	513.1	510.2	507.4	504.9
57.5°	473.1	472.4	471.7	471.1	470.4	468.6	465.8	463.0	460.2	457.4	455.0
60°	438.7	437.6	436.6	435.7	434.6	432.7	430.2	427.5	424.8	422.2	420.3
62.5°	405.0	404.2	403.3	402.4	401.6	399.8	396.9	394.1	391.3	388.5	386.8
65°	354.4	353.4	352.4	351.4	350.3	348.8	346.8	344.7	342.7	340.7	338.6
67.5°	303.5	302.6	301.6	300.7	299.8	298.3	296.4	294.4	292.5	290.5	288.5
70°	272.0	270.6	269.1	267.7	266.3	264.8	263.1	261.5	259.8	258.3	256.7
72.5°	238.3	236.9	235.5	234.0	232.6	231.3	230.0	228.6	227.3	226.0	224.7
75°	188.6	187.6	186.7	185.6	184.6	183.6	182.5	181.5	180.6	179.5	178.7
77.5°	141.2	140.8	140.3	139.9	139.4	138.8	137.8	137.0	136.0	135.2	134.9
80°	112.6	112.0	111.4	110.8	110.2	109.7	109.3	108.9	108.5	108.1	107.6
82.5°	84.8	84.6	84.2	83.9	83.7	83.5	83.4	83.3	83.3	83.2	82.9
85°	49.4	49.4	49.4	49.4	49.4	49.2	48.8	48.5	48.0	47.6	47.6
87.5°	19.5	19.5	19.7	19.9	20.1	20.1	20.2	20.2	20.3	20.4	20.6
90°	1.9	3.4	5.1	6.6	8.2	9.6	10.7	11.8	12.9	14.0	14.9
92.5°	13.7	15.5	17.2	19.0	20.8	22.1	22.9	23.7	24.5	25.3	25.8
95°	38.3	39.6	40.9	42.2	43.5	44.6	45.5	46.6	47.6	48.6	49.0
97.5°	67.0	68.0	69.1	70.0	71.0	72.2	73.4	74.5	75.7	76.8	77.3
100°	89.5	90.1	90.6	91.2	91.7	92.6	93.9	95.2	96.5	97.8	98.1
102.5°	113.0	113.2	113.4	113.7	113.9	114.6	115.7	116.9	118.0	119.2	119.7
105°	148.9	149.0	149.2	149.3	149.5	149.8	150.4	150.9	151.5	152.1	152.5
107.5°	186.6	186.8	186.9	187.1	187.3	187.4	187.5	187.6	187.7	187.8	188.1
110°	212.2	212.4	212.8	213.0	213.3	213.4	213.2	213.1	212.9	212.8	212.5



TEST NUMBER: P332786-935

CATALOG NUMBER: S124DIW-S795D770U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	238.8	238.8	238.8	238.9	238.9	238.8	238.6	238.3	238.1	237.8	237.8
115°	278.6	278.6	278.6	278.6	278.6	278.4	278.2	277.9	277.6	277.3	277.2
117.5°	316.2	316.3	316.4	316.5	316.7	316.6	316.4	316.2	316.0	315.8	315.3
120°	341.2	341.8	342.3	342.9	343.5	343.5	343.2	342.8	342.3	341.9	341.1
122.5°	367.3	367.6	367.7	368.0	368.2	368.2	368.1	367.8	367.6	367.5	367.0
125°	405.8	405.8	405.8	405.8	405.8	405.7	405.5	405.4	405.3	405.1	404.8
127.5°	440.7	441.1	441.5	442.0	442.4	442.5	442.2	442.0	441.8	441.6	441.3
130°	465.2	465.6	466.1	466.5	466.9	467.1	467.1	467.1	467.1	467.1	466.8
132.5°	490.3	490.6	490.9	491.2	491.5	491.6	491.5	491.4	491.3	491.1	490.9
135°	523.4	524.2	525.0	525.9	526.8	527.2	527.2	527.2	527.2	527.2	526.9
137.5°	559.4	559.8	560.2	560.6	561.0	561.3	561.5	561.7	562.0	562.2	561.8
140°	583.4	583.7	584.0	584.3	584.5	584.7	584.7	584.7	584.7	584.7	584.5
142.5°	605.4	605.7	606.0	606.2	606.6	606.7	606.5	606.4	606.3	606.1	606.1
145°	635.8	636.4	637.0	637.6	638.1	638.4	638.6	638.8	638.9	639.0	638.9
147.5°	666.0	666.7	667.4	668.0	668.7	669.0	668.9	668.7	668.7	668.6	668.4
150°	684.4	684.9	685.5	686.1	686.6	687.0	687.0	687.0	687.0	687.0	687.0
152.5°	701.8	702.1	702.5	702.8	703.2	703.4	703.4	703.6	703.7	703.8	704.1
155°	728.5	728.5	728.5	728.5	728.5	728.4	728.2	728.1	728.0	727.9	728.4
157.5°	751.0	750.7	750.4	750.2	749.9	749.8	749.8	749.8	749.8	749.7	750.1
160°	764.3	764.1	764.0	763.9	763.7	763.5	763.4	763.3	763.1	763.0	763.4
162.5°	776.5	776.2	775.8	775.4	775.1	774.8	774.6	774.6	774.4	774.2	775.0
165°	793.1	792.6	792.2	791.8	791.3	791.0	790.7	790.4	790.1	789.8	790.7
167.5°	805.6	805.1	804.5	803.9	803.3	803.0	803.1	803.1	803.1	803.1	804.0
170°	812.9	812.1	811.4	810.7	810.0	809.7	809.9	810.0	810.1	810.3	811.1
172.5°	817.9	817.3	816.7	816.1	815.5	815.3	815.3	815.4	815.4	815.4	816.4
175°	825.0	824.2	823.5	822.9	822.2	821.7	821.6	821.4	821.3	821.1	822.2
177.5°	827.2	826.7	826.1	825.6	825.0	824.8	824.8	824.8	824.8	824.8	825.5
180°	826.2	826.2	826.2	826.2	826.2	826.2	826.2	826.2	826.2	826.2	826.2



TEST NUMBER: P332786-935

CATALOG NUMBER: S124DIW-S795D770U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0	1143.0
2.5°	1138.8	1140.5	1142.1	1142.9	1142.7	1142.5	1142.4	1142.2
5°	1132.7	1135.0	1137.2	1138.2	1137.7	1137.4	1137.0	1136.5
7.5°	1120.2	1122.0	1123.7	1124.5	1124.3	1124.0	1123.8	1123.5
10°	1109.6	1111.2	1112.8	1113.4	1113.0	1112.6	1112.2	1111.8
12.5°	1096.7	1098.5	1100.3	1100.9	1100.4	1099.8	1099.2	1098.6
15°	1072.1	1073.3	1074.5	1074.9	1074.3	1073.7	1073.1	1072.5
17.5°	1044.1	1044.9	1045.7	1045.9	1045.4	1045.0	1044.7	1044.2
20°	1023.3	1023.9	1024.5	1024.6	1024.2	1023.8	1023.4	1023.0
22.5°	1001.5	1002.6	1003.8	1003.9	1003.2	1002.5	1001.7	1001.0
25°	965.7	965.9	966.1	965.8	965.0	964.1	963.4	962.5
27.5°	925.5	925.0	924.5	923.8	922.7	921.7	920.7	919.6
30°	897.7	896.9	896.0	895.2	894.1	893.1	892.1	891.1
32.5°	869.5	868.6	867.6	866.6	865.6	864.5	863.5	862.5
35°	825.1	823.6	822.2	821.0	819.9	819.0	817.9	816.9
37.5°	778.4	776.9	775.4	774.0	772.6	771.3	769.9	768.5
40°	746.0	744.0	741.9	740.4	739.3	738.4	737.4	736.3
42.5°	714.5	712.2	709.8	708.3	707.7	707.0	706.3	705.6
45°	665.9	663.7	661.4	660.0	659.4	658.8	658.1	657.5
47.5°	618.8	616.3	613.7	611.7	610.2	608.6	607.1	605.5
50°	585.9	583.1	580.2	578.2	577.0	575.8	574.5	573.3
52.5°	552.2	549.6	547.1	545.1	543.5	542.0	540.4	538.9
55°	502.5	500.1	497.6	495.8	494.6	493.4	492.1	490.9
57.5°	452.7	450.4	448.1	446.3	445.1	443.9	442.8	441.6
60°	418.5	416.7	414.8	413.5	412.4	411.4	410.4	409.4
62.5°	385.1	383.5	381.9	380.5	379.4	378.4	377.5	376.4
65°	336.7	334.6	332.5	331.1	330.0	329.0	328.0	326.9
67.5°	286.6	284.6	282.7	281.5	281.3	281.0	280.7	280.4
70°	255.0	253.4	251.8	250.6	250.0	249.4	248.8	248.2
72.5°	223.4	222.1	220.8	219.9	219.2	218.6	218.0	217.4
75°	177.9	177.0	176.2	175.7	175.6	175.3	175.1	175.0
77.5°	134.7	134.4	134.2	133.8	133.3	132.8	132.2	131.7
80°	107.3	106.9	106.4	106.2	105.9	105.7	105.6	105.3
82.5°	82.7	82.4	82.1	82.0	81.8	81.5	81.4	81.1
85°	47.6	47.6	47.6	47.5	47.4	47.1	46.9	46.7
87.5°	20.8	20.9	21.1	21.2	21.3	21.3	21.4	21.4
90°	15.8	16.6	17.5	18.0	18.3	18.6	18.9	19.2
92.5°	26.3	26.9	27.4	27.7	27.9	28.1	28.2	28.4
95°	49.4	49.9	50.3	50.5	50.5	50.5	50.5	50.5
97.5°	77.8	78.4	78.9	79.1	79.1	79.1	79.1	79.1
100°	98.3	98.6	98.9	99.0	99.0	99.0	99.0	99.0
102.5°	120.0	120.5	120.8	121.1	121.2	121.3	121.4	121.6
105°	152.9	153.3	153.8	154.2	154.6	155.1	155.5	155.9
107.5°	188.6	188.9	189.3	189.5	189.5	189.5	189.4	189.4
110°	212.2	212.0	211.6	211.7	212.2	212.6	213.0	213.4



TEST NUMBER: P332786-935

CATALOG NUMBER: S124DIW-S795D770U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	237.7	237.6	237.6	237.6	237.7	237.8	237.9	238.0
115°	277.1	276.9	276.7	276.6	276.5	276.4	276.2	276.0
117.5°	314.9	314.4	313.8	313.5	313.2	312.9	312.6	312.4
120°	340.4	339.8	339.1	338.8	339.1	339.4	339.7	339.9
122.5°	366.4	366.0	365.5	365.0	364.5	363.9	363.5	363.0
125°	404.6	404.3	404.0	403.7	403.5	403.1	402.9	402.6
127.5°	441.0	440.7	440.4	440.1	440.0	439.7	439.5	439.3
130°	466.6	466.2	466.0	465.5	465.0	464.4	463.8	463.3
132.5°	490.6	490.3	490.0	489.7	489.6	489.3	489.0	488.9
135°	526.6	526.3	526.1	525.7	525.3	524.9	524.4	524.0
137.5°	561.5	561.1	560.8	560.6	560.7	560.8	560.9	560.9
140°	584.4	584.3	584.1	584.0	583.8	583.7	583.6	583.4
142.5°	606.1	606.1	606.1	606.1	606.0	606.0	606.0	605.9
145°	638.8	638.6	638.4	638.2	637.7	637.3	636.9	636.5
147.5°	668.3	668.2	668.0	668.0	667.8	667.7	667.5	667.4
150°	687.0	687.0	687.0	686.9	686.7	686.6	686.5	686.3
152.5°	704.5	704.8	705.2	705.2	704.8	704.5	704.0	703.7
155°	729.0	729.5	730.1	730.1	729.5	729.0	728.4	727.9
157.5°	750.5	751.0	751.4	751.4	750.9	750.4	749.9	749.4
160°	763.9	764.3	764.7	764.6	763.9	763.1	762.4	761.7
162.5°	775.8	776.5	777.3	777.3	776.6	775.9	775.2	774.5
165°	791.5	792.4	793.2	793.4	792.8	792.2	791.7	791.1
167.5°	804.9	805.6	806.5	806.5	805.6	804.8	803.9	803.0
170°	812.0	812.9	813.7	813.6	812.6	811.7	810.6	809.7
172.5°	817.3	818.3	819.2	819.2	818.2	817.3	816.2	815.3
175°	823.1	824.1	825.1	825.1	824.1	823.1	822.2	821.1
177.5°	826.3	827.1	827.9	827.9	826.9	826.0	825.1	824.2
180°	826.2	826.2	826.2	826.2	826.2	826.2	826.2	826.2

(END OF REPORT)