

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333090-935

Luminaire Tested: **S124RDIW-S1020D1340U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333090-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124RDIW-S1020D1340U935-4F0-1E-UDD-F1  
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7602.0 lumens  
Efficiency: N/A  
Efficacy: 108.9 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 69.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333090-935

CATALOG NUMBER: S124RDIW-S1020D1340U935-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

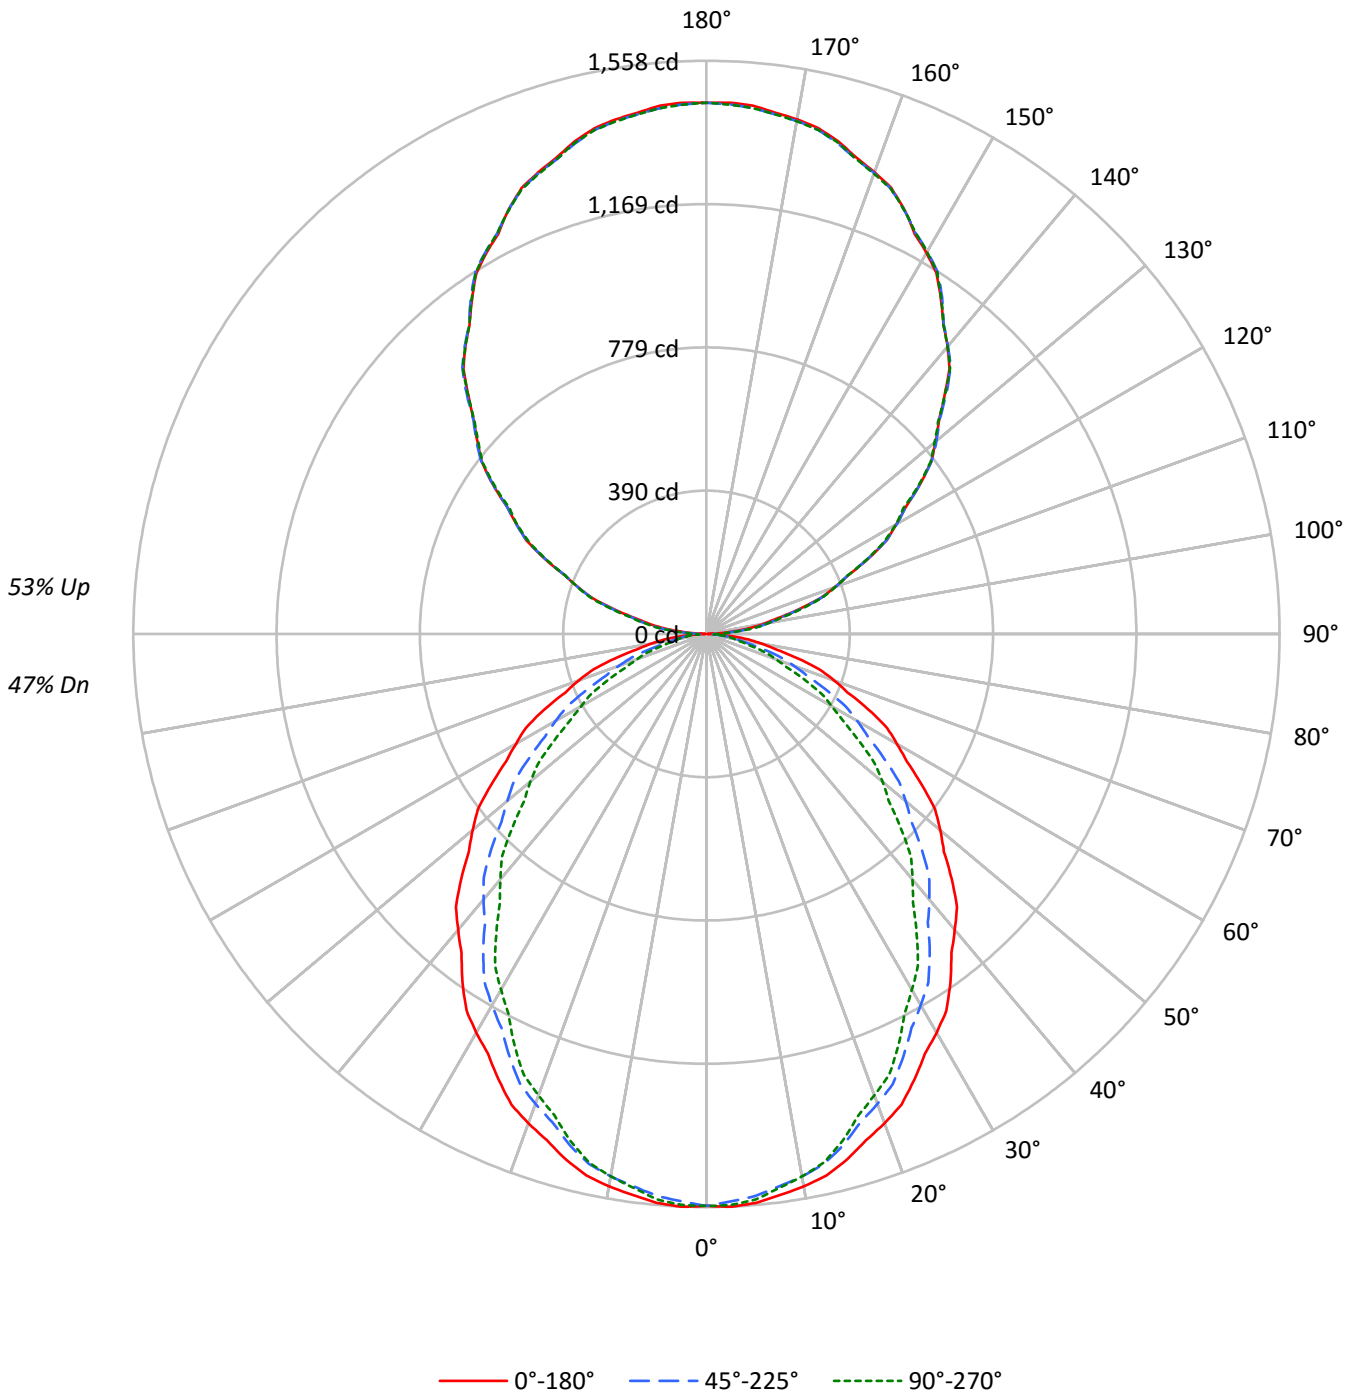



TEST NUMBER: P333090-935

CATALOG NUMBER: S124RDIW-S1020D1340U935-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	82	82	82	67	67	67	54	54	54	47
1	97	93	89	86	89	86	83	80	72	70	68	59	58	56	48	47	46	40
2	89	82	76	71	82	75	70	66	63	60	56	52	50	47	42	41	39	34
3	81	72	65	59	74	67	60	55	56	52	48	47	43	40	38	35	33	29
4	74	64	56	50	68	59	52	47	50	45	41	42	38	35	34	31	29	25
5	68	57	49	43	63	53	46	40	45	39	35	37	33	30	31	28	25	22
6	63	51	43	37	58	47	40	35	40	35	31	34	30	27	28	25	22	19
7	58	46	38	33	54	43	36	31	37	31	27	31	27	24	25	22	20	17
8	54	42	34	29	50	39	32	28	34	28	24	28	24	21	23	20	18	16
9	50	38	31	26	46	36	29	25	31	25	22	26	22	19	22	19	16	14
10	47	35	28	23	43	33	26	22	28	23	20	24	20	17	20	17	15	13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	12551	12551	12551
5°	12580	12426	12503
10°	12500	12276	12276
15°	12357	12018	11929
20°	12160	11679	11465
25°	11908	11282	10996
30°	11663	10864	10409
35°	11392	10430	9819
40°	11065	9936	9183
45°	10764	9445	8535
50°	10420	8881	7850
55°	10054	8294	7104
60°	9649	7650	6344
65°	9278	6844	5593
70°	8738	5958	4749
75°	8057	4938	3862
80°	7029	3761	3543
85°	5956	3418	3196



TEST NUMBER: P333090-935

CATALOG NUMBER: S124RDIW-S1020D1340U935-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	146.0	1.9
10°-20°	407.3	5.4
20°-30°	588.1	7.7
30°-40°	666.6	8.8
40°-50°	643.7	8.5
50°-60°	535.3	7.0
60°-70°	369.6	4.9
70°-80°	187.4	2.5
80°-90°	52.4	0.7
90°-100°	95.2	1.3
100°-110°	282.1	3.7
110°-120°	478.8	6.3
120°-130°	631.3	8.3
130°-140°	709.0	9.3
140°-150°	696.7	9.2
150°-160°	586.0	7.7
160°-170°	389.9	5.1
170°-180°	136.5	1.8
0°-30°	1141.4	15.0
0°-40°	1808.0	23.8
0°-60°	2987.0	39.3
0°-90°	3596.3	47.3
90°-120°	856.1	11.3
90°-150°	2893.2	38.1
90°-180°	4006.0	52.7
0°-180°	7602.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1555	1555	1555	1555	1555	
5°	1552	1547	1533	1544	1543	147
15°	1478	1467	1438	1435	1427	416
25°	1337	1314	1267	1247	1234	616
35°	1156	1117	1058	1019	996	722
45°	943	897	827	771	748	727
55°	714	665	589	530	505	639
65°	486	433	358	309	293	479
75°	258	214	158	132	124	273
85°	64	42	37	35	34	72
90°	3	15	24	31	34	7
95°	67	77	85	88	88	75
105°	260	261	266	269	272	276
115°	487	487	485	484	482	480
125°	709	709	708	706	703	632
135°	914	921	921	919	916	707
145°	1111	1115	1117	1115	1112	695
155°	1273	1273	1272	1276	1272	585
165°	1386	1382	1380	1386	1382	390
175°	1442	1436	1435	1442	1435	137
180°	1444	1444	1444	1444	1444	



TEST NUMBER: P333090-935

CATALOG NUMBER: S124RDIW-S1020D1340U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7
2.5°	1558.5	1557.6	1556.8	1556.0	1555.1	1553.5	1551.2	1548.9	1546.5	1544.2	1546.5
5°	1552.3	1551.3	1550.2	1549.1	1548.1	1545.9	1542.8	1539.6	1536.5	1533.3	1535.9
7.5°	1538.3	1537.1	1536.0	1534.9	1533.8	1531.2	1527.1	1522.9	1518.8	1514.7	1516.4
10°	1524.9	1523.6	1522.2	1521.0	1519.7	1516.6	1511.8	1507.1	1502.3	1497.5	1498.6
12.5°	1507.8	1506.2	1504.7	1503.2	1501.7	1498.1	1492.5	1486.9	1481.3	1475.7	1476.3
15°	1478.5	1476.1	1473.8	1471.4	1469.0	1464.5	1457.8	1451.2	1444.7	1438.0	1437.5
17.5°	1443.0	1439.6	1436.1	1432.7	1429.3	1423.6	1415.7	1407.7	1399.8	1391.8	1390.3
20°	1415.4	1412.0	1408.5	1405.1	1401.6	1395.4	1386.5	1377.4	1368.5	1359.4	1357.4
22.5°	1384.9	1381.0	1377.2	1373.4	1369.5	1362.7	1353.1	1343.5	1333.9	1324.2	1321.0
25°	1336.9	1332.1	1327.3	1322.6	1317.8	1310.0	1299.2	1288.3	1277.5	1266.6	1262.1
27.5°	1286.3	1280.4	1274.5	1268.4	1262.5	1253.7	1242.1	1230.5	1218.9	1207.3	1201.8
30°	1251.1	1244.5	1237.9	1231.3	1224.7	1215.1	1202.7	1190.2	1177.8	1165.4	1158.8
32.5°	1214.0	1206.5	1199.0	1191.6	1184.1	1174.0	1161.1	1148.3	1135.4	1122.6	1114.9
35°	1155.9	1147.5	1138.9	1130.5	1122.1	1111.2	1097.9	1084.8	1071.5	1058.3	1049.3
37.5°	1093.7	1085.0	1076.3	1067.6	1058.9	1047.1	1032.5	1017.9	1003.2	988.5	978.4
40°	1050.0	1041.2	1032.5	1023.7	1015.0	1003.2	988.1	972.9	957.9	942.8	931.7
42.5°	1008.1	998.9	989.7	980.6	971.5	959.0	943.3	927.6	911.9	896.1	884.8
45°	942.8	933.1	923.3	913.4	903.6	890.8	874.9	859.1	843.2	827.3	814.4
47.5°	875.5	865.3	855.2	845.2	835.0	821.7	805.2	788.7	772.1	755.7	742.3
50°	829.7	819.4	809.1	798.7	788.4	774.8	757.9	741.0	724.0	707.1	693.9
52.5°	783.1	772.9	762.8	752.8	742.6	728.9	711.5	694.2	676.8	659.5	646.1
55°	714.3	703.7	693.1	682.5	671.9	658.1	640.8	623.6	606.5	589.3	575.5
57.5°	646.2	635.2	624.1	613.1	602.2	588.1	571.3	554.3	537.4	520.5	506.5
60°	597.6	587.0	576.4	565.8	555.3	541.5	524.6	507.6	490.7	473.8	460.0
62.5°	553.8	542.8	531.8	520.7	509.8	495.6	478.2	460.9	443.5	426.2	413.5
65°	485.7	474.3	463.0	451.6	440.2	426.0	409.1	392.2	375.2	358.3	347.0
67.5°	415.0	404.1	393.2	382.3	371.3	358.1	342.3	326.7	310.9	295.2	285.4
70°	370.2	359.1	348.0	336.9	325.8	312.7	297.6	282.5	267.4	252.4	243.7
72.5°	322.6	312.5	302.5	292.5	282.4	270.3	256.1	241.8	227.6	213.4	205.9
75°	258.3	248.6	238.8	228.9	219.2	208.0	195.6	183.2	170.7	158.3	152.2
77.5°	193.1	184.8	176.5	168.2	159.9	150.7	140.6	130.6	120.5	110.5	106.9
80°	151.2	143.5	135.9	128.2	120.5	112.7	104.8	96.9	88.9	80.9	80.2
82.5°	115.0	108.0	100.9	93.8	86.9	81.0	76.5	72.0	67.4	62.9	62.3
85°	64.3	59.0	53.7	48.4	43.1	40.0	39.3	38.5	37.7	36.9	36.3
87.5°	22.6	21.4	20.3	19.1	18.0	17.5	17.7	17.9	18.1	18.3	18.3
90°	3.4	6.1	8.8	11.5	14.3	16.6	18.6	20.6	22.6	24.5	26.1
92.5°	23.9	27.0	30.1	33.2	36.4	38.7	40.0	41.4	42.8	44.3	45.1
95°	67.0	69.2	71.5	73.7	75.9	77.9	79.6	81.4	83.1	84.9	85.6
97.5°	117.0	118.8	120.6	122.3	124.2	126.1	128.1	130.2	132.2	134.2	135.1
100°	156.4	157.3	158.3	159.3	160.3	161.9	164.1	166.3	168.6	170.8	171.3
102.5°	197.4	197.9	198.2	198.6	199.0	200.2	202.2	204.3	206.3	208.4	209.1
105°	260.2	260.5	260.7	260.9	261.1	261.7	262.8	263.8	264.8	265.8	266.5
107.5°	326.1	326.3	326.7	326.9	327.3	327.4	327.6	327.8	328.0	328.0	328.7
110°	370.7	371.2	371.7	372.2	372.7	372.8	372.6	372.3	372.1	371.9	371.3



TEST NUMBER: P333090-935

CATALOG NUMBER: S124RDIW-S1020D1340U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	417.2	417.2	417.3	417.5	417.6	417.4	417.0	416.5	416.0	415.6	415.5
115°	486.8	486.8	486.8	486.8	486.8	486.6	486.1	485.6	485.1	484.6	484.4
117.5°	552.5	552.7	552.9	553.1	553.3	553.2	552.8	552.5	552.2	551.8	551.0
120°	596.2	597.3	598.2	599.3	600.2	600.4	599.6	598.9	598.1	597.4	596.2
122.5°	641.8	642.2	642.7	643.0	643.4	643.4	643.1	642.7	642.4	642.0	641.2
125°	709.0	709.0	709.0	709.0	709.0	708.9	708.7	708.4	708.2	707.9	707.4
127.5°	770.0	770.8	771.5	772.2	773.0	773.2	772.7	772.4	772.0	771.5	771.1
130°	812.9	813.6	814.4	815.1	815.9	816.2	816.2	816.2	816.2	816.2	815.7
132.5°	856.7	857.2	857.7	858.3	858.8	859.0	858.8	858.6	858.4	858.2	857.7
135°	914.5	916.0	917.5	918.9	920.5	921.2	921.2	921.2	921.2	921.2	920.8
137.5°	977.5	978.2	978.9	979.6	980.2	980.9	981.2	981.6	982.0	982.4	981.7
140°	1019.5	1019.9	1020.5	1021.0	1021.5	1021.7	1021.7	1021.7	1021.7	1021.7	1021.5
142.5°	1057.9	1058.3	1058.9	1059.4	1059.9	1060.0	1059.8	1059.6	1059.5	1059.2	1059.2
145°	1111.0	1112.1	1113.0	1114.0	1115.0	1115.6	1115.9	1116.1	1116.4	1116.6	1116.4
147.5°	1163.7	1164.9	1166.1	1167.3	1168.5	1169.0	1168.8	1168.6	1168.4	1168.2	1168.0
150°	1195.9	1196.9	1197.9	1198.9	1199.9	1200.3	1200.3	1200.3	1200.3	1200.3	1200.3
152.5°	1226.2	1226.8	1227.4	1228.0	1228.6	1229.1	1229.2	1229.4	1229.7	1229.9	1230.5
155°	1272.9	1272.9	1272.9	1272.9	1272.9	1272.8	1272.6	1272.3	1272.0	1271.9	1272.8
157.5°	1312.3	1311.8	1311.4	1310.9	1310.4	1310.2	1310.2	1310.1	1310.1	1310.0	1310.8
160°	1335.5	1335.2	1335.0	1334.7	1334.5	1334.2	1333.9	1333.8	1333.5	1333.3	1333.9
162.5°	1356.9	1356.2	1355.6	1355.0	1354.4	1353.9	1353.7	1353.4	1353.1	1352.9	1354.3
165°	1385.7	1385.0	1384.2	1383.5	1382.8	1382.2	1381.6	1381.1	1380.6	1380.1	1381.6
167.5°	1407.8	1406.8	1405.8	1404.7	1403.7	1403.2	1403.3	1403.3	1403.3	1403.3	1404.9
170°	1420.3	1419.1	1417.9	1416.6	1415.4	1414.9	1415.1	1415.4	1415.7	1415.8	1417.4
172.5°	1429.3	1428.2	1427.2	1426.2	1425.1	1424.6	1424.7	1424.7	1424.8	1424.8	1426.5
175°	1441.6	1440.3	1439.1	1437.9	1436.6	1435.8	1435.6	1435.4	1435.1	1434.9	1436.6
177.5°	1445.5	1444.6	1443.6	1442.6	1441.6	1441.1	1441.1	1441.1	1441.1	1441.1	1442.5
180°	1443.8	1443.8	1443.8	1443.8	1443.8	1443.8	1443.8	1443.8	1443.8	1443.8	1443.8



TEST NUMBER: P333090-935

CATALOG NUMBER: S124RDIW-S1020D1340U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7
2.5°	1548.9	1551.2	1553.5	1554.6	1554.4	1554.2	1553.9	1553.8
5°	1538.5	1541.2	1543.9	1544.9	1544.4	1543.9	1543.3	1542.8
7.5°	1518.1	1519.8	1521.5	1521.9	1521.0	1520.2	1519.3	1518.5
10°	1499.7	1500.7	1501.8	1501.8	1500.7	1499.7	1498.6	1497.5
12.5°	1476.9	1477.6	1478.2	1477.7	1476.3	1474.8	1473.3	1471.9
15°	1437.0	1436.4	1435.9	1434.7	1432.9	1431.0	1429.2	1427.3
17.5°	1388.9	1387.4	1386.0	1383.8	1381.0	1378.2	1375.4	1372.5
20°	1355.2	1353.1	1351.0	1348.2	1344.8	1341.4	1337.9	1334.5
22.5°	1317.8	1314.7	1311.6	1308.5	1305.7	1303.0	1300.1	1297.4
25°	1257.6	1253.1	1248.6	1245.0	1242.4	1239.8	1237.1	1234.5
27.5°	1196.2	1190.7	1185.1	1180.4	1176.6	1172.8	1169.0	1165.2
30°	1152.2	1145.6	1138.9	1133.5	1129.3	1125.1	1120.8	1116.6
32.5°	1107.2	1099.6	1091.9	1086.1	1082.0	1078.0	1074.0	1070.0
35°	1040.3	1031.3	1022.3	1015.5	1010.6	1005.9	1001.2	996.3
37.5°	968.5	958.4	948.3	940.9	936.2	931.3	926.6	921.9
40°	920.6	909.5	898.4	890.4	885.7	880.9	876.2	871.4
42.5°	873.5	862.2	850.8	842.7	837.8	832.8	827.8	822.9
45°	801.4	788.4	775.5	766.6	761.9	757.1	752.3	747.6
47.5°	728.8	715.4	701.9	692.6	687.3	682.1	676.8	671.7
50°	680.6	667.4	654.2	645.1	640.1	635.0	630.0	625.0
52.5°	632.6	619.1	605.7	596.4	591.2	585.9	580.7	575.5
55°	561.7	548.0	534.3	524.9	519.8	514.8	509.8	504.7
57.5°	492.5	478.5	464.6	455.7	451.9	448.1	444.3	440.5
60°	446.3	432.5	418.8	409.7	405.5	401.3	397.1	392.9
62.5°	400.8	388.1	375.4	367.3	363.9	360.6	357.1	353.8
65°	335.5	324.2	312.8	305.6	302.4	299.2	296.0	292.8
67.5°	275.6	265.9	256.1	249.4	245.9	242.5	238.9	235.5
70°	234.9	226.2	217.5	211.7	209.1	206.5	203.8	201.2
72.5°	198.4	191.0	183.5	178.6	176.1	173.7	171.3	168.8
75°	146.2	140.1	134.0	130.2	128.5	127.0	125.4	123.8
77.5°	103.4	99.9	96.3	94.3	93.8	93.3	92.8	92.4
80°	79.4	78.6	77.7	77.2	77.0	76.7	76.5	76.2
82.5°	61.6	61.1	60.5	60.1	59.8	59.6	59.3	59.1
85°	35.8	35.3	34.8	34.5	34.5	34.5	34.5	34.5
87.5°	18.4	18.5	18.6	18.8	19.1	19.4	19.7	20.1
90°	27.6	29.0	30.5	31.5	32.0	32.5	33.0	33.5
92.5°	46.0	46.9	47.8	48.4	48.6	49.0	49.2	49.6
95°	86.4	87.1	87.8	88.3	88.3	88.3	88.3	88.3
97.5°	136.0	136.9	137.8	138.3	138.3	138.3	138.3	138.3
100°	171.9	172.4	172.8	173.1	173.1	173.1	173.1	173.1
102.5°	209.7	210.4	211.1	211.5	211.8	212.0	212.2	212.4
105°	267.3	268.0	268.7	269.5	270.2	271.0	271.7	272.4
107.5°	329.4	330.1	330.9	331.1	331.1	331.1	331.1	331.0
110°	370.8	370.3	369.9	370.0	370.7	371.4	372.2	373.0





TEST NUMBER: P333090-935

CATALOG NUMBER: S124RDIW-S1020D1340U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	415.4	415.3	415.2	415.3	415.3	415.5	415.7	415.9
115°	484.1	483.9	483.6	483.4	483.1	482.8	482.6	482.4
117.5°	550.2	549.3	548.5	547.8	547.3	546.8	546.3	545.8
120°	595.0	593.7	592.5	592.0	592.5	593.1	593.6	594.0
122.5°	640.3	639.6	638.7	637.8	636.9	636.0	635.2	634.2
125°	707.0	706.5	705.9	705.4	705.0	704.5	704.0	703.4
127.5°	770.6	770.1	769.6	769.1	768.8	768.4	767.9	767.6
130°	815.3	814.8	814.2	813.6	812.5	811.5	810.5	809.5
132.5°	857.2	856.8	856.3	855.8	855.4	855.0	854.6	854.2
135°	920.2	919.7	919.2	918.6	917.8	917.1	916.4	915.6
137.5°	981.1	980.5	979.8	979.6	979.7	979.9	980.0	980.2
140°	1021.2	1021.0	1020.7	1020.5	1020.2	1019.9	1019.7	1019.5
142.5°	1059.1	1059.1	1059.0	1058.9	1058.9	1058.9	1058.9	1058.8
145°	1116.1	1115.9	1115.6	1115.2	1114.4	1113.6	1112.9	1112.2
147.5°	1167.8	1167.6	1167.4	1167.2	1166.9	1166.7	1166.5	1166.2
150°	1200.3	1200.3	1200.3	1200.2	1200.0	1199.7	1199.5	1199.3
152.5°	1231.1	1231.7	1232.3	1232.2	1231.6	1230.9	1230.3	1229.6
155°	1273.8	1274.8	1275.8	1275.8	1274.8	1273.8	1272.8	1271.9
157.5°	1311.5	1312.3	1313.0	1312.9	1312.1	1311.2	1310.4	1309.6
160°	1334.7	1335.5	1336.2	1335.9	1334.7	1333.5	1332.2	1331.0
162.5°	1355.6	1356.9	1358.2	1358.3	1357.0	1355.8	1354.6	1353.3
165°	1383.1	1384.6	1386.1	1386.4	1385.3	1384.3	1383.4	1382.3
167.5°	1406.4	1407.8	1409.3	1409.3	1407.7	1406.2	1404.7	1403.2
170°	1418.8	1420.3	1421.9	1421.7	1420.0	1418.2	1416.5	1414.8
172.5°	1428.1	1429.9	1431.6	1431.5	1429.8	1428.1	1426.3	1424.6
175°	1438.3	1440.0	1441.8	1441.8	1440.0	1438.3	1436.6	1434.9
177.5°	1443.9	1445.3	1446.7	1446.6	1445.0	1443.4	1441.8	1440.2
180°	1443.8	1443.8	1443.8	1443.8	1443.8	1443.8	1443.8	1443.8

(END OF REPORT)