

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333078-935

Luminaire Tested: **S124RDIW-S1020D470U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333078-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124RDIW-S1020D470U935-4F0-1E-UDD-F1  
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 470 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4993.1 lumens  
Efficiency: N/A  
Efficacy: 108.1 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 46.2  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333078-935

CATALOG NUMBER: S124RDIW-S1020D470U935-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

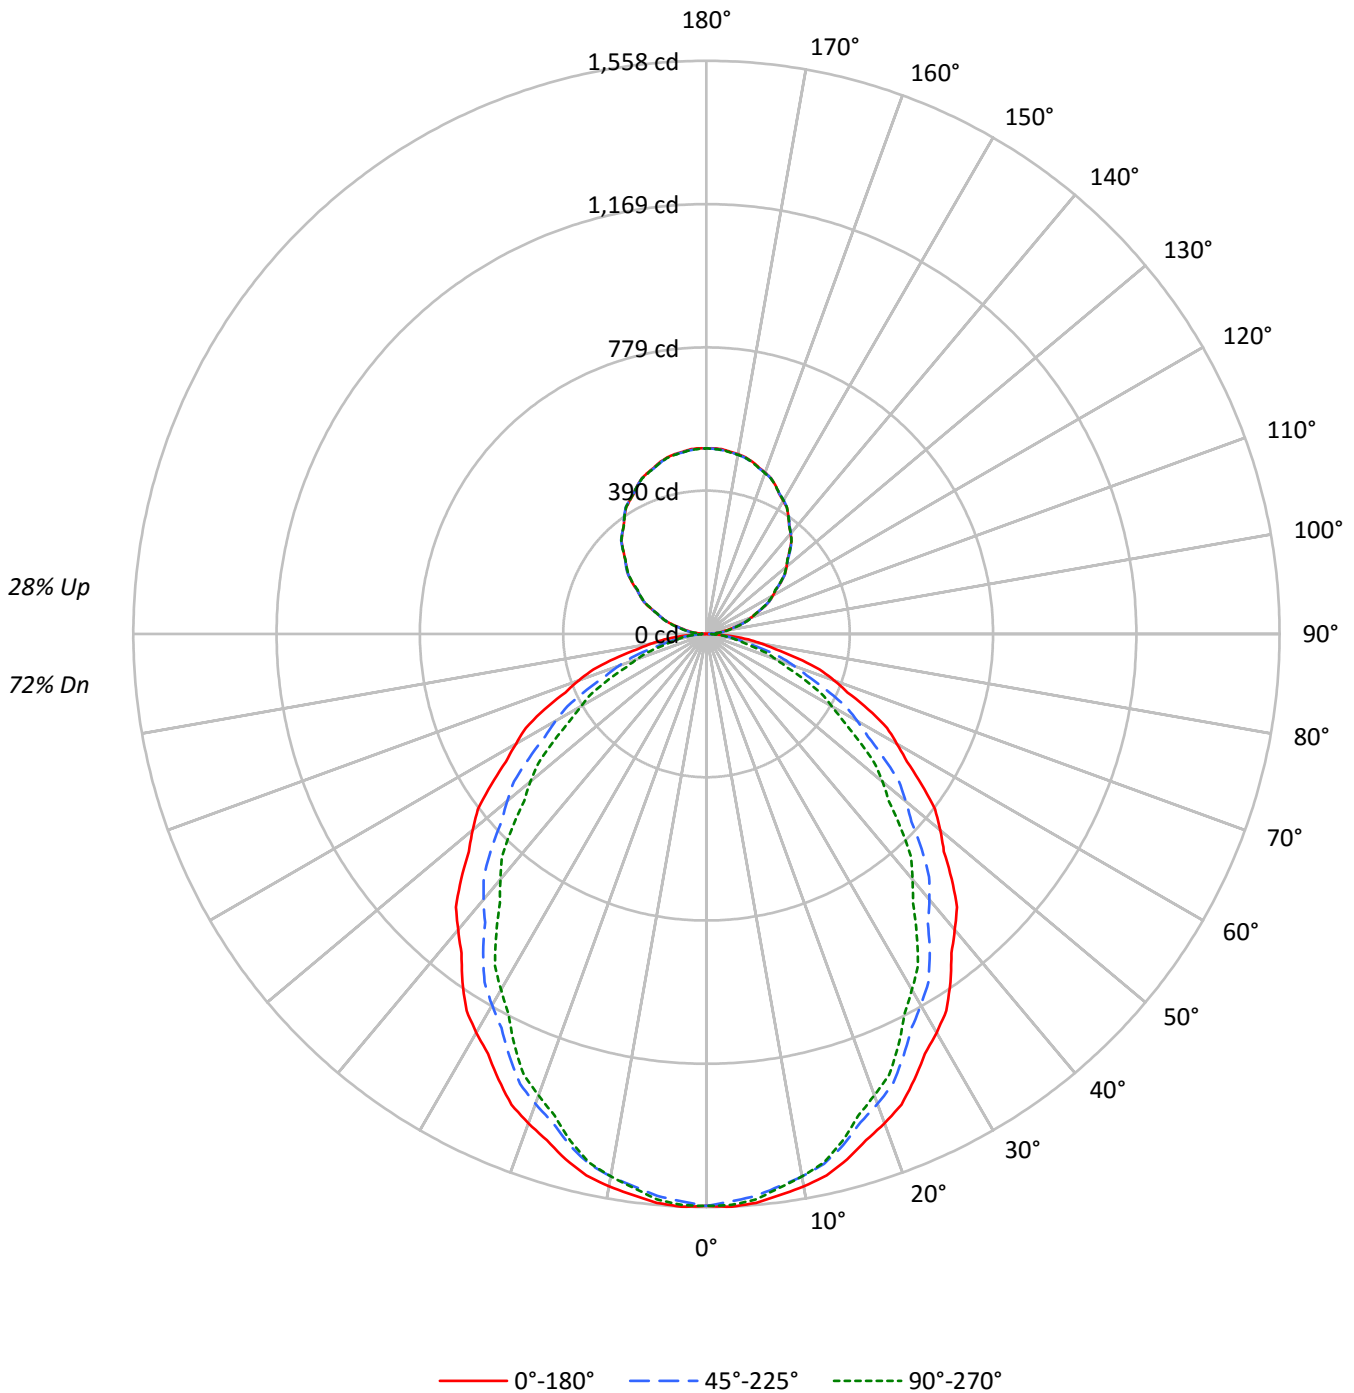



TEST NUMBER: P333078-935

CATALOG NUMBER: S124RDIW-S1020D470U935-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	107	107	107	107	96	96	96	86	86	86	76	76	76	72
1	103	99	95	91	98	94	90	87	85	82	80	76	74	72	68	67	65	61
2	94	87	81	75	89	83	77	72	75	70	66	67	64	61	60	58	56	52
3	86	77	69	63	81	73	66	61	66	61	56	60	56	52	54	51	48	45
4	79	68	60	54	75	65	58	52	59	53	48	54	49	45	48	45	41	38
5	73	61	53	47	69	58	51	45	53	47	42	48	43	39	44	40	36	34
6	67	55	47	41	64	53	45	40	48	42	37	44	39	35	40	36	32	30
7	62	50	42	36	59	48	40	35	44	37	33	40	35	31	36	32	29	26
8	58	46	38	32	55	44	36	31	40	34	29	37	31	28	34	29	26	24
9	54	42	34	29	51	40	33	28	37	31	27	34	29	25	31	27	23	21
10	51	38	31	26	48	37	30	25	34	28	24	31	26	23	29	25	21	20

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	12551	12551	12551
5°	12580	12426	12503
10°	12500	12276	12276
15°	12357	12018	11929
20°	12160	11679	11465
25°	11908	11282	10996
30°	11663	10864	10409
35°	11392	10430	9819
40°	11065	9936	9183
45°	10764	9445	8535
50°	10420	8881	7850
55°	10054	8294	7104
60°	9649	7650	6344
65°	9278	6844	5593
70°	8738	5958	4749
75°	8057	4938	3862
80°	7029	3761	3543
85°	5956	3418	3196



TEST NUMBER: P333078-935

CATALOG NUMBER: S124RDIW-S1020D470U935-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	146.0	2.9
10°-20°	407.3	8.2
20°-30°	588.1	11.8
30°-40°	666.6	13.4
40°-50°	643.7	12.9
50°-60°	535.3	10.7
60°-70°	369.6	7.4
70°-80°	187.4	3.8
80°-90°	49.6	1.0
90°-100°	33.3	0.7
100°-110°	98.6	2.0
110°-120°	167.3	3.4
120°-130°	220.6	4.4
130°-140°	247.7	5.0
140°-150°	243.4	4.9
150°-160°	204.8	4.1
160°-170°	136.2	2.7
170°-180°	47.7	1.0
0°-30°	1141.4	22.9
0°-40°	1808.0	36.2
0°-60°	2987.0	59.8
0°-90°	3593.5	72.0
90°-120°	299.1	6.0
90°-150°	1010.9	20.2
90°-180°	1400.0	28.0
0°-180°	4993.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1555	1555	1555	1555	1555	
5°	1552	1547	1533	1544	1543	147
15°	1478	1467	1438	1435	1427	416
25°	1337	1314	1267	1247	1234	616
35°	1156	1117	1058	1019	996	722
45°	943	897	827	771	748	727
55°	714	665	589	530	505	639
65°	486	433	358	309	293	479
75°	258	214	158	132	124	273
85°	64	42	37	35	34	72
90°	1	5	9	11	12	5
95°	23	27	30	31	31	26
105°	91	91	93	94	95	96
115°	170	170	169	169	169	168
125°	248	248	247	247	246	221
135°	320	322	322	321	320	247
145°	388	390	390	390	389	243
155°	445	445	444	446	444	205
165°	484	483	482	484	483	136
175°	504	502	501	504	501	48
180°	504	504	504	504	504	



TEST NUMBER: P333078-935

CATALOG NUMBER: S124RDIW-S1020D470U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7
2.5°	1558.5	1557.6	1556.8	1556.0	1555.1	1553.5	1551.2	1548.9	1546.5	1544.2	1546.5
5°	1552.3	1551.3	1550.2	1549.1	1548.1	1545.9	1542.8	1539.6	1536.5	1533.3	1535.9
7.5°	1538.3	1537.1	1536.0	1534.9	1533.8	1531.2	1527.1	1522.9	1518.8	1514.7	1516.4
10°	1524.9	1523.6	1522.2	1521.0	1519.7	1516.6	1511.8	1507.1	1502.3	1497.5	1498.6
12.5°	1507.8	1506.2	1504.7	1503.2	1501.7	1498.1	1492.5	1486.9	1481.3	1475.7	1476.3
15°	1478.5	1476.1	1473.8	1471.4	1469.0	1464.5	1457.8	1451.2	1444.7	1438.0	1437.5
17.5°	1443.0	1439.6	1436.1	1432.7	1429.3	1423.6	1415.7	1407.7	1399.8	1391.8	1390.3
20°	1415.4	1412.0	1408.5	1405.1	1401.6	1395.4	1386.5	1377.4	1368.5	1359.4	1357.4
22.5°	1384.9	1381.0	1377.2	1373.4	1369.5	1362.7	1353.1	1343.5	1333.9	1324.2	1321.0
25°	1336.9	1332.1	1327.3	1322.6	1317.8	1310.0	1299.2	1288.3	1277.5	1266.6	1262.1
27.5°	1286.3	1280.4	1274.5	1268.4	1262.5	1253.7	1242.1	1230.5	1218.9	1207.3	1201.8
30°	1251.1	1244.5	1237.9	1231.3	1224.7	1215.1	1202.7	1190.2	1177.8	1165.4	1158.8
32.5°	1214.0	1206.5	1199.0	1191.6	1184.1	1174.0	1161.1	1148.3	1135.4	1122.6	1114.9
35°	1155.9	1147.5	1138.9	1130.5	1122.1	1111.2	1097.9	1084.8	1071.5	1058.3	1049.3
37.5°	1093.7	1085.0	1076.3	1067.6	1058.9	1047.1	1032.5	1017.9	1003.2	988.5	978.4
40°	1050.0	1041.2	1032.5	1023.7	1015.0	1003.2	988.1	972.9	957.9	942.8	931.7
42.5°	1008.1	998.9	989.7	980.6	971.5	959.0	943.3	927.6	911.9	896.1	884.8
45°	942.8	933.1	923.3	913.4	903.6	890.8	874.9	859.1	843.2	827.3	814.4
47.5°	875.5	865.3	855.2	845.2	835.0	821.7	805.2	788.7	772.1	755.7	742.3
50°	829.7	819.4	809.1	798.7	788.4	774.8	757.9	741.0	724.0	707.1	693.9
52.5°	783.1	772.9	762.8	752.8	742.6	728.9	711.5	694.2	676.8	659.5	646.1
55°	714.3	703.7	693.1	682.5	671.9	658.1	640.8	623.6	606.5	589.3	575.5
57.5°	646.2	635.2	624.1	613.1	602.2	588.1	571.3	554.3	537.4	520.5	506.5
60°	597.6	587.0	576.4	565.8	555.3	541.5	524.6	507.6	490.7	473.8	460.0
62.5°	553.8	542.8	531.8	520.7	509.8	495.6	478.2	460.9	443.5	426.2	413.5
65°	485.7	474.3	463.0	451.6	440.2	426.0	409.1	392.2	375.2	358.3	347.0
67.5°	415.0	404.1	393.2	382.3	371.3	358.1	342.3	326.7	310.9	295.2	285.4
70°	370.2	359.1	348.0	336.9	325.8	312.7	297.6	282.5	267.4	252.4	243.7
72.5°	322.6	312.5	302.5	292.5	282.4	270.3	256.1	241.8	227.6	213.4	205.9
75°	258.3	248.6	238.8	228.9	219.2	208.0	195.6	183.2	170.7	158.3	152.2
77.5°	193.1	184.8	176.5	168.2	159.9	150.7	140.6	130.6	120.5	110.5	106.9
80°	151.2	143.5	135.9	128.2	120.5	112.7	104.8	96.9	88.9	80.9	80.2
82.5°	115.0	108.0	100.9	93.8	86.9	81.0	76.5	72.0	67.4	62.9	62.3
85°	64.3	59.0	53.7	48.4	43.1	40.0	39.3	38.5	37.7	36.9	36.3
87.5°	22.1	20.7	19.1	17.7	16.1	15.3	15.2	15.2	15.2	15.1	15.0
90°	1.2	2.2	3.1	4.0	5.0	5.8	6.5	7.2	7.9	8.6	9.1
92.5°	8.4	9.5	10.5	11.6	12.7	13.5	14.0	14.5	15.0	15.4	15.8
95°	23.4	24.2	25.0	25.7	26.5	27.2	27.8	28.4	29.0	29.6	29.9
97.5°	40.9	41.5	42.1	42.8	43.4	44.1	44.8	45.5	46.1	46.9	47.2
100°	54.6	54.9	55.3	55.6	56.1	56.6	57.3	58.1	58.9	59.7	59.8
102.5°	69.0	69.1	69.2	69.4	69.6	70.0	70.7	71.4	72.1	72.8	73.0
105°	90.9	91.0	91.1	91.2	91.3	91.4	91.8	92.1	92.5	92.8	93.1
107.5°	113.9	114.0	114.2	114.3	114.3	114.4	114.5	114.5	114.6	114.6	114.9
110°	129.5	129.7	129.8	130.0	130.2	130.3	130.2	130.1	130.0	129.9	129.8



TEST NUMBER: P333078-935

CATALOG NUMBER: S124RDIW-S1020D470U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	145.8	145.8	145.9	145.9	145.9	145.9	145.7	145.5	145.3	145.3	145.2
115°	170.1	170.1	170.1	170.1	170.1	170.0	169.9	169.7	169.5	169.4	169.3
117.5°	193.0	193.1	193.2	193.3	193.3	193.3	193.2	193.0	193.0	192.8	192.5
120°	208.4	208.7	209.1	209.4	209.7	209.7	209.5	209.2	209.0	208.7	208.3
122.5°	224.3	224.4	224.5	224.6	224.8	224.8	224.7	224.5	224.5	224.4	224.0
125°	247.7	247.7	247.7	247.7	247.7	247.7	247.6	247.5	247.5	247.4	247.2
127.5°	269.1	269.3	269.6	269.8	270.1	270.2	270.0	269.8	269.8	269.6	269.4
130°	284.0	284.3	284.6	284.8	285.1	285.2	285.2	285.2	285.2	285.2	285.0
132.5°	299.3	299.5	299.7	299.9	300.1	300.1	300.1	300.0	300.0	299.9	299.7
135°	319.5	320.0	320.6	321.1	321.6	321.8	321.8	321.8	321.8	321.8	321.7
137.5°	341.6	341.8	342.0	342.2	342.5	342.7	342.9	343.0	343.1	343.3	343.0
140°	356.2	356.4	356.5	356.7	356.9	357.0	357.0	357.0	357.0	357.0	356.9
142.5°	369.6	369.8	370.0	370.1	370.3	370.4	370.3	370.2	370.1	370.1	370.1
145°	388.2	388.6	388.9	389.3	389.6	389.8	389.9	389.9	390.0	390.1	390.0
147.5°	406.7	407.0	407.4	407.9	408.3	408.5	408.4	408.3	408.3	408.2	408.1
150°	417.8	418.2	418.5	418.9	419.2	419.4	419.4	419.4	419.4	419.4	419.4
152.5°	428.4	428.7	428.9	429.1	429.3	429.5	429.5	429.6	429.6	429.7	429.9
155°	444.8	444.8	444.8	444.8	444.8	444.7	444.6	444.5	444.4	444.4	444.7
157.5°	458.5	458.3	458.2	458.1	457.9	457.8	457.8	457.8	457.7	457.7	458.0
160°	466.7	466.6	466.5	466.4	466.3	466.2	466.1	466.1	466.0	465.9	466.1
162.5°	474.2	473.9	473.6	473.5	473.2	473.0	472.9	472.9	472.8	472.7	473.2
165°	484.1	483.9	483.6	483.4	483.1	482.9	482.8	482.6	482.4	482.2	482.8
167.5°	491.9	491.5	491.2	490.9	490.4	490.3	490.3	490.3	490.3	490.3	490.9
170°	496.3	495.8	495.4	495.0	494.6	494.4	494.5	494.6	494.6	494.7	495.2
172.5°	499.4	499.0	498.7	498.3	497.9	497.7	497.7	497.8	497.8	497.8	498.4
175°	503.7	503.3	502.8	502.4	502.0	501.7	501.6	501.5	501.4	501.4	502.0
177.5°	505.1	504.7	504.4	504.0	503.7	503.5	503.5	503.5	503.5	503.5	504.0
180°	504.5	504.5	504.5	504.5	504.5	504.5	504.5	504.5	504.5	504.5	504.5



TEST NUMBER: P333078-935

CATALOG NUMBER: S124RDIW-S1020D470U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7	1554.7
2.5°	1548.9	1551.2	1553.5	1554.6	1554.4	1554.2	1553.9	1553.8
5°	1538.5	1541.2	1543.9	1544.9	1544.4	1543.9	1543.3	1542.8
7.5°	1518.1	1519.8	1521.5	1521.9	1521.0	1520.2	1519.3	1518.5
10°	1499.7	1500.7	1501.8	1501.8	1500.7	1499.7	1498.6	1497.5
12.5°	1476.9	1477.6	1478.2	1477.7	1476.3	1474.8	1473.3	1471.9
15°	1437.0	1436.4	1435.9	1434.7	1432.9	1431.0	1429.2	1427.3
17.5°	1388.9	1387.4	1386.0	1383.8	1381.0	1378.2	1375.4	1372.5
20°	1355.2	1353.1	1351.0	1348.2	1344.8	1341.4	1337.9	1334.5
22.5°	1317.8	1314.7	1311.6	1308.5	1305.7	1303.0	1300.1	1297.4
25°	1257.6	1253.1	1248.6	1245.0	1242.4	1239.8	1237.1	1234.5
27.5°	1196.2	1190.7	1185.1	1180.4	1176.6	1172.8	1169.0	1165.2
30°	1152.2	1145.6	1138.9	1133.5	1129.3	1125.1	1120.8	1116.6
32.5°	1107.2	1099.6	1091.9	1086.1	1082.0	1078.0	1074.0	1070.0
35°	1040.3	1031.3	1022.3	1015.5	1010.6	1005.9	1001.2	996.3
37.5°	968.5	958.4	948.3	940.9	936.2	931.3	926.6	921.9
40°	920.6	909.5	898.4	890.4	885.7	880.9	876.2	871.4
42.5°	873.5	862.2	850.8	842.7	837.8	832.8	827.8	822.9
45°	801.4	788.4	775.5	766.6	761.9	757.1	752.3	747.6
47.5°	728.8	715.4	701.9	692.6	687.3	682.1	676.8	671.7
50°	680.6	667.4	654.2	645.1	640.1	635.0	630.0	625.0
52.5°	632.6	619.1	605.7	596.4	591.2	585.9	580.7	575.5
55°	561.7	548.0	534.3	524.9	519.8	514.8	509.8	504.7
57.5°	492.5	478.5	464.6	455.7	451.9	448.1	444.3	440.5
60°	446.3	432.5	418.8	409.7	405.5	401.3	397.1	392.9
62.5°	400.8	388.1	375.4	367.3	363.9	360.6	357.1	353.8
65°	335.5	324.2	312.8	305.6	302.4	299.2	296.0	292.8
67.5°	275.6	265.9	256.1	249.4	245.9	242.5	238.9	235.5
70°	234.9	226.2	217.5	211.7	209.1	206.5	203.8	201.2
72.5°	198.4	191.0	183.5	178.6	176.1	173.7	171.3	168.8
75°	146.2	140.1	134.0	130.2	128.5	127.0	125.4	123.8
77.5°	103.4	99.9	96.3	94.3	93.8	93.3	92.8	92.4
80°	79.4	78.6	77.7	77.2	77.0	76.7	76.5	76.2
82.5°	61.6	61.1	60.5	60.1	59.8	59.6	59.3	59.1
85°	35.8	35.3	34.8	34.5	34.5	34.5	34.5	34.5
87.5°	14.8	14.7	14.6	14.7	14.9	15.2	15.4	15.7
90°	9.6	10.2	10.7	11.0	11.2	11.4	11.5	11.7
92.5°	16.1	16.4	16.7	16.9	17.0	17.1	17.2	17.3
95°	30.1	30.4	30.7	30.8	30.8	30.8	30.8	30.8
97.5°	47.5	47.9	48.1	48.3	48.3	48.3	48.3	48.3
100°	60.0	60.2	60.4	60.4	60.4	60.4	60.4	60.4
102.5°	73.3	73.5	73.8	74.0	74.0	74.0	74.1	74.2
105°	93.4	93.7	93.9	94.2	94.5	94.7	95.0	95.2
107.5°	115.1	115.4	115.6	115.7	115.7	115.7	115.6	115.6
110°	129.6	129.4	129.2	129.2	129.5	129.8	130.0	130.3





TEST NUMBER: P333078-935

CATALOG NUMBER: S124RDIW-S1020D470U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	145.2	145.1	145.1	145.1	145.2	145.2	145.3	145.3
115°	169.2	169.1	169.0	168.9	168.8	168.8	168.7	168.6
117.5°	192.3	191.9	191.7	191.4	191.2	191.1	190.9	190.7
120°	207.8	207.4	207.0	206.9	207.1	207.2	207.4	207.6
122.5°	223.8	223.4	223.2	222.8	222.6	222.2	221.9	221.6
125°	247.0	246.8	246.7	246.5	246.3	246.2	246.0	245.8
127.5°	269.2	269.1	268.9	268.7	268.6	268.5	268.4	268.2
130°	284.8	284.6	284.5	284.2	283.9	283.5	283.2	282.8
132.5°	299.5	299.4	299.2	299.0	298.9	298.8	298.6	298.5
135°	321.5	321.3	321.2	321.0	320.7	320.5	320.2	319.9
137.5°	342.8	342.6	342.3	342.2	342.3	342.3	342.4	342.5
140°	356.8	356.7	356.6	356.5	356.5	356.4	356.3	356.2
142.5°	370.1	370.1	370.1	370.0	370.0	370.0	370.0	370.0
145°	389.9	389.9	389.8	389.6	389.3	389.1	388.8	388.6
147.5°	408.0	407.9	407.9	407.9	407.8	407.7	407.6	407.5
150°	419.4	419.4	419.4	419.4	419.3	419.2	419.1	419.0
152.5°	430.2	430.3	430.6	430.5	430.3	430.1	429.9	429.6
155°	445.1	445.4	445.7	445.7	445.4	445.1	444.7	444.4
157.5°	458.2	458.5	458.7	458.7	458.5	458.1	457.9	457.5
160°	466.4	466.7	466.9	466.8	466.4	466.0	465.5	465.0
162.5°	473.6	474.2	474.6	474.6	474.2	473.7	473.3	472.9
165°	483.3	483.8	484.3	484.4	484.1	483.7	483.4	483.0
167.5°	491.4	491.9	492.4	492.4	491.9	491.4	490.8	490.3
170°	495.8	496.3	496.8	496.7	496.1	495.5	494.9	494.3
172.5°	499.0	499.6	500.2	500.2	499.6	498.9	498.3	497.7
175°	502.6	503.2	503.8	503.8	503.2	502.6	502.0	501.4
177.5°	504.5	505.0	505.5	505.4	504.9	504.4	503.8	503.3
180°	504.5	504.5	504.5	504.5	504.5	504.5	504.5	504.5

(END OF REPORT)