

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333114-935

Luminaire Tested: **S124RDIW-S1195D1560U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333114-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIW-S1195D1560U935-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8810.8 lumens
Efficiency: N/A
Efficacy: 106.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 82.9
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333114-935

CATALOG NUMBER: S124RDIW-S1195D1560U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

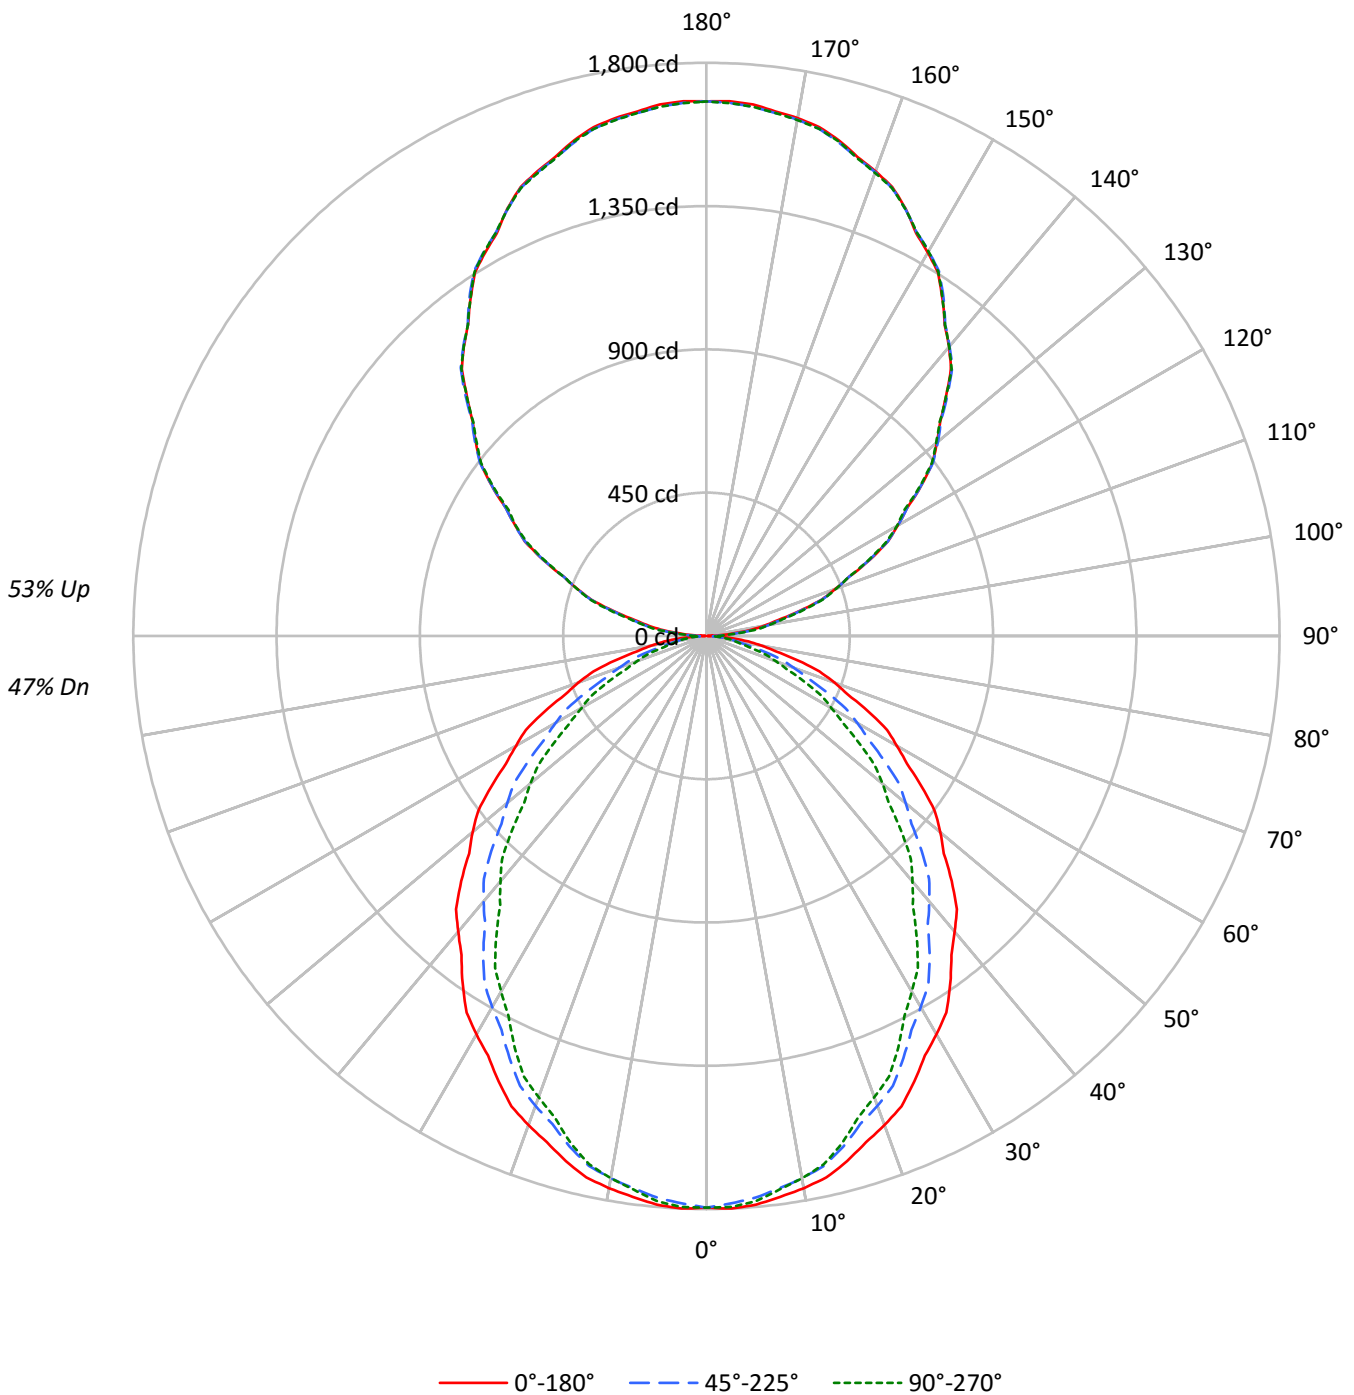



TEST NUMBER: P333114-935

CATALOG NUMBER: S124RDIW-S1195D1560U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	53	53	53	47				
1	97	93	89	86	89	86	83	80	72	70	68	59	58	56	48	47	46	40				
2	89	82	76	71	81	75	70	66	63	60	56	52	50	47	42	40	39	34				
3	81	72	65	59	74	66	60	55	56	51	48	47	43	40	38	35	33	29				
4	74	64	56	50	68	59	52	47	50	45	41	42	38	35	34	31	29	25				
5	68	57	49	43	63	53	46	40	45	39	35	37	33	30	31	28	25	22				
6	63	51	43	37	58	47	40	35	40	35	31	34	30	27	28	25	22	19				
7	58	46	38	33	53	43	36	31	37	31	27	31	27	24	25	22	20	17				
8	54	42	34	29	50	39	32	27	33	28	24	28	24	21	23	20	18	16				
9	50	38	31	26	46	36	29	25	31	25	22	26	22	19	22	18	16	14				
10	47	35	28	23	43	33	26	22	28	23	20	24	20	17	20	17	15	13				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14495	14495	14495
5°	14528	14350	14439
10°	14437	14178	14178
15°	14271	13881	13778
20°	14044	13489	13241
25°	13752	13030	12699
30°	13470	12547	12021
35°	13157	12046	11340
40°	12779	11475	10606
45°	12432	10909	9857
50°	12036	10257	9065
55°	11610	9578	8204
60°	11144	8835	7325
65°	10714	7904	6460
70°	10093	6878	5486
75°	9304	5705	4460
80°	8117	4347	4091
85°	6873	3946	3696



TEST NUMBER: P333114-935

CATALOG NUMBER: S124RDIW-S1195D1560U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	168.7	1.9
10°-20°	470.4	5.3
20°-30°	679.2	7.7
30°-40°	769.9	8.7
40°-50°	743.4	8.4
50°-60°	618.2	7.0
60°-70°	426.9	4.8
70°-80°	216.4	2.5
80°-90°	60.5	0.7
90°-100°	110.7	1.3
100°-110°	328.0	3.7
110°-120°	556.7	6.3
120°-130°	734.0	8.3
130°-140°	824.4	9.4
140°-150°	810.1	9.2
150°-160°	681.3	7.7
160°-170°	453.3	5.1
170°-180°	158.7	1.8
0°-30°	1318.2	15.0
0°-40°	2088.1	23.7
0°-60°	3449.7	39.2
0°-90°	4153.5	47.1
90°-120°	995.4	11.3
90°-150°	3363.9	38.2
90°-180°	4657.0	52.9
0°-180°	8810.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1796	1796	1796	1796	1796	
5°	1793	1787	1771	1784	1782	170
15°	1708	1694	1661	1658	1648	481
25°	1544	1517	1463	1440	1426	711
35°	1335	1290	1222	1177	1151	834
45°	1089	1036	956	890	863	839
55°	825	768	680	612	583	738
65°	561	500	414	357	338	554
75°	298	247	183	152	143	315
85°	74	48	43	40	40	84
90°	4	18	29	36	39	8
95°	78	89	99	102	102	87
105°	302	304	309	313	317	321
115°	566	566	563	562	561	558
125°	824	824	823	820	818	734
135°	1063	1071	1071	1068	1064	822
145°	1292	1297	1298	1297	1293	808
155°	1480	1480	1479	1483	1479	681
165°	1611	1607	1605	1612	1607	454
175°	1676	1670	1668	1676	1668	159
180°	1679	1679	1679	1679	1679	



TEST NUMBER: P333114-935

CATALOG NUMBER: S124RDIW-S1195D1560U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1795.5	1795.5	1795.5	1795.5	1795.5	1795.5	1795.5	1795.5	1795.5	1795.5	1795.5
2.5°	1799.9	1799.0	1798.0	1797.0	1796.0	1794.2	1791.6	1788.8	1786.1	1783.5	1786.1
5°	1792.8	1791.6	1790.4	1789.2	1788.0	1785.5	1781.8	1778.1	1774.5	1770.8	1773.8
7.5°	1776.6	1775.3	1774.0	1772.7	1771.4	1768.4	1763.7	1758.9	1754.1	1749.4	1751.4
10°	1761.2	1759.6	1758.2	1756.6	1755.1	1751.5	1746.1	1740.6	1735.1	1729.6	1730.8
12.5°	1741.4	1739.7	1737.8	1736.0	1734.3	1730.2	1723.7	1717.3	1710.7	1704.3	1705.0
15°	1707.5	1704.8	1702.1	1699.4	1696.6	1691.3	1683.8	1676.1	1668.4	1660.8	1660.2
17.5°	1666.6	1662.6	1658.6	1654.7	1650.7	1644.2	1635.0	1625.8	1616.6	1607.5	1605.8
20°	1634.7	1630.7	1626.8	1622.8	1618.9	1611.6	1601.3	1590.9	1580.5	1570.1	1567.6
22.5°	1599.5	1595.1	1590.6	1586.1	1581.7	1573.9	1562.7	1551.6	1540.5	1529.4	1525.7
25°	1543.9	1538.4	1532.9	1527.5	1522.0	1512.9	1500.5	1487.9	1475.4	1462.8	1457.7
27.5°	1485.7	1478.8	1471.9	1465.0	1458.0	1447.9	1434.5	1421.2	1407.7	1394.4	1387.9
30°	1445.0	1437.4	1429.7	1422.0	1414.5	1403.4	1389.1	1374.7	1360.4	1346.0	1338.3
32.5°	1402.1	1393.4	1384.8	1376.2	1367.6	1355.9	1341.0	1326.2	1311.3	1296.5	1287.6
35°	1335.0	1325.2	1315.4	1305.6	1295.9	1283.3	1268.1	1252.8	1237.5	1222.3	1211.9
37.5°	1263.3	1253.1	1243.0	1233.0	1222.9	1209.4	1192.5	1175.5	1158.6	1141.7	1130.1
40°	1212.6	1202.6	1192.5	1182.4	1172.3	1158.6	1141.2	1123.7	1106.3	1088.9	1076.1
42.5°	1164.2	1153.7	1143.1	1132.5	1122.0	1107.6	1089.4	1071.3	1053.2	1035.0	1021.9
45°	1088.9	1077.5	1066.3	1055.0	1043.7	1028.8	1010.6	992.2	973.9	955.5	940.6
47.5°	1011.1	999.4	987.7	976.0	964.4	949.0	930.0	910.9	891.8	872.8	857.2
50°	958.3	946.3	934.4	922.6	910.6	894.8	875.3	855.7	836.2	816.7	801.4
52.5°	904.4	892.7	881.1	869.4	857.7	841.8	821.8	801.8	781.7	761.6	746.1
55°	824.9	812.7	800.5	788.2	776.0	760.0	740.1	720.3	700.4	680.5	664.7
57.5°	746.2	733.6	720.8	708.2	695.4	679.3	659.8	640.2	620.6	601.1	585.0
60°	690.2	678.0	665.7	653.5	641.3	625.4	605.9	586.3	566.7	547.2	531.3
62.5°	639.6	626.9	614.2	601.5	588.8	572.4	552.3	532.3	512.2	492.2	477.5
65°	560.9	547.8	534.7	521.5	508.4	492.1	472.5	453.0	433.4	413.8	400.7
67.5°	479.2	466.7	454.1	441.5	429.0	413.5	395.4	377.3	359.1	341.0	329.7
70°	427.6	414.7	401.9	389.1	376.3	361.1	343.7	326.3	308.9	291.4	281.4
72.5°	372.6	361.0	349.4	337.8	326.1	312.1	295.7	279.2	262.8	246.3	237.7
75°	298.3	287.1	275.7	264.4	253.1	240.3	225.9	211.5	197.3	182.9	175.8
77.5°	223.0	213.4	203.8	194.2	184.6	174.0	162.4	150.8	139.2	127.6	123.5
80°	174.6	165.7	156.9	148.0	139.1	130.2	121.0	111.8	102.6	93.5	92.6
82.5°	132.9	124.7	116.6	108.4	100.3	93.6	88.3	83.1	77.8	72.6	71.9
85°	74.2	68.1	62.0	55.9	49.8	46.3	45.4	44.4	43.6	42.6	42.0
87.5°	26.1	24.8	23.4	22.1	20.8	20.2	20.5	20.7	20.9	21.1	21.2
90°	3.9	7.1	10.2	13.4	16.6	19.4	21.6	23.9	26.3	28.6	30.3
92.5°	27.8	31.4	35.0	38.7	42.4	44.9	46.6	48.2	49.8	51.4	52.4
95°	77.9	80.5	83.1	85.7	88.3	90.6	92.6	94.6	96.7	98.7	99.5
97.5°	136.0	138.1	140.2	142.3	144.4	146.6	149.0	151.3	153.7	156.0	157.0
100°	181.8	182.9	184.1	185.2	186.4	188.2	190.9	193.5	196.0	198.6	199.2
102.5°	229.5	230.0	230.5	230.9	231.4	232.8	235.1	237.5	239.9	242.3	243.1
105°	302.5	302.8	303.1	303.3	303.7	304.4	305.5	306.7	307.8	309.0	309.9
107.5°	379.1	379.4	379.8	380.1	380.5	380.7	380.9	381.1	381.3	381.4	382.2
110°	431.0	431.6	432.1	432.7	433.3	433.5	433.2	432.9	432.6	432.3	431.7



TEST NUMBER: P333114-935

CATALOG NUMBER: S124RDIW-S1195D1560U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	485.0	485.2	485.3	485.3	485.5	485.3	484.7	484.2	483.7	483.2	483.1
115°	566.0	566.0	566.0	566.0	566.0	565.8	565.2	564.6	564.0	563.4	563.2
117.5°	642.4	642.6	642.8	643.1	643.3	643.3	642.8	642.4	642.0	641.6	640.6
120°	693.3	694.4	695.6	696.7	697.8	698.0	697.2	696.3	695.4	694.6	693.1
122.5°	746.2	746.7	747.2	747.6	748.0	748.1	747.7	747.3	746.9	746.5	745.5
125°	824.4	824.4	824.4	824.4	824.4	824.2	824.0	823.6	823.4	823.1	822.5
127.5°	895.3	896.1	897.0	897.9	898.7	899.0	898.5	898.0	897.6	897.1	896.5
130°	945.1	946.0	946.8	947.7	948.6	949.0	949.0	949.0	949.0	949.0	948.5
132.5°	996.0	996.7	997.3	997.9	998.6	998.8	998.5	998.3	998.1	997.8	997.3
135°	1063.2	1065.0	1066.7	1068.5	1070.2	1071.1	1071.1	1071.1	1071.1	1071.1	1070.5
137.5°	1136.5	1137.3	1138.1	1138.9	1139.7	1140.4	1140.8	1141.3	1141.8	1142.2	1141.4
140°	1185.3	1185.9	1186.5	1187.1	1187.6	1187.9	1187.9	1187.9	1187.9	1187.9	1187.6
142.5°	1229.9	1230.5	1231.1	1231.7	1232.3	1232.4	1232.2	1232.0	1231.7	1231.5	1231.5
145°	1291.8	1292.9	1294.1	1295.2	1296.4	1297.1	1297.4	1297.7	1298.0	1298.2	1298.0
147.5°	1353.1	1354.4	1355.8	1357.2	1358.6	1359.2	1358.9	1358.7	1358.5	1358.2	1358.0
150°	1390.4	1391.5	1392.8	1393.9	1395.1	1395.6	1395.6	1395.6	1395.6	1395.6	1395.6
152.5°	1425.7	1426.4	1427.1	1427.8	1428.5	1429.0	1429.2	1429.4	1429.7	1429.9	1430.6
155°	1480.0	1480.0	1480.0	1480.0	1480.0	1479.9	1479.5	1479.3	1479.0	1478.7	1479.9
157.5°	1525.7	1525.2	1524.7	1524.1	1523.6	1523.4	1523.3	1523.2	1523.2	1523.1	1524.0
160°	1552.7	1552.4	1552.1	1551.9	1551.5	1551.3	1551.0	1550.7	1550.4	1550.1	1551.0
162.5°	1577.6	1576.9	1576.1	1575.4	1574.6	1574.1	1573.8	1573.6	1573.2	1573.0	1574.5
165°	1611.1	1610.2	1609.4	1608.5	1607.7	1607.0	1606.4	1605.8	1605.2	1604.6	1606.4
167.5°	1636.8	1635.6	1634.4	1633.2	1632.0	1631.4	1631.5	1631.5	1631.6	1631.7	1633.4
170°	1651.4	1649.9	1648.5	1647.0	1645.6	1645.0	1645.3	1645.6	1645.9	1646.1	1647.9
172.5°	1661.7	1660.5	1659.3	1658.1	1656.9	1656.3	1656.4	1656.5	1656.5	1656.6	1658.5
175°	1676.0	1674.6	1673.2	1671.7	1670.3	1669.4	1669.1	1668.8	1668.5	1668.3	1670.3
177.5°	1680.7	1679.6	1678.4	1677.2	1676.1	1675.5	1675.5	1675.5	1675.5	1675.5	1677.1
180°	1678.6	1678.6	1678.6	1678.6	1678.6	1678.6	1678.6	1678.6	1678.6	1678.6	1678.6



TEST NUMBER: P333114-935

CATALOG NUMBER: S124RDIW-S1195D1560U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1795.5	1795.5	1795.5	1795.5	1795.5	1795.5	1795.5	1795.5
2.5°	1788.8	1791.6	1794.2	1795.4	1795.2	1794.9	1794.7	1794.5
5°	1776.9	1779.9	1783.0	1784.3	1783.6	1783.0	1782.4	1781.8
7.5°	1753.3	1755.2	1757.2	1757.6	1756.7	1755.8	1754.7	1753.8
10°	1732.0	1733.2	1734.5	1734.5	1733.2	1732.0	1730.8	1729.6
12.5°	1705.7	1706.5	1707.2	1706.7	1705.0	1703.3	1701.6	1699.9
15°	1659.6	1659.0	1658.4	1657.0	1654.8	1652.7	1650.6	1648.5
17.5°	1604.0	1602.3	1600.6	1598.2	1594.9	1591.6	1588.5	1585.2
20°	1565.2	1562.7	1560.3	1557.1	1553.2	1549.2	1545.2	1541.2
22.5°	1522.1	1518.4	1514.8	1511.3	1508.0	1504.8	1501.6	1498.3
25°	1452.4	1447.3	1442.1	1438.0	1434.9	1431.8	1428.7	1425.7
27.5°	1381.6	1375.1	1368.7	1363.3	1358.9	1354.5	1350.1	1345.7
30°	1330.7	1323.1	1315.4	1309.2	1304.2	1299.4	1294.5	1289.6
32.5°	1278.8	1269.9	1261.0	1254.3	1249.7	1245.0	1240.4	1235.7
35°	1201.4	1191.1	1180.7	1172.8	1167.3	1161.7	1156.2	1150.7
37.5°	1118.4	1106.8	1095.3	1086.7	1081.2	1075.6	1070.2	1064.7
40°	1063.2	1050.4	1037.6	1028.4	1022.9	1017.4	1011.9	1006.4
42.5°	1008.8	995.7	982.7	973.3	967.5	961.8	956.1	950.3
45°	925.6	910.6	895.6	885.4	879.9	874.4	868.9	863.4
47.5°	841.7	826.2	810.7	799.9	793.8	787.8	781.7	775.7
50°	786.1	770.9	755.5	745.0	739.3	733.4	727.6	721.8
52.5°	730.6	715.1	699.6	688.8	682.8	676.7	670.6	664.6
55°	648.8	632.9	617.0	606.1	600.4	594.5	588.8	582.9
57.5°	568.9	552.7	536.6	526.3	521.9	517.5	513.1	508.7
60°	515.4	499.6	483.6	473.3	468.4	463.5	458.6	453.7
62.5°	462.9	448.2	433.5	424.2	420.3	416.5	412.5	408.6
65°	387.5	374.4	361.3	352.8	349.2	345.5	341.9	338.2
67.5°	318.4	307.0	295.8	288.1	284.0	280.0	276.0	271.9
70°	271.3	261.2	251.2	244.6	241.5	238.5	235.4	232.4
72.5°	229.1	220.5	211.9	206.2	203.4	200.6	197.8	194.9
75°	168.8	161.8	154.7	150.3	148.5	146.6	144.8	143.0
77.5°	119.4	115.3	111.2	108.9	108.3	107.8	107.3	106.7
80°	91.7	90.7	89.8	89.2	88.9	88.6	88.3	88.0
82.5°	71.3	70.6	69.9	69.4	69.1	68.8	68.5	68.2
85°	41.4	40.8	40.2	39.9	39.9	39.9	39.9	39.9
87.5°	21.4	21.4	21.5	21.8	22.1	22.5	22.8	23.2
90°	32.0	33.8	35.5	36.7	37.2	37.8	38.4	38.9
92.5°	53.5	54.5	55.5	56.2	56.6	56.9	57.3	57.6
95°	100.4	101.3	102.1	102.5	102.5	102.5	102.5	102.5
97.5°	158.2	159.2	160.2	160.7	160.7	160.7	160.7	160.7
100°	199.8	200.4	201.0	201.2	201.2	201.2	201.2	201.2
102.5°	243.8	244.7	245.5	246.0	246.2	246.5	246.7	246.9
105°	310.7	311.6	312.5	313.3	314.2	315.0	315.9	316.8
107.5°	383.1	383.8	384.7	385.0	385.0	385.0	384.9	384.8
110°	431.2	430.6	430.0	430.2	431.0	431.9	432.7	433.6



TEST NUMBER: P333114-935

CATALOG NUMBER: S124RDIW-S1195D1560U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	482.9	482.8	482.8	482.8	482.9	483.1	483.3	483.5
115°	562.8	562.6	562.3	562.0	561.7	561.5	561.1	560.9
117.5°	639.6	638.7	637.7	636.9	636.3	635.8	635.2	634.6
120°	691.6	690.3	688.8	688.4	689.0	689.5	690.1	690.7
122.5°	744.5	743.6	742.6	741.6	740.5	739.5	738.5	737.4
125°	821.9	821.4	820.8	820.2	819.6	819.1	818.5	817.9
127.5°	896.0	895.4	894.8	894.2	893.8	893.4	892.9	892.4
130°	947.9	947.3	946.7	945.8	944.7	943.6	942.4	941.2
132.5°	996.7	996.1	995.5	995.0	994.5	994.1	993.6	993.2
135°	1069.9	1069.4	1068.8	1068.0	1067.1	1066.3	1065.4	1064.5
137.5°	1140.7	1140.0	1139.2	1138.9	1139.1	1139.3	1139.4	1139.6
140°	1187.3	1187.1	1186.7	1186.5	1186.2	1185.9	1185.6	1185.3
142.5°	1231.4	1231.3	1231.3	1231.2	1231.1	1231.1	1231.1	1231.0
145°	1297.7	1297.4	1297.1	1296.5	1295.6	1294.8	1293.9	1293.0
147.5°	1357.8	1357.5	1357.3	1357.0	1356.8	1356.5	1356.2	1355.9
150°	1395.6	1395.6	1395.6	1395.5	1395.2	1394.9	1394.6	1394.3
152.5°	1431.2	1431.9	1432.6	1432.6	1431.8	1431.2	1430.4	1429.6
155°	1481.0	1482.1	1483.3	1483.3	1482.1	1481.0	1479.9	1478.7
157.5°	1524.8	1525.7	1526.6	1526.5	1525.5	1524.6	1523.5	1522.6
160°	1551.9	1552.7	1553.6	1553.2	1551.9	1550.4	1548.9	1547.5
162.5°	1576.1	1577.6	1579.2	1579.2	1577.8	1576.4	1574.9	1573.5
165°	1608.1	1609.8	1611.5	1611.9	1610.7	1609.6	1608.3	1607.2
167.5°	1635.1	1636.8	1638.6	1638.6	1636.8	1635.0	1633.1	1631.3
170°	1649.7	1651.4	1653.1	1652.9	1651.0	1648.9	1646.9	1644.9
172.5°	1660.5	1662.4	1664.4	1664.4	1662.3	1660.4	1658.3	1656.3
175°	1672.3	1674.3	1676.4	1676.4	1674.3	1672.3	1670.3	1668.3
177.5°	1678.8	1680.3	1682.0	1681.9	1680.0	1678.2	1676.4	1674.5
180°	1678.6	1678.6	1678.6	1678.6	1678.6	1678.6	1678.6	1678.6

(END OF REPORT)