

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333033-935

Luminaire Tested: **S124RDIW-S350D1560U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333033-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIW-S350D1560U935-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1560 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6604.7 lumens
Efficiency: N/A
Efficacy: 123.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 53.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333033-935

CATALOG NUMBER: S124RDIW-S350D1560U935-4F0-1E-UDD-F

Luminous Intensity Polar Plot

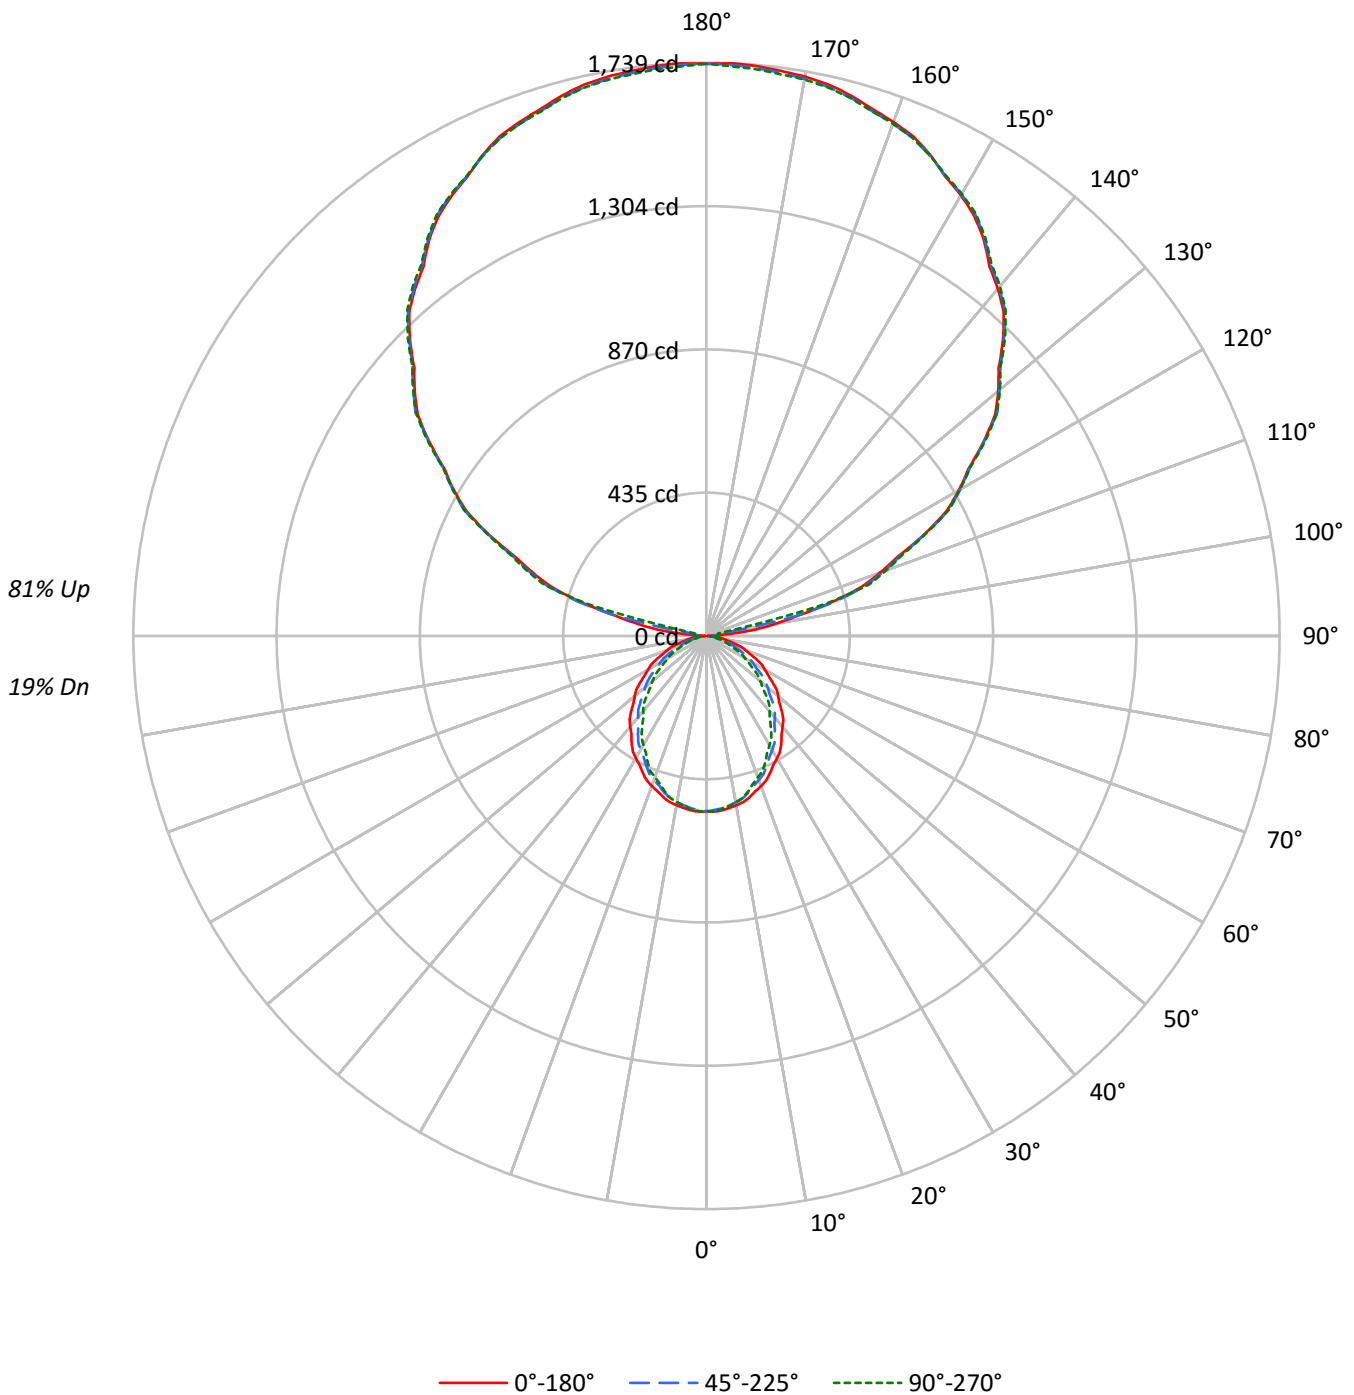



TEST NUMBER: P333033-935

CATALOG NUMBER: S124RDIW-S350D1560U935-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	100	100	100	100	88	88	88	88	66	66	66	46	46	46	27	27	27	19
1	91	87	83	80	80	77	74	71	58	56	54	40	39	38	24	24	23	16
2	83	76	70	65	73	67	62	58	51	47	45	35	34	32	21	20	20	13
3	75	67	60	54	66	59	53	49	45	41	38	31	29	27	19	18	17	12
4	69	59	51	46	61	52	46	41	40	35	32	28	25	23	17	16	15	10
5	63	52	45	39	55	46	40	35	35	31	27	25	22	20	15	14	13	9
6	58	47	39	34	51	42	35	30	32	27	24	23	20	17	14	12	11	8
7	54	42	34	29	47	37	31	26	29	24	21	20	17	15	13	11	10	7
8	50	38	31	26	44	34	28	23	26	21	18	19	16	14	12	10	9	6
9	46	34	27	23	40	31	25	20	24	19	16	17	14	12	11	9	8	6
10	43	31	25	20	38	28	22	18	22	17	14	16	13	11	10	8	7	5

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4297	4297	4297
5°	4306	4254	4280
10°	4279	4203	4203
15°	4231	4115	4084
20°	4163	3998	3924
25°	4077	3862	3764
30°	3993	3719	3564
35°	3900	3571	3362
40°	3789	3402	3144
45°	3685	3234	2923
50°	3567	3041	2688
55°	3441	2839	2432
60°	3303	2619	2172
65°	3177	2344	1914
70°	2991	2039	1626
75°	2757	1691	1323
80°	2404	1288	1213
85°	2038	1176	1093



TEST NUMBER: P333033-935

CATALOG NUMBER: S124RDIW-S350D1560U935-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	50.0	0.8
10°-20°	139.4	2.1
20°-30°	201.3	3.0
30°-40°	228.2	3.5
40°-50°	220.4	3.3
50°-60°	183.2	2.8
60°-70°	126.5	1.9
70°-80°	64.1	1.0
80°-90°	21.5	0.3
90°-100°	59.4	0.9
100°-110°	378.6	5.7
110°-120°	724.2	11.0
120°-130°	919.3	13.9
130°-140°	983.6	14.9
140°-150°	919.8	13.9
150°-160°	741.8	11.2
160°-170°	478.4	7.2
170°-180°	164.9	2.5
0°-30°	390.7	5.9
0°-40°	619.0	9.4
0°-60°	1022.6	15.5
0°-90°	1234.7	18.7
90°-120°	1162.1	17.6
90°-150°	3984.9	60.3
90°-180°	5370.0	81.3
0°-180°	6604.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	532	532	532	532	532	
5°	531	530	525	529	528	50
15°	506	502	492	491	489	143
25°	458	450	434	427	423	211
35°	396	382	362	349	341	247
45°	323	307	283	264	256	249
55°	244	228	202	181	173	219
65°	166	148	123	106	100	164
75°	88	73	54	45	42	93
85°	22	14	13	12	12	25
90°	4	18	29	36	39	4
95°	71	30	29	36	38	92
105°	391	399	405	414	370	409
115°	730	733	732	735	735	718
125°	1026	1030	1028	1032	1034	915
135°	1272	1272	1276	1279	1282	980
145°	1467	1471	1471	1472	1475	916
155°	1609	1610	1606	1611	1608	741
165°	1697	1691	1691	1700	1689	479
175°	1736	1729	1730	1740	1726	165
180°	1736	1736	1736	1736	1736	



TEST NUMBER: P333033-935

CATALOG NUMBER: S124RDIW-S350D1560U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	532.3	532.3	532.3	532.3	532.3	532.3	532.3	532.3	532.3	532.3	532.3
2.5°	533.6	533.2	533.0	532.7	532.4	531.8	531.1	530.3	529.4	528.7	529.4
5°	531.4	531.1	530.7	530.4	529.9	529.3	528.1	527.1	526.0	525.0	525.8
7.5°	526.6	526.2	525.9	525.5	525.1	524.2	522.8	521.3	520.0	518.6	519.1
10°	522.0	521.6	521.2	520.7	520.2	519.2	517.5	515.9	514.3	512.7	513.1
12.5°	516.2	515.7	515.1	514.6	514.1	512.9	510.9	509.0	507.1	505.1	505.4
15°	506.2	505.3	504.5	503.7	502.9	501.4	499.1	496.8	494.6	492.3	492.1
17.5°	494.0	492.8	491.6	490.5	489.3	487.3	484.7	481.9	479.2	476.5	476.0
20°	484.6	483.4	482.2	481.0	479.8	477.8	474.7	471.6	468.5	465.4	464.7
22.5°	474.2	472.8	471.5	470.2	468.8	466.5	463.2	459.9	456.7	453.3	452.3
25°	457.7	456.1	454.4	452.8	451.2	448.5	444.8	441.1	437.3	433.6	432.0
27.5°	440.4	438.3	436.3	434.3	432.2	429.2	425.2	421.3	417.3	413.4	411.4
30°	428.3	426.0	423.8	421.5	419.3	416.0	411.7	407.5	403.2	399.0	396.7
32.5°	415.6	413.0	410.5	407.9	405.4	401.9	397.5	393.1	388.7	384.4	381.7
35°	395.7	392.8	389.9	387.0	384.1	380.4	375.9	371.3	366.9	362.3	359.2
37.5°	374.4	371.4	368.5	365.5	362.5	358.5	353.4	348.4	343.5	338.5	335.0
40°	359.5	356.5	353.4	350.5	347.5	343.5	338.3	333.1	328.0	322.8	319.0
42.5°	345.1	342.0	338.8	335.7	332.6	328.3	323.0	317.5	312.2	306.8	302.9
45°	322.8	319.4	316.1	312.7	309.4	305.0	299.5	294.1	288.7	283.3	278.8
47.5°	299.7	296.3	292.8	289.3	285.9	281.3	275.7	270.0	264.3	258.7	254.1
50°	284.0	280.5	277.0	273.5	269.9	265.3	259.5	253.7	247.9	242.1	237.5
52.5°	268.1	264.6	261.1	257.7	254.3	249.5	243.6	237.6	231.7	225.8	221.2
55°	244.5	240.9	237.3	233.7	230.1	225.2	219.4	213.5	207.6	201.7	197.0
57.5°	221.2	217.4	213.7	209.9	206.1	201.4	195.5	189.8	184.0	178.1	173.4
60°	204.6	201.0	197.3	193.7	190.1	185.4	179.6	173.7	168.0	162.2	157.5
62.5°	189.6	185.8	182.0	178.3	174.5	169.7	163.8	157.8	151.9	145.9	141.5
65°	166.3	162.4	158.5	154.6	150.7	145.9	140.1	134.2	128.5	122.7	118.8
67.5°	142.1	138.4	134.6	130.9	127.2	122.6	117.2	111.8	106.4	101.1	97.7
70°	126.7	123.0	119.2	115.4	111.5	107.0	101.9	96.7	91.5	86.4	83.4
72.5°	110.5	107.0	103.6	100.1	96.7	92.6	87.6	82.7	77.9	73.0	70.5
75°	88.4	85.1	81.7	78.4	75.0	71.2	67.0	62.7	58.5	54.2	52.1
77.5°	66.1	63.3	60.4	57.6	54.8	51.6	48.1	44.7	41.2	37.8	36.6
80°	51.7	49.2	46.5	43.9	41.2	38.6	35.9	33.1	30.4	27.7	27.5
82.5°	39.3	36.9	34.5	32.1	29.7	27.7	26.2	24.6	23.1	21.5	21.4
85°	22.0	20.2	18.4	16.5	14.7	13.7	13.4	13.2	12.9	12.7	12.5
87.5°	8.3	8.4	8.4	8.4	8.5	8.7	9.1	9.5	9.9	10.2	10.6
90°	3.9	7.1	10.2	13.4	16.6	19.4	21.6	23.9	26.3	28.6	30.3
92.5°	16.4	16.5	16.7	16.9	17.0	18.3	20.6	22.9	25.2	27.6	29.3
95°	71.4	61.6	51.8	42.0	32.2	27.4	27.7	28.0	28.2	28.6	30.3
97.5°	151.6	157.7	163.8	170.0	176.2	163.1	130.9	98.7	66.5	34.3	34.4
100°	212.9	218.2	223.3	228.5	233.7	216.4	176.6	136.7	96.9	57.2	52.3
102.5°	281.5	285.3	289.1	292.9	296.7	296.0	290.8	285.7	280.4	275.3	222.3
105°	390.8	392.5	394.3	396.1	397.8	399.3	400.8	402.3	403.6	405.1	407.7
107.5°	492.3	493.3	494.1	495.0	495.8	497.2	499.2	501.2	503.1	505.1	506.4
110°	560.9	561.8	562.7	563.5	564.4	565.7	567.4	569.1	570.8	572.6	573.2



TEST NUMBER: P333033-935

CATALOG NUMBER: S124RDIW-S350D1560U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	627.4	629.0	630.5	632.1	633.6	634.8	635.6	636.5	637.2	638.1	637.9
115°	729.7	730.6	731.4	732.3	733.1	733.5	733.1	732.9	732.6	732.3	732.9
117.5°	821.9	823.0	824.2	825.4	826.6	827.4	828.0	828.7	829.3	829.9	829.8
120°	884.2	885.4	886.6	887.7	888.8	889.2	889.0	888.7	888.4	888.1	888.7
122.5°	942.4	943.1	943.7	944.4	945.2	945.7	946.2	946.5	946.9	947.4	947.7
125°	1025.8	1026.9	1028.0	1029.2	1030.4	1030.6	1030.1	1029.5	1028.9	1028.4	1029.2
127.5°	1104.7	1105.0	1105.3	1105.5	1105.9	1106.6	1108.0	1109.3	1110.6	1112.0	1111.8
130°	1155.6	1155.9	1156.2	1156.5	1156.8	1157.4	1158.2	1159.1	1159.9	1160.8	1161.1
132.5°	1202.3	1202.8	1203.4	1203.9	1204.5	1205.2	1206.3	1207.4	1208.5	1209.6	1209.9
135°	1272.5	1272.1	1271.9	1271.6	1271.3	1271.7	1272.9	1274.0	1275.2	1276.3	1276.9
137.5°	1334.6	1334.6	1334.7	1334.9	1335.0	1335.7	1337.0	1338.3	1339.5	1340.7	1341.4
140°	1375.0	1375.6	1376.2	1376.7	1377.3	1377.9	1378.5	1379.1	1379.7	1380.2	1381.1
142.5°	1411.4	1412.4	1413.5	1414.5	1415.6	1416.3	1416.6	1416.9	1417.3	1417.6	1418.2
145°	1467.2	1468.1	1469.0	1469.8	1470.7	1471.1	1471.1	1471.1	1471.1	1471.1	1471.4
147.5°	1511.7	1513.2	1514.8	1516.5	1518.1	1518.7	1518.5	1518.2	1517.9	1517.6	1517.9
150°	1543.9	1545.0	1546.1	1547.3	1548.4	1548.9	1548.6	1548.3	1548.0	1547.7	1547.7
152.5°	1570.8	1571.8	1572.7	1573.6	1574.5	1574.8	1574.2	1573.6	1573.1	1572.6	1573.1
155°	1608.8	1609.0	1609.3	1609.6	1609.9	1609.6	1608.8	1607.9	1607.1	1606.1	1607.3
157.5°	1640.7	1640.5	1640.4	1640.2	1640.0	1639.4	1638.4	1637.4	1636.5	1635.5	1637.0
160°	1659.4	1658.5	1657.7	1656.8	1656.0	1655.4	1655.0	1654.8	1654.5	1654.2	1656.0
162.5°	1676.0	1674.9	1673.8	1672.8	1671.6	1670.9	1670.6	1670.3	1670.1	1669.7	1671.5
165°	1697.0	1695.6	1694.2	1692.7	1691.3	1690.6	1690.6	1690.6	1690.6	1690.6	1692.8
167.5°	1713.6	1712.2	1710.6	1709.2	1707.6	1706.8	1706.7	1706.5	1706.3	1706.2	1708.7
170°	1723.0	1721.3	1719.5	1717.8	1716.1	1715.4	1715.6	1716.0	1716.2	1716.5	1718.8
172.5°	1729.2	1727.5	1725.8	1724.1	1722.3	1721.6	1721.9	1722.2	1722.4	1722.8	1725.0
175°	1735.9	1734.2	1732.5	1730.8	1729.1	1728.4	1728.6	1728.9	1729.2	1729.5	1732.1
177.5°	1739.1	1737.5	1735.9	1734.2	1732.7	1732.1	1732.5	1733.0	1733.5	1733.9	1735.8
180°	1735.9	1735.9	1735.9	1735.9	1735.9	1735.9	1735.9	1735.9	1735.9	1735.9	1735.9



TEST NUMBER: P333033-935

CATALOG NUMBER: S124RDIW-S350D1560U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	532.3	532.3	532.3	532.3	532.3	532.3	532.3	532.3
2.5°	530.3	531.1	531.8	532.2	532.1	532.1	532.0	531.9
5°	526.8	527.6	528.6	528.9	528.7	528.6	528.3	528.1
7.5°	519.7	520.3	520.9	521.0	520.7	520.5	520.1	519.9
10°	513.4	513.8	514.1	514.1	513.8	513.4	513.1	512.7
12.5°	505.6	505.8	506.1	505.9	505.4	504.9	504.4	503.9
15°	492.0	491.8	491.5	491.2	490.5	489.9	489.3	488.6
17.5°	475.4	475.0	474.5	473.7	472.8	471.8	470.9	469.9
20°	464.0	463.2	462.5	461.6	460.4	459.2	458.1	456.8
22.5°	451.2	450.0	449.0	448.0	447.0	446.1	445.1	444.1
25°	430.5	429.0	427.5	426.3	425.3	424.4	423.5	422.6
27.5°	409.5	407.6	405.7	404.2	402.8	401.5	400.2	398.9
30°	394.4	392.2	389.9	388.1	386.6	385.2	383.7	382.3
32.5°	379.1	376.4	373.8	371.8	370.4	369.0	367.6	366.3
35°	356.1	353.1	350.0	347.7	346.0	344.4	342.8	341.1
37.5°	331.6	328.1	324.7	322.1	320.5	318.8	317.2	315.6
40°	315.1	311.3	307.5	304.9	303.2	301.6	300.0	298.3
42.5°	299.0	295.2	291.3	288.5	286.8	285.1	283.4	281.7
45°	274.4	269.9	265.4	262.4	260.8	259.2	257.5	256.0
47.5°	249.5	244.9	240.3	237.1	235.3	233.5	231.7	230.0
50°	233.0	228.5	223.9	220.8	219.1	217.4	215.7	214.0
52.5°	216.5	212.0	207.4	204.1	202.4	200.6	198.8	197.0
55°	192.3	187.6	182.9	179.7	178.0	176.2	174.5	172.8
57.5°	168.6	163.8	159.0	156.0	154.7	153.4	152.1	150.8
60°	152.7	148.1	143.4	140.3	138.8	137.4	136.0	134.5
62.5°	137.2	132.9	128.5	125.8	124.6	123.5	122.3	121.1
65°	114.9	111.0	107.1	104.6	103.5	102.5	101.3	100.2
67.5°	94.4	91.0	87.6	85.4	84.2	83.0	81.8	80.6
70°	80.4	77.4	74.5	72.5	71.5	70.7	69.7	68.9
72.5°	67.9	65.3	62.9	61.1	60.3	59.5	58.6	57.8
75°	50.0	48.0	45.9	44.6	44.0	43.5	43.0	42.4
77.5°	35.4	34.2	33.0	32.3	32.1	31.9	31.8	31.6
80°	27.2	26.9	26.6	26.4	26.3	26.3	26.2	26.1
82.5°	21.1	20.9	20.8	20.6	20.5	20.4	20.3	20.2
85°	12.3	12.1	11.9	11.8	11.8	11.8	11.8	11.8
87.5°	10.8	11.1	11.4	11.6	11.8	12.0	12.1	12.3
90°	32.0	33.8	35.5	36.7	37.2	37.8	38.4	38.9
92.5°	31.0	32.7	34.4	35.4	35.5	35.6	35.7	35.8
95°	32.0	33.8	35.5	36.5	36.8	37.1	37.4	37.6
97.5°	34.6	34.8	35.0	35.2	35.5	35.8	36.1	36.3
100°	47.4	42.4	37.5	35.2	35.5	35.8	36.1	36.3
102.5°	169.4	116.5	63.6	37.2	37.2	37.3	37.4	37.4
105°	410.3	412.9	415.5	411.6	401.2	390.8	380.5	370.1
107.5°	507.6	508.9	510.1	511.3	512.5	513.5	514.6	515.7
110°	573.8	574.4	574.9	575.7	576.5	577.4	578.2	579.1



TEST NUMBER: P333033-935

CATALOG NUMBER: S124RDIW-S350D1560U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	637.8	637.7	637.6	638.1	639.2	640.2	641.4	642.5
115°	733.5	734.0	734.6	734.9	734.9	734.9	734.9	734.9
117.5°	829.7	829.6	829.5	829.4	829.2	829.1	829.1	828.9
120°	889.2	889.8	890.4	890.4	889.8	889.2	888.7	888.1
122.5°	948.0	948.4	948.7	948.6	948.0	947.4	946.8	946.3
125°	1030.1	1031.0	1031.8	1032.4	1032.7	1032.9	1033.3	1033.5
127.5°	1111.6	1111.5	1111.3	1111.0	1110.9	1110.6	1110.3	1110.2
130°	1161.4	1161.7	1161.9	1162.1	1162.1	1162.1	1162.1	1162.1
132.5°	1210.2	1210.5	1210.7	1210.8	1210.6	1210.3	1210.1	1209.9
135°	1277.5	1278.1	1278.7	1279.3	1279.8	1280.4	1281.0	1281.5
137.5°	1342.0	1342.6	1343.3	1343.5	1343.3	1343.2	1343.0	1342.8
140°	1382.0	1382.9	1383.7	1384.2	1384.6	1384.8	1385.1	1385.4
142.5°	1418.9	1419.5	1420.1	1420.5	1420.6	1420.6	1420.6	1420.7
145°	1471.7	1472.0	1472.2	1472.7	1473.3	1473.9	1474.5	1475.0
147.5°	1518.0	1518.3	1518.5	1518.8	1519.1	1519.3	1519.7	1519.9
150°	1547.7	1547.7	1547.7	1547.9	1548.2	1548.4	1548.8	1549.0
152.5°	1573.6	1574.0	1574.5	1574.6	1574.4	1574.3	1574.1	1573.9
155°	1608.4	1609.6	1610.8	1610.9	1610.1	1609.2	1608.3	1607.5
157.5°	1638.5	1640.0	1641.5	1641.5	1640.0	1638.5	1637.0	1635.5
160°	1657.7	1659.4	1661.1	1661.1	1659.4	1657.7	1656.0	1654.2
162.5°	1673.3	1675.0	1676.7	1676.5	1674.6	1672.7	1670.7	1668.7
165°	1695.1	1697.5	1699.8	1699.6	1697.0	1694.4	1691.9	1689.3
167.5°	1711.2	1713.7	1716.3	1716.1	1713.2	1710.4	1707.4	1704.6
170°	1721.1	1723.5	1725.8	1725.4	1722.6	1719.7	1716.8	1713.9
172.5°	1727.3	1729.7	1732.0	1731.6	1728.5	1725.4	1722.3	1719.1
175°	1734.7	1737.3	1739.9	1739.5	1735.9	1732.5	1729.1	1725.6
177.5°	1737.6	1739.5	1741.3	1740.9	1738.1	1735.3	1732.5	1729.7
180°	1735.9	1735.9	1735.9	1735.9	1735.9	1735.9	1735.9	1735.9

(END OF REPORT)