

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333022-935

Luminaire Tested: **S124RDIW-S350D770U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333022-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIW-S350D770U935-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 770 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3524.6 lumens
Efficiency: N/A
Efficacy: 115.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 30.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333022-935

CATALOG NUMBER: S124RDIW-S350D770U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

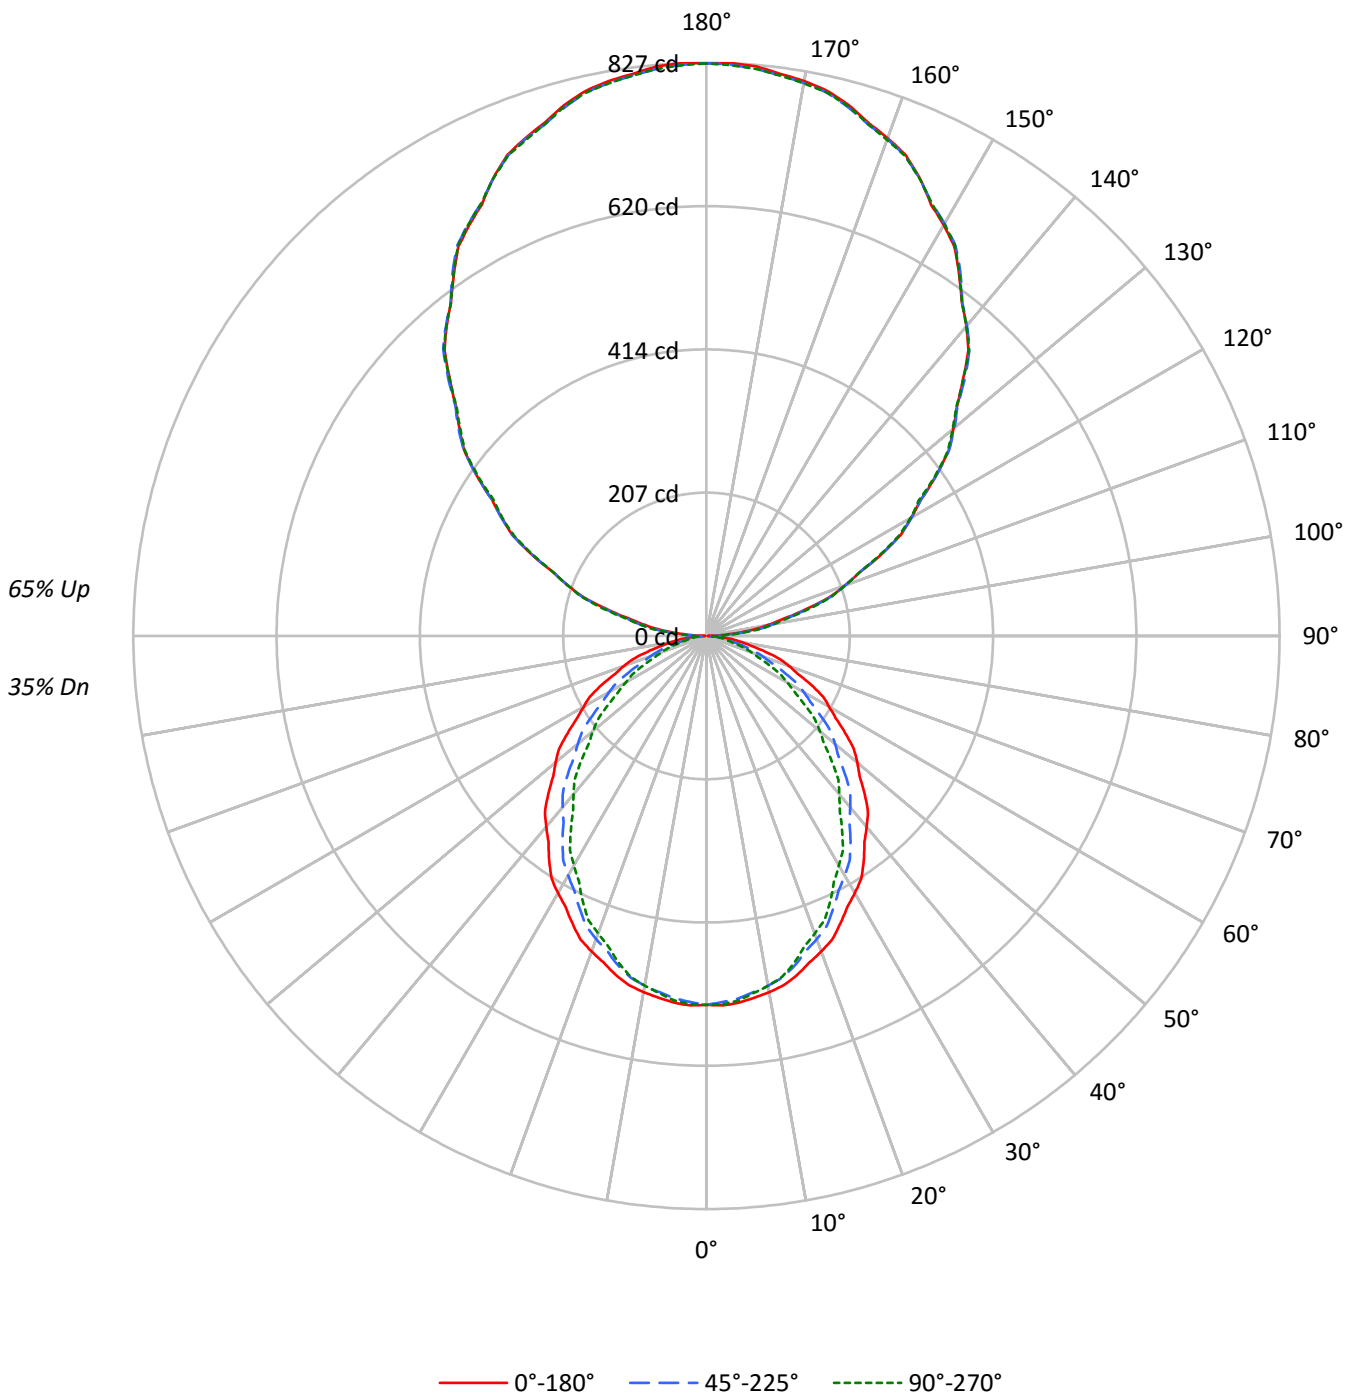



TEST NUMBER: P333022-935

CATALOG NUMBER: S124RDIW-S350D770U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	42	42	42	35
1	95	90	87	83	85	82	79	76	66	64	62	51	50	49	38	37	36	30
2	86	79	73	68	78	72	67	63	58	54	51	45	43	41	33	32	31	25
3	79	70	63	57	71	63	57	52	51	47	43	40	37	35	30	28	26	22
4	72	62	54	48	65	56	50	44	46	41	37	36	32	30	27	24	23	19
5	66	55	47	41	60	50	43	38	41	36	32	32	29	26	24	22	20	16
6	61	49	41	36	55	45	38	33	37	32	28	29	25	23	22	19	18	14
7	56	44	37	31	51	41	34	29	33	28	24	26	23	20	20	17	16	13
8	52	40	33	28	47	37	30	26	30	25	22	24	20	18	18	16	14	12
9	48	37	29	25	44	34	27	23	28	23	19	22	19	16	17	14	13	10
10	45	34	27	22	41	31	25	20	25	21	17	20	17	14	16	13	12	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4297	4297	4297
5°	4306	4254	4280
10°	4279	4203	4203
15°	4231	4115	4084
20°	4163	3998	3924
25°	4077	3862	3764
30°	3993	3719	3564
35°	3900	3571	3362
40°	3789	3402	3144
45°	3685	3234	2923
50°	3567	3041	2688
55°	3441	2839	2432
60°	3303	2619	2172
65°	3177	2344	1914
70°	2991	2039	1626
75°	2757	1691	1323
80°	2404	1288	1213
85°	2038	1176	1093



TEST NUMBER: P333022-935

CATALOG NUMBER: S124RDIW-S350D770U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	50.0	1.4
10°-20°	139.4	4.0
20°-30°	201.3	5.7
30°-40°	228.2	6.5
40°-50°	220.4	6.3
50°-60°	183.2	5.2
60°-70°	126.5	3.6
70°-80°	64.1	1.8
80°-90°	18.9	0.5
90°-100°	54.5	1.5
100°-110°	161.4	4.6
110°-120°	274.0	7.8
120°-130°	361.3	10.3
130°-140°	405.8	11.5
140°-150°	398.7	11.3
150°-160°	335.4	9.5
160°-170°	223.1	6.3
170°-180°	78.1	2.2
0°-30°	390.7	11.1
0°-40°	619.0	17.6
0°-60°	1022.6	29.0
0°-90°	1232.2	35.0
90°-120°	489.9	13.9
90°-150°	1655.8	47.0
90°-180°	2292.0	65.0
0°-180°	3524.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	532	532	532	532	532	
5°	531	530	525	529	528	50
15°	506	502	492	491	489	143
25°	458	450	434	427	423	211
35°	396	382	362	349	341	247
45°	323	307	283	264	256	249
55°	244	228	202	181	173	219
65°	166	148	123	106	100	164
75°	88	73	54	45	42	93
85°	22	14	13	12	12	25
90°	2	9	14	18	19	3
95°	38	44	49	50	50	43
105°	149	150	152	154	156	158
115°	279	278	277	277	276	275
125°	406	406	405	404	403	362
135°	523	527	527	526	524	405
145°	636	638	639	638	636	398
155°	728	728	728	730	728	335
165°	793	791	790	793	791	223
175°	825	822	821	825	821	78
180°	826	826	826	826	826	



TEST NUMBER: P333022-935

CATALOG NUMBER: S124RDIW-S350D770U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	532.3	532.3	532.3	532.3	532.3	532.3	532.3	532.3	532.3	532.3	532.3
2.5°	533.6	533.2	533.0	532.7	532.4	531.8	531.1	530.3	529.4	528.7	529.4
5°	531.4	531.1	530.7	530.4	529.9	529.3	528.1	527.1	526.0	525.0	525.8
7.5°	526.6	526.2	525.9	525.5	525.1	524.2	522.8	521.3	520.0	518.6	519.1
10°	522.0	521.6	521.2	520.7	520.2	519.2	517.5	515.9	514.3	512.7	513.1
12.5°	516.2	515.7	515.1	514.6	514.1	512.9	510.9	509.0	507.1	505.1	505.4
15°	506.2	505.3	504.5	503.7	502.9	501.4	499.1	496.8	494.6	492.3	492.1
17.5°	494.0	492.8	491.6	490.5	489.3	487.3	484.7	481.9	479.2	476.5	476.0
20°	484.6	483.4	482.2	481.0	479.8	477.8	474.7	471.6	468.5	465.4	464.7
22.5°	474.2	472.8	471.5	470.2	468.8	466.5	463.2	459.9	456.7	453.3	452.3
25°	457.7	456.1	454.4	452.8	451.2	448.5	444.8	441.1	437.3	433.6	432.0
27.5°	440.4	438.3	436.3	434.3	432.2	429.2	425.2	421.3	417.3	413.4	411.4
30°	428.3	426.0	423.8	421.5	419.3	416.0	411.7	407.5	403.2	399.0	396.7
32.5°	415.6	413.0	410.5	407.9	405.4	401.9	397.5	393.1	388.7	384.4	381.7
35°	395.7	392.8	389.9	387.0	384.1	380.4	375.9	371.3	366.9	362.3	359.2
37.5°	374.4	371.4	368.5	365.5	362.5	358.5	353.4	348.4	343.5	338.5	335.0
40°	359.5	356.5	353.4	350.5	347.5	343.5	338.3	333.1	328.0	322.8	319.0
42.5°	345.1	342.0	338.8	335.7	332.6	328.3	323.0	317.5	312.2	306.8	302.9
45°	322.8	319.4	316.1	312.7	309.4	305.0	299.5	294.1	288.7	283.3	278.8
47.5°	299.7	296.3	292.8	289.3	285.9	281.3	275.7	270.0	264.3	258.7	254.1
50°	284.0	280.5	277.0	273.5	269.9	265.3	259.5	253.7	247.9	242.1	237.5
52.5°	268.1	264.6	261.1	257.7	254.3	249.5	243.6	237.6	231.7	225.8	221.2
55°	244.5	240.9	237.3	233.7	230.1	225.2	219.4	213.5	207.6	201.7	197.0
57.5°	221.2	217.4	213.7	209.9	206.1	201.4	195.5	189.8	184.0	178.1	173.4
60°	204.6	201.0	197.3	193.7	190.1	185.4	179.6	173.7	168.0	162.2	157.5
62.5°	189.6	185.8	182.0	178.3	174.5	169.7	163.8	157.8	151.9	145.9	141.5
65°	166.3	162.4	158.5	154.6	150.7	145.9	140.1	134.2	128.5	122.7	118.8
67.5°	142.1	138.4	134.6	130.9	127.2	122.6	117.2	111.8	106.4	101.1	97.7
70°	126.7	123.0	119.2	115.4	111.5	107.0	101.9	96.7	91.5	86.4	83.4
72.5°	110.5	107.0	103.6	100.1	96.7	92.6	87.6	82.7	77.9	73.0	70.5
75°	88.4	85.1	81.7	78.4	75.0	71.2	67.0	62.7	58.5	54.2	52.1
77.5°	66.1	63.3	60.4	57.6	54.8	51.6	48.1	44.7	41.2	37.8	36.6
80°	51.7	49.2	46.5	43.9	41.2	38.6	35.9	33.1	30.4	27.7	27.5
82.5°	39.3	36.9	34.5	32.1	29.7	27.7	26.2	24.6	23.1	21.5	21.4
85°	22.0	20.2	18.4	16.5	14.7	13.7	13.4	13.2	12.9	12.7	12.5
87.5°	7.9	7.6	7.3	7.1	6.8	6.7	6.9	7.1	7.2	7.4	7.5
90°	1.9	3.4	5.1	6.6	8.2	9.6	10.7	11.8	12.9	14.0	14.9
92.5°	13.7	15.5	17.2	19.0	20.8	22.1	22.9	23.7	24.5	25.3	25.8
95°	38.3	39.6	40.9	42.2	43.5	44.6	45.5	46.6	47.6	48.6	49.0
97.5°	67.0	68.0	69.1	70.0	71.0	72.2	73.4	74.5	75.7	76.8	77.3
100°	89.5	90.1	90.6	91.2	91.7	92.6	93.9	95.2	96.5	97.8	98.1
102.5°	113.0	113.2	113.4	113.7	113.9	114.6	115.7	116.9	118.0	119.2	119.7
105°	148.9	149.0	149.2	149.3	149.5	149.8	150.4	150.9	151.5	152.1	152.5
107.5°	186.6	186.8	186.9	187.1	187.3	187.4	187.5	187.6	187.7	187.8	188.1
110°	212.2	212.4	212.8	213.0	213.3	213.4	213.2	213.1	212.9	212.8	212.5



TEST NUMBER: P333022-935

CATALOG NUMBER: S124RDIW-S350D770U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	238.8	238.8	238.8	238.9	238.9	238.8	238.6	238.3	238.1	237.8	237.8
115°	278.6	278.6	278.6	278.6	278.6	278.4	278.2	277.9	277.6	277.3	277.2
117.5°	316.2	316.3	316.4	316.5	316.7	316.6	316.4	316.2	316.0	315.8	315.3
120°	341.2	341.8	342.3	342.9	343.5	343.5	343.2	342.8	342.3	341.9	341.1
122.5°	367.3	367.6	367.7	368.0	368.2	368.2	368.1	367.8	367.6	367.5	367.0
125°	405.8	405.8	405.8	405.8	405.8	405.7	405.5	405.4	405.3	405.1	404.8
127.5°	440.7	441.1	441.5	442.0	442.4	442.5	442.2	442.0	441.8	441.6	441.3
130°	465.2	465.6	466.1	466.5	466.9	467.1	467.1	467.1	467.1	467.1	466.8
132.5°	490.3	490.6	490.9	491.2	491.5	491.6	491.5	491.4	491.3	491.1	490.9
135°	523.4	524.2	525.0	525.9	526.8	527.2	527.2	527.2	527.2	527.2	526.9
137.5°	559.4	559.8	560.2	560.6	561.0	561.3	561.5	561.7	562.0	562.2	561.8
140°	583.4	583.7	584.0	584.3	584.5	584.7	584.7	584.7	584.7	584.7	584.5
142.5°	605.4	605.7	606.0	606.2	606.6	606.7	606.5	606.4	606.3	606.1	606.1
145°	635.8	636.4	637.0	637.6	638.1	638.4	638.6	638.8	638.9	639.0	638.9
147.5°	666.0	666.7	667.4	668.0	668.7	669.0	668.9	668.7	668.7	668.6	668.4
150°	684.4	684.9	685.5	686.1	686.6	687.0	687.0	687.0	687.0	687.0	687.0
152.5°	701.8	702.1	702.5	702.8	703.2	703.4	703.4	703.6	703.7	703.8	704.1
155°	728.5	728.5	728.5	728.5	728.5	728.4	728.2	728.1	728.0	727.9	728.4
157.5°	751.0	750.7	750.4	750.2	749.9	749.8	749.8	749.8	749.8	749.7	750.1
160°	764.3	764.1	764.0	763.9	763.7	763.5	763.4	763.3	763.1	763.0	763.4
162.5°	776.5	776.2	775.8	775.4	775.1	774.8	774.6	774.6	774.4	774.2	775.0
165°	793.1	792.6	792.2	791.8	791.3	791.0	790.7	790.4	790.1	789.8	790.7
167.5°	805.6	805.1	804.5	803.9	803.3	803.0	803.1	803.1	803.1	803.1	804.0
170°	812.9	812.1	811.4	810.7	810.0	809.7	809.9	810.0	810.1	810.3	811.1
172.5°	817.9	817.3	816.7	816.1	815.5	815.3	815.3	815.4	815.4	815.4	816.4
175°	825.0	824.2	823.5	822.9	822.2	821.7	821.6	821.4	821.3	821.1	822.2
177.5°	827.2	826.7	826.1	825.6	825.0	824.8	824.8	824.8	824.8	824.8	825.5
180°	826.2	826.2	826.2	826.2	826.2	826.2	826.2	826.2	826.2	826.2	826.2



TEST NUMBER: P333022-935

CATALOG NUMBER: S124RDIW-S350D770U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	532.3	532.3	532.3	532.3	532.3	532.3	532.3	532.3
2.5°	530.3	531.1	531.8	532.2	532.1	532.1	532.0	531.9
5°	526.8	527.6	528.6	528.9	528.7	528.6	528.3	528.1
7.5°	519.7	520.3	520.9	521.0	520.7	520.5	520.1	519.9
10°	513.4	513.8	514.1	514.1	513.8	513.4	513.1	512.7
12.5°	505.6	505.8	506.1	505.9	505.4	504.9	504.4	503.9
15°	492.0	491.8	491.5	491.2	490.5	489.9	489.3	488.6
17.5°	475.4	475.0	474.5	473.7	472.8	471.8	470.9	469.9
20°	464.0	463.2	462.5	461.6	460.4	459.2	458.1	456.8
22.5°	451.2	450.0	449.0	448.0	447.0	446.1	445.1	444.1
25°	430.5	429.0	427.5	426.3	425.3	424.4	423.5	422.6
27.5°	409.5	407.6	405.7	404.2	402.8	401.5	400.2	398.9
30°	394.4	392.2	389.9	388.1	386.6	385.2	383.7	382.3
32.5°	379.1	376.4	373.8	371.8	370.4	369.0	367.6	366.3
35°	356.1	353.1	350.0	347.7	346.0	344.4	342.8	341.1
37.5°	331.6	328.1	324.7	322.1	320.5	318.8	317.2	315.6
40°	315.1	311.3	307.5	304.9	303.2	301.6	300.0	298.3
42.5°	299.0	295.2	291.3	288.5	286.8	285.1	283.4	281.7
45°	274.4	269.9	265.4	262.4	260.8	259.2	257.5	256.0
47.5°	249.5	244.9	240.3	237.1	235.3	233.5	231.7	230.0
50°	233.0	228.5	223.9	220.8	219.1	217.4	215.7	214.0
52.5°	216.5	212.0	207.4	204.1	202.4	200.6	198.8	197.0
55°	192.3	187.6	182.9	179.7	178.0	176.2	174.5	172.8
57.5°	168.6	163.8	159.0	156.0	154.7	153.4	152.1	150.8
60°	152.7	148.1	143.4	140.3	138.8	137.4	136.0	134.5
62.5°	137.2	132.9	128.5	125.8	124.6	123.5	122.3	121.1
65°	114.9	111.0	107.1	104.6	103.5	102.5	101.3	100.2
67.5°	94.4	91.0	87.6	85.4	84.2	83.0	81.8	80.6
70°	80.4	77.4	74.5	72.5	71.5	70.7	69.7	68.9
72.5°	67.9	65.3	62.9	61.1	60.3	59.5	58.6	57.8
75°	50.0	48.0	45.9	44.6	44.0	43.5	43.0	42.4
77.5°	35.4	34.2	33.0	32.3	32.1	31.9	31.8	31.6
80°	27.2	26.9	26.6	26.4	26.3	26.3	26.2	26.1
82.5°	21.1	20.9	20.8	20.6	20.5	20.4	20.3	20.2
85°	12.3	12.1	11.9	11.8	11.8	11.8	11.8	11.8
87.5°	7.6	7.7	7.7	7.9	8.0	8.2	8.3	8.4
90°	15.8	16.6	17.5	18.0	18.3	18.6	18.9	19.2
92.5°	26.3	26.9	27.4	27.7	27.9	28.1	28.2	28.4
95°	49.4	49.9	50.3	50.5	50.5	50.5	50.5	50.5
97.5°	77.8	78.4	78.9	79.1	79.1	79.1	79.1	79.1
100°	98.3	98.6	98.9	99.0	99.0	99.0	99.0	99.0
102.5°	120.0	120.5	120.8	121.1	121.2	121.3	121.4	121.6
105°	152.9	153.3	153.8	154.2	154.6	155.1	155.5	155.9
107.5°	188.6	188.9	189.3	189.5	189.5	189.5	189.4	189.4
110°	212.2	212.0	211.6	211.7	212.2	212.6	213.0	213.4



TEST NUMBER: P333022-935

CATALOG NUMBER: S124RDIW-S350D770U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	237.7	237.6	237.6	237.6	237.7	237.8	237.9	238.0
115°	277.1	276.9	276.7	276.6	276.5	276.4	276.2	276.0
117.5°	314.9	314.4	313.8	313.5	313.2	312.9	312.6	312.4
120°	340.4	339.8	339.1	338.8	339.1	339.4	339.7	339.9
122.5°	366.4	366.0	365.5	365.0	364.5	363.9	363.5	363.0
125°	404.6	404.3	404.0	403.7	403.5	403.1	402.9	402.6
127.5°	441.0	440.7	440.4	440.1	440.0	439.7	439.5	439.3
130°	466.6	466.2	466.0	465.5	465.0	464.4	463.8	463.3
132.5°	490.6	490.3	490.0	489.7	489.6	489.3	489.0	488.9
135°	526.6	526.3	526.1	525.7	525.3	524.9	524.4	524.0
137.5°	561.5	561.1	560.8	560.6	560.7	560.8	560.9	560.9
140°	584.4	584.3	584.1	584.0	583.8	583.7	583.6	583.4
142.5°	606.1	606.1	606.1	606.1	606.0	606.0	606.0	605.9
145°	638.8	638.6	638.4	638.2	637.7	637.3	636.9	636.5
147.5°	668.3	668.2	668.0	668.0	667.8	667.7	667.5	667.4
150°	687.0	687.0	687.0	686.9	686.7	686.6	686.5	686.3
152.5°	704.5	704.8	705.2	705.2	704.8	704.5	704.0	703.7
155°	729.0	729.5	730.1	730.1	729.5	729.0	728.4	727.9
157.5°	750.5	751.0	751.4	751.4	750.9	750.4	749.9	749.4
160°	763.9	764.3	764.7	764.6	763.9	763.1	762.4	761.7
162.5°	775.8	776.5	777.3	777.3	776.6	775.9	775.2	774.5
165°	791.5	792.4	793.2	793.4	792.8	792.2	791.7	791.1
167.5°	804.9	805.6	806.5	806.5	805.6	804.8	803.9	803.0
170°	812.0	812.9	813.7	813.6	812.6	811.7	810.6	809.7
172.5°	817.3	818.3	819.2	819.2	818.2	817.3	816.2	815.3
175°	823.1	824.1	825.1	825.1	824.1	823.1	822.2	821.1
177.5°	826.3	827.1	827.9	827.9	826.9	826.0	825.1	824.2
180°	826.2	826.2	826.2	826.2	826.2	826.2	826.2	826.2

(END OF REPORT)