

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333066-935

Luminaire Tested: **S124RDIW-S795D1050U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333066-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIW-S795D1050U935-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1050 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5895.7 lumens
Efficiency: N/A
Efficacy: 112.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 52.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333066-935

CATALOG NUMBER: S124RDIW-S795D1050U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

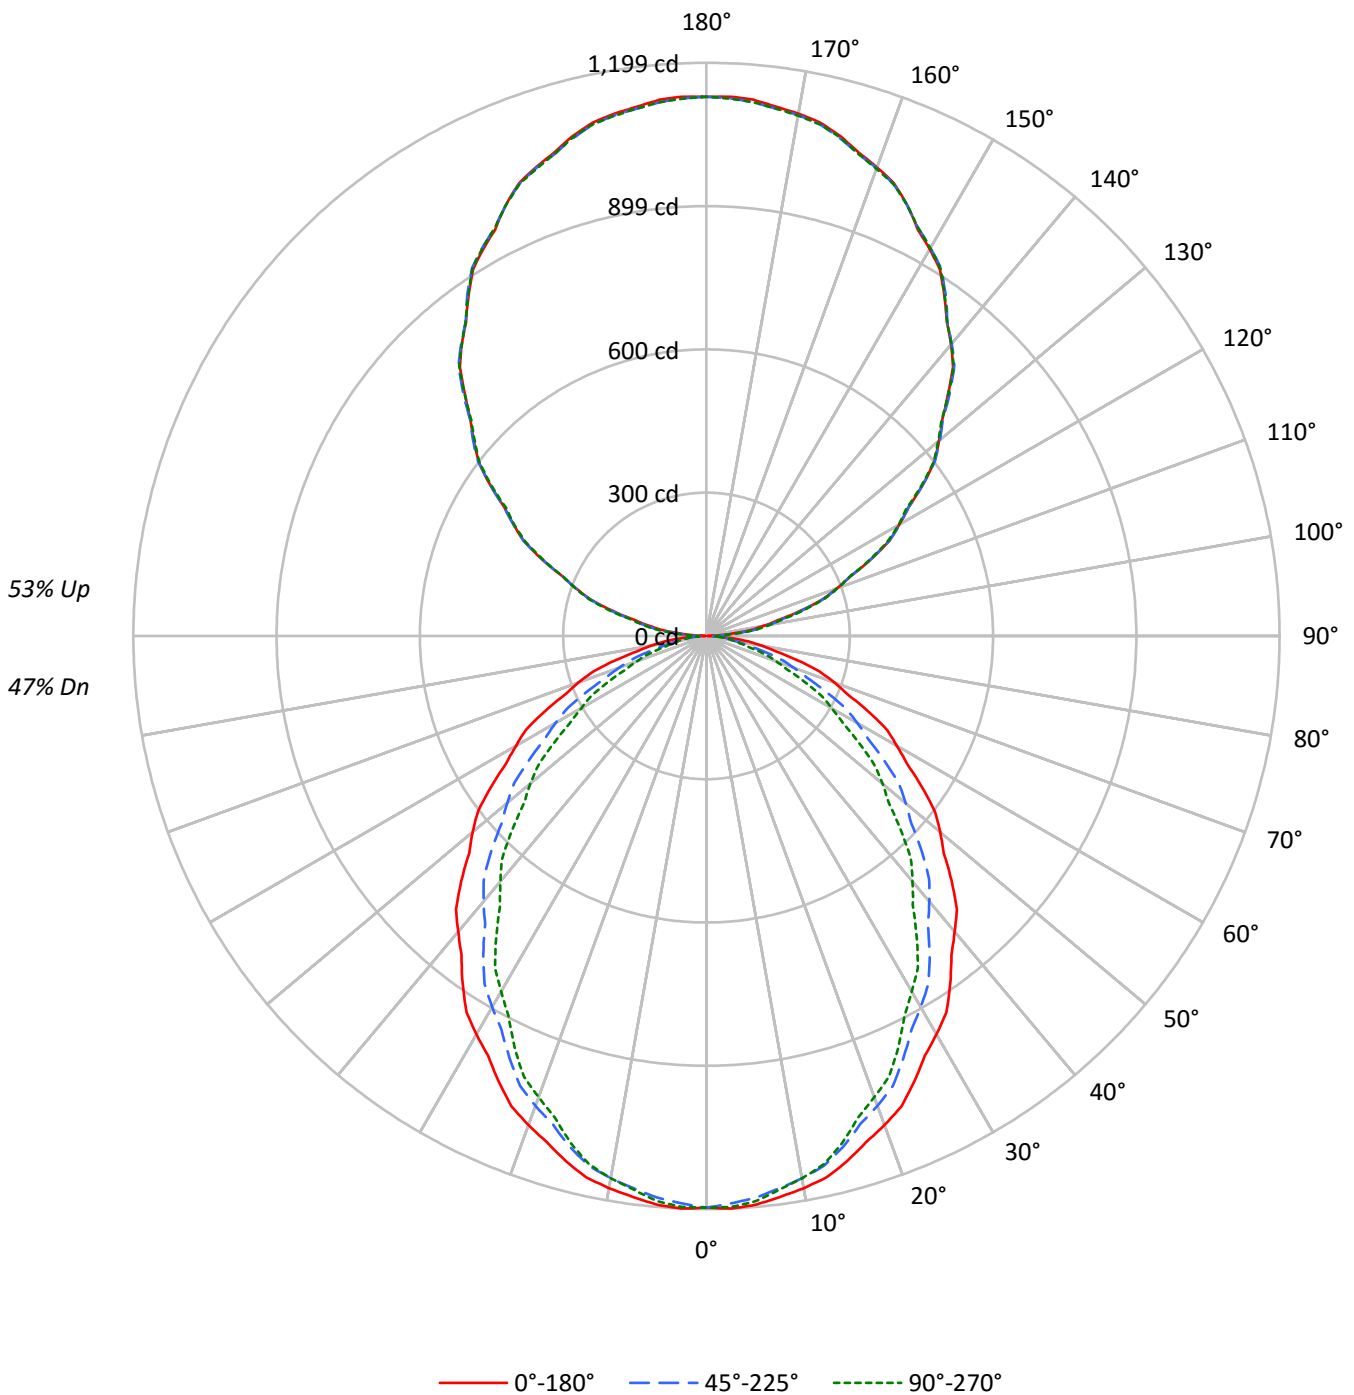



TEST NUMBER: P333066-935

CATALOG NUMBER: S124RDIW-S795D1050U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	53	53	53	47
1	97	93	89	86	89	86	83	80	72	70	68	59	58	56	47	46	45	40
2	89	82	76	71	81	75	70	66	63	60	56	52	50	47	42	40	39	34
3	81	72	65	59	74	66	60	55	56	51	48	46	43	40	37	35	33	29
4	74	64	56	50	68	59	52	47	50	45	41	41	38	35	34	31	29	25
5	68	57	49	43	63	53	46	40	45	39	35	37	33	30	30	28	25	22
6	63	51	43	37	58	47	40	35	40	35	31	34	30	26	28	25	22	19
7	58	46	38	33	53	43	36	31	37	31	27	31	27	24	25	22	20	17
8	54	42	34	29	50	39	32	27	33	28	24	28	24	21	23	20	18	15
9	50	38	31	26	46	36	29	25	31	25	22	26	22	19	22	18	16	14
10	47	35	28	23	43	33	26	22	28	23	20	24	20	17	20	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9656	9656	9656
5°	9678	9559	9618
10°	9617	9444	9444
15°	9507	9246	9177
20°	9355	8985	8820
25°	9161	8679	8459
30°	8972	8358	8007
35°	8763	8024	7554
40°	8513	7644	7065
45°	8281	7267	6566
50°	8017	6832	6038
55°	7734	6380	5465
60°	7424	5885	4879
65°	7138	5266	4304
70°	6722	4584	3654
75°	6198	3799	2969
80°	5407	2896	2724
85°	4576	2631	2455



TEST NUMBER: P333066-935

CATALOG NUMBER: S124RDIW-S795D1050U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	112.4	1.9
10°-20°	313.3	5.3
20°-30°	452.4	7.7
30°-40°	512.8	8.7
40°-50°	495.2	8.4
50°-60°	411.8	7.0
60°-70°	284.4	4.8
70°-80°	144.1	2.4
80°-90°	40.3	0.7
90°-100°	74.4	1.3
100°-110°	220.4	3.7
110°-120°	374.0	6.3
120°-130°	493.2	8.4
130°-140°	553.9	9.4
140°-150°	544.3	9.2
150°-160°	457.8	7.8
160°-170°	304.6	5.2
170°-180°	106.6	1.8
0°-30°	878.1	14.9
0°-40°	1390.9	23.6
0°-60°	2297.9	39.0
0°-90°	2766.7	46.9
90°-120°	668.7	11.3
90°-150°	2260.0	38.3
90°-180°	3129.0	53.1
0°-180°	5895.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1196	1196	1196	1196	1196	
5°	1194	1190	1180	1188	1187	113
15°	1138	1128	1106	1104	1098	320
25°	1028	1011	974	959	950	474
35°	889	859	814	784	766	555
45°	725	690	636	593	575	559
55°	550	512	453	407	388	491
65°	374	333	276	238	225	369
75°	199	164	122	102	95	210
85°	49	32	28	27	26	56
90°	3	12	19	24	26	6
95°	52	60	66	69	69	58
105°	203	204	208	210	213	216
115°	380	380	379	378	377	375
125°	554	554	553	551	550	493
135°	714	719	720	718	715	552
145°	868	871	872	871	869	543
155°	994	994	994	997	994	457
165°	1082	1080	1078	1083	1080	305
175°	1126	1122	1121	1126	1121	107
180°	1128	1128	1128	1128	1128	



TEST NUMBER: P333066-935

CATALOG NUMBER: S124RDIW-S795D1050U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1196.1	1196.1	1196.1	1196.1	1196.1	1196.1	1196.1	1196.1	1196.1	1196.1	1196.1
2.5°	1199.0	1198.3	1197.7	1197.0	1196.4	1195.2	1193.3	1191.6	1189.8	1188.0	1189.8
5°	1194.2	1193.4	1192.6	1191.8	1190.9	1189.4	1186.9	1184.5	1182.0	1179.6	1181.6
7.5°	1183.4	1182.6	1181.7	1180.9	1180.0	1178.0	1174.8	1171.6	1168.5	1165.3	1166.6
10°	1173.2	1172.2	1171.1	1170.1	1169.1	1166.7	1163.1	1159.4	1155.8	1152.1	1152.9
12.5°	1159.9	1158.8	1157.6	1156.4	1155.3	1152.5	1148.2	1143.8	1139.5	1135.2	1135.7
15°	1137.5	1135.7	1133.8	1132.0	1130.1	1126.7	1121.5	1116.5	1111.4	1106.3	1105.9
17.5°	1110.2	1107.5	1104.8	1102.3	1099.6	1095.2	1089.1	1083.0	1076.9	1070.7	1069.6
20°	1088.9	1086.2	1083.7	1081.0	1078.3	1073.6	1066.6	1059.7	1052.7	1045.9	1044.2
22.5°	1065.5	1062.5	1059.5	1056.5	1053.6	1048.4	1040.9	1033.5	1026.1	1018.7	1016.3
25°	1028.5	1024.8	1021.1	1017.4	1013.8	1007.8	999.4	991.1	982.7	974.4	970.9
27.5°	989.6	985.1	980.4	975.9	971.2	964.5	955.5	946.7	937.7	928.8	924.5
30°	962.5	957.4	952.4	947.3	942.2	934.9	925.3	915.8	906.1	896.6	891.5
32.5°	933.9	928.2	922.5	916.7	911.0	903.2	893.3	883.4	873.5	863.6	857.7
35°	889.2	882.8	876.2	869.7	863.2	854.9	844.7	834.5	824.3	814.2	807.3
37.5°	841.5	834.7	828.0	821.3	814.6	805.6	794.4	783.1	771.8	760.5	752.8
40°	807.8	801.1	794.4	787.6	780.9	771.7	760.1	748.6	736.9	725.3	716.8
42.5°	775.5	768.4	761.5	754.4	747.3	737.8	725.7	713.6	701.5	689.4	680.7
45°	725.3	717.8	710.2	702.7	695.2	685.4	673.1	660.9	648.7	636.5	626.5
47.5°	673.5	665.7	658.0	650.1	642.4	632.1	619.5	606.7	594.1	581.3	571.0
50°	638.3	630.4	622.4	614.5	606.6	596.1	583.1	570.1	557.0	544.0	533.8
52.5°	602.4	594.7	586.9	579.1	571.4	560.8	547.4	534.1	520.7	507.4	497.1
55°	549.5	541.3	533.2	525.0	516.9	506.3	493.0	479.7	466.6	453.3	442.7
57.5°	497.1	488.6	480.2	471.7	463.2	452.5	439.5	426.5	413.5	400.4	389.7
60°	459.8	451.6	443.5	435.3	427.1	416.6	403.6	390.5	377.5	364.5	353.9
62.5°	426.0	417.6	409.1	400.6	392.2	381.3	367.9	354.6	341.2	327.9	318.1
65°	373.7	364.9	356.1	347.4	338.6	327.8	314.7	301.7	288.7	275.7	266.9
67.5°	319.3	310.9	302.5	294.1	285.7	275.5	263.4	251.3	239.2	227.1	219.6
70°	284.8	276.3	267.7	259.2	250.6	240.6	228.9	217.3	205.8	194.2	187.4
72.5°	248.2	240.5	232.7	225.0	217.2	207.9	197.0	186.0	175.0	164.1	158.3
75°	198.7	191.2	183.7	176.2	168.6	160.1	150.5	140.9	131.4	121.8	117.1
77.5°	148.5	142.2	135.8	129.4	123.0	115.9	108.2	100.5	92.7	85.0	82.2
80°	116.3	110.4	104.5	98.6	92.7	86.7	80.6	74.5	68.4	62.3	61.6
82.5°	88.5	83.1	77.7	72.2	66.8	62.3	58.9	55.4	51.8	48.4	47.9
85°	49.4	45.4	41.3	37.3	33.1	30.8	30.2	29.6	29.0	28.4	28.0
87.5°	17.4	16.5	15.6	14.7	13.9	13.5	13.7	13.8	13.9	14.1	14.2
90°	2.6	4.7	6.9	9.0	11.1	13.0	14.6	16.1	17.7	19.2	20.3
92.5°	18.7	21.1	23.6	26.0	28.4	30.2	31.3	32.4	33.5	34.5	35.2
95°	52.3	54.1	55.8	57.6	59.3	60.9	62.3	63.5	64.9	66.3	66.9
97.5°	91.4	92.8	94.2	95.6	97.0	98.5	100.0	101.7	103.2	104.9	105.6
100°	122.1	122.9	123.6	124.4	125.2	126.5	128.2	129.9	131.7	133.5	133.8
102.5°	154.2	154.5	154.8	155.2	155.4	156.4	158.0	159.5	161.2	162.7	163.3
105°	203.2	203.5	203.6	203.8	204.0	204.5	205.3	206.0	206.8	207.6	208.2
107.5°	254.7	254.9	255.1	255.4	255.6	255.8	255.9	256.1	256.1	256.2	256.8
110°	289.6	290.0	290.3	290.8	291.1	291.2	291.0	290.8	290.7	290.4	290.1



TEST NUMBER: P333066-935

CATALOG NUMBER: S124RDIW-S795D1050U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	325.9	326.0	326.1	326.1	326.1	326.1	325.7	325.4	325.0	324.7	324.6
115°	380.3	380.3	380.3	380.3	380.3	380.1	379.7	379.4	378.9	378.6	378.3
117.5°	431.6	431.7	431.9	432.0	432.2	432.1	431.9	431.6	431.4	431.0	430.4
120°	465.8	466.6	467.4	468.1	468.9	469.0	468.4	467.8	467.3	466.7	465.7
122.5°	501.4	501.7	502.0	502.3	502.6	502.7	502.3	502.0	501.8	501.5	500.8
125°	553.9	553.9	553.9	553.9	553.9	553.8	553.5	553.4	553.2	553.0	552.6
127.5°	601.5	602.1	602.6	603.2	603.8	604.0	603.6	603.3	603.0	602.7	602.4
130°	635.0	635.6	636.1	636.7	637.3	637.6	637.6	637.6	637.6	637.6	637.2
132.5°	669.2	669.6	670.0	670.5	670.9	671.0	670.9	670.7	670.5	670.4	670.0
135°	714.4	715.5	716.7	717.8	719.0	719.6	719.6	719.6	719.6	719.6	719.2
137.5°	763.5	764.1	764.7	765.2	765.7	766.1	766.5	766.8	767.1	767.4	766.9
140°	796.3	796.8	797.1	797.5	797.9	798.1	798.1	798.1	798.1	798.1	797.9
142.5°	826.4	826.7	827.2	827.5	827.9	828.0	827.9	827.7	827.6	827.4	827.3
145°	867.9	868.7	869.4	870.2	871.0	871.4	871.7	871.8	872.0	872.2	872.0
147.5°	909.0	910.0	910.9	911.8	912.7	913.2	913.0	912.8	912.7	912.5	912.4
150°	934.2	935.0	935.7	936.5	937.3	937.6	937.6	937.6	937.6	937.6	937.6
152.5°	957.9	958.4	958.8	959.2	959.8	960.0	960.2	960.4	960.5	960.7	961.1
155°	994.4	994.4	994.4	994.4	994.4	994.3	994.0	993.9	993.7	993.5	994.3
157.5°	1025.0	1024.7	1024.3	1024.0	1023.6	1023.5	1023.4	1023.4	1023.3	1023.3	1023.9
160°	1043.2	1043.0	1042.8	1042.6	1042.4	1042.2	1042.0	1041.8	1041.6	1041.5	1042.0
162.5°	1059.9	1059.5	1058.9	1058.4	1057.9	1057.6	1057.4	1057.2	1057.0	1056.8	1057.8
165°	1082.4	1081.8	1081.2	1080.7	1080.1	1079.6	1079.3	1078.8	1078.5	1078.1	1079.3
167.5°	1099.7	1098.9	1098.1	1097.3	1096.5	1096.1	1096.1	1096.1	1096.1	1096.2	1097.3
170°	1109.5	1108.5	1107.5	1106.6	1105.6	1105.2	1105.4	1105.6	1105.8	1106.0	1107.2
172.5°	1116.5	1115.6	1114.8	1114.0	1113.2	1112.8	1112.8	1112.9	1112.9	1112.9	1114.3
175°	1126.0	1125.1	1124.1	1123.2	1122.1	1121.6	1121.4	1121.2	1121.0	1120.8	1122.1
177.5°	1129.2	1128.4	1127.7	1126.9	1126.1	1125.7	1125.7	1125.7	1125.7	1125.7	1126.8
180°	1127.8	1127.8	1127.8	1127.8	1127.8	1127.8	1127.8	1127.8	1127.8	1127.8	1127.8



TEST NUMBER: P333066-935

CATALOG NUMBER: S124RDIW-S795D1050U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1196.1	1196.1	1196.1	1196.1	1196.1	1196.1	1196.1	1196.1
2.5°	1191.6	1193.3	1195.2	1196.0	1195.8	1195.7	1195.5	1195.3
5°	1183.6	1185.7	1187.7	1188.5	1188.1	1187.7	1187.3	1186.9
7.5°	1167.9	1169.2	1170.5	1170.8	1170.2	1169.5	1168.9	1168.2
10°	1153.7	1154.5	1155.4	1155.4	1154.5	1153.7	1152.9	1152.1
12.5°	1136.3	1136.7	1137.2	1136.9	1135.7	1134.6	1133.4	1132.3
15°	1105.5	1105.1	1104.7	1103.8	1102.3	1100.9	1099.5	1098.0
17.5°	1068.5	1067.4	1066.2	1064.5	1062.4	1060.2	1058.1	1055.9
20°	1042.6	1040.9	1039.3	1037.2	1034.6	1031.9	1029.2	1026.7
22.5°	1013.9	1011.4	1009.0	1006.7	1004.5	1002.4	1000.2	998.1
25°	967.5	964.1	960.6	957.9	955.8	953.8	951.7	949.7
27.5°	920.2	916.0	911.7	908.1	905.2	902.2	899.3	896.4
30°	886.4	881.3	876.2	872.0	868.8	865.6	862.3	859.0
32.5°	851.8	845.9	840.0	835.5	832.4	829.3	826.2	823.1
35°	800.3	793.4	786.5	781.2	777.6	773.9	770.2	766.5
37.5°	745.0	737.3	729.5	723.8	720.2	716.5	712.9	709.2
40°	708.3	699.6	691.1	685.0	681.4	677.7	674.1	670.4
42.5°	672.0	663.3	654.6	648.3	644.5	640.7	636.9	633.0
45°	616.6	606.6	596.6	589.8	586.1	582.5	578.8	575.1
47.5°	560.7	550.4	540.0	532.8	528.8	524.8	520.7	516.7
50°	523.7	513.5	503.3	496.3	492.4	488.5	484.7	480.8
52.5°	486.7	476.4	466.0	458.8	454.8	450.7	446.8	442.7
55°	432.1	421.5	411.0	403.8	399.9	396.1	392.2	388.3
57.5°	378.9	368.2	357.4	350.6	347.7	344.7	341.8	338.9
60°	343.4	332.8	322.2	315.2	312.0	308.8	305.5	302.2
62.5°	308.3	298.6	288.8	282.6	280.0	277.4	274.7	272.2
65°	258.1	249.4	240.6	235.1	232.6	230.1	227.7	225.3
67.5°	212.1	204.6	197.0	191.9	189.2	186.5	183.8	181.2
70°	180.7	174.0	167.3	162.9	160.9	158.9	156.8	154.8
72.5°	152.7	146.9	141.1	137.3	135.5	133.6	131.7	129.8
75°	112.4	107.8	103.1	100.1	98.9	97.7	96.4	95.2
77.5°	79.6	76.8	74.0	72.5	72.2	71.8	71.5	71.0
80°	61.0	60.4	59.8	59.4	59.2	59.0	58.8	58.6
82.5°	47.4	47.0	46.6	46.2	46.1	45.8	45.6	45.5
85°	27.6	27.2	26.8	26.5	26.5	26.5	26.5	26.5
87.5°	14.2	14.3	14.4	14.6	14.8	15.0	15.2	15.5
90°	21.5	22.6	23.8	24.6	25.0	25.4	25.7	26.2
92.5°	35.9	36.6	37.4	37.8	38.1	38.2	38.5	38.7
95°	67.4	68.0	68.6	68.9	68.9	68.9	68.9	68.9
97.5°	106.2	106.9	107.6	108.0	108.0	108.0	108.0	108.0
100°	134.2	134.6	135.0	135.2	135.2	135.2	135.2	135.2
102.5°	163.8	164.4	165.0	165.3	165.4	165.6	165.7	165.9
105°	208.8	209.3	209.9	210.5	211.1	211.6	212.2	212.8
107.5°	257.4	257.9	258.5	258.6	258.6	258.6	258.6	258.6
110°	289.6	289.3	288.9	289.0	289.6	290.2	290.8	291.4



TEST NUMBER: P333066-935

CATALOG NUMBER: S124RDIW-S795D1050U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	324.5	324.4	324.3	324.3	324.5	324.6	324.7	324.9
115°	378.2	378.0	377.8	377.5	377.4	377.2	377.0	376.8
117.5°	429.7	429.0	428.4	427.9	427.5	427.1	426.7	426.4
120°	464.7	463.7	462.8	462.4	462.9	463.2	463.6	464.0
122.5°	500.2	499.6	498.9	498.2	497.5	496.8	496.1	495.4
125°	552.2	551.8	551.5	551.0	550.7	550.3	549.9	549.5
127.5°	601.9	601.6	601.2	600.8	600.5	600.2	599.9	599.6
130°	636.8	636.5	636.0	635.5	634.7	634.0	633.2	632.4
132.5°	669.6	669.3	668.8	668.5	668.2	667.9	667.5	667.3
135°	718.8	718.4	718.1	717.6	717.0	716.4	715.8	715.2
137.5°	766.4	765.9	765.3	765.2	765.3	765.4	765.5	765.6
140°	797.7	797.5	797.3	797.1	796.9	796.8	796.5	796.3
142.5°	827.3	827.2	827.2	827.2	827.2	827.2	827.1	827.1
145°	871.8	871.7	871.4	871.1	870.5	869.9	869.4	868.7
147.5°	912.2	912.1	911.9	911.7	911.5	911.4	911.1	910.9
150°	937.6	937.6	937.6	937.5	937.4	937.2	936.9	936.8
152.5°	961.6	962.1	962.5	962.5	962.0	961.5	961.0	960.5
155°	995.1	995.8	996.6	996.6	995.8	995.1	994.3	993.5
157.5°	1024.5	1025.0	1025.6	1025.6	1024.9	1024.2	1023.6	1023.0
160°	1042.6	1043.2	1043.8	1043.5	1042.6	1041.6	1040.7	1039.7
162.5°	1058.9	1059.9	1061.0	1061.0	1060.1	1059.1	1058.1	1057.1
165°	1080.4	1081.6	1082.7	1082.9	1082.1	1081.3	1080.6	1079.8
167.5°	1098.5	1099.7	1100.9	1100.9	1099.7	1098.5	1097.3	1096.1
170°	1108.3	1109.5	1110.6	1110.5	1109.2	1107.8	1106.5	1105.1
172.5°	1115.6	1116.9	1118.3	1118.2	1116.9	1115.5	1114.1	1112.8
175°	1123.5	1124.9	1126.3	1126.3	1124.9	1123.5	1122.1	1120.8
177.5°	1127.9	1128.9	1130.1	1130.0	1128.7	1127.5	1126.3	1125.0
180°	1127.8	1127.8	1127.8	1127.8	1127.8	1127.8	1127.8	1127.8

(END OF REPORT)