

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332815-840

Luminaire Tested: **S124DIW-S1020D770U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332815-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S1020D770U840-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 770 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7574.6 lumens
Efficiency: N/A
Efficacy: 141.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 53.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332815-840

CATALOG NUMBER: S124DIW-S1020D770U840-4F0-1E-UDD-F

Luminous Intensity Polar Plot

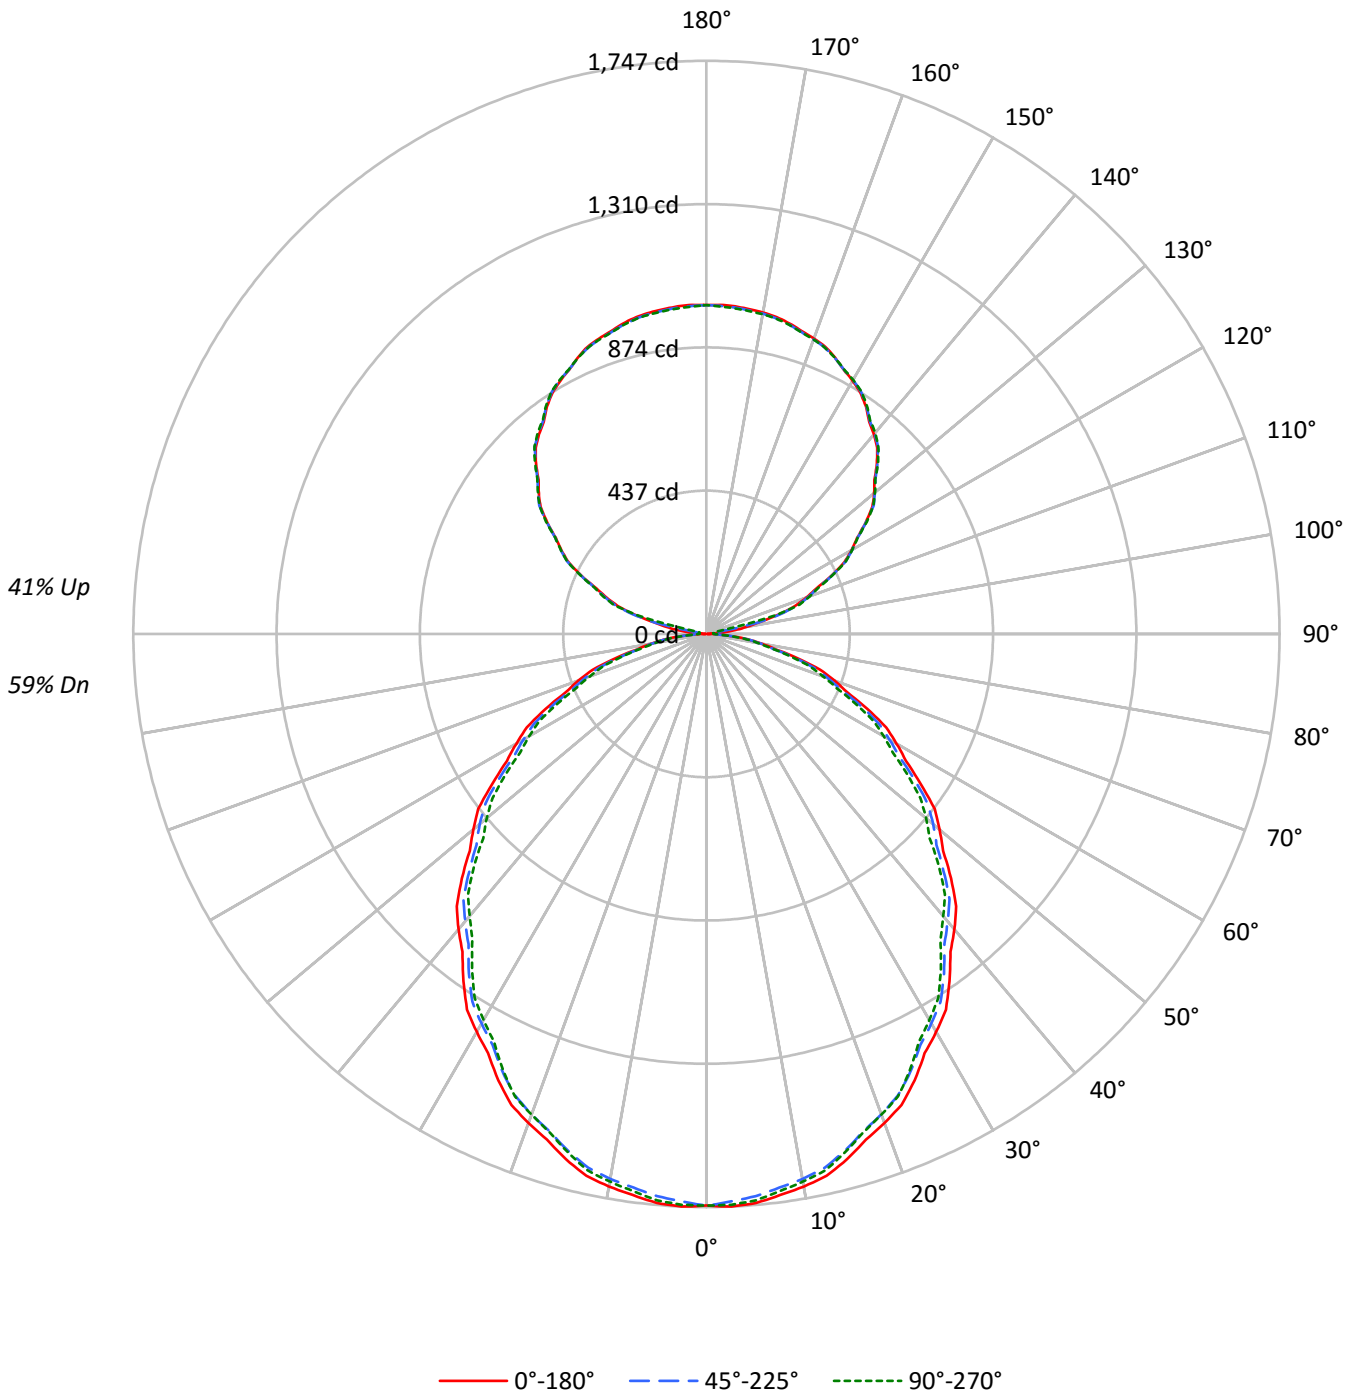



TEST NUMBER: P332815-840

CATALOG NUMBER: S124DIW-S1020D770U840-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64	59
1	100	95	91	88	93	89	86	83	77	75	73	67	65	63	57	56	54	50
2	91	83	77	72	85	78	72	68	68	64	60	59	56	53	50	48	46	42
3	83	73	66	60	77	69	62	57	60	55	51	52	48	45	44	41	39	35
4	76	65	57	51	70	61	54	48	53	48	43	46	42	38	40	36	34	30
5	70	58	50	43	65	54	47	41	48	42	37	42	37	33	36	32	29	26
6	64	52	44	38	60	49	41	36	43	37	33	38	33	29	32	29	26	23
7	59	47	39	33	55	44	37	32	39	33	29	34	29	26	30	26	23	20
8	55	43	35	29	51	40	33	28	36	30	26	31	27	23	27	23	21	18
9	51	39	31	26	48	37	30	25	33	27	23	29	24	21	25	21	19	16
10	48	36	28	24	45	34	27	23	30	25	21	27	22	19	23	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14067	14067	14067
5°	14109	13940	14041
10°	14021	13827	13896
15°	13852	13630	13665
20°	13626	13387	13399
25°	13370	13109	13071
30°	13055	12781	12665
35°	12728	12439	12275
40°	12390	12052	11830
45°	12036	11669	11445
50°	11645	11328	10977
55°	11222	10888	10534
60°	10798	10393	10077
65°	10323	9922	9522
70°	9788	9293	8932
75°	8971	8537	8319
80°	7987	7657	7466
85°	6984	6725	6595



TEST NUMBER: P332815-840

CATALOG NUMBER: S124DIW-S1020D770U840-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	164.1	2.2
10°-20°	462.4	6.1
20°-30°	680.5	9.0
30°-40°	791.1	10.4
40°-50°	791.2	10.4
50°-60°	692.1	9.1
60°-70°	514.0	6.8
70°-80°	292.0	3.9
80°-90°	87.2	1.2
90°-100°	34.3	0.5
100°-110°	218.6	2.9
110°-120°	418.1	5.5
120°-130°	530.7	7.0
130°-140°	567.9	7.5
140°-150°	531.0	7.0
150°-160°	428.2	5.7
160°-170°	276.2	3.6
170°-180°	95.2	1.3
0°-30°	1307.0	17.3
0°-40°	2098.1	27.7
0°-60°	3581.3	47.3
0°-90°	4474.4	59.1
90°-120°	670.9	8.9
90°-150°	2300.6	30.4
90°-180°	3100.0	40.9
0°-180°	7574.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1742	1742	1742	1742	1742	
5°	1741	1735	1720	1735	1733	165
15°	1657	1651	1631	1638	1635	467
25°	1501	1491	1472	1473	1467	690
35°	1292	1281	1262	1253	1246	807
45°	1054	1044	1022	1007	1002	812
55°	797	792	774	757	748	714
65°	540	533	519	506	498	535
75°	288	281	274	268	267	306
85°	75	75	73	72	71	83
90°	2	10	16	21	22	6
95°	41	17	16	21	22	53
105°	226	230	234	239	214	236
115°	421	423	423	424	424	414
125°	592	595	594	596	597	529
135°	735	734	737	738	740	566
145°	847	849	849	850	852	529
155°	929	929	927	930	928	428
165°	980	976	976	981	975	277
175°	1002	998	998	1004	996	95
180°	1002	1002	1002	1002	1002	



TEST NUMBER: P332815-840

CATALOG NUMBER: S124DIW-S1020D770U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5
2.5°	1747.0	1746.3	1745.5	1744.7	1744.0	1742.2	1739.5	1736.8	1734.0	1731.3	1733.8
5°	1741.1	1739.9	1738.7	1737.4	1736.2	1733.8	1730.4	1727.0	1723.6	1720.2	1723.6
7.5°	1725.0	1723.6	1722.4	1721.2	1720.0	1717.5	1713.6	1709.9	1706.1	1702.3	1705.1
10°	1710.4	1709.2	1707.9	1706.7	1705.5	1702.8	1698.8	1694.8	1690.7	1686.7	1689.1
12.5°	1691.4	1690.2	1688.9	1687.7	1686.5	1683.6	1679.4	1675.2	1670.8	1666.6	1669.3
15°	1657.4	1656.1	1654.9	1653.7	1652.3	1649.4	1644.8	1640.1	1635.5	1630.8	1632.6
17.5°	1616.3	1614.8	1613.2	1611.6	1610.1	1607.1	1602.7	1598.3	1593.9	1589.5	1590.6
20°	1586.1	1584.6	1583.1	1581.4	1579.9	1576.8	1572.2	1567.5	1562.9	1558.2	1559.1
22.5°	1553.8	1551.7	1549.6	1547.6	1545.6	1542.2	1537.5	1532.9	1528.2	1523.6	1525.3
25°	1501.0	1498.8	1496.6	1494.4	1492.3	1489.0	1484.7	1480.4	1476.0	1471.7	1472.0
27.5°	1440.7	1438.5	1436.1	1433.9	1431.7	1428.6	1424.5	1420.5	1416.4	1412.4	1411.7
30°	1400.5	1398.0	1395.4	1393.0	1390.5	1387.3	1383.2	1379.2	1375.1	1371.1	1369.9
32.5°	1358.0	1355.7	1353.5	1351.3	1349.1	1345.7	1341.5	1337.3	1332.9	1328.7	1327.2
35°	1291.5	1289.4	1287.2	1285.1	1282.8	1279.6	1275.3	1270.9	1266.6	1262.2	1260.0
37.5°	1221.4	1219.4	1217.5	1215.5	1213.5	1210.2	1205.5	1200.8	1196.2	1191.5	1189.2
40°	1175.7	1173.2	1170.6	1168.2	1165.7	1162.2	1157.5	1152.9	1148.2	1143.6	1140.4
42.5°	1126.5	1125.0	1123.5	1122.1	1120.5	1117.2	1112.1	1106.9	1101.8	1096.6	1093.0
45°	1054.2	1052.0	1049.9	1047.6	1045.5	1041.9	1036.9	1032.0	1027.0	1022.1	1018.7
47.5°	978.5	977.0	975.5	974.0	972.5	969.5	964.9	960.3	955.7	951.1	947.3
50°	927.2	925.8	924.6	923.4	922.1	919.4	915.0	910.7	906.4	902.0	897.7
52.5°	876.9	875.4	873.8	872.4	870.9	867.9	863.2	858.7	854.0	849.5	845.7
55°	797.3	796.3	795.4	794.5	793.6	790.9	786.6	782.2	777.9	773.6	769.8
57.5°	721.3	720.2	719.2	718.1	717.1	714.4	710.1	705.9	701.6	697.3	693.8
60°	668.8	667.2	665.7	664.2	662.6	659.8	655.8	651.8	647.7	643.7	640.9
62.5°	617.4	616.1	614.8	613.5	612.2	609.5	605.1	600.9	596.5	592.3	589.8
65°	540.4	538.8	537.2	535.7	534.1	531.8	528.7	525.6	522.5	519.4	516.3
67.5°	462.7	461.3	459.9	458.5	457.0	454.8	451.8	448.9	445.9	442.9	439.9
70°	414.7	412.5	410.3	408.2	406.0	403.6	401.2	398.7	396.3	393.7	391.2
72.5°	363.3	361.1	359.0	356.8	354.7	352.5	350.5	348.6	346.6	344.6	342.6
75°	287.6	286.1	284.5	283.0	281.4	279.8	278.3	276.8	275.2	273.7	272.5
77.5°	215.3	214.6	213.9	213.3	212.6	211.6	210.2	208.8	207.4	206.1	205.7
80°	171.8	170.8	169.9	169.0	168.0	167.2	166.6	166.0	165.4	164.7	164.1
82.5°	129.3	128.9	128.5	127.9	127.5	127.2	127.1	127.0	126.9	126.7	126.4
85°	75.4	75.4	75.4	75.4	75.4	75.1	74.4	73.8	73.2	72.6	72.6
87.5°	29.5	29.6	29.7	29.9	30.0	30.0	30.1	30.1	30.1	30.1	30.3
90°	2.2	4.0	6.0	7.8	9.6	11.2	12.5	13.8	15.1	16.5	17.5
92.5°	9.5	9.6	9.7	9.7	9.8	10.6	11.9	13.2	14.5	15.9	16.9
95°	41.2	35.5	29.9	24.2	18.6	15.9	16.0	16.2	16.4	16.5	17.5
97.5°	87.6	91.1	94.6	98.2	101.7	94.1	75.5	57.0	38.4	19.8	19.9
100°	122.9	125.9	129.0	131.9	134.9	124.9	102.0	79.0	55.9	33.0	30.2
102.5°	162.5	164.7	166.9	169.2	171.3	170.9	167.9	164.9	161.9	159.0	128.4
105°	225.6	226.6	227.6	228.6	229.6	230.6	231.4	232.2	233.1	233.9	235.4
107.5°	284.3	284.8	285.3	285.8	286.3	287.1	288.2	289.3	290.4	291.5	292.4
110°	323.9	324.4	324.9	325.4	325.8	326.6	327.6	328.6	329.6	330.5	330.9



TEST NUMBER: P332815-840

CATALOG NUMBER: S124DIW-S1020D770U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	362.2	363.1	364.1	364.9	365.8	366.5	367.0	367.4	367.9	368.4	368.3
115°	421.3	421.8	422.3	422.7	423.2	423.4	423.2	423.1	422.9	422.7	423.1
117.5°	474.5	475.1	475.8	476.5	477.2	477.7	478.1	478.4	478.8	479.2	479.1
120°	510.5	511.2	511.8	512.5	513.1	513.4	513.2	513.1	512.9	512.7	513.1
122.5°	544.1	544.4	544.8	545.2	545.6	545.9	546.2	546.4	546.6	546.9	547.1
125°	592.2	592.9	593.5	594.2	594.8	595.0	594.7	594.4	594.0	593.7	594.2
127.5°	637.7	637.9	638.1	638.2	638.4	638.9	639.6	640.5	641.2	642.0	641.9
130°	667.1	667.3	667.5	667.6	667.8	668.1	668.6	669.1	669.6	670.1	670.3
132.5°	694.2	694.5	694.8	695.0	695.3	695.8	696.4	697.1	697.7	698.3	698.5
135°	734.6	734.5	734.3	734.1	734.0	734.2	734.9	735.5	736.2	736.9	737.2
137.5°	770.4	770.5	770.6	770.6	770.7	771.1	771.8	772.5	773.4	774.1	774.4
140°	793.9	794.2	794.5	794.9	795.2	795.5	795.9	796.2	796.5	796.9	797.3
142.5°	814.9	815.5	816.1	816.6	817.2	817.6	817.8	818.0	818.2	818.4	818.8
145°	847.1	847.6	848.1	848.6	849.1	849.3	849.3	849.3	849.3	849.3	849.5
147.5°	872.7	873.6	874.5	875.5	876.5	876.8	876.7	876.5	876.3	876.2	876.3
150°	891.3	891.9	892.6	893.3	893.9	894.2	894.0	893.8	893.7	893.5	893.5
152.5°	906.9	907.4	908.0	908.5	909.0	909.1	908.8	908.6	908.3	908.0	908.2
155°	928.8	929.0	929.1	929.3	929.5	929.3	928.8	928.3	927.8	927.3	928.0
157.5°	947.3	947.2	947.1	947.0	946.8	946.4	945.9	945.3	944.7	944.2	945.0
160°	958.0	957.5	957.0	956.5	956.0	955.6	955.5	955.3	955.1	955.0	956.0
162.5°	967.6	966.9	966.3	965.7	965.0	964.6	964.5	964.3	964.1	964.0	965.0
165°	979.8	978.9	978.1	977.2	976.4	976.0	976.0	976.0	976.0	976.0	977.3
167.5°	989.4	988.5	987.6	986.7	985.8	985.4	985.3	985.2	985.1	985.0	986.4
170°	994.7	993.7	992.7	991.7	990.8	990.3	990.5	990.7	990.8	991.0	992.3
172.5°	998.4	997.3	996.3	995.3	994.3	993.9	994.1	994.2	994.4	994.6	995.9
175°	1002.2	1001.2	1000.3	999.3	998.3	997.8	997.9	998.2	998.4	998.5	1000.0
177.5°	1004.0	1003.1	1002.2	1001.2	1000.3	1000.0	1000.3	1000.5	1000.8	1001.0	1002.1
180°	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2



TEST NUMBER: P332815-840

CATALOG NUMBER: S124DIW-S1020D770U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5
2.5°	1736.3	1738.8	1741.3	1742.4	1742.1	1741.9	1741.6	1741.4
5°	1727.0	1730.4	1733.8	1735.3	1734.6	1733.9	1733.3	1732.7
7.5°	1707.8	1710.5	1713.2	1714.4	1714.0	1713.6	1713.2	1712.9
10°	1691.6	1694.1	1696.6	1697.5	1696.9	1696.3	1695.7	1695.1
12.5°	1672.0	1674.8	1677.5	1678.4	1677.6	1676.7	1675.8	1675.0
15°	1634.6	1636.4	1638.3	1638.7	1637.8	1636.9	1636.0	1635.0
17.5°	1591.9	1593.1	1594.2	1594.5	1593.9	1593.3	1592.7	1592.0
20°	1560.0	1561.0	1562.0	1562.1	1561.5	1560.8	1560.2	1559.6
22.5°	1526.9	1528.6	1530.2	1530.6	1529.4	1528.3	1527.2	1526.1
25°	1472.3	1472.6	1472.9	1472.4	1471.2	1470.0	1468.6	1467.4
27.5°	1411.0	1410.2	1409.5	1408.4	1406.7	1405.2	1403.6	1402.1
30°	1368.7	1367.4	1366.1	1364.7	1363.2	1361.6	1360.1	1358.6
32.5°	1325.6	1324.2	1322.7	1321.2	1319.6	1318.1	1316.6	1314.9
35°	1257.9	1255.7	1253.5	1251.6	1250.1	1248.6	1247.0	1245.5
37.5°	1186.8	1184.5	1182.1	1179.9	1177.9	1175.8	1173.8	1171.7
40°	1137.3	1134.2	1131.1	1128.8	1127.2	1125.7	1124.2	1122.6
42.5°	1089.4	1085.8	1082.2	1079.8	1078.8	1077.7	1076.7	1075.7
45°	1015.2	1011.8	1008.4	1006.2	1005.3	1004.4	1003.4	1002.5
47.5°	943.4	939.6	935.7	932.6	930.3	927.9	925.5	923.2
50°	893.3	889.0	884.6	881.5	879.6	877.8	876.0	874.0
52.5°	841.8	837.9	834.0	831.0	828.6	826.3	823.9	821.5
55°	766.1	762.3	758.6	755.9	754.0	752.1	750.2	748.4
57.5°	690.2	686.7	683.2	680.4	678.6	676.9	675.1	673.3
60°	638.1	635.3	632.5	630.4	628.7	627.2	625.7	624.1
62.5°	587.2	584.6	582.1	580.1	578.6	576.9	575.4	573.9
65°	513.2	510.1	507.0	504.6	503.1	501.6	500.0	498.5
67.5°	437.0	433.9	431.0	429.3	428.8	428.4	428.0	427.6
70°	388.8	386.3	383.8	382.1	381.2	380.2	379.3	378.4
72.5°	340.6	338.6	336.7	335.2	334.3	333.4	332.4	331.4
75°	271.1	269.9	268.7	267.9	267.6	267.3	267.0	266.7
77.5°	205.3	205.0	204.6	204.0	203.2	202.4	201.6	200.8
80°	163.5	162.9	162.3	161.8	161.5	161.2	160.9	160.6
82.5°	126.0	125.6	125.3	124.9	124.6	124.3	124.0	123.7
85°	72.6	72.6	72.6	72.4	72.1	71.8	71.5	71.2
87.5°	30.5	30.7	30.9	31.0	31.1	31.2	31.2	31.3
90°	18.5	19.5	20.5	21.1	21.5	21.8	22.1	22.5
92.5°	17.9	18.9	19.9	20.4	20.5	20.6	20.6	20.7
95°	18.5	19.5	20.5	21.1	21.2	21.4	21.6	21.7
97.5°	20.0	20.1	20.2	20.3	20.5	20.7	20.8	21.0
100°	27.4	24.4	21.6	20.3	20.5	20.7	20.8	21.0
102.5°	97.9	67.3	36.8	21.4	21.5	21.5	21.5	21.6
105°	236.9	238.3	239.8	237.6	231.7	225.6	219.6	213.7
107.5°	293.1	293.8	294.6	295.2	295.9	296.5	297.1	297.7
110°	331.2	331.5	331.9	332.3	332.9	333.4	333.9	334.4



TEST NUMBER: P332815-840

CATALOG NUMBER: S124DIW-S1020D770U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	368.2	368.2	368.1	368.4	369.0	369.6	370.3	370.9
115°	423.4	423.7	424.1	424.2	424.2	424.2	424.2	424.2
117.5°	479.0	479.0	478.9	478.8	478.8	478.7	478.6	478.6
120°	513.4	513.7	514.0	514.0	513.7	513.4	513.1	512.7
122.5°	547.3	547.5	547.8	547.6	547.3	546.9	546.6	546.3
125°	594.7	595.2	595.7	596.0	596.2	596.3	596.5	596.7
127.5°	641.8	641.7	641.6	641.5	641.4	641.2	641.1	641.0
130°	670.4	670.7	670.9	670.9	670.9	670.9	670.9	670.9
132.5°	698.6	698.8	699.0	699.0	698.9	698.7	698.6	698.5
135°	737.5	737.9	738.2	738.5	738.8	739.2	739.5	739.8
137.5°	774.8	775.2	775.5	775.7	775.6	775.5	775.4	775.3
140°	797.8	798.3	798.8	799.2	799.3	799.5	799.7	799.8
142.5°	819.2	819.5	819.9	820.1	820.1	820.1	820.2	820.2
145°	849.6	849.8	850.0	850.2	850.5	850.9	851.2	851.5
147.5°	876.4	876.6	876.7	876.9	877.0	877.2	877.4	877.5
150°	893.5	893.5	893.5	893.6	893.8	893.9	894.1	894.2
152.5°	908.5	908.7	909.0	909.1	909.0	908.9	908.8	908.7
155°	928.6	929.3	929.9	930.0	929.5	929.0	928.5	928.1
157.5°	945.9	946.8	947.7	947.7	946.8	945.9	945.0	944.2
160°	957.0	958.0	959.0	959.0	958.0	957.0	956.0	955.0
162.5°	966.0	966.9	968.0	968.0	966.8	965.6	964.5	963.4
165°	978.7	980.0	981.3	981.3	979.8	978.3	976.7	975.2
167.5°	988.0	989.4	990.9	990.8	989.1	987.4	985.7	984.1
170°	993.6	995.0	996.3	996.1	994.5	992.8	991.2	989.5
172.5°	997.2	998.6	999.9	999.7	997.8	996.1	994.3	992.5
175°	1001.5	1003.0	1004.5	1004.2	1002.2	1000.3	998.3	996.2
177.5°	1003.2	1004.2	1005.3	1005.0	1003.4	1001.8	1000.3	998.7
180°	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2

(END OF REPORT)