

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332816-840

Luminaire Tested: **S124DIW-S1020D770U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332816-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S1020D770U840-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 770 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7163.1 lumens
Efficiency: N/A
Efficacy: 133.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 53.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332816-840

CATALOG NUMBER: S124DIW-S1020D770U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

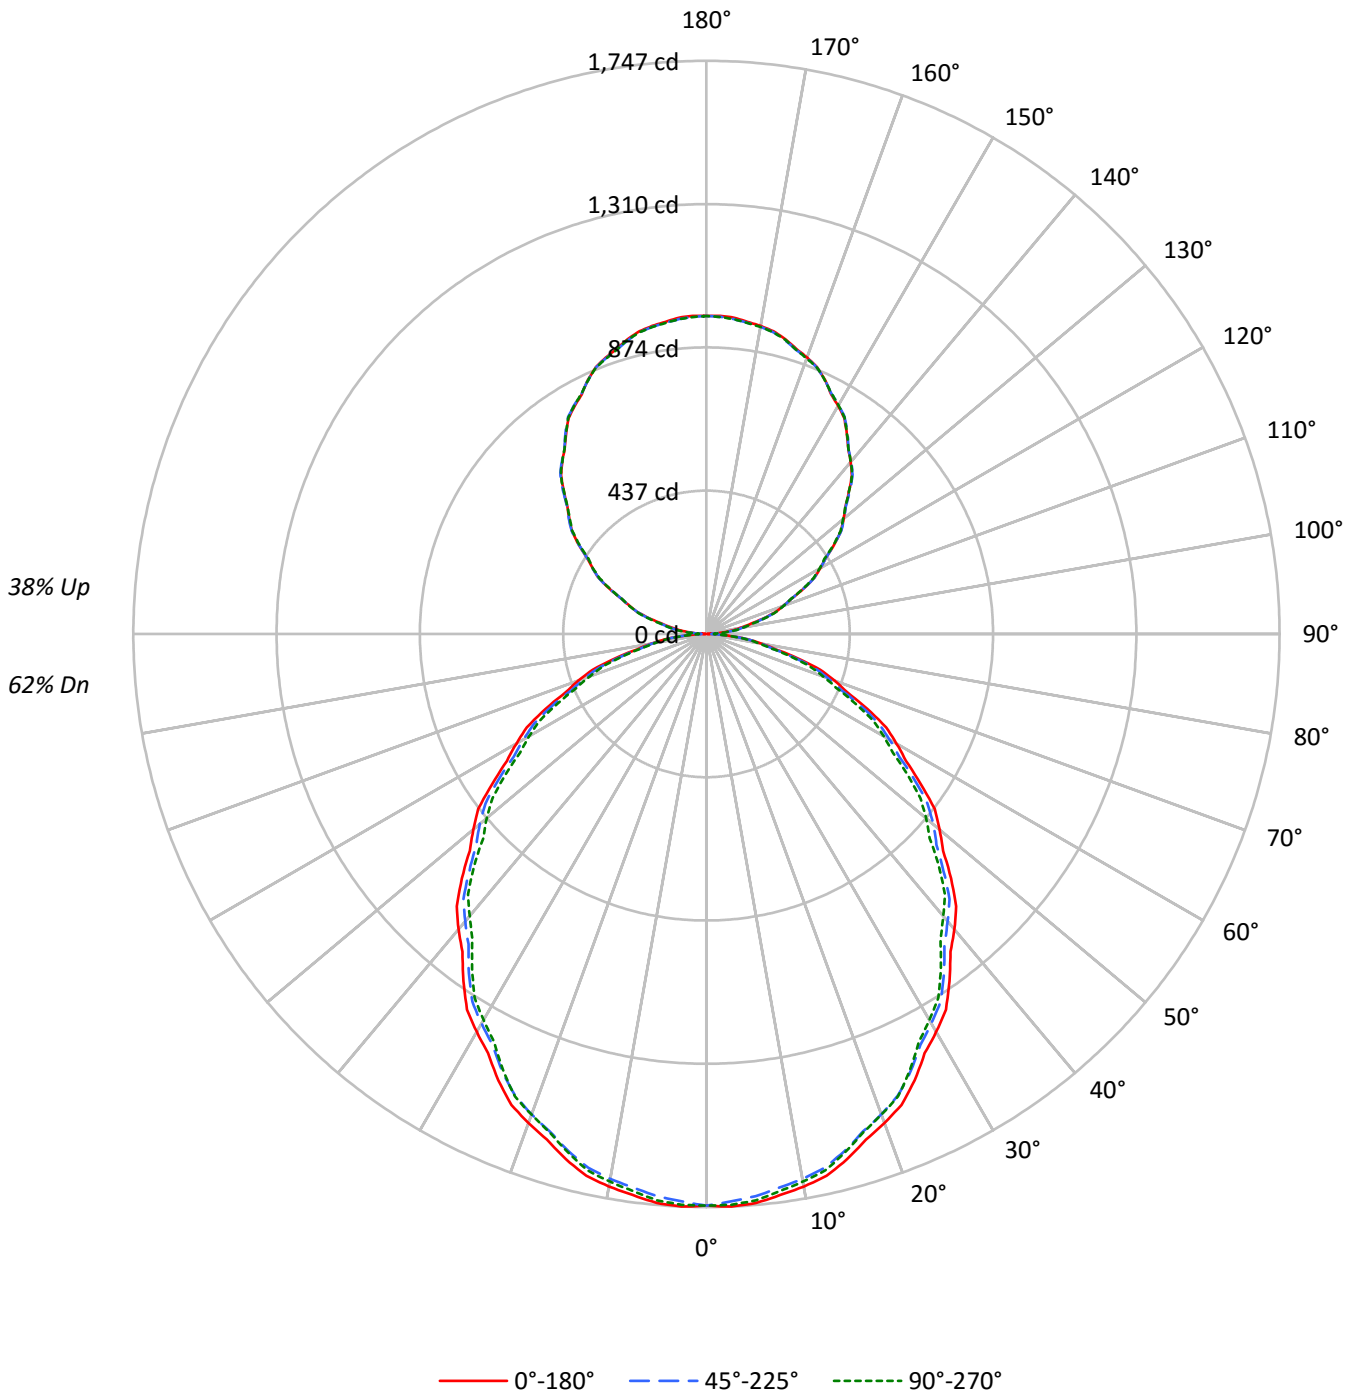



TEST NUMBER: P332816-840

CATALOG NUMBER: S124DIW-S1020D770U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	68	68	68	62
1	101	96	92	89	94	90	87	84	79	77	74	69	67	65	60	58	57	53
2	92	84	78	72	86	79	73	69	69	65	61	61	57	55	52	50	48	44
3	84	74	66	60	78	69	63	57	61	56	52	54	50	46	47	43	41	37
4	76	65	57	51	71	62	54	49	54	49	44	48	43	40	42	38	35	32
5	70	58	50	44	66	55	48	42	49	43	38	43	38	34	37	34	31	28
6	65	52	44	38	60	49	42	37	44	38	33	39	34	30	34	30	27	24
7	60	47	39	34	56	45	37	32	40	34	29	35	30	27	31	27	24	22
8	56	43	35	30	52	41	34	29	36	30	26	32	27	24	29	25	22	19
9	52	39	32	27	49	37	30	26	34	28	24	30	25	22	26	22	20	17
10	49	36	29	24	46	34	28	23	31	25	21	28	23	19	25	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14067	14067	14067
5°	14109	13940	14041
10°	14021	13827	13896
15°	13852	13630	13665
20°	13626	13387	13399
25°	13370	13109	13071
30°	13055	12781	12665
35°	12728	12439	12275
40°	12390	12052	11830
45°	12036	11669	11445
50°	11645	11328	10977
55°	11222	10888	10534
60°	10798	10393	10077
65°	10323	9922	9522
70°	9788	9293	8932
75°	8971	8537	8319
80°	7987	7657	7466
85°	6984	6725	6595



TEST NUMBER: P332816-840

CATALOG NUMBER: S124DIW-S1020D770U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	164.1	2.3
10°-20°	462.4	6.5
20°-30°	680.5	9.5
30°-40°	791.1	11.0
40°-50°	791.2	11.0
50°-60°	692.1	9.7
60°-70°	514.0	7.2
70°-80°	292.0	4.1
80°-90°	87.2	1.2
90°-100°	63.9	0.9
100°-110°	189.3	2.6
110°-120°	321.4	4.5
120°-130°	423.8	5.9
130°-140°	475.9	6.6
140°-150°	467.7	6.5
150°-160°	393.4	5.5
160°-170°	261.7	3.7
170°-180°	91.6	1.3
0°-30°	1307.0	18.2
0°-40°	2098.1	29.3
0°-60°	3581.3	50.0
0°-90°	4474.4	62.5
90°-120°	574.6	8.0
90°-150°	1942.0	27.1
90°-180°	2689.0	37.5
0°-180°	7163.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1742	1742	1742	1742	1742	
5°	1741	1735	1720	1735	1733	165
15°	1657	1651	1631	1638	1635	467
25°	1501	1491	1472	1473	1467	690
35°	1292	1281	1262	1253	1246	807
45°	1054	1044	1022	1007	1002	812
55°	797	792	774	757	748	714
65°	540	533	519	506	498	535
75°	288	281	274	268	267	306
85°	75	75	73	72	71	83
90°	2	10	16	21	22	7
95°	45	52	57	59	59	50
105°	175	176	178	181	183	185
115°	327	327	325	325	324	322
125°	476	476	475	474	472	424
135°	614	618	618	617	615	475
145°	746	749	750	749	746	467
155°	854	854	854	856	854	393
165°	930	928	926	930	928	262
175°	968	964	963	968	963	92
180°	969	969	969	969	969	



TEST NUMBER: P332816-840

CATALOG NUMBER: S124DIW-S1020D770U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5
2.5°	1747.0	1746.3	1745.5	1744.7	1744.0	1742.2	1739.5	1736.8	1734.0	1731.3	1733.8
5°	1741.1	1739.9	1738.7	1737.4	1736.2	1733.8	1730.4	1727.0	1723.6	1720.2	1723.6
7.5°	1725.0	1723.6	1722.4	1721.2	1720.0	1717.5	1713.6	1709.9	1706.1	1702.3	1705.1
10°	1710.4	1709.2	1707.9	1706.7	1705.5	1702.8	1698.8	1694.8	1690.7	1686.7	1689.1
12.5°	1691.4	1690.2	1688.9	1687.7	1686.5	1683.6	1679.4	1675.2	1670.8	1666.6	1669.3
15°	1657.4	1656.1	1654.9	1653.7	1652.3	1649.4	1644.8	1640.1	1635.5	1630.8	1632.6
17.5°	1616.3	1614.8	1613.2	1611.6	1610.1	1607.1	1602.7	1598.3	1593.9	1589.5	1590.6
20°	1586.1	1584.6	1583.1	1581.4	1579.9	1576.8	1572.2	1567.5	1562.9	1558.2	1559.1
22.5°	1553.8	1551.7	1549.6	1547.6	1545.6	1542.2	1537.5	1532.9	1528.2	1523.6	1525.3
25°	1501.0	1498.8	1496.6	1494.4	1492.3	1489.0	1484.7	1480.4	1476.0	1471.7	1472.0
27.5°	1440.7	1438.5	1436.1	1433.9	1431.7	1428.6	1424.5	1420.5	1416.4	1412.4	1411.7
30°	1400.5	1398.0	1395.4	1393.0	1390.5	1387.3	1383.2	1379.2	1375.1	1371.1	1369.9
32.5°	1358.0	1355.7	1353.5	1351.3	1349.1	1345.7	1341.5	1337.3	1332.9	1328.7	1327.2
35°	1291.5	1289.4	1287.2	1285.1	1282.8	1279.6	1275.3	1270.9	1266.6	1262.2	1260.0
37.5°	1221.4	1219.4	1217.5	1215.5	1213.5	1210.2	1205.5	1200.8	1196.2	1191.5	1189.2
40°	1175.7	1173.2	1170.6	1168.2	1165.7	1162.2	1157.5	1152.9	1148.2	1143.6	1140.4
42.5°	1126.5	1125.0	1123.5	1122.1	1120.5	1117.2	1112.1	1106.9	1101.8	1096.6	1093.0
45°	1054.2	1052.0	1049.9	1047.6	1045.5	1041.9	1036.9	1032.0	1027.0	1022.1	1018.7
47.5°	978.5	977.0	975.5	974.0	972.5	969.5	964.9	960.3	955.7	951.1	947.3
50°	927.2	925.8	924.6	923.4	922.1	919.4	915.0	910.7	906.4	902.0	897.7
52.5°	876.9	875.4	873.8	872.4	870.9	867.9	863.2	858.7	854.0	849.5	845.7
55°	797.3	796.3	795.4	794.5	793.6	790.9	786.6	782.2	777.9	773.6	769.8
57.5°	721.3	720.2	719.2	718.1	717.1	714.4	710.1	705.9	701.6	697.3	693.8
60°	668.8	667.2	665.7	664.2	662.6	659.8	655.8	651.8	647.7	643.7	640.9
62.5°	617.4	616.1	614.8	613.5	612.2	609.5	605.1	600.9	596.5	592.3	589.8
65°	540.4	538.8	537.2	535.7	534.1	531.8	528.7	525.6	522.5	519.4	516.3
67.5°	462.7	461.3	459.9	458.5	457.0	454.8	451.8	448.9	445.9	442.9	439.9
70°	414.7	412.5	410.3	408.2	406.0	403.6	401.2	398.7	396.3	393.7	391.2
72.5°	363.3	361.1	359.0	356.8	354.7	352.5	350.5	348.6	346.6	344.6	342.6
75°	287.6	286.1	284.5	283.0	281.4	279.8	278.3	276.8	275.2	273.7	272.5
77.5°	215.3	214.6	213.9	213.3	212.6	211.6	210.2	208.8	207.4	206.1	205.7
80°	171.8	170.8	169.9	169.0	168.0	167.2	166.6	166.0	165.4	164.7	164.1
82.5°	129.3	128.9	128.5	127.9	127.5	127.2	127.1	127.0	126.9	126.7	126.4
85°	75.4	75.4	75.4	75.4	75.4	75.1	74.4	73.8	73.2	72.6	72.6
87.5°	29.5	29.6	29.7	29.9	30.0	30.0	30.1	30.1	30.1	30.1	30.3
90°	2.2	4.0	6.0	7.8	9.6	11.2	12.5	13.8	15.1	16.5	17.5
92.5°	16.1	18.2	20.2	22.3	24.4	26.0	26.9	27.8	28.8	29.7	30.3
95°	44.9	46.5	48.0	49.5	51.0	52.3	53.4	54.6	55.8	57.0	57.5
97.5°	78.6	79.8	81.0	82.1	83.3	84.6	86.0	87.4	88.8	90.1	90.7
100°	104.9	105.6	106.2	106.9	107.6	108.7	110.2	111.7	113.2	114.7	115.0
102.5°	132.5	132.8	133.0	133.3	133.6	134.4	135.7	137.1	138.5	139.9	140.4
105°	174.6	174.8	175.0	175.1	175.3	175.7	176.4	177.0	177.7	178.3	178.8
107.5°	218.8	219.0	219.2	219.4	219.6	219.8	219.9	220.0	220.2	220.3	220.7
110°	248.8	249.1	249.5	249.8	250.1	250.2	250.0	249.9	249.7	249.5	249.2



TEST NUMBER: P332816-840

CATALOG NUMBER: S124DIW-S1020D770U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	280.0	280.0	280.1	280.2	280.2	280.1	279.8	279.5	279.2	278.9	278.9
115°	326.8	326.8	326.8	326.8	326.8	326.6	326.3	326.0	325.6	325.3	325.1
117.5°	370.8	371.0	371.1	371.2	371.4	371.3	371.1	370.9	370.6	370.4	369.8
120°	400.2	400.9	401.5	402.2	402.9	402.9	402.5	402.0	401.5	401.0	400.1
122.5°	430.8	431.1	431.3	431.6	431.9	431.9	431.7	431.4	431.2	431.0	430.4
125°	475.9	475.9	475.9	475.9	475.9	475.8	475.6	475.5	475.3	475.1	474.8
127.5°	516.8	517.4	517.9	518.4	518.9	519.0	518.7	518.5	518.2	518.0	517.6
130°	545.6	546.1	546.6	547.1	547.6	547.9	547.9	547.9	547.9	547.9	547.5
132.5°	575.0	575.4	575.7	576.1	576.5	576.6	576.4	576.3	576.2	576.0	575.7
135°	613.9	614.8	615.8	616.8	617.8	618.3	618.3	618.3	618.3	618.3	618.0
137.5°	656.1	656.6	657.0	657.5	658.0	658.3	658.6	658.8	659.1	659.4	658.9
140°	684.3	684.6	685.0	685.3	685.6	685.8	685.8	685.8	685.8	685.8	685.6
142.5°	710.0	710.4	710.7	711.0	711.4	711.6	711.3	711.2	711.1	710.9	710.9
145°	745.8	746.4	747.1	747.8	748.4	748.8	749.0	749.2	749.3	749.5	749.3
147.5°	781.1	781.9	782.7	783.6	784.4	784.7	784.6	784.4	784.3	784.2	784.0
150°	802.7	803.3	804.1	804.8	805.4	805.8	805.8	805.8	805.8	805.8	805.8
152.5°	823.1	823.5	823.9	824.4	824.8	825.0	825.1	825.3	825.4	825.5	825.9
155°	854.4	854.4	854.4	854.4	854.4	854.3	854.1	854.0	853.8	853.7	854.3
157.5°	880.8	880.5	880.2	879.9	879.6	879.5	879.4	879.4	879.4	879.3	879.8
160°	896.5	896.3	896.1	896.0	895.8	895.5	895.4	895.2	895.0	894.9	895.4
162.5°	910.8	910.4	909.9	909.5	909.1	908.8	908.6	908.5	908.3	908.1	909.0
165°	930.2	929.7	929.2	928.7	928.2	927.8	927.4	927.1	926.8	926.3	927.4
167.5°	944.9	944.3	943.6	942.9	942.2	941.8	941.9	941.9	941.9	942.0	943.0
170°	953.4	952.5	951.7	950.9	950.1	949.7	949.9	950.1	950.2	950.4	951.4
172.5°	959.4	958.7	958.0	957.3	956.5	956.2	956.2	956.3	956.3	956.3	957.6
175°	967.7	966.7	965.9	965.1	964.3	963.8	963.6	963.4	963.3	963.1	964.3
177.5°	970.3	969.7	969.0	968.4	967.7	967.3	967.3	967.3	967.3	967.3	968.3
180°	969.1	969.1	969.1	969.1	969.1	969.1	969.1	969.1	969.1	969.1	969.1



TEST NUMBER: P332816-840

CATALOG NUMBER: S124DIW-S1020D770U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5	1742.5
2.5°	1736.3	1738.8	1741.3	1742.4	1742.1	1741.9	1741.6	1741.4
5°	1727.0	1730.4	1733.8	1735.3	1734.6	1733.9	1733.3	1732.7
7.5°	1707.8	1710.5	1713.2	1714.4	1714.0	1713.6	1713.2	1712.9
10°	1691.6	1694.1	1696.6	1697.5	1696.9	1696.3	1695.7	1695.1
12.5°	1672.0	1674.8	1677.5	1678.4	1677.6	1676.7	1675.8	1675.0
15°	1634.6	1636.4	1638.3	1638.7	1637.8	1636.9	1636.0	1635.0
17.5°	1591.9	1593.1	1594.2	1594.5	1593.9	1593.3	1592.7	1592.0
20°	1560.0	1561.0	1562.0	1562.1	1561.5	1560.8	1560.2	1559.6
22.5°	1526.9	1528.6	1530.2	1530.6	1529.4	1528.3	1527.2	1526.1
25°	1472.3	1472.6	1472.9	1472.4	1471.2	1470.0	1468.6	1467.4
27.5°	1411.0	1410.2	1409.5	1408.4	1406.7	1405.2	1403.6	1402.1
30°	1368.7	1367.4	1366.1	1364.7	1363.2	1361.6	1360.1	1358.6
32.5°	1325.6	1324.2	1322.7	1321.2	1319.6	1318.1	1316.6	1314.9
35°	1257.9	1255.7	1253.5	1251.6	1250.1	1248.6	1247.0	1245.5
37.5°	1186.8	1184.5	1182.1	1179.9	1177.9	1175.8	1173.8	1171.7
40°	1137.3	1134.2	1131.1	1128.8	1127.2	1125.7	1124.2	1122.6
42.5°	1089.4	1085.8	1082.2	1079.8	1078.8	1077.7	1076.7	1075.7
45°	1015.2	1011.8	1008.4	1006.2	1005.3	1004.4	1003.4	1002.5
47.5°	943.4	939.6	935.7	932.6	930.3	927.9	925.5	923.2
50°	893.3	889.0	884.6	881.5	879.6	877.8	876.0	874.0
52.5°	841.8	837.9	834.0	831.0	828.6	826.3	823.9	821.5
55°	766.1	762.3	758.6	755.9	754.0	752.1	750.2	748.4
57.5°	690.2	686.7	683.2	680.4	678.6	676.9	675.1	673.3
60°	638.1	635.3	632.5	630.4	628.7	627.2	625.7	624.1
62.5°	587.2	584.6	582.1	580.1	578.6	576.9	575.4	573.9
65°	513.2	510.1	507.0	504.6	503.1	501.6	500.0	498.5
67.5°	437.0	433.9	431.0	429.3	428.8	428.4	428.0	427.6
70°	388.8	386.3	383.8	382.1	381.2	380.2	379.3	378.4
72.5°	340.6	338.6	336.7	335.2	334.3	333.4	332.4	331.4
75°	271.1	269.9	268.7	267.9	267.6	267.3	267.0	266.7
77.5°	205.3	205.0	204.6	204.0	203.2	202.4	201.6	200.8
80°	163.5	162.9	162.3	161.8	161.5	161.2	160.9	160.6
82.5°	126.0	125.6	125.3	124.9	124.6	124.3	124.0	123.7
85°	72.6	72.6	72.6	72.4	72.1	71.8	71.5	71.2
87.5°	30.5	30.7	30.9	31.0	31.1	31.2	31.2	31.3
90°	18.5	19.5	20.5	21.1	21.5	21.8	22.1	22.5
92.5°	30.9	31.5	32.1	32.5	32.7	32.9	33.1	33.3
95°	58.0	58.5	59.0	59.2	59.2	59.2	59.2	59.2
97.5°	91.3	91.9	92.5	92.8	92.8	92.8	92.8	92.8
100°	115.3	115.6	116.0	116.1	116.1	116.1	116.1	116.1
102.5°	140.8	141.3	141.7	142.0	142.2	142.3	142.4	142.6
105°	179.4	179.9	180.4	180.9	181.4	181.9	182.4	182.9
107.5°	221.2	221.6	222.1	222.3	222.3	222.3	222.2	222.2
110°	248.9	248.6	248.2	248.3	248.8	249.3	249.8	250.3



TEST NUMBER: P332816-840

CATALOG NUMBER: S124DIW-S1020D770U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	278.8	278.7	278.7	278.7	278.8	278.9	279.0	279.1
115°	325.0	324.8	324.6	324.5	324.3	324.2	324.0	323.8
117.5°	369.3	368.7	368.1	367.7	367.4	367.0	366.7	366.4
120°	399.3	398.5	397.7	397.4	397.8	398.1	398.4	398.7
122.5°	429.8	429.3	428.7	428.1	427.5	426.9	426.4	425.8
125°	474.5	474.2	473.8	473.5	473.2	472.8	472.5	472.2
127.5°	517.3	516.9	516.5	516.2	516.0	515.7	515.4	515.2
130°	547.2	546.8	546.5	546.0	545.4	544.7	544.0	543.4
132.5°	575.4	575.1	574.7	574.4	574.2	573.9	573.6	573.4
135°	617.6	617.3	617.0	616.6	616.1	615.6	615.1	614.6
137.5°	658.5	658.1	657.7	657.5	657.6	657.7	657.8	657.9
140°	685.5	685.3	685.1	685.0	684.8	684.6	684.5	684.3
142.5°	710.9	710.8	710.8	710.8	710.7	710.7	710.7	710.6
145°	749.2	749.0	748.8	748.5	748.0	747.5	747.0	746.5
147.5°	783.9	783.8	783.6	783.5	783.3	783.2	782.9	782.7
150°	805.8	805.8	805.8	805.7	805.5	805.3	805.2	805.0
152.5°	826.3	826.7	827.1	827.1	826.7	826.3	825.8	825.4
155°	855.1	855.7	856.4	856.4	855.7	855.1	854.3	853.7
157.5°	880.3	880.8	881.3	881.3	880.7	880.2	879.6	879.0
160°	896.0	896.5	897.0	896.8	896.0	895.0	894.2	893.4
162.5°	909.9	910.8	911.7	911.7	910.9	910.1	909.3	908.4
165°	928.4	929.4	930.4	930.6	929.9	929.2	928.6	927.9
167.5°	944.0	944.9	945.9	945.9	944.9	943.9	942.9	941.8
170°	952.4	953.4	954.4	954.3	953.1	952.0	950.8	949.7
172.5°	958.7	959.8	960.9	960.9	959.7	958.6	957.4	956.2
175°	965.4	966.6	967.8	967.8	966.6	965.4	964.3	963.1
177.5°	969.2	970.1	971.1	971.0	969.9	968.9	967.8	966.7
180°	969.1	969.1	969.1	969.1	969.1	969.1	969.1	969.1

(END OF REPORT)