

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332786-840

Luminaire Tested: **S124DIW-S795D770U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332786-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124DIW-S795D770U840-4F0-1E-UDD-F1  
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 770 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6131.7 lumens  
Efficiency: N/A  
Efficacy: 136.3 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 45  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332786-840

CATALOG NUMBER: S124DIW-S795D770U840-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

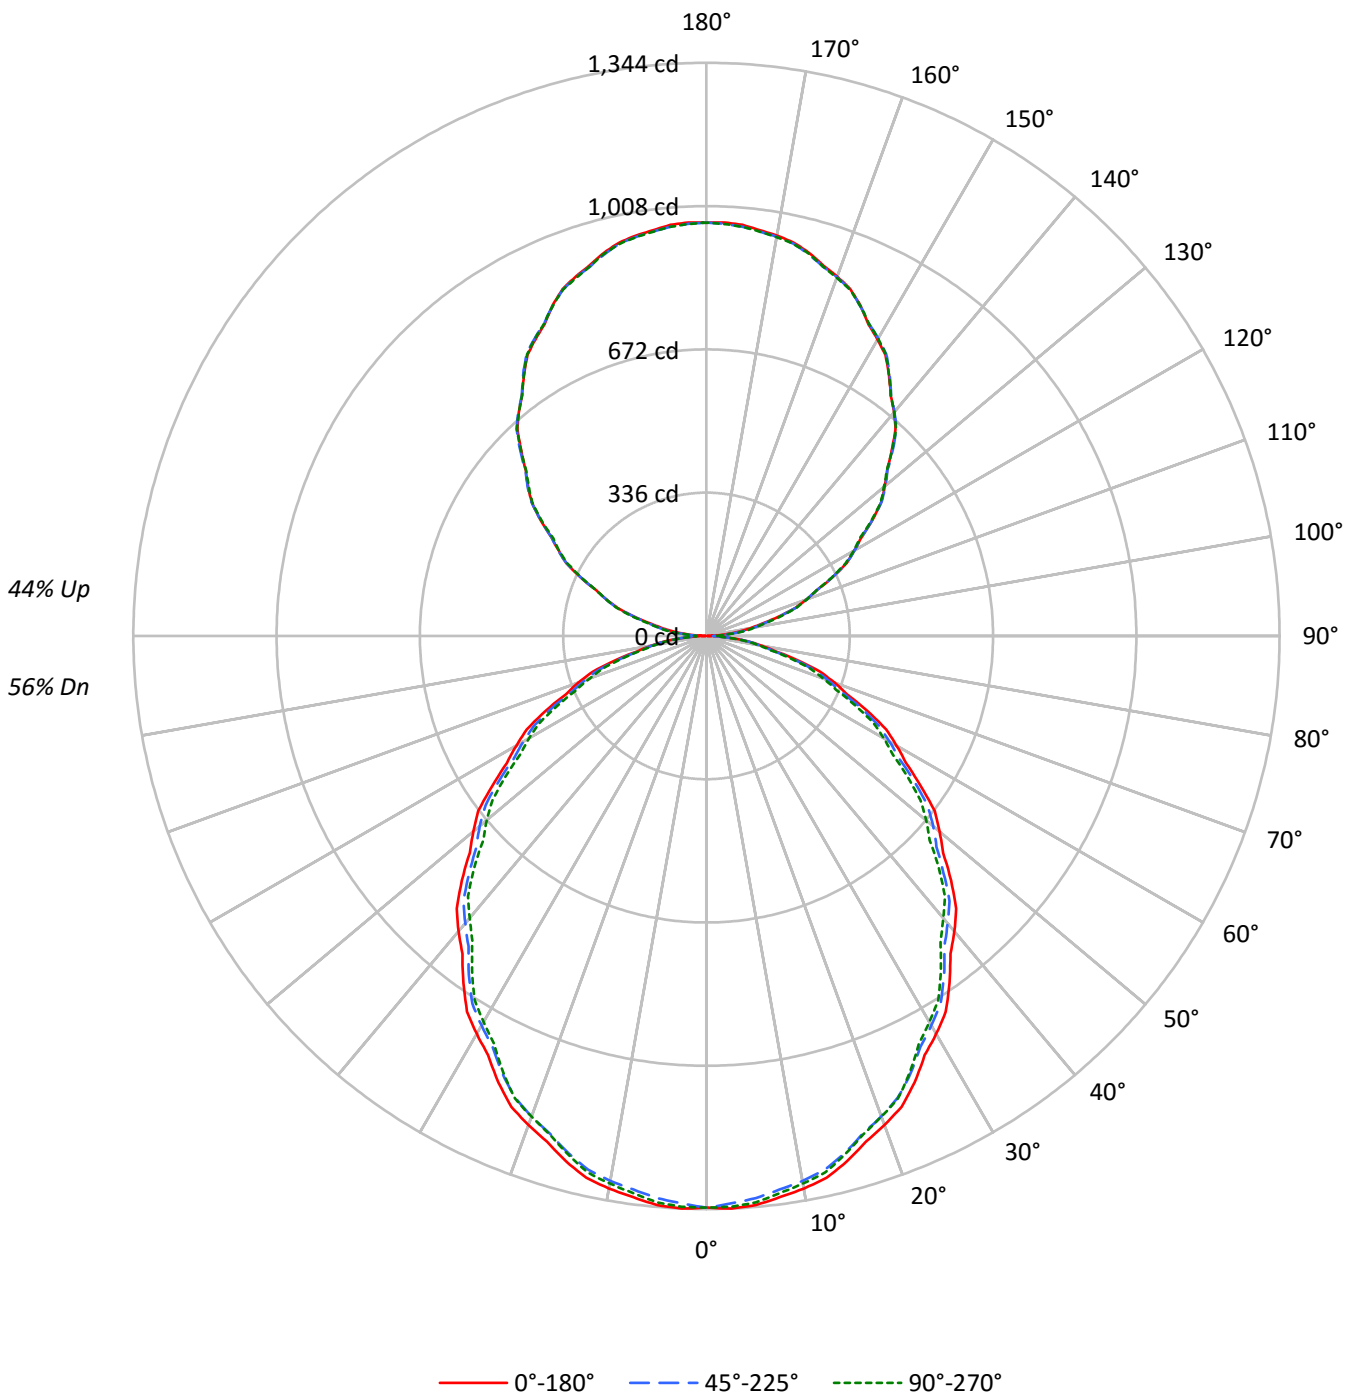



TEST NUMBER: P332786-840

CATALOG NUMBER: S124DIW-S795D770U840-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	56
1	99	95	91	87	92	88	85	82	76	74	71	65	63	61	55	53	52	47
2	90	83	76	71	84	77	72	67	67	62	59	57	54	51	48	46	44	40
3	82	73	65	59	76	68	61	56	59	54	50	50	47	43	43	40	37	33
4	75	64	56	50	70	60	53	48	52	47	42	45	41	37	38	35	32	29
5	69	57	49	43	64	54	46	41	47	41	36	40	36	32	34	31	28	25
6	64	52	43	37	59	48	41	36	42	36	32	36	32	28	31	27	25	22
7	59	47	38	33	55	44	36	31	38	32	28	33	28	25	28	25	22	19
8	55	42	34	29	51	40	33	28	35	29	25	30	26	22	26	22	20	17
9	51	39	31	26	47	36	29	25	32	26	22	28	23	20	24	20	18	16
10	48	35	28	23	44	33	27	22	30	24	20	26	21	18	22	19	16	14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	10823	10823	10823
5°	10855	10724	10802
10°	10787	10637	10690
15°	10657	10486	10513
20°	10483	10299	10308
25°	10286	10085	10056
30°	10043	9833	9743
35°	9792	9570	9443
40°	9531	9271	9101
45°	9259	8977	8805
50°	8959	8715	8446
55°	8633	8376	8103
60°	8307	7995	7753
65°	7941	7633	7324
70°	7530	7152	6871
75°	6903	6569	6400
80°	6141	5890	5742
85°	5372	5169	5067



TEST NUMBER: P332786-840

CATALOG NUMBER: S124DIW-S795D770U840-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	126.2	2.1
10°-20°	355.7	5.8
20°-30°	523.5	8.5
30°-40°	608.6	9.9
40°-50°	608.7	9.9
50°-60°	532.4	8.7
60°-70°	395.4	6.4
70°-80°	224.6	3.7
80°-90°	67.7	1.1
90°-100°	63.9	1.0
100°-110°	189.3	3.1
110°-120°	321.4	5.2
120°-130°	423.8	6.9
130°-140°	475.9	7.8
140°-150°	467.7	7.6
150°-160°	393.4	6.4
160°-170°	261.7	4.3
170°-180°	91.6	1.5
0°-30°	1005.5	16.4
0°-40°	1614.1	26.3
0°-60°	2755.2	44.9
0°-90°	3443.0	56.2
90°-120°	574.6	9.4
90°-150°	1942.0	31.7
90°-180°	2689.0	43.9
0°-180°	6131.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1341	1341	1341	1341	1341	
5°	1340	1335	1323	1334	1333	127
15°	1275	1270	1255	1260	1258	359
25°	1155	1147	1132	1133	1129	531
35°	994	986	971	964	958	621
45°	811	803	786	775	771	625
55°	613	609	595	583	576	549
65°	416	410	400	389	383	411
75°	221	216	211	206	205	235
85°	58	58	56	56	55	64
90°	2	10	16	21	22	6
95°	45	52	57	59	59	50
105°	175	176	178	181	183	185
115°	327	327	325	325	324	322
125°	476	476	475	474	472	424
135°	614	618	618	617	615	475
145°	746	749	750	749	746	467
155°	854	854	854	856	854	393
165°	930	928	926	930	928	262
175°	968	964	963	968	963	92
180°	969	969	969	969	969	



TEST NUMBER: P332786-840

CATALOG NUMBER: S124DIW-S795D770U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6
2.5°	1344.0	1343.4	1342.8	1342.3	1341.7	1340.4	1338.3	1336.2	1334.0	1332.0	1333.8
5°	1339.5	1338.6	1337.6	1336.7	1335.6	1333.8	1331.2	1328.6	1326.0	1323.3	1326.0
7.5°	1327.1	1326.1	1325.1	1324.1	1323.2	1321.3	1318.4	1315.5	1312.5	1309.6	1311.7
10°	1315.9	1314.9	1313.9	1313.0	1312.0	1310.0	1306.9	1303.8	1300.7	1297.6	1299.5
12.5°	1301.2	1300.3	1299.3	1298.4	1297.5	1295.3	1292.0	1288.7	1285.5	1282.1	1284.2
15°	1275.1	1274.0	1273.1	1272.1	1271.2	1269.0	1265.4	1261.8	1258.2	1254.7	1256.1
17.5°	1243.4	1242.2	1241.0	1239.9	1238.7	1236.4	1233.0	1229.6	1226.2	1222.8	1223.8
20°	1220.2	1219.0	1217.9	1216.7	1215.5	1213.0	1209.5	1205.9	1202.3	1198.8	1199.5
22.5°	1195.4	1193.8	1192.1	1190.6	1189.0	1186.5	1182.9	1179.3	1175.7	1172.2	1173.5
25°	1154.7	1153.1	1151.3	1149.7	1148.0	1145.5	1142.2	1138.8	1135.5	1132.2	1132.4
27.5°	1108.3	1106.6	1104.9	1103.2	1101.5	1099.0	1095.9	1092.9	1089.7	1086.6	1086.0
30°	1077.4	1075.5	1073.6	1071.7	1069.8	1067.2	1064.1	1061.1	1057.9	1054.8	1053.9
32.5°	1044.7	1043.0	1041.3	1039.6	1037.8	1035.3	1032.1	1028.7	1025.5	1022.2	1021.1
35°	993.6	991.9	990.3	988.6	986.9	984.4	981.1	977.8	974.4	971.1	969.4
37.5°	939.7	938.2	936.6	935.1	933.5	931.0	927.5	923.8	920.3	916.7	914.8
40°	904.4	902.5	900.6	898.7	896.8	894.0	890.5	886.9	883.3	879.7	877.4
42.5°	866.7	865.5	864.3	863.2	862.0	859.5	855.6	851.6	847.6	843.6	840.9
45°	811.0	809.3	807.7	806.0	804.4	801.5	797.8	794.0	790.1	786.3	783.7
47.5°	752.8	751.6	750.5	749.3	748.2	745.9	742.4	738.8	735.3	731.7	728.7
50°	713.3	712.3	711.3	710.3	709.4	707.3	704.0	700.6	697.2	693.9	690.5
52.5°	674.6	673.5	672.3	671.2	669.9	667.6	664.1	660.6	657.0	653.5	650.6
55°	613.4	612.6	611.9	611.2	610.5	608.4	605.1	601.8	598.4	595.1	592.2
57.5°	554.9	554.1	553.3	552.5	551.7	549.6	546.3	543.0	539.8	536.4	533.7
60°	514.5	513.3	512.1	511.0	509.8	507.6	504.5	501.4	498.3	495.2	493.0
62.5°	475.0	474.0	473.0	472.0	471.0	468.9	465.5	462.2	459.0	455.7	453.7
65°	415.7	414.5	413.3	412.1	410.9	409.1	406.8	404.3	401.9	399.6	397.2
67.5°	356.0	354.9	353.8	352.6	351.6	349.9	347.6	345.3	343.1	340.7	338.4
70°	319.0	317.4	315.7	314.0	312.4	310.5	308.6	306.7	304.8	303.0	301.0
72.5°	279.5	277.8	276.2	274.5	272.8	271.2	269.7	268.1	266.6	265.1	263.6
75°	221.3	220.0	218.9	217.7	216.5	215.3	214.1	212.9	211.8	210.6	209.5
77.5°	165.6	165.1	164.6	164.1	163.5	162.8	161.7	160.7	159.6	158.5	158.2
80°	132.1	131.4	130.7	130.0	129.3	128.7	128.2	127.7	127.2	126.7	126.2
82.5°	99.5	99.2	98.8	98.5	98.2	98.0	97.9	97.8	97.7	97.6	97.3
85°	58.0	58.0	58.0	58.0	58.0	57.8	57.3	56.9	56.4	55.8	55.8
87.5°	22.8	22.9	23.1	23.3	23.5	23.6	23.7	23.7	23.8	23.9	24.1
90°	2.2	4.0	6.0	7.8	9.6	11.2	12.5	13.8	15.1	16.5	17.5
92.5°	16.1	18.2	20.2	22.3	24.4	26.0	26.9	27.8	28.8	29.7	30.3
95°	44.9	46.5	48.0	49.5	51.0	52.3	53.4	54.6	55.8	57.0	57.5
97.5°	78.6	79.8	81.0	82.1	83.3	84.6	86.0	87.4	88.8	90.1	90.7
100°	104.9	105.6	106.2	106.9	107.6	108.7	110.2	111.7	113.2	114.7	115.0
102.5°	132.5	132.8	133.0	133.3	133.6	134.4	135.7	137.1	138.5	139.9	140.4
105°	174.6	174.8	175.0	175.1	175.3	175.7	176.4	177.0	177.7	178.3	178.8
107.5°	218.8	219.0	219.2	219.4	219.6	219.8	219.9	220.0	220.2	220.3	220.7
110°	248.8	249.1	249.5	249.8	250.1	250.2	250.0	249.9	249.7	249.5	249.2



TEST NUMBER: P332786-840

CATALOG NUMBER: S124DIW-S795D770U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	280.0	280.0	280.1	280.2	280.2	280.1	279.8	279.5	279.2	278.9	278.9
115°	326.8	326.8	326.8	326.8	326.8	326.6	326.3	326.0	325.6	325.3	325.1
117.5°	370.8	371.0	371.1	371.2	371.4	371.3	371.1	370.9	370.6	370.4	369.8
120°	400.2	400.9	401.5	402.2	402.9	402.9	402.5	402.0	401.5	401.0	400.1
122.5°	430.8	431.1	431.3	431.6	431.9	431.9	431.7	431.4	431.2	431.0	430.4
125°	475.9	475.9	475.9	475.9	475.9	475.8	475.6	475.5	475.3	475.1	474.8
127.5°	516.8	517.4	517.9	518.4	518.9	519.0	518.7	518.5	518.2	518.0	517.6
130°	545.6	546.1	546.6	547.1	547.6	547.9	547.9	547.9	547.9	547.9	547.5
132.5°	575.0	575.4	575.7	576.1	576.5	576.6	576.4	576.3	576.2	576.0	575.7
135°	613.9	614.8	615.8	616.8	617.8	618.3	618.3	618.3	618.3	618.3	618.0
137.5°	656.1	656.6	657.0	657.5	658.0	658.3	658.6	658.8	659.1	659.4	658.9
140°	684.3	684.6	685.0	685.3	685.6	685.8	685.8	685.8	685.8	685.8	685.6
142.5°	710.0	710.4	710.7	711.0	711.4	711.6	711.3	711.2	711.1	710.9	710.9
145°	745.8	746.4	747.1	747.8	748.4	748.8	749.0	749.2	749.3	749.5	749.3
147.5°	781.1	781.9	782.7	783.6	784.4	784.7	784.6	784.4	784.3	784.2	784.0
150°	802.7	803.3	804.1	804.8	805.4	805.8	805.8	805.8	805.8	805.8	805.8
152.5°	823.1	823.5	823.9	824.4	824.8	825.0	825.1	825.3	825.4	825.5	825.9
155°	854.4	854.4	854.4	854.4	854.4	854.3	854.1	854.0	853.8	853.7	854.3
157.5°	880.8	880.5	880.2	879.9	879.6	879.5	879.4	879.4	879.4	879.3	879.8
160°	896.5	896.3	896.1	896.0	895.8	895.5	895.4	895.2	895.0	894.9	895.4
162.5°	910.8	910.4	909.9	909.5	909.1	908.8	908.6	908.5	908.3	908.1	909.0
165°	930.2	929.7	929.2	928.7	928.2	927.8	927.4	927.1	926.8	926.3	927.4
167.5°	944.9	944.3	943.6	942.9	942.2	941.8	941.9	941.9	941.9	942.0	943.0
170°	953.4	952.5	951.7	950.9	950.1	949.7	949.9	950.1	950.2	950.4	951.4
172.5°	959.4	958.7	958.0	957.3	956.5	956.2	956.2	956.3	956.3	956.3	957.6
175°	967.7	966.7	965.9	965.1	964.3	963.8	963.6	963.4	963.3	963.1	964.3
177.5°	970.3	969.7	969.0	968.4	967.7	967.3	967.3	967.3	967.3	967.3	968.3
180°	969.1	969.1	969.1	969.1	969.1	969.1	969.1	969.1	969.1	969.1	969.1



TEST NUMBER: P332786-840

CATALOG NUMBER: S124DIW-S795D770U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6	1340.6
2.5°	1335.7	1337.7	1339.6	1340.5	1340.3	1340.1	1339.9	1339.7
5°	1328.6	1331.2	1333.8	1334.9	1334.4	1334.0	1333.5	1333.0
7.5°	1313.8	1316.0	1318.0	1318.9	1318.7	1318.4	1318.1	1317.8
10°	1301.4	1303.3	1305.3	1306.0	1305.5	1304.9	1304.5	1304.0
12.5°	1286.4	1288.4	1290.5	1291.2	1290.6	1289.9	1289.2	1288.6
15°	1257.5	1258.9	1260.3	1260.7	1260.0	1259.3	1258.6	1257.9
17.5°	1224.7	1225.6	1226.5	1226.7	1226.2	1225.7	1225.3	1224.8
20°	1200.2	1200.9	1201.6	1201.7	1201.2	1200.8	1200.3	1199.8
22.5°	1174.7	1176.0	1177.3	1177.5	1176.6	1175.8	1174.9	1174.1
25°	1132.7	1132.9	1133.2	1132.8	1131.9	1130.8	1129.9	1128.9
27.5°	1085.5	1084.9	1084.3	1083.5	1082.3	1081.1	1079.8	1078.6
30°	1052.9	1052.0	1051.0	1050.0	1048.7	1047.5	1046.3	1045.2
32.5°	1019.9	1018.8	1017.6	1016.4	1015.2	1014.0	1012.8	1011.7
35°	967.8	966.0	964.3	962.9	961.7	960.6	959.4	958.2
37.5°	913.0	911.2	909.5	907.8	906.2	904.6	903.0	901.4
40°	874.9	872.6	870.2	868.4	867.2	866.1	864.8	863.6
42.5°	838.1	835.4	832.5	830.8	830.0	829.2	828.4	827.6
45°	781.0	778.4	775.8	774.2	773.4	772.6	771.9	771.2
47.5°	725.8	722.9	719.8	717.5	715.7	713.9	712.1	710.2
50°	687.2	683.9	680.5	678.1	676.7	675.3	673.9	672.5
52.5°	647.6	644.6	641.7	639.3	637.5	635.7	633.9	632.1
55°	589.4	586.5	583.6	581.5	580.1	578.7	577.1	575.7
57.5°	531.0	528.3	525.5	523.5	522.1	520.7	519.4	518.0
60°	490.9	488.8	486.6	484.9	483.7	482.5	481.3	480.2
62.5°	451.7	449.8	447.9	446.3	445.0	443.8	442.7	441.5
65°	394.9	392.4	390.0	388.3	387.1	385.9	384.7	383.4
67.5°	336.2	333.9	331.5	330.2	329.9	329.6	329.2	328.9
70°	299.1	297.2	295.3	294.0	293.3	292.6	291.9	291.1
72.5°	262.1	260.5	259.0	257.9	257.1	256.4	255.7	255.0
75°	208.6	207.6	206.7	206.1	205.9	205.6	205.4	205.2
77.5°	157.9	157.6	157.4	156.9	156.3	155.7	155.1	154.5
80°	125.8	125.3	124.8	124.5	124.2	124.0	123.8	123.5
82.5°	96.9	96.6	96.3	96.1	95.9	95.6	95.4	95.1
85°	55.8	55.8	55.8	55.7	55.5	55.2	55.0	54.7
87.5°	24.3	24.5	24.7	24.8	24.9	24.9	25.0	25.1
90°	18.5	19.5	20.5	21.1	21.5	21.8	22.1	22.5
92.5°	30.9	31.5	32.1	32.5	32.7	32.9	33.1	33.3
95°	58.0	58.5	59.0	59.2	59.2	59.2	59.2	59.2
97.5°	91.3	91.9	92.5	92.8	92.8	92.8	92.8	92.8
100°	115.3	115.6	116.0	116.1	116.1	116.1	116.1	116.1
102.5°	140.8	141.3	141.7	142.0	142.2	142.3	142.4	142.6
105°	179.4	179.9	180.4	180.9	181.4	181.9	182.4	182.9
107.5°	221.2	221.6	222.1	222.3	222.3	222.3	222.2	222.2
110°	248.9	248.6	248.2	248.3	248.8	249.3	249.8	250.3





TEST NUMBER: P332786-840

CATALOG NUMBER: S124DIW-S795D770U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	278.8	278.7	278.7	278.7	278.8	278.9	279.0	279.1
115°	325.0	324.8	324.6	324.5	324.3	324.2	324.0	323.8
117.5°	369.3	368.7	368.1	367.7	367.4	367.0	366.7	366.4
120°	399.3	398.5	397.7	397.4	397.8	398.1	398.4	398.7
122.5°	429.8	429.3	428.7	428.1	427.5	426.9	426.4	425.8
125°	474.5	474.2	473.8	473.5	473.2	472.8	472.5	472.2
127.5°	517.3	516.9	516.5	516.2	516.0	515.7	515.4	515.2
130°	547.2	546.8	546.5	546.0	545.4	544.7	544.0	543.4
132.5°	575.4	575.1	574.7	574.4	574.2	573.9	573.6	573.4
135°	617.6	617.3	617.0	616.6	616.1	615.6	615.1	614.6
137.5°	658.5	658.1	657.7	657.5	657.6	657.7	657.8	657.9
140°	685.5	685.3	685.1	685.0	684.8	684.6	684.5	684.3
142.5°	710.9	710.8	710.8	710.8	710.7	710.7	710.7	710.6
145°	749.2	749.0	748.8	748.5	748.0	747.5	747.0	746.5
147.5°	783.9	783.8	783.6	783.5	783.3	783.2	782.9	782.7
150°	805.8	805.8	805.8	805.7	805.5	805.3	805.2	805.0
152.5°	826.3	826.7	827.1	827.1	826.7	826.3	825.8	825.4
155°	855.1	855.7	856.4	856.4	855.7	855.1	854.3	853.7
157.5°	880.3	880.8	881.3	881.3	880.7	880.2	879.6	879.0
160°	896.0	896.5	897.0	896.8	896.0	895.0	894.2	893.4
162.5°	909.9	910.8	911.7	911.7	910.9	910.1	909.3	908.4
165°	928.4	929.4	930.4	930.6	929.9	929.2	928.6	927.9
167.5°	944.0	944.9	945.9	945.9	944.9	943.9	942.9	941.8
170°	952.4	953.4	954.4	954.3	953.1	952.0	950.8	949.7
172.5°	958.7	959.8	960.9	960.9	959.7	958.6	957.4	956.2
175°	965.4	966.6	967.8	967.8	966.6	965.4	964.3	963.1
177.5°	969.2	970.1	971.1	971.0	969.9	968.9	967.8	966.7
180°	969.1	969.1	969.1	969.1	969.1	969.1	969.1	969.1

(END OF REPORT)