

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333089-840

Luminaire Tested: **S124RDIW-S1020D1340U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333089-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIW-S1020D1340U840-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1340 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9635.3 lumens
Efficiency: N/A
Efficacy: 138.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 69.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333089-840

CATALOG NUMBER: S124RDIW-S1020D1340U840-4F0-1E-UDD-F

Luminous Intensity Polar Plot

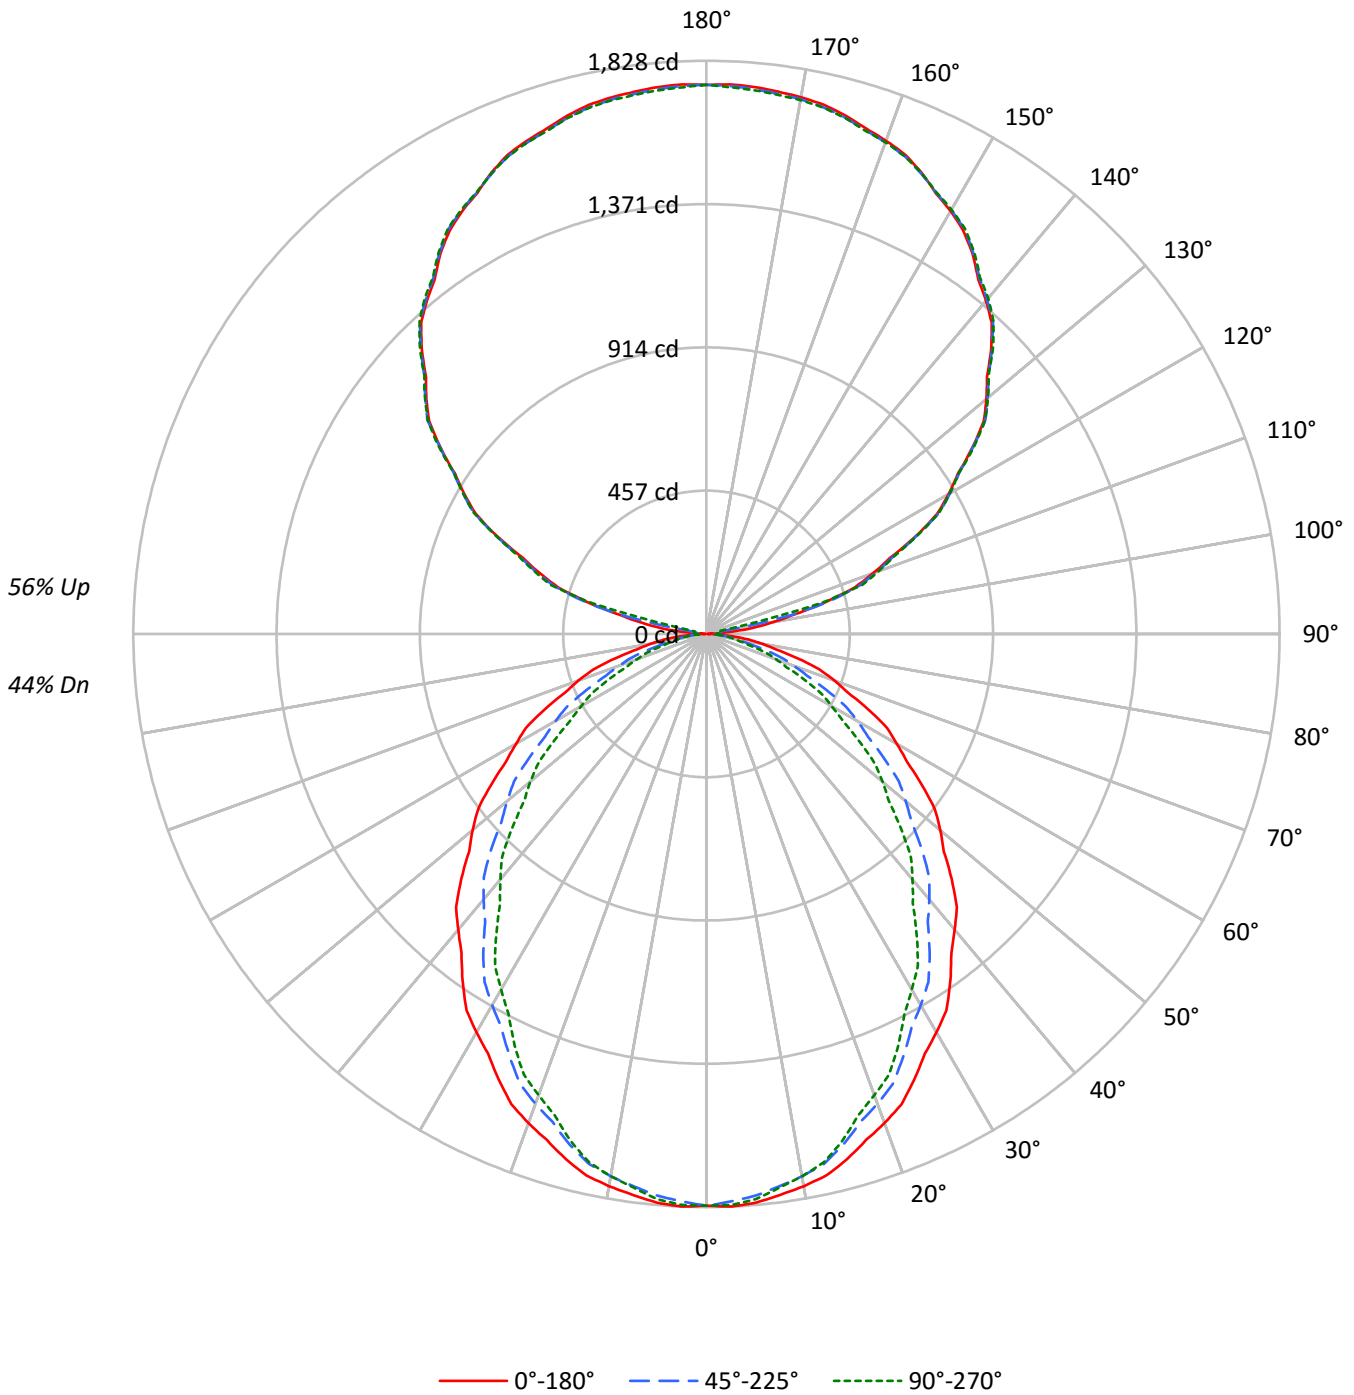



TEST NUMBER: P333089-840

CATALOG NUMBER: S124RDIW-S1020D1340U840-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	50	50	50	44
1	97	92	89	85	88	85	82	79	70	68	66	57	56	54	45	44	43	37
2	88	81	75	70	80	74	69	65	62	58	55	50	48	46	40	38	37	32
3	81	71	64	59	73	66	59	54	55	50	46	45	41	39	35	33	31	27
4	74	63	56	50	67	58	51	46	49	44	40	40	36	33	32	29	27	23
5	68	56	48	43	62	52	45	40	44	38	34	36	32	29	29	26	24	20
6	62	51	43	37	57	47	40	35	39	34	30	33	29	25	26	23	21	18
7	58	46	38	32	53	42	35	30	36	30	26	30	26	23	24	21	19	16
8	54	41	34	29	49	38	32	27	33	27	24	27	23	20	22	19	17	14
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	20	17	15	13
10	47	35	28	23	43	32	26	22	28	22	19	23	19	16	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14721	14721	14721
5°	14755	14574	14665
10°	14662	14399	14399
15°	14493	14097	13992
20°	14262	13698	13447
25°	13967	13233	12897
30°	13679	12743	12209
35°	13361	12232	11517
40°	12978	11653	10771
45°	12625	11079	10011
50°	12223	10417	9207
55°	11792	9728	8332
60°	11317	8972	7440
65°	10883	8029	6562
70°	10249	6987	5570
75°	9451	5792	4529
80°	8243	4412	4156
85°	6984	4011	3751



TEST NUMBER: P333089-840

CATALOG NUMBER: S124RDIW-S1020D1340U840-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	171.3	1.8
10°-20°	477.7	5.0
20°-30°	689.8	7.2
30°-40°	781.8	8.1
40°-50°	755.0	7.8
50°-60°	627.8	6.5
60°-70°	433.5	4.5
70°-80°	219.7	2.3
80°-90°	61.4	0.6
90°-100°	59.9	0.6
100°-110°	381.9	4.0
110°-120°	730.6	7.6
120°-130°	927.4	9.6
130°-140°	992.3	10.3
140°-150°	927.9	9.6
150°-160°	748.3	7.8
160°-170°	482.6	5.0
170°-180°	166.3	1.7
0°-30°	1338.7	13.9
0°-40°	2120.6	22.0
0°-60°	3503.4	36.4
0°-90°	4218.1	43.8
90°-120°	1172.4	12.2
90°-150°	4020.0	41.7
90°-180°	5417.0	56.2
0°-180°	9635.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1824	1824	1824	1824	1824	
5°	1821	1814	1798	1811	1810	173
15°	1734	1720	1687	1683	1674	488
25°	1568	1541	1486	1462	1448	722
35°	1356	1310	1241	1195	1169	847
45°	1106	1052	970	904	877	852
55°	838	780	691	621	592	749
65°	570	508	420	363	344	562
75°	303	251	186	155	145	320
85°	75	49	43	41	40	85
90°	4	18	29	36	39	7
95°	72	30	29	36	38	93
105°	394	402	409	417	373	413
115°	736	740	739	741	741	724
125°	1035	1040	1037	1041	1043	924
135°	1284	1283	1288	1290	1293	989
145°	1480	1484	1484	1485	1488	925
155°	1623	1624	1620	1625	1622	748
165°	1712	1706	1706	1715	1704	484
175°	1751	1744	1745	1755	1741	167
180°	1751	1751	1751	1751	1751	



TEST NUMBER: P333089-840

CATALOG NUMBER: S124RDIW-S1020D1340U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5
2.5°	1828.0	1826.9	1825.9	1825.0	1824.0	1822.1	1819.4	1816.6	1813.9	1811.2	1813.9
5°	1820.7	1819.5	1818.3	1816.9	1815.7	1813.2	1809.6	1805.8	1802.1	1798.4	1801.5
7.5°	1804.2	1802.9	1801.6	1800.3	1799.0	1795.9	1791.1	1786.2	1781.4	1776.6	1778.6
10°	1788.6	1787.1	1785.4	1783.9	1782.4	1778.8	1773.2	1767.7	1762.0	1756.5	1757.7
12.5°	1768.5	1766.7	1764.8	1763.1	1761.3	1757.1	1750.5	1743.9	1737.4	1730.8	1731.5
15°	1734.1	1731.3	1728.6	1725.8	1722.9	1717.7	1709.9	1702.1	1694.5	1686.7	1686.1
17.5°	1692.5	1688.5	1684.5	1680.4	1676.4	1669.7	1660.4	1651.1	1641.8	1632.4	1630.7
20°	1660.1	1656.1	1652.0	1648.0	1644.0	1636.7	1626.2	1615.6	1605.1	1594.5	1592.1
22.5°	1624.4	1619.8	1615.3	1610.8	1606.3	1598.3	1587.1	1575.8	1564.5	1553.2	1549.4
25°	1568.0	1562.4	1556.8	1551.3	1545.6	1536.5	1523.8	1511.1	1498.3	1485.6	1480.4
27.5°	1508.7	1501.8	1494.8	1487.7	1480.8	1470.5	1456.8	1443.3	1429.7	1416.0	1409.6
30°	1467.4	1459.7	1452.0	1444.2	1436.4	1425.2	1410.7	1396.0	1381.5	1367.0	1359.2
32.5°	1423.9	1415.1	1406.3	1397.7	1388.9	1377.0	1361.9	1346.9	1331.7	1316.7	1307.7
35°	1355.7	1345.8	1335.8	1326.0	1316.1	1303.3	1287.8	1272.3	1256.8	1241.2	1230.7
37.5°	1282.8	1272.6	1262.4	1252.1	1241.9	1228.2	1211.0	1193.9	1176.6	1159.4	1147.6
40°	1231.5	1221.2	1211.0	1200.7	1190.5	1176.6	1158.9	1141.1	1123.5	1105.8	1092.8
42.5°	1182.3	1171.6	1160.8	1150.1	1139.4	1124.8	1106.4	1087.9	1069.5	1051.1	1037.8
45°	1105.8	1094.4	1082.9	1071.4	1059.9	1044.8	1026.2	1007.6	989.0	970.4	955.2
47.5°	1026.8	1014.9	1003.1	991.3	979.4	963.8	944.4	925.0	905.6	886.4	870.6
50°	973.2	961.1	949.0	936.9	924.7	908.8	889.0	869.1	849.2	829.4	813.9
52.5°	918.5	906.6	894.7	882.9	871.0	855.0	834.6	814.3	793.9	773.6	757.8
55°	837.8	825.4	812.9	800.5	788.1	771.8	751.6	731.4	711.3	691.2	675.0
57.5°	757.9	745.0	732.1	719.1	706.3	689.8	670.0	650.2	630.3	610.5	594.1
60°	700.9	688.5	676.1	663.7	651.3	635.1	615.3	595.4	575.5	555.7	539.6
62.5°	649.5	636.6	623.7	610.8	597.9	581.3	560.9	540.6	520.2	499.9	484.9
65°	569.7	556.3	543.0	529.7	516.3	499.7	479.9	460.0	440.1	420.3	407.0
67.5°	486.8	473.9	461.2	448.4	435.6	420.0	401.5	383.1	364.7	346.3	334.8
70°	434.2	421.2	408.2	395.2	382.1	366.8	349.1	331.3	313.7	296.0	285.8
72.5°	378.4	366.6	354.8	343.1	331.2	317.0	300.3	283.6	266.9	250.2	241.5
75°	303.0	291.5	280.0	268.5	257.1	244.0	229.4	214.9	200.3	185.7	178.5
77.5°	226.5	216.7	207.0	197.2	187.5	176.7	164.9	153.2	141.4	129.6	125.4
80°	177.3	168.3	159.4	150.4	141.4	132.2	122.9	113.6	104.2	94.9	94.0
82.5°	134.9	126.6	118.4	110.1	101.9	95.0	89.8	84.4	79.1	73.7	73.0
85°	75.4	69.2	63.0	56.8	50.6	47.0	46.0	45.1	44.2	43.3	42.6
87.5°	26.5	25.1	23.8	22.4	21.1	20.5	20.7	21.0	21.2	21.4	21.5
90°	3.9	7.2	10.3	13.5	16.8	19.5	21.8	24.1	26.5	28.8	30.6
92.5°	16.5	16.7	16.9	17.1	17.2	18.5	20.8	23.1	25.4	27.8	29.5
95°	72.0	62.1	52.2	42.3	32.4	27.7	28.0	28.3	28.5	28.8	30.6
97.5°	153.0	159.2	165.3	171.5	177.6	164.5	132.0	99.6	67.1	34.5	34.7
100°	214.8	220.0	225.3	230.6	235.8	218.3	178.1	137.9	97.8	57.7	52.7
102.5°	284.0	287.8	291.6	295.5	299.3	298.6	293.4	288.2	283.0	277.7	224.3
105°	394.3	396.0	397.8	399.5	401.2	402.8	404.3	405.8	407.2	408.7	411.3
107.5°	496.7	497.6	498.5	499.3	500.2	501.6	503.6	505.5	507.6	509.6	510.8
110°	565.8	566.7	567.6	568.5	569.4	570.7	572.4	574.1	575.9	577.6	578.2



TEST NUMBER: P333089-840

CATALOG NUMBER: S124RDIW-S1020D1340U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	632.9	634.5	636.1	637.6	639.2	640.4	641.3	642.1	642.9	643.7	643.6
115°	736.1	737.0	737.9	738.7	739.6	739.9	739.6	739.3	739.0	738.7	739.3
117.5°	829.1	830.3	831.4	832.6	833.7	834.7	835.4	836.0	836.6	837.3	837.2
120°	892.0	893.1	894.3	895.5	896.7	897.1	896.9	896.6	896.3	896.0	896.6
122.5°	950.7	951.4	952.1	952.8	953.5	954.0	954.4	954.8	955.2	955.6	956.0
125°	1034.8	1035.9	1037.1	1038.2	1039.5	1039.8	1039.2	1038.5	1037.9	1037.4	1038.2
127.5°	1114.4	1114.7	1115.0	1115.3	1115.6	1116.4	1117.7	1119.0	1120.4	1121.8	1121.6
130°	1165.8	1166.1	1166.4	1166.6	1166.9	1167.5	1168.4	1169.2	1170.1	1171.0	1171.3
132.5°	1212.9	1213.5	1214.0	1214.5	1215.0	1215.9	1217.0	1218.0	1219.1	1220.2	1220.5
135°	1283.6	1283.3	1283.0	1282.8	1282.5	1282.9	1284.0	1285.3	1286.5	1287.6	1288.2
137.5°	1346.3	1346.4	1346.5	1346.7	1346.8	1347.5	1348.7	1350.0	1351.3	1352.5	1353.2
140°	1387.2	1387.8	1388.3	1388.9	1389.5	1390.1	1390.6	1391.2	1391.8	1392.4	1393.2
142.5°	1423.8	1424.8	1425.9	1426.9	1428.1	1428.7	1429.1	1429.4	1429.8	1430.1	1430.8
145°	1480.2	1481.0	1481.9	1482.8	1483.6	1484.1	1484.1	1484.1	1484.1	1484.1	1484.4
147.5°	1524.9	1526.5	1528.2	1529.8	1531.5	1532.2	1531.9	1531.6	1531.3	1531.0	1531.2
150°	1557.4	1558.6	1559.7	1560.9	1562.1	1562.5	1562.3	1562.0	1561.7	1561.4	1561.4
152.5°	1584.7	1585.6	1586.5	1587.4	1588.4	1588.6	1588.1	1587.5	1587.0	1586.5	1587.0
155°	1623.0	1623.2	1623.5	1623.8	1624.1	1623.8	1623.0	1622.0	1621.1	1620.3	1621.4
157.5°	1655.2	1655.0	1654.8	1654.6	1654.5	1653.9	1652.8	1651.8	1650.9	1649.9	1651.4
160°	1674.0	1673.1	1672.2	1671.3	1670.5	1669.9	1669.6	1669.3	1669.0	1668.8	1670.5
162.5°	1690.7	1689.6	1688.6	1687.5	1686.4	1685.7	1685.4	1685.1	1684.8	1684.5	1686.2
165°	1712.0	1710.5	1709.1	1707.6	1706.2	1705.5	1705.5	1705.5	1705.5	1705.5	1707.8
167.5°	1728.8	1727.3	1725.8	1724.2	1722.7	1721.8	1721.7	1721.5	1721.3	1721.1	1723.7
170°	1738.2	1736.5	1734.6	1732.9	1731.2	1730.5	1730.7	1731.0	1731.3	1731.6	1733.9
172.5°	1744.4	1742.7	1741.0	1739.2	1737.5	1736.8	1737.1	1737.4	1737.6	1737.9	1740.2
175°	1751.3	1749.5	1747.8	1746.1	1744.2	1743.5	1743.8	1744.1	1744.4	1744.7	1747.4
177.5°	1754.4	1752.8	1751.1	1749.5	1747.9	1747.3	1747.8	1748.3	1748.7	1749.2	1751.0
180°	1751.3	1751.3	1751.3	1751.3	1751.3	1751.3	1751.3	1751.3	1751.3	1751.3	1751.3



TEST NUMBER: P333089-840

CATALOG NUMBER: S124RDIW-S1020D1340U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5	1823.5
2.5°	1816.6	1819.4	1822.1	1823.4	1823.1	1822.9	1822.6	1822.4
5°	1804.5	1807.7	1810.8	1812.0	1811.4	1810.8	1810.2	1809.6
7.5°	1780.6	1782.5	1784.5	1785.0	1784.0	1783.0	1782.0	1781.0
10°	1759.0	1760.2	1761.4	1761.4	1760.2	1759.0	1757.7	1756.5
12.5°	1732.2	1733.0	1733.7	1733.2	1731.5	1729.8	1728.1	1726.4
15°	1685.5	1684.8	1684.2	1682.7	1680.6	1678.4	1676.3	1674.1
17.5°	1629.0	1627.3	1625.6	1623.1	1619.7	1616.5	1613.2	1609.8
20°	1589.5	1587.1	1584.6	1581.3	1577.3	1573.3	1569.2	1565.2
22.5°	1545.7	1542.0	1538.3	1534.8	1531.5	1528.2	1524.9	1521.7
25°	1475.0	1469.8	1464.5	1460.3	1457.2	1454.1	1451.0	1447.9
27.5°	1403.0	1396.5	1390.0	1384.5	1380.1	1375.5	1371.1	1366.7
30°	1351.4	1343.6	1335.8	1329.5	1324.5	1319.6	1314.6	1309.7
32.5°	1298.7	1289.7	1280.7	1273.8	1269.1	1264.4	1259.7	1255.0
35°	1220.1	1209.6	1199.0	1191.0	1185.4	1179.8	1174.3	1168.6
37.5°	1135.9	1124.1	1112.3	1103.6	1098.0	1092.4	1086.8	1081.3
40°	1079.7	1066.7	1053.7	1044.4	1038.8	1033.2	1027.6	1022.1
42.5°	1024.5	1011.3	997.9	988.5	982.6	976.7	970.9	965.1
45°	940.0	924.7	909.6	899.2	893.6	888.0	882.4	876.9
47.5°	854.9	839.1	823.2	812.3	806.2	800.0	793.9	787.8
50°	798.3	782.8	767.3	756.6	750.7	744.8	738.9	733.1
52.5°	741.9	726.2	710.4	699.5	693.4	687.2	681.1	675.0
55°	658.8	642.8	626.6	615.6	609.7	603.8	597.9	592.0
57.5°	577.6	561.3	544.9	534.5	530.0	525.5	521.1	516.6
60°	523.4	507.3	491.2	480.6	475.6	470.7	465.7	460.8
62.5°	470.1	455.1	440.3	430.8	426.9	422.9	418.9	415.0
65°	393.5	380.2	366.9	358.4	354.7	350.9	347.2	343.5
67.5°	323.3	311.8	300.3	292.6	288.4	284.4	280.2	276.2
70°	275.5	265.3	255.1	248.3	245.3	242.2	239.0	236.0
72.5°	232.7	224.0	215.2	209.4	206.5	203.7	200.9	198.0
75°	171.5	164.3	157.1	152.7	150.8	149.0	147.0	145.2
77.5°	121.3	117.1	112.9	110.6	110.0	109.5	108.9	108.4
80°	93.1	92.2	91.2	90.6	90.3	90.0	89.7	89.4
82.5°	72.3	71.7	71.0	70.5	70.2	69.9	69.6	69.3
85°	42.0	41.4	40.8	40.5	40.5	40.5	40.5	40.5
87.5°	21.6	21.7	21.8	22.0	22.4	22.7	23.1	23.5
90°	32.3	34.0	35.9	37.0	37.6	38.2	38.7	39.3
92.5°	31.3	33.0	34.7	35.6	35.9	36.0	36.1	36.2
95°	32.3	34.0	35.9	36.9	37.1	37.4	37.7	38.0
97.5°	34.9	35.1	35.2	35.5	35.9	36.1	36.4	36.7
100°	47.8	42.8	37.9	35.5	35.9	36.1	36.4	36.7
102.5°	171.0	117.5	64.1	37.5	37.6	37.6	37.7	37.8
105°	413.9	416.6	419.2	415.3	404.8	394.3	383.7	373.3
107.5°	512.1	513.4	514.6	515.8	516.9	518.1	519.2	520.3
110°	578.9	579.4	580.0	580.7	581.6	582.5	583.3	584.2



TEST NUMBER: P333089-840

CATALOG NUMBER: S124RDIW-S1020D1340U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	643.4	643.3	643.2	643.7	644.8	645.9	647.0	648.1
115°	739.9	740.5	741.0	741.3	741.3	741.3	741.3	741.3
117.5°	837.0	836.9	836.8	836.7	836.6	836.5	836.4	836.2
120°	897.1	897.7	898.3	898.3	897.7	897.1	896.6	896.0
122.5°	956.3	956.7	957.0	956.9	956.3	955.7	955.2	954.6
125°	1039.2	1040.1	1040.9	1041.5	1041.8	1042.1	1042.4	1042.7
127.5°	1121.5	1121.3	1121.1	1120.8	1120.6	1120.3	1120.1	1119.9
130°	1171.5	1171.8	1172.2	1172.4	1172.4	1172.4	1172.4	1172.4
132.5°	1220.8	1221.1	1221.4	1221.4	1221.2	1221.0	1220.7	1220.5
135°	1288.8	1289.3	1289.9	1290.5	1291.1	1291.6	1292.2	1292.8
137.5°	1353.8	1354.4	1355.1	1355.3	1355.1	1355.0	1354.8	1354.6
140°	1394.1	1395.0	1395.8	1396.4	1396.7	1397.0	1397.4	1397.7
142.5°	1431.4	1432.0	1432.7	1433.0	1433.1	1433.1	1433.2	1433.2
145°	1484.6	1484.9	1485.2	1485.7	1486.2	1486.8	1487.4	1488.0
147.5°	1531.5	1531.7	1531.9	1532.2	1532.5	1532.8	1533.0	1533.3
150°	1561.4	1561.4	1561.4	1561.5	1561.8	1562.1	1562.4	1562.7
152.5°	1587.4	1587.9	1588.3	1588.5	1588.3	1588.1	1588.0	1587.8
155°	1622.7	1623.8	1625.0	1625.1	1624.3	1623.4	1622.4	1621.6
157.5°	1652.9	1654.5	1656.0	1656.0	1654.5	1652.9	1651.4	1649.9
160°	1672.2	1674.0	1675.8	1675.8	1674.0	1672.2	1670.5	1668.8
162.5°	1688.0	1689.7	1691.4	1691.3	1689.4	1687.4	1685.4	1683.4
165°	1710.1	1712.4	1714.8	1714.5	1712.0	1709.4	1706.8	1704.1
167.5°	1726.3	1728.8	1731.4	1731.2	1728.3	1725.4	1722.5	1719.6
170°	1736.3	1738.6	1740.9	1740.6	1737.8	1734.8	1731.9	1729.0
172.5°	1742.5	1744.9	1747.3	1746.9	1743.6	1740.5	1737.4	1734.2
175°	1750.0	1752.6	1755.2	1754.7	1751.3	1747.8	1744.2	1740.8
177.5°	1752.9	1754.7	1756.7	1756.2	1753.3	1750.6	1747.8	1744.9
180°	1751.3	1751.3	1751.3	1751.3	1751.3	1751.3	1751.3	1751.3

(END OF REPORT)