

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333075-840

Luminaire Tested: **S124RDIW-S1020D470U840-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333075-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIW-S1020D470U840-4F0-1E-UDD-A
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 470 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6274.5 lumens
Efficiency: N/A
Efficacy: 135.8 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.23 / 1.39
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 46.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333075-840

CATALOG NUMBER: S124RDIW-S1020D470U840-4F0-1E-UDD-A

Luminous Intensity Polar Plot

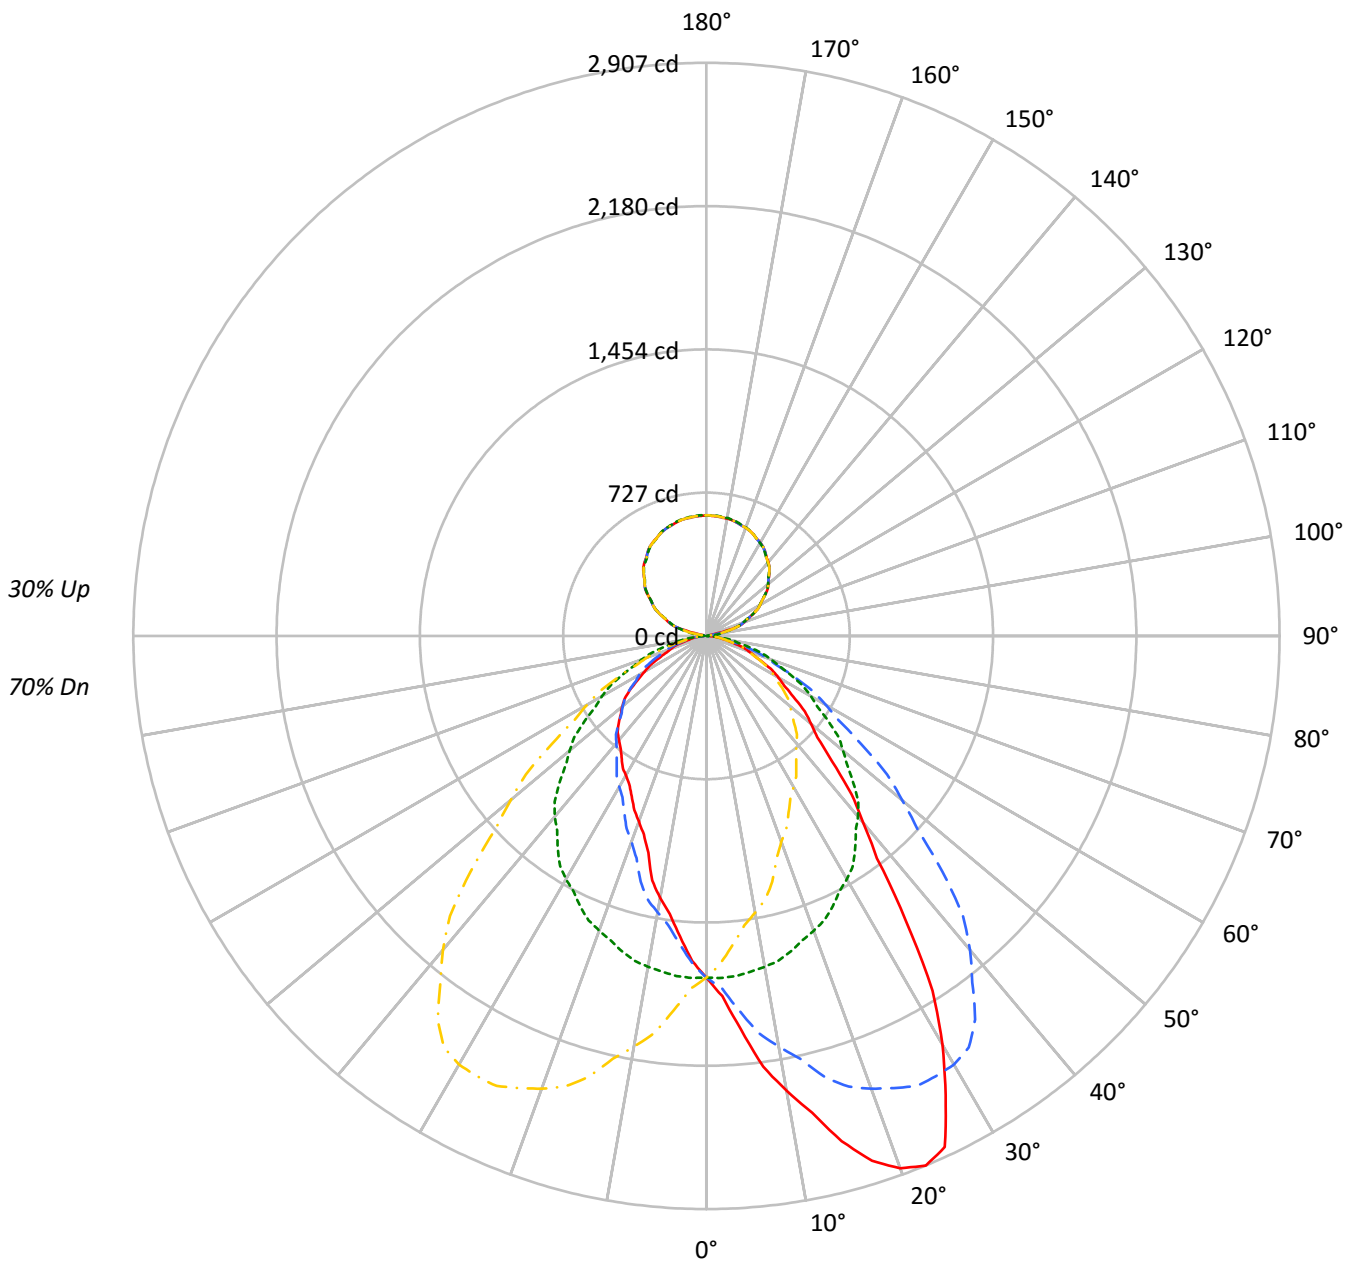

— 0°-180° - - 45°-225° ···· 90°-270° - · - · 135°-315°



TEST NUMBER: P333075-840

CATALOG NUMBER: S124RDIW-S1020D470U840-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	106	106	106	106	94	94	94	84	84	84	74	74	74	70
1	103	99	95	92	97	94	90	87	84	81	79	75	73	71	67	65	64	60
2	94	87	81	76	89	83	77	73	74	70	66	67	63	61	60	57	55	51
3	86	77	70	64	81	73	67	61	66	61	57	59	55	52	53	50	47	44
4	79	69	61	55	75	65	58	53	59	53	49	53	49	45	48	44	41	38
5	73	62	53	47	69	59	51	46	53	47	43	48	43	39	44	40	36	34
6	68	56	47	42	64	53	46	40	48	42	38	44	39	35	40	36	32	30
7	63	50	42	37	59	48	41	36	44	38	33	40	35	31	36	32	29	27
8	58	46	38	33	55	44	37	32	40	34	30	37	32	28	33	29	26	24
9	54	42	35	29	52	40	33	29	37	31	27	34	29	25	31	27	24	22
10	51	39	32	27	48	37	30	26	34	28	24	31	27	23	29	25	22	20

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	13988	13988	13988	13988
5°	16226	14030	12400	14030
10°	19194	13969	11068	13969
15°	22172	13840	9510	13840
20°	24686	13662	8600	13662
25°	25483	13488	7985	13488
30°	22309	13276	7614	13276
35°	17366	12962	7389	12962
40°	13022	12603	7268	12603
45°	10282	12028	7205	12028
50°	8681	11362	6997	11362
55°	7567	10632	6622	10632
60°	6807	9875	5861	9875
65°	6002	9054	5041	9054
70°	5403	8207	4548	8207
75°	4529	7274	3877	7274
80°	3831	6197	3636	6197
85°	3233	4844	3233	4844



TEST NUMBER: P333075-840

CATALOG NUMBER: S124RDIW-S1020D470U840-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	167.9	2.7
10°-20°	506.4	8.1
20°-30°	792.1	12.6
30°-40°	880.6	14.0
40°-50°	781.3	12.5
50°-60°	608.8	9.7
60°-70°	398.6	6.4
70°-80°	196.0	3.1
80°-90°	50.1	0.8
90°-100°	20.9	0.3
100°-110°	133.4	2.1
110°-120°	255.3	4.1
120°-130°	324.0	5.2
130°-140°	346.7	5.5
140°-150°	324.2	5.2
150°-160°	261.4	4.2
160°-170°	168.6	2.7
170°-180°	58.1	0.9
0°-30°	1466.4	23.4
0°-40°	2347.0	37.4
0°-60°	3737.0	59.6
0°-90°	4381.7	69.8
90°-120°	409.6	6.5
90°-150°	1404.6	22.4
90°-180°	1893.0	30.2
0°-180°	6274.5	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1733	1733	1733	1733	1733	
5°	2002	1731	1530	1731	2002	203
15°	2653	1656	1138	1656	2653	754
25°	2861	1514	896	1514	2861	1269
35°	1762	1315	750	1315	1762	1105
45°	901	1054	631	1054	901	713
55°	538	755	470	755	538	489
65°	314	474	264	474	314	316
75°	145	233	124	233	145	160
85°	35	52	35	52	35	40
90°	14	1	14	1	14	8
95°	13	25	13	25	13	11
105°	130	138	130	138	130	114
115°	259	257	259	257	259	256
125°	364	362	364	362	364	324
135°	452	448	452	448	452	348
145°	520	517	520	517	520	325
155°	567	567	567	567	567	261
165°	595	598	595	598	595	168
175°	608	612	608	612	608	58
180°	612	612	612	612	612	



TEST NUMBER: P333075-840

CATALOG NUMBER: S124RDIW-S1020D470U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7
2.5°	1827.7	1832.7	1827.7	1827.1	1821.6	1819.9	1817.7	1810.4	1797.0	1789.2	1790.8
5°	2002.3	2019.6	2009.9	2008.5	1993.2	1977.8	1968.0	1945.7	1922.0	1905.9	1892.6
7.5°	2204.1	2214.1	2208.1	2198.3	2173.4	2159.3	2136.7	2107.2	2064.7	2032.1	2002.4
10°	2341.5	2349.9	2347.1	2329.0	2310.8	2273.8	2252.8	2211.7	2157.9	2115.4	2075.5
12.5°	2476.7	2485.6	2461.0	2461.8	2427.5	2398.3	2365.1	2313.3	2251.2	2196.3	2146.5
15°	2652.9	2641.7	2641.7	2627.8	2589.3	2548.9	2514.7	2460.2	2382.0	2316.3	2247.3
17.5°	2790.9	2794.7	2789.0	2756.0	2725.9	2684.0	2621.3	2557.8	2485.2	2397.1	2326.4
20°	2873.5	2873.5	2867.2	2844.9	2805.8	2761.1	2693.4	2624.2	2532.1	2443.5	2363.9
22.5°	2907.0	2909.2	2901.8	2883.4	2848.2	2804.6	2746.9	2676.7	2581.8	2481.9	2383.4
25°	2860.9	2874.2	2875.6	2870.6	2860.2	2833.7	2784.1	2712.2	2627.1	2518.8	2412.7
27.5°	2626.7	2643.4	2658.1	2682.2	2714.3	2731.1	2733.3	2696.7	2622.4	2518.3	2411.5
30°	2393.2	2407.1	2452.6	2511.8	2557.9	2599.8	2636.2	2645.8	2604.0	2510.4	2398.0
32.5°	2134.0	2153.0	2198.4	2262.2	2338.9	2409.9	2491.4	2533.0	2531.9	2475.8	2371.8
35°	1762.1	1776.0	1818.0	1884.9	1977.1	2082.5	2211.7	2312.2	2380.6	2375.7	2312.2
37.5°	1421.1	1436.8	1479.1	1534.8	1624.2	1754.6	1879.7	2018.1	2144.7	2215.7	2194.4
40°	1235.7	1236.4	1277.6	1334.8	1418.6	1532.4	1668.5	1822.1	1963.1	2078.3	2100.6
42.5°	1089.3	1089.4	1116.7	1178.4	1238.8	1345.8	1475.8	1628.3	1793.3	1926.4	1985.6
45°	900.6	906.9	929.2	966.2	1013.7	1104.4	1208.4	1350.2	1535.2	1692.9	1791.4
47.5°	762.7	771.8	786.1	816.3	854.0	914.5	1000.6	1127.9	1278.4	1452.0	1592.1
50°	691.2	692.6	710.6	727.4	760.2	808.4	883.8	990.0	1128.1	1295.1	1450.7
52.5°	629.8	629.4	640.4	661.6	688.2	725.8	786.7	883.2	1005.8	1155.4	1316.1
55°	537.6	541.1	549.5	566.1	586.4	613.0	661.2	733.8	830.1	957.9	1103.8
57.5°	467.5	469.3	475.8	482.9	501.5	520.8	556.9	607.3	688.6	793.2	929.2
60°	421.6	422.3	424.4	434.9	449.6	467.8	492.2	534.7	603.2	698.8	806.4
62.5°	377.0	378.2	381.4	389.1	400.4	413.0	438.6	472.8	529.5	611.2	708.0
65°	314.2	314.9	319.7	322.6	331.6	342.7	361.6	384.7	423.7	492.2	565.5
67.5°	262.5	262.5	262.8	266.5	272.9	280.2	291.5	309.9	339.4	381.4	446.1
70°	228.9	228.9	230.4	232.5	236.0	242.3	248.5	262.5	284.2	318.3	367.9
72.5°	197.7	198.2	199.7	200.1	201.9	207.0	211.7	220.7	236.7	262.5	302.6
75°	145.2	147.3	150.8	153.6	157.0	156.4	161.3	166.8	171.8	187.1	210.2
77.5°	108.1	106.9	107.3	109.8	110.2	110.9	114.3	118.7	122.3	129.6	137.8
80°	82.4	82.4	84.4	85.1	84.4	85.1	88.7	90.8	92.2	94.9	102.6
82.5°	62.3	63.4	62.7	63.4	63.8	64.5	67.5	67.9	69.3	70.4	73.6
85°	34.9	35.6	36.3	34.9	34.9	34.9	36.3	37.0	38.4	37.7	39.1
87.5°	15.0	14.4	14.9	14.9	15.5	14.7	15.2	16.3	14.9	15.5	15.2
90°	13.7	13.5	13.3	13.1	12.9	12.5	11.9	11.3	10.7	10.1	9.3
92.5°	12.6	12.6	12.5	12.5	12.4	12.1	11.5	10.9	10.3	9.7	8.9
95°	13.2	13.1	13.0	12.9	12.8	12.5	11.9	11.3	10.7	10.1	10.0
97.5°	12.8	12.7	12.6	12.5	12.4	12.3	12.2	12.2	12.1	12.1	23.4
100°	12.8	12.7	12.6	12.5	12.4	13.2	14.9	16.7	18.4	20.1	34.1
102.5°	13.2	13.1	13.1	13.1	13.1	22.4	41.1	59.7	78.4	97.0	98.9
105°	130.5	134.1	137.7	141.4	145.1	146.4	145.5	144.6	143.7	142.8	142.3
107.5°	181.8	181.4	181.0	180.7	180.3	179.9	179.4	178.9	178.4	178.0	177.3
110°	204.1	203.8	203.5	203.2	202.9	202.7	202.5	202.3	202.1	201.9	201.3



TEST NUMBER: P333075-840

CATALOG NUMBER: S124RDIW-S1020D470U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	226.4	226.1	225.7	225.3	224.9	224.7	224.8	224.8	224.9	224.9	224.6
115°	259.0	259.0	259.0	259.0	259.0	258.9	258.7	258.5	258.3	258.1	258.2
117.5°	292.2	292.3	292.3	292.3	292.4	292.4	292.5	292.5	292.5	292.6	292.4
120°	313.1	313.3	313.5	313.7	313.9	313.9	313.7	313.5	313.3	313.1	313.2
122.5°	333.6	333.8	334.0	334.2	334.4	334.4	334.3	334.2	334.1	334.0	333.8
125°	364.3	364.2	364.1	364.0	363.9	363.7	363.3	363.0	362.7	362.4	362.6
127.5°	391.3	391.4	391.4	391.5	391.6	391.7	391.7	391.8	391.9	391.9	391.5
130°	409.6	409.6	409.6	409.6	409.6	409.6	409.5	409.4	409.3	409.2	408.9
132.5°	426.5	426.6	426.7	426.7	426.8	426.8	426.7	426.6	426.5	426.4	426.0
135°	451.7	451.5	451.3	451.1	450.9	450.7	450.5	450.3	450.1	449.9	449.5
137.5°	473.3	473.4	473.4	473.5	473.5	473.5	473.2	473.0	472.8	472.6	472.1
140°	488.4	488.3	488.2	488.1	488.0	487.8	487.5	487.2	486.9	486.6	486.4
142.5°	500.8	500.8	500.8	500.7	500.7	500.6	500.4	500.1	499.9	499.7	499.6
145°	519.9	519.7	519.5	519.3	519.1	519.0	518.9	518.8	518.7	518.6	518.6
147.5°	535.7	535.6	535.5	535.4	535.3	535.2	535.1	535.1	535.0	534.9	535.0
150°	546.0	545.9	545.8	545.7	545.6	545.5	545.5	545.5	545.5	545.5	545.6
152.5°	554.8	554.8	554.9	555.0	555.0	555.0	554.8	554.6	554.5	554.3	554.5
155°	566.6	566.9	567.2	567.5	567.8	567.7	567.3	566.9	566.5	566.1	566.4
157.5°	576.5	577.0	577.5	578.0	578.6	578.6	578.0	577.5	577.0	576.5	576.8
160°	583.1	583.7	584.3	584.9	585.5	585.5	584.9	584.3	583.7	583.1	583.2
162.5°	588.2	588.9	589.6	590.3	591.0	591.0	590.4	589.8	589.2	588.5	588.7
165°	595.4	596.3	597.2	598.1	599.1	599.2	598.3	597.5	596.7	595.9	595.9
167.5°	600.9	601.9	602.9	603.9	604.9	605.0	604.1	603.2	602.3	601.4	601.5
170°	604.1	605.1	606.1	607.1	608.2	608.3	607.4	606.6	605.8	605.0	604.9
172.5°	605.9	607.0	608.1	609.3	610.4	610.5	609.7	608.8	608.0	607.2	607.1
175°	608.2	609.5	610.7	611.9	613.1	613.3	612.4	611.5	610.6	609.7	609.6
177.5°	609.8	610.7	611.7	612.7	613.6	613.8	613.1	612.5	611.8	611.2	611.0
180°	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9



TEST NUMBER: P333075-840

CATALOG NUMBER: S124RDIW-S1020D470U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7
2.5°	1785.2	1777.5	1773.5	1764.5	1753.9	1748.4	1743.3	1736.1	1726.6	1716.6	1709.3
5°	1875.8	1859.1	1838.2	1813.0	1790.7	1769.1	1750.2	1731.3	1709.7	1687.4	1665.1
7.5°	1968.8	1935.9	1900.3	1859.1	1819.1	1782.6	1749.1	1717.0	1680.6	1648.1	1618.5
10°	2033.7	1988.9	1939.3	1887.0	1834.6	1789.3	1744.6	1704.1	1659.4	1619.6	1586.1
12.5°	2086.2	2033.7	1974.0	1908.8	1845.8	1791.0	1739.6	1686.8	1636.0	1592.9	1548.1
15°	2173.2	2101.3	2021.0	1942.9	1861.2	1786.5	1717.4	1656.0	1598.0	1537.3	1494.7
17.5°	2233.1	2147.9	2050.2	1956.3	1859.8	1771.7	1691.9	1618.8	1552.0	1490.0	1439.3
20°	2268.9	2174.6	2066.5	1959.6	1851.4	1757.2	1671.3	1590.3	1521.3	1454.2	1401.8
22.5°	2289.0	2184.7	2066.5	1954.6	1842.5	1740.4	1646.2	1561.9	1486.6	1419.6	1361.6
25°	2295.4	2183.7	2063.0	1934.5	1811.6	1703.4	1605.7	1514.2	1430.5	1363.4	1302.0
27.5°	2286.5	2155.0	2031.2	1899.5	1772.7	1658.6	1556.0	1460.0	1376.0	1304.1	1241.1
30°	2273.1	2132.0	1999.4	1862.6	1734.1	1624.6	1516.3	1424.2	1336.9	1262.2	1198.7
32.5°	2244.0	2104.2	1961.5	1821.3	1691.1	1578.2	1475.5	1382.8	1297.3	1220.9	1153.5
35°	2186.6	2044.8	1889.9	1746.1	1618.2	1501.0	1404.6	1315.2	1233.6	1152.0	1080.7
37.5°	2110.7	1965.9	1811.8	1654.3	1526.4	1415.6	1327.3	1243.3	1163.7	1089.0	1010.2
40°	2039.2	1907.2	1748.1	1591.7	1460.5	1353.6	1272.0	1195.9	1115.6	1041.6	962.7
42.5°	1952.7	1840.3	1679.4	1522.5	1392.9	1290.0	1213.9	1139.4	1066.4	994.7	912.4
45°	1808.2	1722.9	1572.2	1421.4	1290.8	1188.9	1119.1	1053.5	989.3	920.8	843.3
47.5°	1642.5	1584.9	1454.7	1300.3	1179.5	1087.8	1020.4	966.7	912.4	844.0	776.1
50°	1527.5	1490.5	1364.8	1223.9	1108.6	1024.1	955.0	904.7	859.4	793.8	733.1
52.5°	1404.6	1384.9	1278.8	1144.0	1032.7	949.9	890.8	845.6	799.6	745.2	688.3
55°	1217.5	1228.0	1137.9	1021.4	916.7	846.9	793.0	755.4	716.3	670.2	626.2
57.5°	1026.2	1064.5	1004.0	901.7	803.5	739.0	698.5	666.8	634.0	595.8	558.3
60°	911.7	943.8	909.7	819.6	733.8	673.7	636.0	611.6	578.8	543.8	515.2
62.5°	800.0	834.4	814.2	741.4	661.7	610.1	576.8	554.0	529.6	499.2	469.4
65°	659.7	682.1	672.3	622.1	565.5	521.5	490.8	474.0	451.7	429.4	402.8
67.5°	505.3	548.5	542.7	516.0	467.2	432.8	412.7	397.9	377.6	360.9	343.0
70°	415.4	455.1	454.4	432.8	406.3	374.2	360.2	347.7	329.5	313.5	298.8
72.5°	340.0	376.5	381.8	365.3	347.1	322.9	309.4	300.7	283.2	272.2	260.2
75°	238.0	264.6	271.6	271.6	263.2	250.6	238.7	233.2	220.7	210.9	203.9
77.5°	156.1	172.9	183.8	186.2	187.5	183.3	173.6	169.7	160.0	156.5	149.9
80°	110.3	121.5	134.0	138.3	141.7	140.4	136.1	133.3	124.3	120.8	118.0
82.5°	76.2	82.4	92.7	101.9	101.0	104.6	101.0	98.8	91.9	90.6	87.9
85°	39.8	40.5	41.9	48.2	51.7	53.0	53.7	52.3	50.3	50.3	45.3
87.5°	15.0	14.3	15.3	15.1	15.5	17.5	18.9	19.3	17.8	16.4	14.9
90°	8.5	7.7	6.8	5.9	4.7	3.6	2.5	1.4	2.5	3.6	4.7
92.5°	8.1	7.3	6.5	6.1	6.0	5.9	5.9	5.8	5.9	5.9	6.0
95°	9.9	9.8	9.7	11.3	14.8	18.3	21.7	25.1	21.7	18.3	14.8
97.5°	34.7	46.2	57.5	62.1	59.9	57.8	55.6	53.4	55.6	57.8	59.9
100°	48.2	62.2	76.2	82.4	80.6	78.8	76.9	75.0	76.9	78.8	80.6
102.5°	100.7	102.5	104.3	104.6	103.2	101.9	100.6	99.3	100.6	101.9	103.2
105°	141.8	141.3	140.8	140.2	139.6	139.0	138.4	137.7	138.4	139.0	139.6
107.5°	176.6	175.9	175.3	174.8	174.5	174.2	173.9	173.6	173.9	174.2	174.5
110°	200.7	200.0	199.3	198.9	198.6	198.3	198.0	197.7	198.0	198.3	198.6



TEST NUMBER: P333075-840

CATALOG NUMBER: S124RDIW-S1020D470U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	224.3	224.1	223.8	223.4	222.8	222.3	221.7	221.2	221.7	222.3	222.8
115°	258.3	258.4	258.5	258.4	258.1	257.8	257.5	257.2	257.5	257.8	258.1
117.5°	292.1	291.9	291.6	291.3	290.9	290.5	290.1	289.7	290.1	290.5	290.9
120°	313.3	313.4	313.5	313.3	312.9	312.5	312.0	311.6	312.0	312.5	312.9
122.5°	333.7	333.5	333.4	333.2	333.0	332.6	332.4	332.1	332.4	332.6	333.0
125°	362.8	363.0	363.2	363.1	362.7	362.3	361.9	361.5	361.9	362.3	362.7
127.5°	391.0	390.5	390.1	389.8	389.7	389.6	389.5	389.4	389.5	389.6	389.7
130°	408.6	408.3	408.0	407.8	407.7	407.6	407.4	407.3	407.4	407.6	407.7
132.5°	425.6	425.3	424.9	424.5	424.3	424.1	423.9	423.8	423.9	424.1	424.3
135°	449.1	448.7	448.3	448.1	448.2	448.3	448.4	448.5	448.4	448.3	448.2
137.5°	471.7	471.2	470.8	470.6	470.5	470.5	470.4	470.4	470.4	470.5	470.5
140°	486.1	485.8	485.6	485.4	485.2	485.0	484.8	484.6	484.8	485.0	485.2
142.5°	499.5	499.3	499.2	499.0	498.6	498.3	497.9	497.5	497.9	498.3	498.6
145°	518.6	518.6	518.6	518.4	518.1	517.8	517.5	517.2	517.5	517.8	518.1
147.5°	535.1	535.2	535.3	535.1	534.5	533.9	533.4	532.8	533.4	533.9	534.5
150°	545.7	545.8	545.9	545.8	545.4	545.0	544.6	544.2	544.6	545.0	545.4
152.5°	554.7	554.9	555.0	555.0	554.6	554.3	554.0	553.7	554.0	554.3	554.6
155°	566.7	567.0	567.3	567.4	567.3	567.2	567.1	567.0	567.1	567.2	567.3
157.5°	577.1	577.5	577.8	578.0	578.1	578.1	578.2	578.3	578.2	578.1	578.1
160°	583.3	583.4	583.5	583.7	584.0	584.3	584.6	584.9	584.6	584.3	584.0
162.5°	588.8	588.9	589.0	589.3	589.6	590.0	590.4	590.8	590.4	590.0	589.6
165°	595.9	595.9	595.9	596.1	596.6	597.1	597.6	598.1	597.6	597.1	596.6
167.5°	601.5	601.6	601.6	601.9	602.5	603.0	603.5	604.0	603.5	603.0	602.5
170°	604.8	604.7	604.6	604.9	605.5	606.1	606.7	607.3	606.7	606.1	605.5
172.5°	607.0	606.9	606.8	607.1	607.7	608.3	608.9	609.6	608.9	608.3	607.7
175°	609.5	609.4	609.3	609.5	610.1	610.7	611.3	611.9	611.3	610.7	610.1
177.5°	610.9	610.7	610.6	610.8	611.3	611.9	612.5	613.0	612.5	611.9	611.3
180°	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9



TEST NUMBER: P333075-840

CATALOG NUMBER: S124RDIW-S1020D470U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7
2.5°	1701.4	1695.9	1688.6	1680.2	1670.2	1661.2	1657.4	1660.7	1662.3	1657.9	1657.4
5°	1649.7	1632.2	1618.2	1597.3	1580.5	1566.6	1556.8	1552.7	1554.0	1542.9	1540.0
7.5°	1591.4	1570.7	1547.9	1523.0	1499.9	1479.4	1468.5	1462.7	1450.9	1445.8	1437.3
10°	1554.0	1526.1	1503.8	1474.4	1447.9	1423.5	1411.6	1401.8	1390.0	1384.4	1372.5
12.5°	1515.5	1483.1	1458.5	1428.1	1401.0	1371.5	1360.2	1342.1	1323.5	1311.8	1296.6
15°	1461.2	1422.1	1392.1	1355.7	1323.6	1290.1	1260.1	1226.6	1214.1	1187.5	1172.2
17.5°	1397.7	1358.0	1320.8	1272.1	1222.5	1180.9	1148.9	1116.8	1097.6	1080.7	1072.9
20°	1355.7	1319.5	1267.8	1211.2	1156.1	1110.0	1084.2	1063.3	1042.3	1030.5	1022.1
22.5°	1316.1	1269.7	1209.7	1148.7	1093.6	1057.5	1035.6	1014.1	997.0	985.7	974.6
25°	1249.6	1188.9	1125.4	1055.6	1017.8	986.4	962.7	945.2	934.8	920.1	914.5
27.5°	1181.3	1107.8	1037.7	990.8	951.5	922.8	902.1	889.0	875.8	866.4	859.1
30°	1128.8	1054.2	991.4	946.6	906.9	883.1	866.4	851.0	840.5	832.8	827.3
32.5°	1076.9	1002.2	949.5	901.4	870.0	846.9	829.0	817.5	809.3	799.3	796.0
35°	1001.8	935.4	889.4	846.2	814.1	793.0	779.1	767.2	760.2	757.5	755.4
37.5°	929.6	875.4	825.8	790.3	761.6	745.2	728.7	722.9	718.1	713.1	715.3
40°	883.8	832.8	788.9	751.1	728.1	710.0	700.2	693.3	689.0	689.0	689.0
42.5°	844.1	794.4	751.4	717.7	694.6	679.2	668.4	662.5	661.2	660.6	663.9
45°	782.6	736.5	693.3	665.3	645.8	630.4	624.1	619.2	619.2	622.1	622.7
47.5°	721.5	678.4	643.7	612.4	594.5	584.9	579.5	576.9	577.2	580.0	583.2
50°	684.2	641.6	607.3	579.5	562.7	553.6	548.8	547.3	548.8	548.8	553.6
52.5°	643.4	605.3	571.6	548.2	529.2	520.7	518.0	516.0	516.8	519.2	521.2
55°	583.6	549.5	517.4	494.9	481.0	475.4	469.2	469.8	468.5	469.8	469.8
57.5°	523.7	493.0	463.1	445.5	433.1	425.1	418.2	420.1	418.1	417.8	416.7
60°	485.2	451.7	428.0	411.9	397.9	390.9	384.7	386.1	384.0	382.5	379.8
62.5°	443.3	415.4	392.7	377.3	366.1	358.0	351.7	350.3	345.5	340.7	334.6
65°	382.5	359.5	339.3	324.7	314.2	307.9	303.0	298.8	288.3	277.1	271.6
67.5°	323.6	306.9	288.0	275.6	267.1	258.8	249.5	242.4	232.6	226.5	223.0
70°	285.5	269.4	253.4	241.6	232.5	224.8	214.3	209.4	202.5	199.7	196.2
72.5°	249.2	234.3	219.3	208.6	198.9	193.0	184.7	179.9	176.7	175.6	172.2
75°	194.1	182.2	171.1	161.3	153.6	149.4	145.9	142.4	141.0	134.7	131.3
77.5°	141.6	133.8	126.7	119.8	114.3	111.6	104.8	100.8	98.5	95.5	94.8
80°	110.3	104.7	97.8	93.5	85.8	83.1	80.3	79.6	78.9	78.2	77.5
82.5°	82.9	77.4	70.4	67.9	65.7	64.1	62.4	61.7	61.0	61.4	61.3
85°	41.9	39.1	39.1	38.4	37.7	37.0	36.3	36.3	35.6	36.3	35.6
87.5°	15.1	14.7	14.9	13.9	14.7	14.8	14.4	14.5	15.2	14.2	14.3
90°	5.9	6.8	7.7	8.5	9.3	10.1	10.7	11.3	11.9	12.5	12.9
92.5°	6.1	6.5	7.3	8.1	8.9	9.7	10.3	10.9	11.5	12.1	12.4
95°	11.3	9.7	9.8	9.9	10.0	10.1	10.7	11.3	11.9	12.5	12.8
97.5°	62.1	57.5	46.2	34.7	23.4	12.1	12.1	12.2	12.2	12.3	12.4
100°	82.4	76.2	62.2	48.2	34.1	20.1	18.4	16.7	14.9	13.2	12.4
102.5°	104.6	104.3	102.5	100.7	98.9	97.0	78.4	59.7	41.1	22.4	13.1
105°	140.2	140.8	141.3	141.8	142.3	142.8	143.7	144.6	145.5	146.4	145.1
107.5°	174.8	175.3	175.9	176.6	177.3	178.0	178.4	178.9	179.4	179.9	180.3
110°	198.9	199.3	200.0	200.7	201.3	201.9	202.1	202.3	202.5	202.7	202.9



TEST NUMBER: P333075-840

CATALOG NUMBER: S124RDIW-S1020D470U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	223.4	223.8	224.1	224.3	224.6	224.9	224.9	224.8	224.8	224.7	224.9
115°	258.4	258.5	258.4	258.3	258.2	258.1	258.3	258.5	258.7	258.9	259.0
117.5°	291.3	291.6	291.9	292.1	292.4	292.6	292.5	292.5	292.5	292.4	292.4
120°	313.3	313.5	313.4	313.3	313.2	313.1	313.3	313.5	313.7	313.9	313.9
122.5°	333.2	333.4	333.5	333.7	333.8	334.0	334.1	334.2	334.3	334.4	334.4
125°	363.1	363.2	363.0	362.8	362.6	362.4	362.7	363.0	363.3	363.7	363.9
127.5°	389.8	390.1	390.5	391.0	391.5	391.9	391.9	391.8	391.7	391.7	391.6
130°	407.8	408.0	408.3	408.6	408.9	409.2	409.3	409.4	409.5	409.6	409.6
132.5°	424.5	424.9	425.3	425.6	426.0	426.4	426.5	426.6	426.7	426.8	426.8
135°	448.1	448.3	448.7	449.1	449.5	449.9	450.1	450.3	450.5	450.7	450.9
137.5°	470.6	470.8	471.2	471.7	472.1	472.6	472.8	473.0	473.2	473.5	473.5
140°	485.4	485.6	485.8	486.1	486.4	486.6	486.9	487.2	487.5	487.8	488.0
142.5°	499.0	499.2	499.3	499.5	499.6	499.7	499.9	500.1	500.4	500.6	500.7
145°	518.4	518.6	518.6	518.6	518.6	518.6	518.7	518.8	518.9	519.0	519.1
147.5°	535.1	535.3	535.2	535.1	535.0	534.9	535.0	535.1	535.1	535.2	535.3
150°	545.8	545.9	545.8	545.7	545.6	545.5	545.5	545.5	545.5	545.5	545.6
152.5°	555.0	555.0	554.9	554.7	554.5	554.3	554.5	554.6	554.8	555.0	555.0
155°	567.4	567.3	567.0	566.7	566.4	566.1	566.5	566.9	567.3	567.7	567.8
157.5°	578.0	577.8	577.5	577.1	576.8	576.5	577.0	577.5	578.0	578.6	578.6
160°	583.7	583.5	583.4	583.3	583.2	583.1	583.7	584.3	584.9	585.5	585.5
162.5°	589.3	589.0	588.9	588.8	588.7	588.5	589.2	589.8	590.4	591.0	591.0
165°	596.1	595.9	595.9	595.9	595.9	595.9	596.7	597.5	598.3	599.2	599.1
167.5°	601.9	601.6	601.6	601.5	601.5	601.4	602.3	603.2	604.1	605.0	604.9
170°	604.9	604.6	604.7	604.8	604.9	605.0	605.8	606.6	607.4	608.3	608.2
172.5°	607.1	606.8	606.9	607.0	607.1	607.2	608.0	608.8	609.7	610.5	610.4
175°	609.5	609.3	609.4	609.5	609.6	609.7	610.6	611.5	612.4	613.3	613.1
177.5°	610.8	610.6	610.7	610.9	611.0	611.2	611.8	612.5	613.1	613.8	613.6
180°	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9



TEST NUMBER: P333075-840

CATALOG NUMBER: S124RDIW-S1020D470U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7
2.5°	1654.0	1655.1	1651.2	1650.1	1651.2	1655.1	1654.0	1657.4	1657.9	1662.3	1660.7
5°	1534.5	1533.1	1529.5	1530.2	1529.5	1533.1	1534.5	1540.0	1542.9	1554.0	1552.7
7.5°	1432.3	1426.8	1428.4	1422.8	1428.4	1426.8	1432.3	1437.3	1445.8	1450.9	1462.7
10°	1369.7	1362.0	1355.7	1350.2	1355.7	1362.0	1369.7	1372.5	1384.4	1390.0	1401.8
12.5°	1284.2	1277.7	1269.2	1270.9	1269.2	1277.7	1284.2	1296.6	1311.8	1323.5	1342.1
15°	1163.1	1152.6	1135.9	1137.9	1135.9	1152.6	1163.1	1172.2	1187.5	1214.1	1226.6
17.5°	1060.5	1060.6	1052.9	1054.7	1052.9	1060.6	1060.5	1072.9	1080.7	1097.6	1116.8
20°	1007.4	1002.5	1003.2	1001.1	1003.2	1002.5	1007.4	1022.1	1030.5	1042.3	1063.3
22.5°	970.6	964.5	959.7	955.3	959.7	964.5	970.6	974.6	985.7	997.0	1014.1
25°	908.3	904.0	897.8	896.4	897.8	904.0	908.3	914.5	920.1	934.8	945.2
27.5°	853.5	852.7	850.2	847.0	850.2	852.7	853.5	859.1	866.4	875.8	889.0
30°	821.7	820.3	818.9	816.8	818.9	820.3	821.7	827.3	832.8	840.5	851.0
32.5°	793.2	792.3	790.9	791.1	790.9	792.3	793.2	796.0	799.3	809.3	817.5
35°	752.6	751.8	750.5	749.8	750.5	751.8	752.6	755.4	757.5	760.2	767.2
37.5°	714.6	716.4	715.6	715.4	715.6	716.4	714.6	715.3	713.1	718.1	722.9
40°	688.3	689.0	690.4	689.7	690.4	689.0	688.3	689.0	689.0	689.0	693.3
42.5°	666.6	666.7	668.6	666.3	668.6	666.7	666.6	663.9	660.6	661.2	662.5
45°	627.6	631.8	631.1	631.1	631.1	631.8	627.6	622.7	622.1	619.2	619.2
47.5°	585.0	588.7	589.7	589.5	589.7	588.7	585.0	583.2	580.0	577.2	576.9
50°	557.1	555.7	557.8	557.1	557.8	555.7	557.1	553.6	548.8	548.8	547.3
52.5°	523.0	523.3	523.2	522.5	523.2	523.3	523.0	521.2	519.2	516.8	516.0
55°	470.5	471.2	469.8	470.5	469.8	471.2	470.5	469.8	469.8	468.5	469.8
57.5°	413.5	410.2	411.6	409.9	411.6	410.2	413.5	416.7	417.8	418.1	420.1
60°	372.8	367.2	365.8	363.0	365.8	367.2	372.8	379.8	382.5	384.0	386.1
62.5°	327.0	323.1	318.3	320.5	318.3	323.1	327.0	334.6	340.7	345.5	350.3
65°	266.0	263.2	261.1	263.9	261.1	263.2	266.0	271.6	277.1	288.3	298.8
67.5°	220.2	218.6	218.6	217.2	218.6	218.6	220.2	223.0	226.5	232.6	242.4
70°	196.2	194.1	194.1	192.7	194.1	194.1	196.2	196.2	199.7	202.5	209.4
72.5°	171.6	169.5	170.1	169.3	170.1	169.5	171.6	172.2	175.6	176.7	179.9
75°	127.0	123.6	123.6	124.3	123.6	123.6	127.0	131.3	134.7	141.0	142.4
77.5°	94.8	94.1	95.1	93.8	95.1	94.1	94.8	94.8	95.5	98.5	100.8
80°	77.5	76.7	76.1	78.2	76.1	76.7	77.5	77.5	78.2	78.9	79.6
82.5°	60.2	60.1	59.9	62.5	59.9	60.1	60.2	61.3	61.4	61.0	61.7
85°	36.3	34.9	36.3	34.9	36.3	34.9	36.3	35.6	36.3	35.6	36.3
87.5°	15.5	14.9	14.4	15.0	14.4	14.9	15.5	14.3	14.2	15.2	14.5
90°	13.1	13.3	13.5	13.7	13.5	13.3	13.1	12.9	12.5	11.9	11.3
92.5°	12.5	12.5	12.6	12.6	12.6	12.5	12.5	12.4	12.1	11.5	10.9
95°	12.9	13.0	13.1	13.2	13.1	13.0	12.9	12.8	12.5	11.9	11.3
97.5°	12.5	12.6	12.7	12.8	12.7	12.6	12.5	12.4	12.3	12.2	12.2
100°	12.5	12.6	12.7	12.8	12.7	12.6	12.5	12.4	13.2	14.9	16.7
102.5°	13.1	13.1	13.1	13.2	13.1	13.1	13.1	13.1	22.4	41.1	59.7
105°	141.4	137.7	134.1	130.5	134.1	137.7	141.4	145.1	146.4	145.5	144.6
107.5°	180.7	181.0	181.4	181.8	181.4	181.0	180.7	180.3	179.9	179.4	178.9
110°	203.2	203.5	203.8	204.1	203.8	203.5	203.2	202.9	202.7	202.5	202.3



TEST NUMBER: P333075-840

CATALOG NUMBER: S124RDIW-S1020D470U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	225.3	225.7	226.1	226.4	226.1	225.7	225.3	224.9	224.7	224.8	224.8
115°	259.0	259.0	259.0	259.0	259.0	259.0	259.0	259.0	258.9	258.7	258.5
117.5°	292.3	292.3	292.3	292.2	292.3	292.3	292.3	292.4	292.4	292.5	292.5
120°	313.7	313.5	313.3	313.1	313.3	313.5	313.7	313.9	313.9	313.7	313.5
122.5°	334.2	334.0	333.8	333.6	333.8	334.0	334.2	334.4	334.4	334.3	334.2
125°	364.0	364.1	364.2	364.3	364.2	364.1	364.0	363.9	363.7	363.3	363.0
127.5°	391.5	391.4	391.4	391.3	391.4	391.4	391.5	391.6	391.7	391.7	391.8
130°	409.6	409.6	409.6	409.6	409.6	409.6	409.6	409.6	409.6	409.5	409.4
132.5°	426.7	426.7	426.6	426.5	426.6	426.7	426.7	426.8	426.8	426.7	426.6
135°	451.1	451.3	451.5	451.7	451.5	451.3	451.1	450.9	450.7	450.5	450.3
137.5°	473.5	473.4	473.4	473.3	473.4	473.4	473.5	473.5	473.5	473.2	473.0
140°	488.1	488.2	488.3	488.4	488.3	488.2	488.1	488.0	487.8	487.5	487.2
142.5°	500.7	500.8	500.8	500.8	500.8	500.8	500.7	500.7	500.6	500.4	500.1
145°	519.3	519.5	519.7	519.9	519.7	519.5	519.3	519.1	519.0	518.9	518.8
147.5°	535.4	535.5	535.6	535.7	535.6	535.5	535.4	535.3	535.2	535.1	535.1
150°	545.7	545.8	545.9	546.0	545.9	545.8	545.7	545.6	545.5	545.5	545.5
152.5°	555.0	554.9	554.8	554.8	554.8	554.9	555.0	555.0	555.0	554.8	554.6
155°	567.5	567.2	566.9	566.6	566.9	567.2	567.5	567.8	567.7	567.3	566.9
157.5°	578.0	577.5	577.0	576.5	577.0	577.5	578.0	578.6	578.6	578.0	577.5
160°	584.9	584.3	583.7	583.1	583.7	584.3	584.9	585.5	585.5	584.9	584.3
162.5°	590.3	589.6	588.9	588.2	588.9	589.6	590.3	591.0	591.0	590.4	589.8
165°	598.1	597.2	596.3	595.4	596.3	597.2	598.1	599.1	599.2	598.3	597.5
167.5°	603.9	602.9	601.9	600.9	601.9	602.9	603.9	604.9	605.0	604.1	603.2
170°	607.1	606.1	605.1	604.1	605.1	606.1	607.1	608.2	608.3	607.4	606.6
172.5°	609.3	608.1	607.0	605.9	607.0	608.1	609.3	610.4	610.5	609.7	608.8
175°	611.9	610.7	609.5	608.2	609.5	610.7	611.9	613.1	613.3	612.4	611.5
177.5°	612.7	611.7	610.7	609.8	610.7	611.7	612.7	613.6	613.8	613.1	612.5
180°	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9



TEST NUMBER: P333075-840

CATALOG NUMBER: S124RDIW-S1020D470U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7
2.5°	1657.4	1661.2	1670.2	1680.2	1688.6	1695.9	1701.4	1709.3	1716.6	1726.6	1736.1
5°	1556.8	1566.6	1580.5	1597.3	1618.2	1632.2	1649.7	1665.1	1687.4	1709.7	1731.3
7.5°	1468.5	1479.4	1499.9	1523.0	1547.9	1570.7	1591.4	1618.5	1648.1	1680.6	1717.0
10°	1411.6	1423.5	1447.9	1474.4	1503.8	1526.1	1554.0	1586.1	1619.6	1659.4	1704.1
12.5°	1360.2	1371.5	1401.0	1428.1	1458.5	1483.1	1515.5	1548.1	1592.9	1636.0	1686.8
15°	1260.1	1290.1	1323.6	1355.7	1392.1	1422.1	1461.2	1494.7	1537.3	1598.0	1656.0
17.5°	1148.9	1180.9	1222.5	1272.1	1320.8	1358.0	1397.7	1439.3	1490.0	1552.0	1618.8
20°	1084.2	1110.0	1156.1	1211.2	1267.8	1319.5	1355.7	1401.8	1454.2	1521.3	1590.3
22.5°	1035.6	1057.5	1093.6	1148.7	1209.7	1269.7	1316.1	1361.6	1419.6	1486.6	1561.9
25°	962.7	986.4	1017.8	1055.6	1125.4	1188.9	1249.6	1302.0	1363.4	1430.5	1514.2
27.5°	902.1	922.8	951.5	990.8	1037.7	1107.8	1181.3	1241.1	1304.1	1376.0	1460.0
30°	866.4	883.1	906.9	946.6	991.4	1054.2	1128.8	1198.7	1262.2	1336.9	1424.2
32.5°	829.0	846.9	870.0	901.4	949.5	1002.2	1076.9	1153.5	1220.9	1297.3	1382.8
35°	779.1	793.0	814.1	846.2	889.4	935.4	1001.8	1080.7	1152.0	1233.6	1315.2
37.5°	728.7	745.2	761.6	790.3	825.8	875.4	929.6	1010.2	1089.0	1163.7	1243.3
40°	700.2	710.0	728.1	751.1	788.9	832.8	883.8	962.7	1041.6	1115.6	1195.9
42.5°	668.4	679.2	694.6	717.7	751.4	794.4	844.1	912.4	994.7	1066.4	1139.4
45°	624.1	630.4	645.8	665.3	693.3	736.5	782.6	843.3	920.8	989.3	1053.5
47.5°	579.5	584.9	594.5	612.4	643.7	678.4	721.5	776.1	844.0	912.4	966.7
50°	548.8	553.6	562.7	579.5	607.3	641.6	684.2	733.1	793.8	859.4	904.7
52.5°	518.0	520.7	529.2	548.2	571.6	605.3	643.4	688.3	745.2	799.6	845.6
55°	469.2	475.4	481.0	494.9	517.4	549.5	583.6	626.2	670.2	716.3	755.4
57.5°	418.2	425.1	433.1	445.5	463.1	493.0	523.7	558.3	595.8	634.0	666.8
60°	384.7	390.9	397.9	411.9	428.0	451.7	485.2	515.2	543.8	578.8	611.6
62.5°	351.7	358.0	366.1	377.3	392.7	415.4	443.3	469.4	499.2	529.6	554.0
65°	303.0	307.9	314.2	324.7	339.3	359.5	382.5	402.8	429.4	451.7	474.0
67.5°	249.5	258.8	267.1	275.6	288.0	306.9	323.6	343.0	360.9	377.6	397.9
70°	214.3	224.8	232.5	241.6	253.4	269.4	285.5	298.8	313.5	329.5	347.7
72.5°	184.7	193.0	198.9	208.6	219.3	234.3	249.2	260.2	272.2	283.2	300.7
75°	145.9	149.4	153.6	161.3	171.1	182.2	194.1	203.9	210.9	220.7	233.2
77.5°	104.8	111.6	114.3	119.8	126.7	133.8	141.6	149.9	156.5	160.0	169.7
80°	80.3	83.1	85.8	93.5	97.8	104.7	110.3	118.0	120.8	124.3	133.3
82.5°	62.4	64.1	65.7	67.9	70.4	77.4	82.9	87.9	90.6	91.9	98.8
85°	36.3	37.0	37.7	38.4	39.1	39.1	41.9	45.3	50.3	50.3	52.3
87.5°	14.4	14.8	14.7	13.9	14.9	14.7	15.1	14.9	16.4	17.8	19.3
90°	10.7	10.1	9.3	8.5	7.7	6.8	5.9	4.7	3.6	2.5	1.4
92.5°	10.3	9.7	8.9	8.1	7.3	6.5	6.1	6.0	5.9	5.9	5.8
95°	10.7	10.1	10.0	9.9	9.8	9.7	11.3	14.8	18.3	21.7	25.1
97.5°	12.1	12.1	23.4	34.7	46.2	57.5	62.1	59.9	57.8	55.6	53.4
100°	18.4	20.1	34.1	48.2	62.2	76.2	82.4	80.6	78.8	76.9	75.0
102.5°	78.4	97.0	98.9	100.7	102.5	104.3	104.6	103.2	101.9	100.6	99.3
105°	143.7	142.8	142.3	141.8	141.3	140.8	140.2	139.6	139.0	138.4	137.7
107.5°	178.4	178.0	177.3	176.6	175.9	175.3	174.8	174.5	174.2	173.9	173.6
110°	202.1	201.9	201.3	200.7	200.0	199.3	198.9	198.6	198.3	198.0	197.7



TEST NUMBER: P333075-840

CATALOG NUMBER: S124RDIW-S1020D470U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	224.9	224.9	224.6	224.3	224.1	223.8	223.4	222.8	222.3	221.7	221.2
115°	258.3	258.1	258.2	258.3	258.4	258.5	258.4	258.1	257.8	257.5	257.2
117.5°	292.5	292.6	292.4	292.1	291.9	291.6	291.3	290.9	290.5	290.1	289.7
120°	313.3	313.1	313.2	313.3	313.4	313.5	313.3	312.9	312.5	312.0	311.6
122.5°	334.1	334.0	333.8	333.7	333.5	333.4	333.2	333.0	332.6	332.4	332.1
125°	362.7	362.4	362.6	362.8	363.0	363.2	363.1	362.7	362.3	361.9	361.5
127.5°	391.9	391.9	391.5	391.0	390.5	390.1	389.8	389.7	389.6	389.5	389.4
130°	409.3	409.2	408.9	408.6	408.3	408.0	407.8	407.7	407.6	407.4	407.3
132.5°	426.5	426.4	426.0	425.6	425.3	424.9	424.5	424.3	424.1	423.9	423.8
135°	450.1	449.9	449.5	449.1	448.7	448.3	448.1	448.2	448.3	448.4	448.5
137.5°	472.8	472.6	472.1	471.7	471.2	470.8	470.6	470.5	470.5	470.4	470.4
140°	486.9	486.6	486.4	486.1	485.8	485.6	485.4	485.2	485.0	484.8	484.6
142.5°	499.9	499.7	499.6	499.5	499.3	499.2	499.0	498.6	498.3	497.9	497.5
145°	518.7	518.6	518.6	518.6	518.6	518.6	518.4	518.1	517.8	517.5	517.2
147.5°	535.0	534.9	535.0	535.1	535.2	535.3	535.1	534.5	533.9	533.4	532.8
150°	545.5	545.5	545.6	545.7	545.8	545.9	545.8	545.4	545.0	544.6	544.2
152.5°	554.5	554.3	554.5	554.7	554.9	555.0	555.0	554.6	554.3	554.0	553.7
155°	566.5	566.1	566.4	566.7	567.0	567.3	567.4	567.3	567.2	567.1	567.0
157.5°	577.0	576.5	576.8	577.1	577.5	577.8	578.0	578.1	578.1	578.2	578.3
160°	583.7	583.1	583.2	583.3	583.4	583.5	583.7	584.0	584.3	584.6	584.9
162.5°	589.2	588.5	588.7	588.8	588.9	589.0	589.3	589.6	590.0	590.4	590.8
165°	596.7	595.9	595.9	595.9	595.9	595.9	596.1	596.6	597.1	597.6	598.1
167.5°	602.3	601.4	601.5	601.5	601.6	601.6	601.9	602.5	603.0	603.5	604.0
170°	605.8	605.0	604.9	604.8	604.7	604.6	604.9	605.5	606.1	606.7	607.3
172.5°	608.0	607.2	607.1	607.0	606.9	606.8	607.1	607.7	608.3	608.9	609.6
175°	610.6	609.7	609.6	609.5	609.4	609.3	609.5	610.1	610.7	611.3	611.9
177.5°	611.8	611.2	611.0	610.9	610.7	610.6	610.8	611.3	611.9	612.5	613.0
180°	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9



TEST NUMBER: P333075-840

CATALOG NUMBER: S124RDIW-S1020D470U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7
2.5°	1743.3	1748.4	1753.9	1764.5	1773.5	1777.5	1785.2	1790.8	1789.2	1797.0	1810.4
5°	1750.2	1769.1	1790.7	1813.0	1838.2	1859.1	1875.8	1892.6	1905.9	1922.0	1945.7
7.5°	1749.1	1782.6	1819.1	1859.1	1900.3	1935.9	1968.8	2002.4	2032.1	2064.7	2107.2
10°	1744.6	1789.3	1834.6	1887.0	1939.3	1988.9	2033.7	2075.5	2115.4	2157.9	2211.7
12.5°	1739.6	1791.0	1845.8	1908.8	1974.0	2033.7	2086.2	2146.5	2196.3	2251.2	2313.3
15°	1717.4	1786.5	1861.2	1942.9	2021.0	2101.3	2173.2	2247.3	2316.3	2382.0	2460.2
17.5°	1691.9	1771.7	1859.8	1956.3	2050.2	2147.9	2233.1	2326.4	2397.1	2485.2	2557.8
20°	1671.3	1757.2	1851.4	1959.6	2066.5	2174.6	2268.9	2363.9	2443.5	2532.1	2624.2
22.5°	1646.2	1740.4	1842.5	1954.6	2066.5	2184.7	2289.0	2383.4	2481.9	2581.8	2676.7
25°	1605.7	1703.4	1811.6	1934.5	2063.0	2183.7	2295.4	2412.7	2518.8	2627.1	2712.2
27.5°	1556.0	1658.6	1772.7	1899.5	2031.2	2155.0	2286.5	2411.5	2518.3	2622.4	2696.7
30°	1516.3	1624.6	1734.1	1862.6	1999.4	2132.0	2273.1	2398.0	2510.4	2604.0	2645.8
32.5°	1475.5	1578.2	1691.1	1821.3	1961.5	2104.2	2244.0	2371.8	2475.8	2531.9	2533.0
35°	1404.6	1501.0	1618.2	1746.1	1889.9	2044.8	2186.6	2312.2	2375.7	2380.6	2312.2
37.5°	1327.3	1415.6	1526.4	1654.3	1811.8	1965.9	2110.7	2194.4	2215.7	2144.7	2018.1
40°	1272.0	1353.6	1460.5	1591.7	1748.1	1907.2	2039.2	2100.6	2078.3	1963.1	1822.1
42.5°	1213.9	1290.0	1392.9	1522.5	1679.4	1840.3	1952.7	1985.6	1926.4	1793.3	1628.3
45°	1119.1	1188.9	1290.8	1421.4	1572.2	1722.9	1808.2	1791.4	1692.9	1535.2	1350.2
47.5°	1020.4	1087.8	1179.5	1300.3	1454.7	1584.9	1642.5	1592.1	1452.0	1278.4	1127.9
50°	955.0	1024.1	1108.6	1223.9	1364.8	1490.5	1527.5	1450.7	1295.1	1128.1	990.0
52.5°	890.8	949.9	1032.7	1144.0	1278.8	1384.9	1404.6	1316.1	1155.4	1005.8	883.2
55°	793.0	846.9	916.7	1021.4	1137.9	1228.0	1217.5	1103.8	957.9	830.1	733.8
57.5°	698.5	739.0	803.5	901.7	1004.0	1064.5	1026.2	929.2	793.2	688.6	607.3
60°	636.0	673.7	733.8	819.6	909.7	943.8	911.7	806.4	698.8	603.2	534.7
62.5°	576.8	610.1	661.7	741.4	814.2	834.4	800.0	708.0	611.2	529.5	472.8
65°	490.8	521.5	565.5	622.1	672.3	682.1	659.7	565.5	492.2	423.7	384.7
67.5°	412.7	432.8	467.2	516.0	542.7	548.5	505.3	446.1	381.4	339.4	309.9
70°	360.2	374.2	406.3	432.8	454.4	455.1	415.4	367.9	318.3	284.2	262.5
72.5°	309.4	322.9	347.1	365.3	381.8	376.5	340.0	302.6	262.5	236.7	220.7
75°	238.7	250.6	263.2	271.6	271.6	264.6	238.0	210.2	187.1	171.8	166.8
77.5°	173.6	183.3	187.5	186.2	183.8	172.9	156.1	137.8	129.6	122.3	118.7
80°	136.1	140.4	141.7	138.3	134.0	121.5	110.3	102.6	94.9	92.2	90.8
82.5°	101.0	104.6	101.0	101.9	92.7	82.4	76.2	73.6	70.4	69.3	67.9
85°	53.7	53.0	51.7	48.2	41.9	40.5	39.8	39.1	37.7	38.4	37.0
87.5°	18.9	17.5	15.5	15.1	15.3	14.3	15.0	15.2	15.5	14.9	16.3
90°	2.5	3.6	4.7	5.9	6.8	7.7	8.5	9.3	10.1	10.7	11.3
92.5°	5.9	5.9	6.0	6.1	6.5	7.3	8.1	8.9	9.7	10.3	10.9
95°	21.7	18.3	14.8	11.3	9.7	9.8	9.9	10.0	10.1	10.7	11.3
97.5°	55.6	57.8	59.9	62.1	57.5	46.2	34.7	23.4	12.1	12.1	12.2
100°	76.9	78.8	80.6	82.4	76.2	62.2	48.2	34.1	20.1	18.4	16.7
102.5°	100.6	101.9	103.2	104.6	104.3	102.5	100.7	98.9	97.0	78.4	59.7
105°	138.4	139.0	139.6	140.2	140.8	141.3	141.8	142.3	142.8	143.7	144.6
107.5°	173.9	174.2	174.5	174.8	175.3	175.9	176.6	177.3	178.0	178.4	178.9
110°	198.0	198.3	198.6	198.9	199.3	200.0	200.7	201.3	201.9	202.1	202.3



TEST NUMBER: P333075-840

CATALOG NUMBER: S124RDIW-S1020D470U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	221.7	222.3	222.8	223.4	223.8	224.1	224.3	224.6	224.9	224.9	224.8
115°	257.5	257.8	258.1	258.4	258.5	258.4	258.3	258.2	258.1	258.3	258.5
117.5°	290.1	290.5	290.9	291.3	291.6	291.9	292.1	292.4	292.6	292.5	292.5
120°	312.0	312.5	312.9	313.3	313.5	313.4	313.3	313.2	313.1	313.3	313.5
122.5°	332.4	332.6	333.0	333.2	333.4	333.5	333.7	333.8	334.0	334.1	334.2
125°	361.9	362.3	362.7	363.1	363.2	363.0	362.8	362.6	362.4	362.7	363.0
127.5°	389.5	389.6	389.7	389.8	390.1	390.5	391.0	391.5	391.9	391.9	391.8
130°	407.4	407.6	407.7	407.8	408.0	408.3	408.6	408.9	409.2	409.3	409.4
132.5°	423.9	424.1	424.3	424.5	424.9	425.3	425.6	426.0	426.4	426.5	426.6
135°	448.4	448.3	448.2	448.1	448.3	448.7	449.1	449.5	449.9	450.1	450.3
137.5°	470.4	470.5	470.5	470.6	470.8	471.2	471.7	472.1	472.6	472.8	473.0
140°	484.8	485.0	485.2	485.4	485.6	485.8	486.1	486.4	486.6	486.9	487.2
142.5°	497.9	498.3	498.6	499.0	499.2	499.3	499.5	499.6	499.7	499.9	500.1
145°	517.5	517.8	518.1	518.4	518.6	518.6	518.6	518.6	518.6	518.7	518.8
147.5°	533.4	533.9	534.5	535.1	535.3	535.2	535.1	535.0	534.9	535.0	535.1
150°	544.6	545.0	545.4	545.8	545.9	545.8	545.7	545.6	545.5	545.5	545.5
152.5°	554.0	554.3	554.6	555.0	555.0	554.9	554.7	554.5	554.3	554.5	554.6
155°	567.1	567.2	567.3	567.4	567.3	567.0	566.7	566.4	566.1	566.5	566.9
157.5°	578.2	578.1	578.1	578.0	577.8	577.5	577.1	576.8	576.5	577.0	577.5
160°	584.6	584.3	584.0	583.7	583.5	583.4	583.3	583.2	583.1	583.7	584.3
162.5°	590.4	590.0	589.6	589.3	589.0	588.9	588.8	588.7	588.5	589.2	589.8
165°	597.6	597.1	596.6	596.1	595.9	595.9	595.9	595.9	595.9	596.7	597.5
167.5°	603.5	603.0	602.5	601.9	601.6	601.6	601.5	601.5	601.4	602.3	603.2
170°	606.7	606.1	605.5	604.9	604.6	604.7	604.8	604.9	605.0	605.8	606.6
172.5°	608.9	608.3	607.7	607.1	606.8	606.9	607.0	607.1	607.2	608.0	608.8
175°	611.3	610.7	610.1	609.5	609.3	609.4	609.5	609.6	609.7	610.6	611.5
177.5°	612.5	611.9	611.3	610.8	610.6	610.7	610.9	611.0	611.2	611.8	612.5
180°	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9



TEST NUMBER: P333075-840

CATALOG NUMBER: S124RDIW-S1020D470U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7	1732.7
2.5°	1817.7	1819.9	1821.6	1827.1	1827.7	1832.7	1827.7
5°	1968.0	1977.8	1993.2	2008.5	2009.9	2019.6	2002.3
7.5°	2136.7	2159.3	2173.4	2198.3	2208.1	2214.1	2204.1
10°	2252.8	2273.8	2310.8	2329.0	2347.1	2349.9	2341.5
12.5°	2365.1	2398.3	2427.5	2461.8	2461.0	2485.6	2476.7
15°	2514.7	2548.9	2589.3	2627.8	2641.7	2641.7	2652.9
17.5°	2621.3	2684.0	2725.9	2756.0	2789.0	2794.7	2790.9
20°	2693.4	2761.1	2805.8	2844.9	2867.2	2873.5	2873.5
22.5°	2746.9	2804.6	2848.2	2883.4	2901.8	2909.2	2907.0
25°	2784.1	2833.7	2860.2	2870.6	2875.6	2874.2	2860.9
27.5°	2733.3	2731.1	2714.3	2682.2	2658.1	2643.4	2626.7
30°	2636.2	2599.8	2557.9	2511.8	2452.6	2407.1	2393.2
32.5°	2491.4	2409.9	2338.9	2262.2	2198.4	2153.0	2134.0
35°	2211.7	2082.5	1977.1	1884.9	1818.0	1776.0	1762.1
37.5°	1879.7	1754.6	1624.2	1534.8	1479.1	1436.8	1421.1
40°	1668.5	1532.4	1418.6	1334.8	1277.6	1236.4	1235.7
42.5°	1475.8	1345.8	1238.8	1178.4	1116.7	1089.4	1089.3
45°	1208.4	1104.4	1013.7	966.2	929.2	906.9	900.6
47.5°	1000.6	914.5	854.0	816.3	786.1	771.8	762.7
50°	883.8	808.4	760.2	727.4	710.6	692.6	691.2
52.5°	786.7	725.8	688.2	661.6	640.4	629.4	629.8
55°	661.2	613.0	586.4	566.1	549.5	541.1	537.6
57.5°	556.9	520.8	501.5	482.9	475.8	469.3	467.5
60°	492.2	467.8	449.6	434.9	424.4	422.3	421.6
62.5°	438.6	413.0	400.4	389.1	381.4	378.2	377.0
65°	361.6	342.7	331.6	322.6	319.7	314.9	314.2
67.5°	291.5	280.2	272.9	266.5	262.8	262.5	262.5
70°	248.5	242.3	236.0	232.5	230.4	228.9	228.9
72.5°	211.7	207.0	201.9	200.1	199.7	198.2	197.7
75°	161.3	156.4	157.0	153.6	150.8	147.3	145.2
77.5°	114.3	110.9	110.2	109.8	107.3	106.9	108.1
80°	88.7	85.1	84.4	85.1	84.4	82.4	82.4
82.5°	67.5	64.5	63.8	63.4	62.7	63.4	62.3
85°	36.3	34.9	34.9	34.9	36.3	35.6	34.9
87.5°	15.2	14.7	15.5	14.9	14.9	14.4	15.0
90°	11.9	12.5	12.9	13.1	13.3	13.5	13.7
92.5°	11.5	12.1	12.4	12.5	12.5	12.6	12.6
95°	11.9	12.5	12.8	12.9	13.0	13.1	13.2
97.5°	12.2	12.3	12.4	12.5	12.6	12.7	12.8
100°	14.9	13.2	12.4	12.5	12.6	12.7	12.8
102.5°	41.1	22.4	13.1	13.1	13.1	13.1	13.2
105°	145.5	146.4	145.1	141.4	137.7	134.1	130.5
107.5°	179.4	179.9	180.3	180.7	181.0	181.4	181.8
110°	202.5	202.7	202.9	203.2	203.5	203.8	204.1



TEST NUMBER: P333075-840

CATALOG NUMBER: S124RDIW-S1020D470U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	224.8	224.7	224.9	225.3	225.7	226.1	226.4
115°	258.7	258.9	259.0	259.0	259.0	259.0	259.0
117.5°	292.5	292.4	292.4	292.3	292.3	292.3	292.2
120°	313.7	313.9	313.9	313.7	313.5	313.3	313.1
122.5°	334.3	334.4	334.4	334.2	334.0	333.8	333.6
125°	363.3	363.7	363.9	364.0	364.1	364.2	364.3
127.5°	391.7	391.7	391.6	391.5	391.4	391.4	391.3
130°	409.5	409.6	409.6	409.6	409.6	409.6	409.6
132.5°	426.7	426.8	426.8	426.7	426.7	426.6	426.5
135°	450.5	450.7	450.9	451.1	451.3	451.5	451.7
137.5°	473.2	473.5	473.5	473.5	473.4	473.4	473.3
140°	487.5	487.8	488.0	488.1	488.2	488.3	488.4
142.5°	500.4	500.6	500.7	500.7	500.8	500.8	500.8
145°	518.9	519.0	519.1	519.3	519.5	519.7	519.9
147.5°	535.1	535.2	535.3	535.4	535.5	535.6	535.7
150°	545.5	545.5	545.6	545.7	545.8	545.9	546.0
152.5°	554.8	555.0	555.0	555.0	554.9	554.8	554.8
155°	567.3	567.7	567.8	567.5	567.2	566.9	566.6
157.5°	578.0	578.6	578.6	578.0	577.5	577.0	576.5
160°	584.9	585.5	585.5	584.9	584.3	583.7	583.1
162.5°	590.4	591.0	591.0	590.3	589.6	588.9	588.2
165°	598.3	599.2	599.1	598.1	597.2	596.3	595.4
167.5°	604.1	605.0	604.9	603.9	602.9	601.9	600.9
170°	607.4	608.3	608.2	607.1	606.1	605.1	604.1
172.5°	609.7	610.5	610.4	609.3	608.1	607.0	605.9
175°	612.4	613.3	613.1	611.9	610.7	609.5	608.2
177.5°	613.1	613.8	613.6	612.7	611.7	610.7	609.8
180°	611.9	611.9	611.9	611.9	611.9	611.9	611.9

(END OF REPORT)