

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333108-840

Luminaire Tested: **S124RDIW-S1195D1340U840-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333108-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIW-S1195D1340U840-4F0-1E-UDD-A1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1195 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 1340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9761.9 lumens
Efficiency: N/A
Efficacy: 128.1 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.23 / 1.39
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 76.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333108-840

CATALOG NUMBER: S124RDIW-S1195D1340U840-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

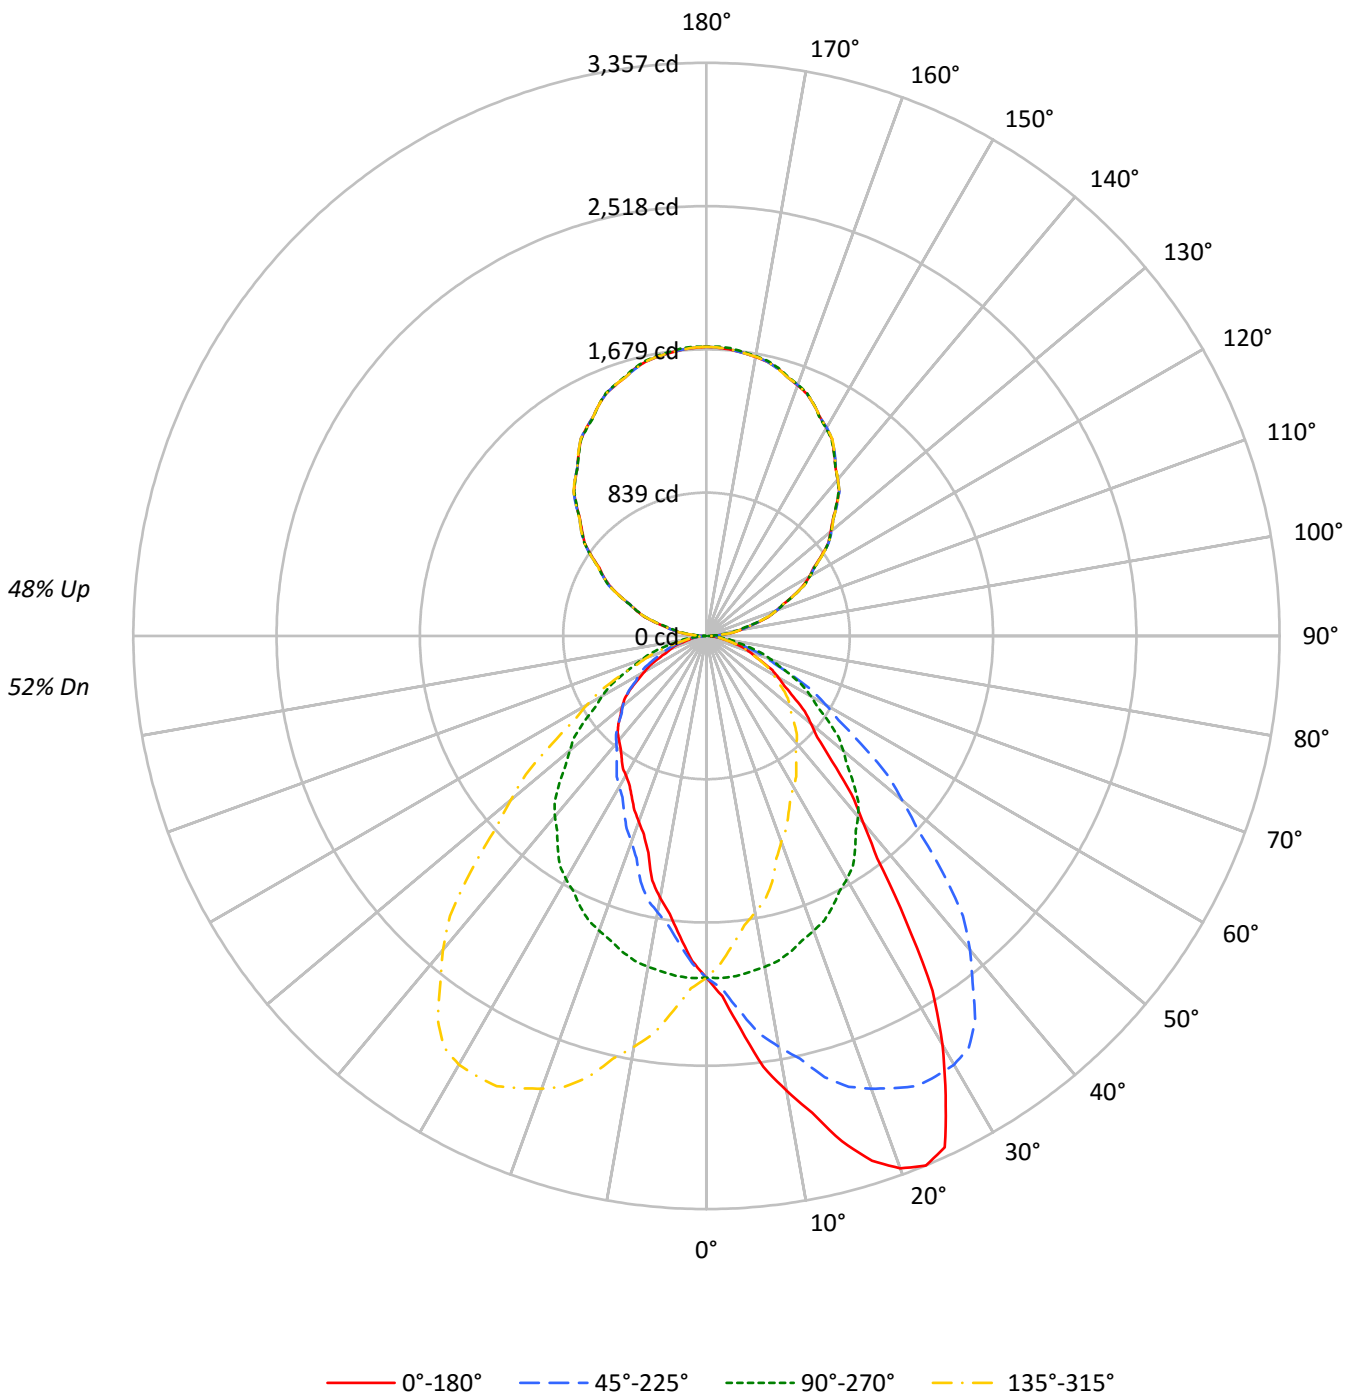



TEST NUMBER: P333108-840

CATALOG NUMBER: S124RDIW-S1195D1340U840-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	99	99	99	99	84	84	84	71	71	71	58	58	58	52
1	99	95	91	87	91	88	84	82	75	72	70	63	61	60	52	51	50	45
2	90	83	77	72	83	77	72	68	66	62	59	56	53	51	46	44	43	38
3	83	73	66	61	76	68	62	57	59	54	50	50	46	43	41	39	37	33
4	76	65	58	52	70	61	54	49	52	47	43	45	41	37	37	34	32	29
5	70	58	50	45	64	54	47	42	47	42	37	40	36	33	34	31	28	25
6	64	52	45	39	59	49	42	37	43	37	33	36	32	29	31	27	25	22
7	60	47	40	34	55	44	37	32	39	33	29	33	29	26	28	25	22	20
8	55	43	36	30	51	40	34	29	35	30	26	30	26	23	26	23	20	18
9	52	40	32	27	48	37	30	26	32	27	23	28	24	21	24	21	18	16
10	48	36	29	24	45	34	28	23	30	25	21	26	22	19	22	19	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	16156	16156	16156	16156
5°	18739	16204	14323	16204
10°	22168	16133	12782	16133
15°	25607	15984	10984	15984
20°	28511	15779	9933	15779
25°	29432	15577	9222	15577
30°	25765	15333	8793	15333
35°	20056	14970	8535	14970
40°	15039	14556	8395	14556
45°	11875	13891	8322	13891
50°	10025	13123	8081	13123
55°	8739	12279	7648	12279
60°	7863	11404	6770	11404
65°	6930	10457	5822	10457
70°	6243	9477	5254	9477
75°	5231	8400	4476	8400
80°	4421	7159	4198	7159
85°	3733	5604	3733	5604



TEST NUMBER: P333108-840

CATALOG NUMBER: S124RDIW-S1195D1340U840-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	193.9	2.0
10°-20°	584.9	6.0
20°-30°	914.8	9.4
30°-40°	1017.0	10.4
40°-50°	902.3	9.2
50°-60°	703.1	7.2
60°-70°	460.3	4.7
70°-80°	226.4	2.3
80°-90°	60.9	0.6
90°-100°	111.7	1.1
100°-110°	330.9	3.4
110°-120°	561.6	5.8
120°-130°	740.5	7.6
130°-140°	831.6	8.5
140°-150°	817.2	8.4
150°-160°	687.3	7.0
160°-170°	457.3	4.7
170°-180°	160.1	1.6
0°-30°	1693.6	17.3
0°-40°	2710.6	27.8
0°-60°	4316.0	44.2
0°-90°	5063.6	51.9
90°-120°	1004.2	10.3
90°-150°	3393.5	34.8
90°-180°	4698.0	48.1
0°-180°	9761.9	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	2001	2001	2001	2001	2001	
5°	2312	2000	1767	2000	2312	234
15°	3064	1912	1314	1912	3064	871
25°	3304	1749	1035	1749	3304	1466
35°	2035	1519	866	1519	2035	1276
45°	1040	1217	729	1217	1040	824
55°	621	872	543	872	621	565
65°	363	547	305	547	363	365
75°	168	269	144	269	168	185
85°	40	60	40	60	40	46
90°	39	4	39	4	39	22
95°	104	79	104	79	104	108
105°	320	305	320	305	320	337
115°	566	571	566	571	566	559
125°	825	832	825	832	825	736
135°	1074	1073	1074	1073	1074	829
145°	1304	1303	1304	1303	1304	816
155°	1492	1493	1492	1493	1492	687
165°	1621	1625	1621	1625	1621	457
175°	1683	1691	1683	1691	1683	160
180°	1693	1693	1693	1693	1693	



TEST NUMBER: P333108-840

CATALOG NUMBER: S124RDIW-S1195D1340U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2
2.5°	2110.8	2116.7	2110.8	2110.2	2103.8	2101.8	2099.2	2090.8	2075.4	2066.4	2068.3
5°	2312.4	2332.6	2321.3	2319.7	2302.0	2284.2	2272.9	2247.2	2219.7	2201.2	2185.9
7.5°	2545.6	2557.2	2550.1	2538.8	2510.1	2493.9	2467.7	2433.7	2384.5	2346.9	2312.6
10°	2704.3	2713.9	2710.8	2689.8	2668.8	2626.1	2601.9	2554.4	2492.2	2443.1	2397.1
12.5°	2860.3	2870.7	2842.4	2843.3	2803.6	2770.0	2731.6	2671.7	2600.0	2536.6	2479.0
15°	3063.9	3051.0	3051.0	3034.8	2990.5	2943.8	2904.3	2841.4	2751.1	2675.2	2595.5
17.5°	3223.2	3227.7	3221.1	3183.1	3148.3	3099.9	3027.5	2954.1	2870.2	2768.4	2686.8
20°	3318.7	3318.7	3311.4	3285.6	3240.5	3188.9	3110.7	3030.8	2924.4	2822.0	2730.1
22.5°	3357.4	3359.9	3351.4	3330.1	3289.5	3239.1	3172.6	3091.5	2981.8	2866.5	2752.7
25°	3304.2	3319.5	3321.0	3315.5	3303.4	3272.7	3215.5	3132.4	3034.0	2909.1	2786.5
27.5°	3033.5	3052.9	3069.9	3097.8	3134.8	3154.2	3156.7	3114.5	3028.7	2908.4	2785.1
30°	2763.9	2780.1	2832.5	2901.0	2954.3	3002.6	3044.5	3055.9	3007.5	2899.4	2769.6
32.5°	2464.7	2486.6	2539.0	2612.7	2701.4	2783.3	2877.5	2925.5	2924.3	2859.4	2739.3
35°	2035.1	2051.2	2099.6	2177.0	2283.4	2405.2	2554.4	2670.4	2749.5	2743.8	2670.4
37.5°	1641.2	1659.5	1708.4	1772.5	1875.7	2026.5	2170.8	2330.8	2476.9	2559.0	2534.5
40°	1427.1	1427.9	1475.5	1541.7	1638.4	1769.8	1927.0	2104.4	2267.2	2400.3	2426.1
42.5°	1258.1	1258.3	1289.7	1361.0	1430.7	1554.4	1704.5	1880.6	2071.2	2224.8	2293.2
45°	1040.1	1047.3	1073.2	1115.9	1170.7	1275.6	1395.6	1559.3	1773.0	1955.2	2068.9
47.5°	880.8	891.4	907.9	942.7	986.4	1056.2	1155.6	1302.6	1476.4	1676.9	1838.7
50°	798.2	799.8	820.8	840.1	878.1	933.7	1020.8	1143.3	1302.9	1495.6	1675.5
52.5°	727.3	726.9	739.5	764.1	794.9	838.2	908.5	1020.1	1161.6	1334.4	1520.0
55°	620.9	624.9	634.5	653.9	677.3	707.9	763.6	847.4	958.7	1106.2	1274.8
57.5°	539.9	542.0	549.6	557.7	579.3	601.5	643.3	701.5	795.4	916.1	1073.2
60°	487.0	487.8	490.2	502.3	519.3	540.2	568.5	617.6	696.6	807.1	931.3
62.5°	435.4	436.9	440.6	449.4	462.5	477.0	506.5	546.0	611.5	705.8	817.7
65°	362.8	363.7	369.3	372.5	382.9	395.9	417.7	444.2	489.4	568.5	653.1
67.5°	303.2	303.2	303.5	307.8	315.1	323.7	336.7	358.0	392.0	440.6	515.2
70°	264.5	264.5	266.1	268.5	272.6	279.7	287.0	303.2	328.2	367.7	425.0
72.5°	228.3	228.9	230.6	231.1	233.2	239.1	244.5	254.8	273.4	303.2	349.4
75°	167.7	170.2	174.2	177.4	181.4	180.6	186.2	192.7	198.3	216.1	242.7
77.5°	124.8	123.5	124.0	126.7	127.2	128.1	132.1	137.0	141.3	149.7	159.2
80°	95.1	95.1	97.6	98.4	97.6	98.4	102.4	104.8	106.4	109.7	118.6
82.5°	71.9	73.2	72.4	73.2	73.7	74.5	77.9	78.4	80.0	81.3	85.0
85°	40.3	41.1	41.9	40.3	40.3	40.3	41.9	42.7	44.3	43.5	45.1
87.5°	22.0	21.3	21.8	21.7	22.2	21.3	21.6	22.6	20.9	21.2	20.8
90°	39.3	38.7	38.2	37.6	37.0	35.7	34.0	32.3	30.6	28.8	26.5
92.5°	58.2	57.8	57.5	57.1	56.8	56.0	55.0	53.9	52.9	51.9	50.2
95°	103.5	103.5	103.5	103.5	103.5	103.0	102.2	101.3	100.4	99.6	97.5
97.5°	162.2	162.2	162.2	162.2	162.2	161.6	160.6	159.6	158.4	157.4	155.0
100°	203.0	203.0	203.0	203.0	203.0	202.7	202.2	201.6	201.0	200.4	197.7
102.5°	249.1	248.8	248.6	248.4	248.1	247.6	246.8	246.0	245.2	244.4	242.0
105°	319.5	318.7	317.8	316.9	316.1	315.2	314.4	313.5	312.6	311.7	310.5
107.5°	388.2	388.3	388.3	388.4	388.4	388.1	387.2	386.4	385.6	384.8	384.7
110°	437.5	436.6	435.7	434.8	433.9	433.8	434.3	434.9	435.6	436.2	436.5



TEST NUMBER: P333108-840

CATALOG NUMBER: S124RDIW-S1195D1340U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	487.8	487.6	487.4	487.2	487.1	487.0	487.2	487.3	487.4	487.5	488.0
115°	565.8	566.0	566.3	566.6	566.9	567.2	567.5	567.8	568.2	568.4	569.0
117.5°	640.2	640.8	641.4	641.9	642.5	643.3	644.3	645.3	646.2	647.2	647.6
120°	696.7	696.2	695.6	695.0	694.4	694.9	696.3	697.8	699.2	700.6	701.6
122.5°	743.9	745.0	746.0	747.0	748.1	749.1	750.1	751.0	752.0	753.1	753.5
125°	825.1	825.7	826.3	826.9	827.4	828.0	828.6	829.2	829.7	830.3	830.6
127.5°	900.3	900.7	901.2	901.7	902.1	902.6	903.2	903.8	904.4	904.9	905.4
130°	949.5	950.7	951.8	953.0	954.2	955.0	955.6	956.2	956.7	957.4	957.4
132.5°	1001.9	1002.4	1002.8	1003.3	1003.8	1004.3	1004.9	1005.4	1006.0	1006.6	1006.8
135°	1073.9	1074.8	1075.7	1076.5	1077.4	1078.1	1078.7	1079.3	1079.9	1080.5	1080.5
137.5°	1149.6	1149.4	1149.3	1149.1	1148.9	1149.2	1150.0	1150.7	1151.4	1152.3	1151.8
140°	1195.8	1196.0	1196.3	1196.6	1196.9	1197.2	1197.5	1197.8	1198.1	1198.3	1198.3
142.5°	1241.8	1241.9	1241.9	1242.0	1242.0	1242.1	1242.2	1242.2	1242.3	1242.3	1242.6
145°	1304.4	1305.4	1306.2	1307.1	1308.0	1308.5	1308.8	1309.1	1309.4	1309.7	1309.4
147.5°	1367.9	1368.2	1368.4	1368.7	1369.0	1369.3	1369.5	1369.7	1370.0	1370.2	1370.4
150°	1406.6	1406.8	1407.1	1407.4	1407.8	1407.9	1407.9	1407.9	1407.9	1407.9	1407.9
152.5°	1442.2	1443.0	1443.7	1444.5	1445.2	1445.3	1444.6	1443.9	1443.2	1442.5	1442.3
155°	1491.8	1492.9	1494.1	1495.2	1496.4	1496.4	1495.2	1494.1	1492.9	1491.8	1492.0
157.5°	1536.0	1537.0	1537.9	1538.9	1539.9	1540.0	1539.1	1538.2	1537.4	1536.5	1536.6
160°	1561.2	1562.6	1564.1	1565.5	1566.9	1567.2	1566.4	1565.5	1564.6	1563.8	1564.1
162.5°	1587.3	1588.8	1590.2	1591.6	1593.2	1593.1	1591.5	1589.9	1588.4	1586.8	1587.1
165°	1621.3	1622.6	1623.7	1624.9	1626.1	1625.8	1624.0	1622.2	1620.5	1618.7	1619.3
167.5°	1645.8	1647.6	1649.3	1651.1	1652.9	1652.9	1651.2	1649.5	1647.8	1646.0	1646.0
170°	1659.4	1661.4	1663.4	1665.5	1667.5	1667.7	1665.9	1664.2	1662.4	1660.6	1660.4
172.5°	1670.9	1672.9	1675.0	1677.0	1679.0	1679.1	1677.1	1675.1	1673.1	1671.1	1671.1
175°	1682.9	1685.0	1687.0	1689.0	1691.1	1691.1	1689.0	1687.0	1685.0	1682.9	1683.2
177.5°	1689.2	1691.1	1692.9	1694.9	1696.7	1696.8	1695.2	1693.5	1691.9	1690.3	1690.3
180°	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4



TEST NUMBER: P333108-840

CATALOG NUMBER: S124RDIW-S1195D1340U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2
2.5°	2061.8	2052.9	2048.3	2038.0	2025.7	2019.2	2013.5	2005.1	1994.1	1982.5	1974.1
5°	2166.5	2147.2	2122.9	2094.0	2068.1	2043.2	2021.3	1999.6	1974.6	1948.8	1923.0
7.5°	2273.9	2235.8	2194.7	2147.2	2100.8	2058.8	2020.0	1983.0	1941.1	1903.5	1869.3
10°	2348.7	2297.1	2239.9	2179.4	2118.9	2066.5	2014.9	1968.1	1916.5	1870.6	1831.9
12.5°	2409.3	2348.7	2279.9	2204.5	2131.8	2068.4	2009.1	1948.1	1889.5	1839.7	1788.1
15°	2509.9	2426.9	2334.2	2243.9	2149.6	2063.3	1983.5	1912.5	1845.6	1775.4	1726.3
17.5°	2579.2	2480.6	2367.9	2259.4	2148.0	2046.2	1954.1	1869.7	1792.4	1720.8	1662.2
20°	2620.4	2511.5	2386.6	2263.2	2138.3	2029.4	1930.3	1836.7	1756.9	1679.5	1619.0
22.5°	2643.6	2523.1	2386.6	2257.5	2128.0	2010.0	1901.2	1803.8	1716.9	1639.5	1572.6
25°	2651.1	2522.0	2382.6	2234.2	2092.3	1967.3	1854.4	1748.8	1652.0	1574.7	1503.7
27.5°	2640.8	2488.8	2346.0	2193.7	2047.3	1915.6	1797.1	1686.1	1589.2	1506.1	1433.4
30°	2625.2	2462.4	2309.2	2151.2	2002.8	1876.2	1751.2	1644.9	1544.1	1457.7	1384.4
32.5°	2591.7	2430.1	2265.3	2103.4	1953.2	1822.7	1704.1	1597.1	1498.2	1410.1	1332.1
35°	2525.3	2361.6	2182.6	2016.5	1869.0	1733.5	1622.2	1519.0	1424.7	1330.4	1248.1
37.5°	2437.7	2270.5	2092.4	1910.6	1762.8	1635.0	1532.9	1436.0	1343.9	1257.8	1166.7
40°	2355.2	2202.8	2018.9	1838.4	1686.8	1563.4	1469.1	1381.2	1288.5	1203.0	1111.9
42.5°	2255.2	2125.4	1939.6	1758.4	1608.7	1489.9	1402.0	1316.1	1231.7	1148.8	1053.8
45°	2088.3	1989.9	1815.7	1641.6	1490.9	1373.1	1292.5	1216.7	1142.5	1063.5	974.0
47.5°	1897.0	1830.4	1680.1	1501.8	1362.3	1256.4	1178.5	1116.5	1053.8	974.8	896.3
50°	1764.1	1721.4	1576.3	1413.4	1280.4	1182.9	1103.0	1044.9	992.5	916.8	846.6
52.5°	1622.2	1599.5	1476.9	1321.2	1192.7	1097.0	1028.9	976.5	923.5	860.6	795.0
55°	1406.1	1418.3	1314.2	1179.6	1058.6	978.1	915.9	872.4	827.3	774.1	723.3
57.5°	1185.3	1229.4	1159.6	1041.4	928.1	853.5	806.8	770.1	732.3	688.1	644.7
60°	1053.0	1090.0	1050.6	946.5	847.4	778.1	734.6	706.3	668.4	628.1	595.0
62.5°	924.0	963.7	940.3	856.3	764.2	704.6	666.1	639.9	611.7	576.5	542.2
65°	761.9	787.7	776.5	718.4	653.1	602.3	566.8	547.4	521.7	495.8	465.2
67.5°	583.6	633.4	626.8	596.0	539.6	499.9	476.7	459.6	436.1	416.9	396.1
70°	479.8	525.7	524.9	499.9	469.3	432.1	416.1	401.5	380.5	362.0	345.1
72.5°	392.6	434.7	441.0	421.8	400.9	372.8	357.4	347.4	327.0	314.3	300.5
75°	275.0	305.6	313.7	313.7	304.0	289.4	275.8	269.3	254.8	243.5	235.4
77.5°	180.3	199.7	212.2	215.1	216.6	211.8	200.5	195.9	184.8	180.8	173.0
80°	127.3	140.3	154.8	159.7	163.7	162.1	157.2	154.0	143.5	139.5	136.2
82.5°	88.1	95.1	107.0	117.8	116.5	120.8	116.5	114.0	106.1	104.6	101.4
85°	45.9	46.8	48.4	55.6	59.7	61.3	62.1	60.5	58.1	58.1	52.4
87.5°	20.3	19.2	20.0	19.5	19.5	21.4	22.7	22.7	21.4	20.1	18.8
90°	24.1	21.8	19.5	16.8	13.5	10.3	7.2	3.9	7.2	10.3	13.5
92.5°	48.6	47.0	45.3	42.7	39.0	35.3	31.7	28.1	31.7	35.3	39.0
95°	95.4	93.4	91.4	89.1	86.4	83.8	81.2	78.6	81.2	83.8	86.4
97.5°	152.7	150.3	147.8	145.6	143.5	141.5	139.4	137.2	139.4	141.5	143.5
100°	195.1	192.5	189.9	188.0	186.8	185.7	184.5	183.4	184.5	185.7	186.8
102.5°	239.6	237.2	234.8	233.4	233.0	232.5	232.1	231.6	232.1	232.5	233.0
105°	309.4	308.2	307.0	306.3	306.0	305.8	305.5	305.2	305.5	305.8	306.0
107.5°	384.5	384.3	384.1	383.8	383.4	383.1	382.7	382.4	382.7	383.1	383.4
110°	436.7	437.0	437.3	437.2	436.6	436.0	435.4	434.8	435.4	436.0	436.6



TEST NUMBER: P333108-840

CATALOG NUMBER: S124RDIW-S1195D1340U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	488.5	489.1	489.6	489.8	489.7	489.5	489.4	489.3	489.4	489.5	489.7
115°	569.6	570.2	570.8	571.0	571.0	571.0	571.0	571.0	571.0	571.0	571.0
117.5°	648.0	648.4	648.8	648.9	648.7	648.5	648.2	648.0	648.2	648.5	648.7
120°	702.5	703.3	704.2	704.0	702.9	701.7	700.5	699.3	700.5	701.7	702.9
122.5°	753.9	754.3	754.7	754.7	754.2	753.8	753.3	752.8	753.3	753.8	754.2
125°	830.9	831.2	831.5	831.6	831.6	831.6	831.6	831.6	831.6	831.6	831.6
127.5°	905.9	906.4	906.9	906.7	905.7	904.9	904.0	903.1	904.0	904.9	905.7
130°	957.4	957.4	957.4	956.9	956.0	955.2	954.3	953.4	954.3	955.2	956.0
132.5°	1007.0	1007.3	1007.5	1007.3	1006.7	1006.0	1005.4	1004.8	1005.4	1006.0	1006.7
135°	1080.5	1080.5	1080.5	1079.6	1077.8	1076.1	1074.4	1072.6	1074.4	1076.1	1077.8
137.5°	1151.3	1150.8	1150.4	1149.7	1148.9	1148.1	1147.3	1146.5	1147.3	1148.1	1148.9
140°	1198.3	1198.3	1198.3	1198.1	1197.5	1196.9	1196.3	1195.8	1196.3	1196.9	1197.5
142.5°	1242.8	1243.0	1243.2	1243.1	1242.5	1241.9	1241.3	1240.8	1241.3	1241.9	1242.5
145°	1309.1	1308.8	1308.5	1307.8	1306.7	1305.5	1304.3	1303.1	1304.3	1305.5	1306.7
147.5°	1370.7	1370.9	1371.1	1370.5	1369.2	1367.8	1366.3	1364.9	1366.3	1367.8	1369.2
150°	1407.9	1407.9	1407.9	1407.3	1406.1	1405.0	1403.8	1402.7	1403.8	1405.0	1406.1
152.5°	1442.0	1441.8	1441.6	1441.1	1440.4	1439.7	1439.0	1438.2	1439.0	1439.7	1440.4
155°	1492.3	1492.6	1492.9	1493.0	1493.0	1493.0	1493.0	1493.0	1493.0	1493.0	1493.0
157.5°	1536.6	1536.7	1536.7	1537.0	1537.5	1538.1	1538.6	1539.1	1538.6	1538.1	1537.5
160°	1564.4	1564.6	1564.9	1565.2	1565.5	1565.8	1566.1	1566.4	1566.1	1565.8	1565.5
162.5°	1587.4	1587.7	1588.0	1588.5	1589.2	1590.0	1590.7	1591.5	1590.7	1590.0	1589.2
165°	1619.9	1620.5	1621.1	1621.8	1622.7	1623.6	1624.5	1625.3	1624.5	1623.6	1622.7
167.5°	1645.9	1645.9	1645.8	1646.4	1647.6	1648.8	1650.0	1651.2	1650.0	1648.8	1647.6
170°	1660.1	1659.8	1659.5	1660.1	1661.5	1663.0	1664.5	1665.9	1664.5	1663.0	1661.5
172.5°	1671.0	1671.0	1670.9	1671.5	1672.7	1674.0	1675.2	1676.4	1675.2	1674.0	1672.7
175°	1683.5	1683.8	1684.1	1685.0	1686.5	1687.9	1689.3	1690.8	1689.3	1687.9	1686.5
177.5°	1690.3	1690.3	1690.3	1690.8	1692.0	1693.1	1694.4	1695.5	1694.4	1693.1	1692.0
180°	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4



TEST NUMBER: P333108-840

CATALOG NUMBER: S124RDIW-S1195D1340U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2
2.5°	1965.1	1958.6	1950.3	1940.6	1928.9	1918.6	1914.1	1918.0	1920.0	1914.8	1914.1
5°	1905.2	1885.1	1869.0	1844.8	1825.4	1809.3	1798.1	1793.2	1794.8	1781.9	1778.7
7.5°	1838.1	1814.1	1787.7	1759.0	1732.2	1708.5	1696.1	1689.3	1675.7	1669.8	1660.0
10°	1794.8	1762.5	1736.8	1702.8	1672.2	1644.1	1630.3	1619.0	1605.3	1598.8	1585.2
12.5°	1750.3	1712.8	1684.5	1649.3	1618.0	1584.1	1570.9	1550.0	1528.5	1515.0	1497.4
15°	1687.6	1642.4	1607.7	1565.8	1528.7	1490.1	1455.3	1416.6	1402.1	1371.5	1353.7
17.5°	1614.2	1568.4	1525.5	1469.3	1412.0	1363.9	1327.0	1289.9	1267.7	1248.1	1239.1
20°	1565.8	1523.9	1464.2	1398.9	1335.2	1282.0	1252.1	1228.0	1203.8	1190.1	1180.4
22.5°	1520.0	1466.4	1397.1	1326.7	1262.9	1221.3	1196.1	1171.2	1151.5	1138.5	1125.6
25°	1443.3	1373.1	1299.7	1219.1	1175.6	1139.3	1111.9	1091.7	1079.6	1062.7	1056.2
27.5°	1364.4	1279.4	1198.5	1144.3	1098.9	1065.7	1041.9	1026.7	1011.4	1000.6	992.2
30°	1303.7	1217.5	1144.9	1093.3	1047.3	1020.0	1000.6	982.9	970.8	961.9	955.4
32.5°	1243.7	1157.5	1096.5	1041.1	1004.8	978.1	957.4	944.1	934.6	923.2	919.3
35°	1157.0	1080.5	1027.2	977.2	940.1	915.9	899.8	886.2	878.1	874.8	872.4
37.5°	1073.7	1010.9	953.7	912.7	879.7	860.6	841.6	834.9	829.3	823.5	826.2
40°	1020.8	961.9	911.1	867.6	840.9	820.0	808.7	800.6	795.8	795.8	795.8
42.5°	974.9	917.4	867.9	828.9	802.2	784.6	771.9	765.2	763.6	763.0	766.8
45°	903.8	850.6	800.6	768.4	745.8	728.1	720.8	715.2	715.2	718.4	719.2
47.5°	833.3	783.6	743.4	707.3	686.6	675.5	669.2	666.3	666.6	669.8	673.6
50°	790.1	740.9	701.5	669.2	649.8	639.3	633.7	632.2	633.7	633.7	639.3
52.5°	743.1	699.0	660.1	633.1	611.2	601.4	598.2	596.0	596.9	599.6	602.0
55°	674.1	634.5	597.4	571.7	555.5	549.1	541.8	542.6	541.0	542.6	542.6
57.5°	604.9	569.4	534.9	514.4	500.2	490.9	482.9	485.2	482.8	482.5	481.2
60°	560.4	521.7	494.2	475.7	459.6	451.5	444.2	445.9	443.4	441.8	438.6
62.5°	512.0	479.8	453.6	435.8	422.8	413.4	406.2	404.6	399.0	393.4	386.4
65°	441.8	415.3	391.8	375.0	362.8	355.6	349.9	345.1	333.0	320.1	313.7
67.5°	373.7	354.5	332.6	318.3	308.5	299.0	288.2	279.9	268.6	261.6	257.5
70°	329.7	311.2	292.7	278.9	268.5	259.6	247.5	241.9	233.8	230.6	226.6
72.5°	287.8	270.5	253.4	241.0	229.7	222.9	213.4	207.7	204.2	202.9	198.8
75°	224.2	210.5	197.5	186.2	177.4	172.6	168.5	164.5	162.9	155.6	151.6
77.5°	163.5	154.5	146.4	138.4	132.1	128.9	121.1	116.4	113.7	110.3	109.5
80°	127.3	121.0	112.9	108.1	99.2	95.9	92.7	91.9	91.1	90.3	89.5
82.5°	95.8	89.4	81.3	78.4	75.9	74.0	72.1	71.3	70.5	71.0	70.8
85°	48.4	45.1	45.1	44.3	43.5	42.7	41.9	41.9	41.1	41.9	41.1
87.5°	19.5	19.4	19.9	19.0	20.1	20.6	20.3	20.6	21.6	20.7	20.9
90°	16.8	19.5	21.8	24.1	26.5	28.8	30.6	32.3	34.0	35.7	37.0
92.5°	42.7	45.3	47.0	48.6	50.2	51.9	52.9	53.9	55.0	56.0	56.8
95°	89.1	91.4	93.4	95.4	97.5	99.6	100.4	101.3	102.2	103.0	103.5
97.5°	145.6	147.8	150.3	152.7	155.0	157.4	158.4	159.6	160.6	161.6	162.2
100°	188.0	189.9	192.5	195.1	197.7	200.4	201.0	201.6	202.2	202.7	203.0
102.5°	233.4	234.8	237.2	239.6	242.0	244.4	245.2	246.0	246.8	247.6	248.1
105°	306.3	307.0	308.2	309.4	310.5	311.7	312.6	313.5	314.4	315.2	316.1
107.5°	383.8	384.1	384.3	384.5	384.7	384.8	385.6	386.4	387.2	388.1	388.4
110°	437.2	437.3	437.0	436.7	436.5	436.2	435.6	434.9	434.3	433.8	433.9



TEST NUMBER: P333108-840

CATALOG NUMBER: S124RDIW-S1195D1340U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	489.8	489.6	489.1	488.5	488.0	487.5	487.4	487.3	487.2	487.0	487.1
115°	571.0	570.8	570.2	569.6	569.0	568.4	568.2	567.8	567.5	567.2	566.9
117.5°	648.9	648.8	648.4	648.0	647.6	647.2	646.2	645.3	644.3	643.3	642.5
120°	704.0	704.2	703.3	702.5	701.6	700.6	699.2	697.8	696.3	694.9	694.4
122.5°	754.7	754.7	754.3	753.9	753.5	753.1	752.0	751.0	750.1	749.1	748.1
125°	831.6	831.5	831.2	830.9	830.6	830.3	829.7	829.2	828.6	828.0	827.4
127.5°	906.7	906.9	906.4	905.9	905.4	904.9	904.4	903.8	903.2	902.6	902.1
130°	956.9	957.4	957.4	957.4	957.4	957.4	956.7	956.2	955.6	955.0	954.2
132.5°	1007.3	1007.5	1007.3	1007.0	1006.8	1006.6	1006.0	1005.4	1004.9	1004.3	1003.8
135°	1079.6	1080.5	1080.5	1080.5	1080.5	1080.5	1079.9	1079.3	1078.7	1078.1	1077.4
137.5°	1149.7	1150.4	1150.8	1151.3	1151.8	1152.3	1151.4	1150.7	1150.0	1149.2	1148.9
140°	1198.1	1198.3	1198.3	1198.3	1198.3	1198.3	1198.1	1197.8	1197.5	1197.2	1196.9
142.5°	1243.1	1243.2	1243.0	1242.8	1242.6	1242.3	1242.3	1242.2	1242.2	1242.1	1242.0
145°	1307.8	1308.5	1308.8	1309.1	1309.4	1309.7	1309.4	1309.1	1308.8	1308.5	1308.0
147.5°	1370.5	1371.1	1370.9	1370.7	1370.4	1370.2	1370.0	1369.7	1369.5	1369.3	1369.0
150°	1407.3	1407.9	1407.9	1407.9	1407.9	1407.9	1407.9	1407.9	1407.9	1407.9	1407.8
152.5°	1441.1	1441.6	1441.8	1442.0	1442.3	1442.5	1443.2	1443.9	1444.6	1445.3	1445.2
155°	1493.0	1492.9	1492.6	1492.3	1492.0	1491.8	1492.9	1494.1	1495.2	1496.4	1496.4
157.5°	1537.0	1536.7	1536.7	1536.6	1536.6	1536.5	1537.4	1538.2	1539.1	1540.0	1539.9
160°	1565.2	1564.9	1564.6	1564.4	1564.1	1563.8	1564.6	1565.5	1566.4	1567.2	1566.9
162.5°	1588.5	1588.0	1587.7	1587.4	1587.1	1586.8	1588.4	1589.9	1591.5	1593.1	1593.2
165°	1621.8	1621.1	1620.5	1619.9	1619.3	1618.7	1620.5	1622.2	1624.0	1625.8	1626.1
167.5°	1646.4	1645.8	1645.9	1645.9	1646.0	1646.0	1647.8	1649.5	1651.2	1652.9	1652.9
170°	1660.1	1659.5	1659.8	1660.1	1660.4	1660.6	1662.4	1664.2	1665.9	1667.7	1667.5
172.5°	1671.5	1670.9	1671.0	1671.0	1671.1	1671.1	1673.1	1675.1	1677.1	1679.1	1679.0
175°	1685.0	1684.1	1683.8	1683.5	1683.2	1682.9	1685.0	1687.0	1689.0	1691.1	1691.1
177.5°	1690.8	1690.3	1690.3	1690.3	1690.3	1690.3	1691.9	1693.5	1695.2	1696.8	1696.7
180°	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4



TEST NUMBER: P333108-840

CATALOG NUMBER: S124RDIW-S1195D1340U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2
2.5°	1910.3	1911.6	1907.0	1905.7	1907.0	1911.6	1910.3	1914.1	1914.8	1920.0	1918.0
5°	1772.2	1770.6	1766.6	1767.4	1766.6	1770.6	1772.2	1778.7	1781.9	1794.8	1793.2
7.5°	1654.2	1647.9	1649.6	1643.3	1649.6	1647.9	1654.2	1660.0	1669.8	1675.7	1689.3
10°	1582.0	1573.1	1565.8	1559.3	1565.8	1573.1	1582.0	1585.2	1598.8	1605.3	1619.0
12.5°	1483.3	1475.6	1465.8	1467.7	1465.8	1475.6	1483.3	1497.4	1515.0	1528.5	1550.0
15°	1343.2	1331.2	1311.8	1314.2	1311.8	1331.2	1343.2	1353.7	1371.5	1402.1	1416.6
17.5°	1224.8	1224.9	1216.1	1218.1	1216.1	1224.9	1224.8	1239.1	1248.1	1267.7	1289.9
20°	1163.5	1157.8	1158.6	1156.2	1158.6	1157.8	1163.5	1180.4	1190.1	1203.8	1228.0
22.5°	1120.8	1114.0	1108.3	1103.3	1108.3	1114.0	1120.8	1125.6	1138.5	1151.5	1171.2
25°	1048.9	1044.1	1036.9	1035.3	1036.9	1044.1	1048.9	1056.2	1062.7	1079.6	1091.7
27.5°	985.7	984.8	981.9	978.2	981.9	984.8	985.7	992.2	1000.6	1011.4	1026.7
30°	949.0	947.4	945.7	943.3	945.7	947.4	949.0	955.4	961.9	970.8	982.9
32.5°	916.1	915.1	913.5	913.7	913.5	915.1	916.1	919.3	923.2	934.6	944.1
35°	869.2	868.4	866.8	866.0	866.8	868.4	869.2	872.4	874.8	878.1	886.2
37.5°	825.4	827.4	826.5	826.3	826.5	827.4	825.4	826.2	823.5	829.3	834.9
40°	795.0	795.8	797.4	796.6	797.4	795.8	795.0	795.8	795.8	795.8	800.6
42.5°	769.8	770.0	772.2	769.5	772.2	770.0	769.8	766.8	763.0	763.6	765.2
45°	724.9	729.7	728.9	728.9	728.9	729.7	724.9	719.2	718.4	715.2	715.2
47.5°	675.7	679.8	681.0	680.9	681.0	679.8	675.7	673.6	669.8	666.6	666.3
50°	643.4	641.8	644.2	643.4	644.2	641.8	643.4	639.3	633.7	633.7	632.2
52.5°	604.1	604.4	604.2	603.4	604.2	604.4	604.1	602.0	599.6	596.9	596.0
55°	543.4	544.2	542.6	543.4	542.6	544.2	543.4	542.6	542.6	541.0	542.6
57.5°	477.7	473.7	475.3	473.4	475.3	473.7	477.7	481.2	482.5	482.8	485.2
60°	430.6	424.1	422.5	419.3	422.5	424.1	430.6	438.6	441.8	443.4	445.9
62.5°	377.7	373.1	367.7	370.2	367.7	373.1	377.7	386.4	393.4	399.0	404.6
65°	307.2	304.0	301.5	304.8	301.5	304.0	307.2	313.7	320.1	333.0	345.1
67.5°	254.3	252.6	252.6	251.0	252.6	252.6	254.3	257.5	261.6	268.6	279.9
70°	226.6	224.2	224.2	222.6	224.2	224.2	226.6	226.6	230.6	233.8	241.9
72.5°	198.1	195.8	196.4	195.4	196.4	195.8	198.1	198.8	202.9	204.2	207.7
75°	146.7	142.7	142.7	143.5	142.7	142.7	146.7	151.6	155.6	162.9	164.5
77.5°	109.5	108.7	109.8	108.4	109.8	108.7	109.5	109.5	110.3	113.7	116.4
80°	89.5	88.7	87.9	90.3	87.9	88.7	89.5	89.5	90.3	91.1	91.9
82.5°	69.5	69.4	69.2	72.2	69.2	69.4	69.5	70.8	71.0	70.5	71.3
85°	41.9	40.3	41.9	40.3	41.9	40.3	41.9	41.1	41.9	41.1	41.9
87.5°	22.3	21.8	21.3	22.0	21.3	21.8	22.3	20.9	20.7	21.6	20.6
90°	37.6	38.2	38.7	39.3	38.7	38.2	37.6	37.0	35.7	34.0	32.3
92.5°	57.1	57.5	57.8	58.2	57.8	57.5	57.1	56.8	56.0	55.0	53.9
95°	103.5	103.5	103.5	103.5	103.5	103.5	103.5	103.5	103.0	102.2	101.3
97.5°	162.2	162.2	162.2	162.2	162.2	162.2	162.2	162.2	161.6	160.6	159.6
100°	203.0	203.0	203.0	203.0	203.0	203.0	203.0	203.0	202.7	202.2	201.6
102.5°	248.4	248.6	248.8	249.1	248.8	248.6	248.4	248.1	247.6	246.8	246.0
105°	316.9	317.8	318.7	319.5	318.7	317.8	316.9	316.1	315.2	314.4	313.5
107.5°	388.4	388.3	388.3	388.2	388.3	388.3	388.4	388.4	388.1	387.2	386.4
110°	434.8	435.7	436.6	437.5	436.6	435.7	434.8	433.9	433.8	434.3	434.9



TEST NUMBER: P333108-840

CATALOG NUMBER: S124RDIW-S1195D1340U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	487.2	487.4	487.6	487.8	487.6	487.4	487.2	487.1	487.0	487.2	487.3
115°	566.6	566.3	566.0	565.8	566.0	566.3	566.6	566.9	567.2	567.5	567.8
117.5°	641.9	641.4	640.8	640.2	640.8	641.4	641.9	642.5	643.3	644.3	645.3
120°	695.0	695.6	696.2	696.7	696.2	695.6	695.0	694.4	694.9	696.3	697.8
122.5°	747.0	746.0	745.0	743.9	745.0	746.0	747.0	748.1	749.1	750.1	751.0
125°	826.9	826.3	825.7	825.1	825.7	826.3	826.9	827.4	828.0	828.6	829.2
127.5°	901.7	901.2	900.7	900.3	900.7	901.2	901.7	902.1	902.6	903.2	903.8
130°	953.0	951.8	950.7	949.5	950.7	951.8	953.0	954.2	955.0	955.6	956.2
132.5°	1003.3	1002.8	1002.4	1001.9	1002.4	1002.8	1003.3	1003.8	1004.3	1004.9	1005.4
135°	1076.5	1075.7	1074.8	1073.9	1074.8	1075.7	1076.5	1077.4	1078.1	1078.7	1079.3
137.5°	1149.1	1149.3	1149.4	1149.6	1149.4	1149.3	1149.1	1148.9	1149.2	1150.0	1150.7
140°	1196.6	1196.3	1196.0	1195.8	1196.0	1196.3	1196.6	1196.9	1197.2	1197.5	1197.8
142.5°	1242.0	1241.9	1241.9	1241.8	1241.9	1241.9	1242.0	1242.0	1242.1	1242.2	1242.2
145°	1307.1	1306.2	1305.4	1304.4	1305.4	1306.2	1307.1	1308.0	1308.5	1308.8	1309.1
147.5°	1368.7	1368.4	1368.2	1367.9	1368.2	1368.4	1368.7	1369.0	1369.3	1369.5	1369.7
150°	1407.4	1407.1	1406.8	1406.6	1406.8	1407.1	1407.4	1407.8	1407.9	1407.9	1407.9
152.5°	1444.5	1443.7	1443.0	1442.2	1443.0	1443.7	1444.5	1445.2	1445.3	1444.6	1443.9
155°	1495.2	1494.1	1492.9	1491.8	1492.9	1494.1	1495.2	1496.4	1496.4	1495.2	1494.1
157.5°	1538.9	1537.9	1537.0	1536.0	1537.0	1537.9	1538.9	1539.9	1540.0	1539.1	1538.2
160°	1565.5	1564.1	1562.6	1561.2	1562.6	1564.1	1565.5	1566.9	1567.2	1566.4	1565.5
162.5°	1591.6	1590.2	1588.8	1587.3	1588.8	1590.2	1591.6	1593.2	1593.1	1591.5	1589.9
165°	1624.9	1623.7	1622.6	1621.3	1622.6	1623.7	1624.9	1626.1	1625.8	1624.0	1622.2
167.5°	1651.1	1649.3	1647.6	1645.8	1647.6	1649.3	1651.1	1652.9	1652.9	1651.2	1649.5
170°	1665.5	1663.4	1661.4	1659.4	1661.4	1663.4	1665.5	1667.5	1667.7	1665.9	1664.2
172.5°	1677.0	1675.0	1672.9	1670.9	1672.9	1675.0	1677.0	1679.0	1679.1	1677.1	1675.1
175°	1689.0	1687.0	1685.0	1682.9	1685.0	1687.0	1689.0	1691.1	1691.1	1689.0	1687.0
177.5°	1694.9	1692.9	1691.1	1689.2	1691.1	1692.9	1694.9	1696.7	1696.8	1695.2	1693.5
180°	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4



TEST NUMBER: P333108-840

CATALOG NUMBER: S124RDIW-S1195D1340U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2
2.5°	1914.1	1918.6	1928.9	1940.6	1950.3	1958.6	1965.1	1974.1	1982.5	1994.1	2005.1
5°	1798.1	1809.3	1825.4	1844.8	1869.0	1885.1	1905.2	1923.0	1948.8	1974.6	1999.6
7.5°	1696.1	1708.5	1732.2	1759.0	1787.7	1814.1	1838.1	1869.3	1903.5	1941.1	1983.0
10°	1630.3	1644.1	1672.2	1702.8	1736.8	1762.5	1794.8	1831.9	1870.6	1916.5	1968.1
12.5°	1570.9	1584.1	1618.0	1649.3	1684.5	1712.8	1750.3	1788.1	1839.7	1889.5	1948.1
15°	1455.3	1490.1	1528.7	1565.8	1607.7	1642.4	1687.6	1726.3	1775.4	1845.6	1912.5
17.5°	1327.0	1363.9	1412.0	1469.3	1525.5	1568.4	1614.2	1662.2	1720.8	1792.4	1869.7
20°	1252.1	1282.0	1335.2	1398.9	1464.2	1523.9	1565.8	1619.0	1679.5	1756.9	1836.7
22.5°	1196.1	1221.3	1262.9	1326.7	1397.1	1466.4	1520.0	1572.6	1639.5	1716.9	1803.8
25°	1111.9	1139.3	1175.6	1219.1	1299.7	1373.1	1443.3	1503.7	1574.7	1652.0	1748.8
27.5°	1041.9	1065.7	1098.9	1144.3	1198.5	1279.4	1364.4	1433.4	1506.1	1589.2	1686.1
30°	1000.6	1020.0	1047.3	1093.3	1144.9	1217.5	1303.7	1384.4	1457.7	1544.1	1644.9
32.5°	957.4	978.1	1004.8	1041.1	1096.5	1157.5	1243.7	1332.1	1410.1	1498.2	1597.1
35°	899.8	915.9	940.1	977.2	1027.2	1080.5	1157.0	1248.1	1330.4	1424.7	1519.0
37.5°	841.6	860.6	879.7	912.7	953.7	1010.9	1073.7	1166.7	1257.8	1343.9	1436.0
40°	808.7	820.0	840.9	867.6	911.1	961.9	1020.8	1111.9	1203.0	1288.5	1381.2
42.5°	771.9	784.6	802.2	828.9	867.9	917.4	974.9	1053.8	1148.8	1231.7	1316.1
45°	720.8	728.1	745.8	768.4	800.6	850.6	903.8	974.0	1063.5	1142.5	1216.7
47.5°	669.2	675.5	686.6	707.3	743.4	783.6	833.3	896.3	974.8	1053.8	1116.5
50°	633.7	639.3	649.8	669.2	701.5	740.9	790.1	846.6	916.8	992.5	1044.9
52.5°	598.2	601.4	611.2	633.1	660.1	699.0	743.1	795.0	860.6	923.5	976.5
55°	541.8	549.1	555.5	571.7	597.4	634.5	674.1	723.3	774.1	827.3	872.4
57.5°	482.9	490.9	500.2	514.4	534.9	569.4	604.9	644.7	688.1	732.3	770.1
60°	444.2	451.5	459.6	475.7	494.2	521.7	560.4	595.0	628.1	668.4	706.3
62.5°	406.2	413.4	422.8	435.8	453.6	479.8	512.0	542.2	576.5	611.7	639.9
65°	349.9	355.6	362.8	375.0	391.8	415.3	441.8	465.2	495.8	521.7	547.4
67.5°	288.2	299.0	308.5	318.3	332.6	354.5	373.7	396.1	416.9	436.1	459.6
70°	247.5	259.6	268.5	278.9	292.7	311.2	329.7	345.1	362.0	380.5	401.5
72.5°	213.4	222.9	229.7	241.0	253.4	270.5	287.8	300.5	314.3	327.0	347.4
75°	168.5	172.6	177.4	186.2	197.5	210.5	224.2	235.4	243.5	254.8	269.3
77.5°	121.1	128.9	132.1	138.4	146.4	154.5	163.5	173.0	180.8	184.8	195.9
80°	92.7	95.9	99.2	108.1	112.9	121.0	127.3	136.2	139.5	143.5	154.0
82.5°	72.1	74.0	75.9	78.4	81.3	89.4	95.8	101.4	104.6	106.1	114.0
85°	41.9	42.7	43.5	44.3	45.1	45.1	48.4	52.4	58.1	58.1	60.5
87.5°	20.3	20.6	20.1	19.0	19.9	19.4	19.5	18.8	20.1	21.4	22.7
90°	30.6	28.8	26.5	24.1	21.8	19.5	16.8	13.5	10.3	7.2	3.9
92.5°	52.9	51.9	50.2	48.6	47.0	45.3	42.7	39.0	35.3	31.7	28.1
95°	100.4	99.6	97.5	95.4	93.4	91.4	89.1	86.4	83.8	81.2	78.6
97.5°	158.4	157.4	155.0	152.7	150.3	147.8	145.6	143.5	141.5	139.4	137.2
100°	201.0	200.4	197.7	195.1	192.5	189.9	188.0	186.8	185.7	184.5	183.4
102.5°	245.2	244.4	242.0	239.6	237.2	234.8	233.4	233.0	232.5	232.1	231.6
105°	312.6	311.7	310.5	309.4	308.2	307.0	306.3	306.0	305.8	305.5	305.2
107.5°	385.6	384.8	384.7	384.5	384.3	384.1	383.8	383.4	383.1	382.7	382.4
110°	435.6	436.2	436.5	436.7	437.0	437.3	437.2	436.6	436.0	435.4	434.8



TEST NUMBER: P333108-840

CATALOG NUMBER: S124RDIW-S1195D1340U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	487.4	487.5	488.0	488.5	489.1	489.6	489.8	489.7	489.5	489.4	489.3
115°	568.2	568.4	569.0	569.6	570.2	570.8	571.0	571.0	571.0	571.0	571.0
117.5°	646.2	647.2	647.6	648.0	648.4	648.8	648.9	648.7	648.5	648.2	648.0
120°	699.2	700.6	701.6	702.5	703.3	704.2	704.0	702.9	701.7	700.5	699.3
122.5°	752.0	753.1	753.5	753.9	754.3	754.7	754.7	754.2	753.8	753.3	752.8
125°	829.7	830.3	830.6	830.9	831.2	831.5	831.6	831.6	831.6	831.6	831.6
127.5°	904.4	904.9	905.4	905.9	906.4	906.9	906.7	905.7	904.9	904.0	903.1
130°	956.7	957.4	957.4	957.4	957.4	957.4	956.9	956.0	955.2	954.3	953.4
132.5°	1006.0	1006.6	1006.8	1007.0	1007.3	1007.5	1007.3	1006.7	1006.0	1005.4	1004.8
135°	1079.9	1080.5	1080.5	1080.5	1080.5	1080.5	1079.6	1077.8	1076.1	1074.4	1072.6
137.5°	1151.4	1152.3	1151.8	1151.3	1150.8	1150.4	1149.7	1148.9	1148.1	1147.3	1146.5
140°	1198.1	1198.3	1198.3	1198.3	1198.3	1198.3	1198.1	1197.5	1196.9	1196.3	1195.8
142.5°	1242.3	1242.3	1242.6	1242.8	1243.0	1243.2	1243.1	1242.5	1241.9	1241.3	1240.8
145°	1309.4	1309.7	1309.4	1309.1	1308.8	1308.5	1307.8	1306.7	1305.5	1304.3	1303.1
147.5°	1370.0	1370.2	1370.4	1370.7	1370.9	1371.1	1370.5	1369.2	1367.8	1366.3	1364.9
150°	1407.9	1407.9	1407.9	1407.9	1407.9	1407.9	1407.3	1406.1	1405.0	1403.8	1402.7
152.5°	1443.2	1442.5	1442.3	1442.0	1441.8	1441.6	1441.1	1440.4	1439.7	1439.0	1438.2
155°	1492.9	1491.8	1492.0	1492.3	1492.6	1492.9	1493.0	1493.0	1493.0	1493.0	1493.0
157.5°	1537.4	1536.5	1536.6	1536.6	1536.7	1536.7	1537.0	1537.5	1538.1	1538.6	1539.1
160°	1564.6	1563.8	1564.1	1564.4	1564.6	1564.9	1565.2	1565.5	1565.8	1566.1	1566.4
162.5°	1588.4	1586.8	1587.1	1587.4	1587.7	1588.0	1588.5	1589.2	1590.0	1590.7	1591.5
165°	1620.5	1618.7	1619.3	1619.9	1620.5	1621.1	1621.8	1622.7	1623.6	1624.5	1625.3
167.5°	1647.8	1646.0	1646.0	1645.9	1645.9	1645.8	1646.4	1647.6	1648.8	1650.0	1651.2
170°	1662.4	1660.6	1660.4	1660.1	1659.8	1659.5	1660.1	1661.5	1663.0	1664.5	1665.9
172.5°	1673.1	1671.1	1671.1	1671.0	1671.0	1670.9	1671.5	1672.7	1674.0	1675.2	1676.4
175°	1685.0	1682.9	1683.2	1683.5	1683.8	1684.1	1685.0	1686.5	1687.9	1689.3	1690.8
177.5°	1691.9	1690.3	1690.3	1690.3	1690.3	1690.3	1690.8	1692.0	1693.1	1694.4	1695.5
180°	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4



TEST NUMBER: P333108-840

CATALOG NUMBER: S124RDIW-S1195D1340U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2
2.5°	2013.5	2019.2	2025.7	2038.0	2048.3	2052.9	2061.8	2068.3	2066.4	2075.4	2090.8
5°	2021.3	2043.2	2068.1	2094.0	2122.9	2147.2	2166.5	2185.9	2201.2	2219.7	2247.2
7.5°	2020.0	2058.8	2100.8	2147.2	2194.7	2235.8	2273.9	2312.6	2346.9	2384.5	2433.7
10°	2014.9	2066.5	2118.9	2179.4	2239.9	2297.1	2348.7	2397.1	2443.1	2492.2	2554.4
12.5°	2009.1	2068.4	2131.8	2204.5	2279.9	2348.7	2409.3	2479.0	2536.6	2600.0	2671.7
15°	1983.5	2063.3	2149.6	2243.9	2334.2	2426.9	2509.9	2595.5	2675.2	2751.1	2841.4
17.5°	1954.1	2046.2	2148.0	2259.4	2367.9	2480.6	2579.2	2686.8	2768.4	2870.2	2954.1
20°	1930.3	2029.4	2138.3	2263.2	2386.6	2511.5	2620.4	2730.1	2822.0	2924.4	3030.8
22.5°	1901.2	2010.0	2128.0	2257.5	2386.6	2523.1	2643.6	2752.7	2866.5	2981.8	3091.5
25°	1854.4	1967.3	2092.3	2234.2	2382.6	2522.0	2651.1	2786.5	2909.1	3034.0	3132.4
27.5°	1797.1	1915.6	2047.3	2193.7	2346.0	2488.8	2640.8	2785.1	2908.4	3028.7	3114.5
30°	1751.2	1876.2	2002.8	2151.2	2309.2	2462.4	2625.2	2769.6	2899.4	3007.5	3055.9
32.5°	1704.1	1822.7	1953.2	2103.4	2265.3	2430.1	2591.7	2739.3	2859.4	2924.3	2925.5
35°	1622.2	1733.5	1869.0	2016.5	2182.6	2361.6	2525.3	2670.4	2743.8	2749.5	2670.4
37.5°	1532.9	1635.0	1762.8	1910.6	2092.4	2270.5	2437.7	2534.5	2559.0	2476.9	2330.8
40°	1469.1	1563.4	1686.8	1838.4	2018.9	2202.8	2355.2	2426.1	2400.3	2267.2	2104.4
42.5°	1402.0	1489.9	1608.7	1758.4	1939.6	2125.4	2255.2	2293.2	2224.8	2071.2	1880.6
45°	1292.5	1373.1	1490.9	1641.6	1815.7	1989.9	2088.3	2068.9	1955.2	1773.0	1559.3
47.5°	1178.5	1256.4	1362.3	1501.8	1680.1	1830.4	1897.0	1838.7	1676.9	1476.4	1302.6
50°	1103.0	1182.9	1280.4	1413.4	1576.3	1721.4	1764.1	1675.5	1495.6	1302.9	1143.3
52.5°	1028.9	1097.0	1192.7	1321.2	1476.9	1599.5	1622.2	1520.0	1334.4	1161.6	1020.1
55°	915.9	978.1	1058.6	1179.6	1314.2	1418.3	1406.1	1274.8	1106.2	958.7	847.4
57.5°	806.8	853.5	928.1	1041.4	1159.6	1229.4	1185.3	1073.2	916.1	795.4	701.5
60°	734.6	778.1	847.4	946.5	1050.6	1090.0	1053.0	931.3	807.1	696.6	617.6
62.5°	666.1	704.6	764.2	856.3	940.3	963.7	924.0	817.7	705.8	611.5	546.0
65°	566.8	602.3	653.1	718.4	776.5	787.7	761.9	653.1	568.5	489.4	444.2
67.5°	476.7	499.9	539.6	596.0	626.8	633.4	583.6	515.2	440.6	392.0	358.0
70°	416.1	432.1	469.3	499.9	524.9	525.7	479.8	425.0	367.7	328.2	303.2
72.5°	357.4	372.8	400.9	421.8	441.0	434.7	392.6	349.4	303.2	273.4	254.8
75°	275.8	289.4	304.0	313.7	313.7	305.6	275.0	242.7	216.1	198.3	192.7
77.5°	200.5	211.8	216.6	215.1	212.2	199.7	180.3	159.2	149.7	141.3	137.0
80°	157.2	162.1	163.7	159.7	154.8	140.3	127.3	118.6	109.7	106.4	104.8
82.5°	116.5	120.8	116.5	117.8	107.0	95.1	88.1	85.0	81.3	80.0	78.4
85°	62.1	61.3	59.7	55.6	48.4	46.8	45.9	45.1	43.5	44.3	42.7
87.5°	22.7	21.4	19.5	19.5	20.0	19.2	20.3	20.8	21.2	20.9	22.6
90°	7.2	10.3	13.5	16.8	19.5	21.8	24.1	26.5	28.8	30.6	32.3
92.5°	31.7	35.3	39.0	42.7	45.3	47.0	48.6	50.2	51.9	52.9	53.9
95°	81.2	83.8	86.4	89.1	91.4	93.4	95.4	97.5	99.6	100.4	101.3
97.5°	139.4	141.5	143.5	145.6	147.8	150.3	152.7	155.0	157.4	158.4	159.6
100°	184.5	185.7	186.8	188.0	189.9	192.5	195.1	197.7	200.4	201.0	201.6
102.5°	232.1	232.5	233.0	233.4	234.8	237.2	239.6	242.0	244.4	245.2	246.0
105°	305.5	305.8	306.0	306.3	307.0	308.2	309.4	310.5	311.7	312.6	313.5
107.5°	382.7	383.1	383.4	383.8	384.1	384.3	384.5	384.7	384.8	385.6	386.4
110°	435.4	436.0	436.6	437.2	437.3	437.0	436.7	436.5	436.2	435.6	434.9



TEST NUMBER: P333108-840

CATALOG NUMBER: S124RDIW-S1195D1340U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	489.4	489.5	489.7	489.8	489.6	489.1	488.5	488.0	487.5	487.4	487.3
115°	571.0	571.0	571.0	571.0	570.8	570.2	569.6	569.0	568.4	568.2	567.8
117.5°	648.2	648.5	648.7	648.9	648.8	648.4	648.0	647.6	647.2	646.2	645.3
120°	700.5	701.7	702.9	704.0	704.2	703.3	702.5	701.6	700.6	699.2	697.8
122.5°	753.3	753.8	754.2	754.7	754.7	754.3	753.9	753.5	753.1	752.0	751.0
125°	831.6	831.6	831.6	831.6	831.5	831.2	830.9	830.6	830.3	829.7	829.2
127.5°	904.0	904.9	905.7	906.7	906.9	906.4	905.9	905.4	904.9	904.4	903.8
130°	954.3	955.2	956.0	956.9	957.4	957.4	957.4	957.4	957.4	956.7	956.2
132.5°	1005.4	1006.0	1006.7	1007.3	1007.5	1007.3	1007.0	1006.8	1006.6	1006.0	1005.4
135°	1074.4	1076.1	1077.8	1079.6	1080.5	1080.5	1080.5	1080.5	1080.5	1079.9	1079.3
137.5°	1147.3	1148.1	1148.9	1149.7	1150.4	1150.8	1151.3	1151.8	1152.3	1151.4	1150.7
140°	1196.3	1196.9	1197.5	1198.1	1198.3	1198.3	1198.3	1198.3	1198.3	1198.1	1197.8
142.5°	1241.3	1241.9	1242.5	1243.1	1243.2	1243.0	1242.8	1242.6	1242.3	1242.3	1242.2
145°	1304.3	1305.5	1306.7	1307.8	1308.5	1308.8	1309.1	1309.4	1309.7	1309.4	1309.1
147.5°	1366.3	1367.8	1369.2	1370.5	1371.1	1370.9	1370.7	1370.4	1370.2	1370.0	1369.7
150°	1403.8	1405.0	1406.1	1407.3	1407.9	1407.9	1407.9	1407.9	1407.9	1407.9	1407.9
152.5°	1439.0	1439.7	1440.4	1441.1	1441.6	1441.8	1442.0	1442.3	1442.5	1443.2	1443.9
155°	1493.0	1493.0	1493.0	1493.0	1492.9	1492.6	1492.3	1492.0	1491.8	1492.9	1494.1
157.5°	1538.6	1538.1	1537.5	1537.0	1536.7	1536.7	1536.6	1536.6	1536.5	1537.4	1538.2
160°	1566.1	1565.8	1565.5	1565.2	1564.9	1564.6	1564.4	1564.1	1563.8	1564.6	1565.5
162.5°	1590.7	1590.0	1589.2	1588.5	1588.0	1587.7	1587.4	1587.1	1586.8	1588.4	1589.9
165°	1624.5	1623.6	1622.7	1621.8	1621.1	1620.5	1619.9	1619.3	1618.7	1620.5	1622.2
167.5°	1650.0	1648.8	1647.6	1646.4	1645.8	1645.9	1645.9	1646.0	1646.0	1647.8	1649.5
170°	1664.5	1663.0	1661.5	1660.1	1659.5	1659.8	1660.1	1660.4	1660.6	1662.4	1664.2
172.5°	1675.2	1674.0	1672.7	1671.5	1670.9	1671.0	1671.0	1671.1	1671.1	1673.1	1675.1
175°	1689.3	1687.9	1686.5	1685.0	1684.1	1683.8	1683.5	1683.2	1682.9	1685.0	1687.0
177.5°	1694.4	1693.1	1692.0	1690.8	1690.3	1690.3	1690.3	1690.3	1690.3	1691.9	1693.5
180°	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4



TEST NUMBER: P333108-840

CATALOG NUMBER: S124RDIW-S1195D1340U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2	2001.2
2.5°	2099.2	2101.8	2103.8	2110.2	2110.8	2116.7	2110.8
5°	2272.9	2284.2	2302.0	2319.7	2321.3	2332.6	2312.4
7.5°	2467.7	2493.9	2510.1	2538.8	2550.1	2557.2	2545.6
10°	2601.9	2626.1	2668.8	2689.8	2710.8	2713.9	2704.3
12.5°	2731.6	2770.0	2803.6	2843.3	2842.4	2870.7	2860.3
15°	2904.3	2943.8	2990.5	3034.8	3051.0	3051.0	3063.9
17.5°	3027.5	3099.9	3148.3	3183.1	3221.1	3227.7	3223.2
20°	3110.7	3188.9	3240.5	3285.6	3311.4	3318.7	3318.7
22.5°	3172.6	3239.1	3289.5	3330.1	3351.4	3359.9	3357.4
25°	3215.5	3272.7	3303.4	3315.5	3321.0	3319.5	3304.2
27.5°	3156.7	3154.2	3134.8	3097.8	3069.9	3052.9	3033.5
30°	3044.5	3002.6	2954.3	2901.0	2832.5	2780.1	2763.9
32.5°	2877.5	2783.3	2701.4	2612.7	2539.0	2486.6	2464.7
35°	2554.4	2405.2	2283.4	2177.0	2099.6	2051.2	2035.1
37.5°	2170.8	2026.5	1875.7	1772.5	1708.4	1659.5	1641.2
40°	1927.0	1769.8	1638.4	1541.7	1475.5	1427.9	1427.1
42.5°	1704.5	1554.4	1430.7	1361.0	1289.7	1258.3	1258.1
45°	1395.6	1275.6	1170.7	1115.9	1073.2	1047.3	1040.1
47.5°	1155.6	1056.2	986.4	942.7	907.9	891.4	880.8
50°	1020.8	933.7	878.1	840.1	820.8	799.8	798.2
52.5°	908.5	838.2	794.9	764.1	739.5	726.9	727.3
55°	763.6	707.9	677.3	653.9	634.5	624.9	620.9
57.5°	643.3	601.5	579.3	557.7	549.6	542.0	539.9
60°	568.5	540.2	519.3	502.3	490.2	487.8	487.0
62.5°	506.5	477.0	462.5	449.4	440.6	436.9	435.4
65°	417.7	395.9	382.9	372.5	369.3	363.7	362.8
67.5°	336.7	323.7	315.1	307.8	303.5	303.2	303.2
70°	287.0	279.7	272.6	268.5	266.1	264.5	264.5
72.5°	244.5	239.1	233.2	231.1	230.6	228.9	228.3
75°	186.2	180.6	181.4	177.4	174.2	170.2	167.7
77.5°	132.1	128.1	127.2	126.7	124.0	123.5	124.8
80°	102.4	98.4	97.6	98.4	97.6	95.1	95.1
82.5°	77.9	74.5	73.7	73.2	72.4	73.2	71.9
85°	41.9	40.3	40.3	40.3	41.9	41.1	40.3
87.5°	21.6	21.3	22.2	21.7	21.8	21.3	22.0
90°	34.0	35.7	37.0	37.6	38.2	38.7	39.3
92.5°	55.0	56.0	56.8	57.1	57.5	57.8	58.2
95°	102.2	103.0	103.5	103.5	103.5	103.5	103.5
97.5°	160.6	161.6	162.2	162.2	162.2	162.2	162.2
100°	202.2	202.7	203.0	203.0	203.0	203.0	203.0
102.5°	246.8	247.6	248.1	248.4	248.6	248.8	249.1
105°	314.4	315.2	316.1	316.9	317.8	318.7	319.5
107.5°	387.2	388.1	388.4	388.4	388.3	388.3	388.2
110°	434.3	433.8	433.9	434.8	435.7	436.6	437.5



TEST NUMBER: P333108-840

CATALOG NUMBER: S124RDIW-S1195D1340U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	487.2	487.0	487.1	487.2	487.4	487.6	487.8
115°	567.5	567.2	566.9	566.6	566.3	566.0	565.8
117.5°	644.3	643.3	642.5	641.9	641.4	640.8	640.2
120°	696.3	694.9	694.4	695.0	695.6	696.2	696.7
122.5°	750.1	749.1	748.1	747.0	746.0	745.0	743.9
125°	828.6	828.0	827.4	826.9	826.3	825.7	825.1
127.5°	903.2	902.6	902.1	901.7	901.2	900.7	900.3
130°	955.6	955.0	954.2	953.0	951.8	950.7	949.5
132.5°	1004.9	1004.3	1003.8	1003.3	1002.8	1002.4	1001.9
135°	1078.7	1078.1	1077.4	1076.5	1075.7	1074.8	1073.9
137.5°	1150.0	1149.2	1148.9	1149.1	1149.3	1149.4	1149.6
140°	1197.5	1197.2	1196.9	1196.6	1196.3	1196.0	1195.8
142.5°	1242.2	1242.1	1242.0	1242.0	1241.9	1241.9	1241.8
145°	1308.8	1308.5	1308.0	1307.1	1306.2	1305.4	1304.4
147.5°	1369.5	1369.3	1369.0	1368.7	1368.4	1368.2	1367.9
150°	1407.9	1407.9	1407.8	1407.4	1407.1	1406.8	1406.6
152.5°	1444.6	1445.3	1445.2	1444.5	1443.7	1443.0	1442.2
155°	1495.2	1496.4	1496.4	1495.2	1494.1	1492.9	1491.8
157.5°	1539.1	1540.0	1539.9	1538.9	1537.9	1537.0	1536.0
160°	1566.4	1567.2	1566.9	1565.5	1564.1	1562.6	1561.2
162.5°	1591.5	1593.1	1593.2	1591.6	1590.2	1588.8	1587.3
165°	1624.0	1625.8	1626.1	1624.9	1623.7	1622.6	1621.3
167.5°	1651.2	1652.9	1652.9	1651.1	1649.3	1647.6	1645.8
170°	1665.9	1667.7	1667.5	1665.5	1663.4	1661.4	1659.4
172.5°	1677.1	1679.1	1679.0	1677.0	1675.0	1672.9	1670.9
175°	1689.0	1691.1	1691.1	1689.0	1687.0	1685.0	1682.9
177.5°	1695.2	1696.8	1696.7	1694.9	1692.9	1691.1	1689.2
180°	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4	1693.4

(END OF REPORT)