

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333034-840

Luminaire Tested: **S124RDIW-S350D1560U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333034-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIW-S350D1560U840-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6910.7 lumens
Efficiency: N/A
Efficacy: 129.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 53.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333034-840

CATALOG NUMBER: S124RDIW-S350D1560U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

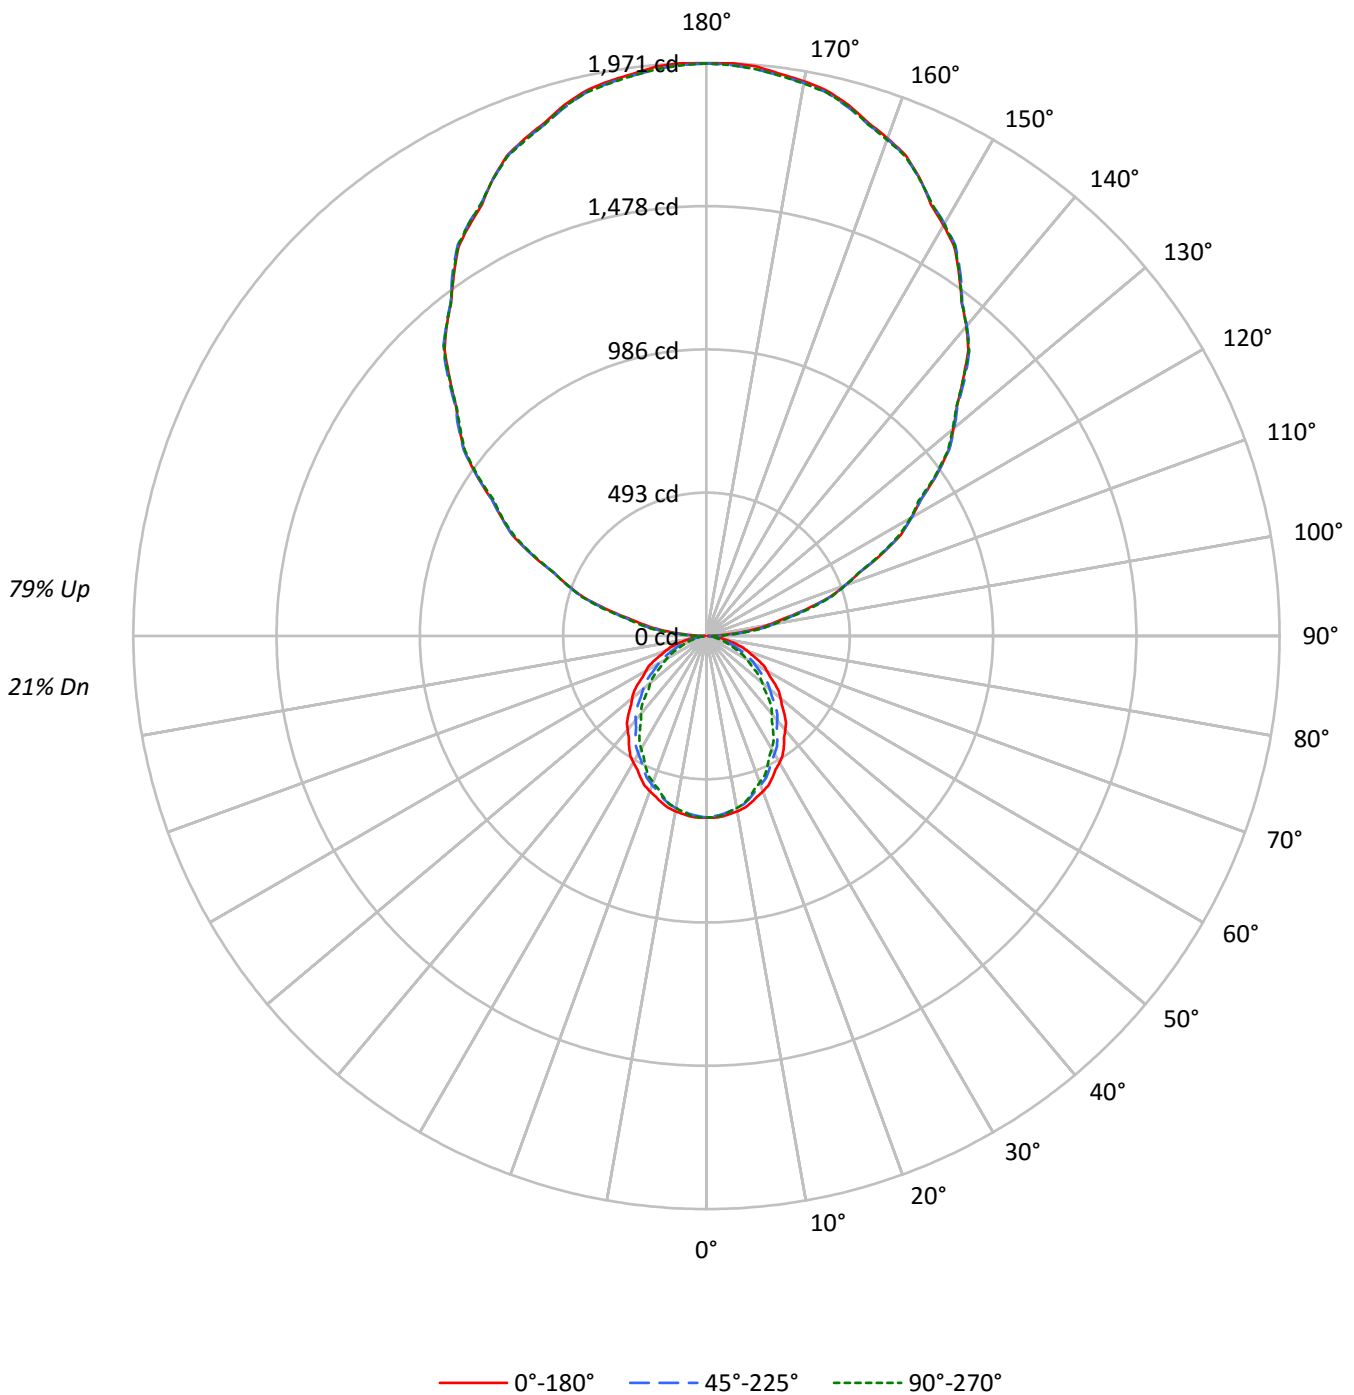



TEST NUMBER: P333034-840

CATALOG NUMBER: S124RDIW-S350D1560U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	100	100	100	100	89	89	89	89	67	67	67	48	48	48	29	29	29
1	91	87	84	80	81	77	74	72	59	57	55	42	41	40	26	26	25
2	83	76	70	66	73	68	63	59	52	48	46	37	35	33	23	22	21
3	76	67	60	55	67	60	54	49	46	42	38	33	30	28	21	19	18
4	69	59	52	46	61	53	46	42	40	36	33	29	26	24	18	17	16
5	64	53	45	39	56	47	40	36	36	32	28	26	23	21	17	15	14
6	58	47	39	34	52	42	35	31	32	28	24	23	20	18	15	13	12
7	54	42	35	30	48	38	31	27	29	25	21	21	18	16	14	12	11
8	50	38	31	26	44	34	28	24	27	22	19	19	16	14	13	11	10
9	46	35	28	23	41	31	25	21	24	20	17	18	15	13	12	10	9
10	43	32	25	20	38	28	23	19	22	18	15	16	13	11	11	9	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5040	5040	5040
5°	5051	4989	5020
10°	5019	4930	4930
15°	4962	4826	4790
20°	4883	4689	4603
25°	4782	4530	4415
30°	4683	4363	4180
35°	4574	4188	3943
40°	4443	3990	3687
45°	4322	3793	3427
50°	4185	3567	3152
55°	4037	3330	2853
60°	3873	3073	2546
65°	3725	2749	2245
70°	3510	2391	1907
75°	3235	1984	1550
80°	2822	1511	1423
85°	2399	1371	1278



TEST NUMBER: P333034-840

CATALOG NUMBER: S124RDIW-S350D1560U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	58.6	0.8
10°-20°	163.5	2.4
20°-30°	236.1	3.4
30°-40°	267.7	3.9
40°-50°	258.5	3.7
50°-60°	214.9	3.1
60°-70°	148.4	2.1
70°-80°	75.2	1.1
80°-90°	25.2	0.4
90°-100°	129.9	1.9
100°-110°	384.7	5.6
110°-120°	652.9	9.4
120°-130°	861.0	12.5
130°-140°	966.9	14.0
140°-150°	950.1	13.7
150°-160°	799.1	11.6
160°-170°	531.7	7.7
170°-180°	186.2	2.7
0°-30°	458.3	6.6
0°-40°	726.0	10.5
0°-60°	1199.4	17.4
0°-90°	1448.2	21.0
90°-120°	1167.5	16.9
90°-150°	3945.5	57.1
90°-180°	5463.0	79.1
0°-180°	6910.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	624	624	624	624	624	
5°	623	621	616	620	620	59
15°	594	589	577	576	573	167
25°	537	528	509	501	496	247
35°	464	448	425	409	400	290
45°	379	360	332	310	300	292
55°	287	267	237	213	203	256
65°	195	174	144	124	118	193
75°	104	86	64	53	50	110
85°	26	17	15	14	14	29
90°	4	21	34	42	46	7
95°	91	105	116	120	120	102
105°	355	357	362	367	372	376
115°	664	664	661	659	658	654
125°	967	967	965	962	959	861
135°	1247	1256	1256	1253	1249	964
145°	1515	1521	1523	1521	1517	948
155°	1736	1736	1734	1740	1734	798
165°	1890	1885	1882	1890	1885	532
175°	1966	1958	1957	1966	1957	187
180°	1969	1969	1969	1969	1969	



TEST NUMBER: P333034-840

CATALOG NUMBER: S124RDIW-S350D1560U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	624.3	624.3	624.3	624.3	624.3	624.3	624.3	624.3	624.3	624.3	624.3
2.5°	625.8	625.4	625.1	624.8	624.4	623.8	622.9	622.0	621.0	620.1	621.0
5°	623.3	622.9	622.5	622.1	621.6	620.8	619.5	618.2	616.9	615.7	616.7
7.5°	617.6	617.2	616.8	616.3	615.9	614.8	613.2	611.5	609.9	608.2	608.8
10°	612.3	611.8	611.3	610.8	610.2	608.9	607.0	605.1	603.2	601.4	601.8
12.5°	605.4	604.8	604.2	603.6	603.0	601.6	599.3	597.0	594.8	592.5	592.8
15°	593.7	592.7	591.8	590.8	589.9	588.0	585.4	582.7	580.1	577.4	577.2
17.5°	579.5	578.0	576.6	575.3	573.9	571.6	568.5	565.2	562.1	558.9	558.3
20°	568.4	566.9	565.6	564.2	562.8	560.4	556.7	553.1	549.5	545.8	545.0
22.5°	556.1	554.5	553.0	551.5	549.9	547.1	543.3	539.5	535.6	531.7	530.5
25°	536.8	534.9	533.0	531.1	529.2	526.0	521.7	517.4	512.9	508.6	506.8
27.5°	516.5	514.1	511.7	509.4	507.0	503.4	498.8	494.1	489.5	484.8	482.5
30°	502.4	499.7	497.1	494.4	491.8	488.0	482.9	478.0	472.9	468.0	465.3
32.5°	487.5	484.4	481.5	478.5	475.4	471.4	466.3	461.1	456.0	450.8	447.7
35°	464.1	460.7	457.4	453.9	450.5	446.2	440.9	435.6	430.3	425.0	421.3
37.5°	439.2	435.7	432.2	428.7	425.2	420.5	414.5	408.7	402.8	397.0	392.9
40°	421.6	418.1	414.5	411.1	407.6	402.8	396.8	390.7	384.7	378.6	374.2
42.5°	404.8	401.1	397.4	393.7	390.1	385.1	378.8	372.4	366.2	359.8	355.3
45°	378.6	374.7	370.7	366.8	362.8	357.7	351.3	345.0	338.6	332.2	327.0
47.5°	351.5	347.5	343.5	339.3	335.3	329.9	323.4	316.7	310.0	303.5	298.0
50°	333.2	329.0	324.9	320.7	316.6	311.1	304.4	297.5	290.7	284.0	278.6
52.5°	314.5	310.3	306.3	302.3	298.2	292.7	285.7	278.7	271.8	264.8	259.4
55°	286.8	282.6	278.3	274.1	269.8	264.2	257.3	250.4	243.5	236.6	231.1
57.5°	259.4	255.0	250.6	246.2	241.8	236.2	229.3	222.6	215.8	208.9	203.4
60°	239.9	235.7	231.5	227.2	223.0	217.4	210.7	203.8	197.0	190.3	184.7
62.5°	222.4	217.9	213.5	209.1	204.7	199.0	192.1	185.1	178.1	171.2	166.0
65°	195.0	190.5	185.9	181.4	176.7	171.1	164.3	157.4	150.7	143.9	139.4
67.5°	166.6	162.3	157.8	153.5	149.2	143.8	137.4	131.2	124.8	118.6	114.6
70°	148.7	144.2	139.8	135.3	130.8	125.5	119.5	113.4	107.3	101.3	97.9
72.5°	129.6	125.5	121.5	117.4	113.4	108.6	102.8	97.0	91.4	85.6	82.7
75°	103.7	99.8	95.8	91.9	88.0	83.5	78.6	73.5	68.6	63.6	61.1
77.5°	77.6	74.2	70.9	67.6	64.2	60.5	56.5	52.4	48.4	44.3	42.9
80°	60.7	57.7	54.5	51.5	48.4	45.2	42.1	38.9	35.6	32.5	32.2
82.5°	46.2	43.3	40.5	37.7	34.8	32.5	30.7	28.9	27.1	25.2	25.0
85°	25.9	23.7	21.6	19.4	17.3	16.1	15.8	15.5	15.1	14.8	14.6
87.5°	9.7	9.8	9.8	9.9	10.0	10.2	10.7	11.1	11.6	12.0	12.4
90°	4.5	8.3	12.0	15.8	19.5	22.7	25.3	28.1	30.8	33.5	35.5
92.5°	32.6	36.9	41.1	45.3	49.7	52.7	54.6	56.6	58.4	60.3	61.5
95°	91.4	94.4	97.5	100.5	103.5	106.2	108.7	111.0	113.4	115.7	116.7
97.5°	159.6	162.0	164.4	166.9	169.4	172.0	174.7	177.4	180.3	183.0	184.2
100°	213.2	214.5	215.9	217.2	218.6	220.8	223.9	226.9	229.9	233.0	233.7
102.5°	269.2	269.7	270.3	270.8	271.4	273.1	275.8	278.6	281.3	284.2	285.1
105°	354.8	355.2	355.5	355.8	356.2	357.0	358.3	359.7	361.0	362.4	363.5
107.5°	444.6	445.0	445.5	445.9	446.3	446.6	446.8	447.0	447.2	447.4	448.3
110°	505.5	506.2	506.9	507.6	508.3	508.5	508.1	507.8	507.4	507.1	506.3



TEST NUMBER: P333034-840

CATALOG NUMBER: S124RDIW-S350D1560U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	568.9	569.1	569.2	569.3	569.5	569.2	568.6	567.9	567.3	566.7	566.6
115°	663.9	663.9	663.9	663.9	663.9	663.6	662.9	662.2	661.6	660.9	660.6
117.5°	753.5	753.7	754.0	754.3	754.6	754.5	754.0	753.5	753.0	752.6	751.3
120°	813.1	814.5	815.9	817.2	818.5	818.7	817.7	816.7	815.7	814.7	812.9
122.5°	875.3	875.8	876.4	876.9	877.4	877.5	877.0	876.5	876.1	875.6	874.4
125°	966.9	966.9	966.9	966.9	966.9	966.7	966.4	966.0	965.7	965.4	964.7
127.5°	1050.1	1051.1	1052.1	1053.1	1054.1	1054.4	1053.8	1053.3	1052.8	1052.2	1051.5
130°	1108.5	1109.5	1110.5	1111.6	1112.6	1113.1	1113.1	1113.1	1113.1	1113.1	1112.5
132.5°	1168.2	1169.0	1169.7	1170.4	1171.2	1171.4	1171.1	1170.9	1170.6	1170.3	1169.7
135°	1247.1	1249.1	1251.1	1253.2	1255.3	1256.3	1256.3	1256.3	1256.3	1256.3	1255.6
137.5°	1333.0	1333.9	1334.8	1335.8	1336.8	1337.6	1338.1	1338.6	1339.2	1339.7	1338.8
140°	1390.3	1390.9	1391.6	1392.3	1392.9	1393.3	1393.3	1393.3	1393.3	1393.3	1392.9
142.5°	1442.6	1443.3	1444.0	1444.6	1445.3	1445.5	1445.2	1445.0	1444.7	1444.4	1444.4
145°	1515.1	1516.4	1517.8	1519.1	1520.6	1521.4	1521.7	1522.1	1522.4	1522.7	1522.4
147.5°	1587.0	1588.6	1590.2	1591.9	1593.5	1594.2	1593.9	1593.6	1593.4	1593.1	1592.8
150°	1630.8	1632.1	1633.6	1634.9	1636.3	1636.9	1636.9	1636.9	1636.9	1636.9	1636.9
152.5°	1672.2	1673.0	1673.9	1674.7	1675.5	1676.1	1676.3	1676.6	1676.9	1677.1	1677.9
155°	1735.9	1735.9	1735.9	1735.9	1735.9	1735.8	1735.4	1735.0	1734.7	1734.3	1735.8
157.5°	1789.5	1788.9	1788.3	1787.7	1787.1	1786.8	1786.7	1786.6	1786.6	1786.5	1787.5
160°	1821.2	1820.8	1820.5	1820.2	1819.8	1819.5	1819.2	1818.8	1818.5	1818.2	1819.2
162.5°	1850.4	1849.6	1848.7	1847.8	1846.8	1846.2	1845.9	1845.6	1845.2	1844.9	1846.7
165°	1889.7	1888.6	1887.6	1886.6	1885.6	1884.8	1884.1	1883.4	1882.8	1882.1	1884.1
167.5°	1919.9	1918.4	1917.0	1915.6	1914.2	1913.5	1913.6	1913.6	1913.7	1913.8	1915.8
170°	1936.9	1935.2	1933.5	1931.8	1930.2	1929.4	1929.8	1930.2	1930.5	1930.8	1932.8
172.5°	1949.0	1947.6	1946.2	1944.8	1943.4	1942.7	1942.8	1942.9	1942.9	1943.0	1945.3
175°	1965.8	1964.1	1962.5	1960.8	1959.0	1958.0	1957.7	1957.3	1957.0	1956.7	1959.0
177.5°	1971.3	1969.9	1968.6	1967.2	1965.9	1965.2	1965.2	1965.2	1965.2	1965.2	1967.1
180°	1968.8	1968.8	1968.8	1968.8	1968.8	1968.8	1968.8	1968.8	1968.8	1968.8	1968.8



TEST NUMBER: P333034-840

CATALOG NUMBER: S124RDIW-S350D1560U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	624.3	624.3	624.3	624.3	624.3	624.3	624.3	624.3
2.5°	622.0	622.9	623.8	624.2	624.1	624.1	624.0	623.9
5°	617.8	618.8	620.0	620.4	620.2	620.0	619.7	619.5
7.5°	609.6	610.3	611.0	611.1	610.8	610.5	610.1	609.8
10°	602.2	602.6	603.0	603.0	602.6	602.2	601.8	601.4
12.5°	593.0	593.3	593.6	593.4	592.8	592.2	591.6	591.0
15°	577.0	576.8	576.5	576.1	575.3	574.6	573.9	573.1
17.5°	557.6	557.1	556.5	555.6	554.5	553.4	552.3	551.2
20°	544.2	543.3	542.5	541.4	540.0	538.6	537.2	535.8
22.5°	529.2	527.9	526.6	525.4	524.3	523.2	522.1	520.9
25°	504.9	503.2	501.4	500.0	498.9	497.8	496.8	495.6
27.5°	480.3	478.1	475.8	474.0	472.4	470.9	469.4	467.9
30°	462.6	460.0	457.4	455.1	453.4	451.8	450.1	448.4
32.5°	444.6	441.5	438.5	436.1	434.4	432.8	431.2	429.6
35°	417.7	414.1	410.5	407.8	405.9	403.9	402.0	400.1
37.5°	388.9	384.9	380.8	377.8	375.9	374.0	372.0	370.1
40°	369.6	365.2	360.7	357.6	355.7	353.8	351.8	349.9
42.5°	350.7	346.2	341.6	338.4	336.4	334.4	332.3	330.4
45°	321.8	316.6	311.3	307.8	305.9	304.0	302.1	300.2
47.5°	292.7	287.2	281.9	278.1	276.0	273.9	271.8	269.7
50°	273.3	268.0	262.7	259.0	257.0	255.0	253.0	251.0
52.5°	254.0	248.6	243.3	239.4	237.4	235.3	233.2	231.1
55°	225.6	220.0	214.5	210.8	208.7	206.7	204.7	202.7
57.5°	197.7	192.2	186.5	183.0	181.5	180.0	178.3	176.8
60°	179.2	173.7	168.1	164.5	162.8	161.2	159.5	157.7
62.5°	161.0	155.8	150.8	147.5	146.1	144.8	143.4	142.1
65°	134.7	130.2	125.6	122.7	121.4	120.2	118.9	117.5
67.5°	110.7	106.7	102.8	100.2	98.8	97.4	95.9	94.5
70°	94.3	90.8	87.4	85.0	83.9	82.9	81.8	80.8
72.5°	79.7	76.6	73.7	71.7	70.7	69.8	68.8	67.8
75°	58.7	56.2	53.8	52.3	51.6	51.0	50.4	49.7
77.5°	41.5	40.1	38.7	37.9	37.7	37.5	37.3	37.1
80°	31.9	31.5	31.2	31.0	30.9	30.8	30.7	30.6
82.5°	24.7	24.5	24.3	24.1	24.0	23.9	23.8	23.7
85°	14.4	14.1	13.9	13.8	13.8	13.8	13.8	13.8
87.5°	12.7	13.0	13.3	13.6	13.8	14.0	14.2	14.4
90°	37.6	39.6	41.6	43.0	43.6	44.3	45.0	45.6
92.5°	62.7	63.9	65.1	65.9	66.3	66.8	67.2	67.6
95°	117.8	118.8	119.8	120.3	120.3	120.3	120.3	120.3
97.5°	185.5	186.7	187.9	188.5	188.5	188.5	188.5	188.5
100°	234.3	235.0	235.7	236.0	236.0	236.0	236.0	236.0
102.5°	286.0	287.0	287.9	288.5	288.8	289.1	289.3	289.6
105°	364.5	365.5	366.5	367.5	368.5	369.5	370.5	371.5
107.5°	449.3	450.2	451.2	451.6	451.5	451.5	451.4	451.3
110°	505.7	505.0	504.3	504.5	505.5	506.5	507.6	508.6



TEST NUMBER: P333034-840

CATALOG NUMBER: S124RDIW-S350D1560U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	566.4	566.3	566.2	566.2	566.4	566.6	566.8	567.0
115°	660.1	659.8	659.5	659.1	658.8	658.5	658.1	657.8
117.5°	750.2	749.1	747.9	747.0	746.3	745.7	745.0	744.3
120°	811.2	809.6	807.9	807.4	808.1	808.7	809.4	810.1
122.5°	873.2	872.1	871.0	869.8	868.6	867.4	866.2	864.9
125°	964.0	963.4	962.7	962.0	961.3	960.7	960.0	959.3
127.5°	1050.9	1050.2	1049.5	1048.8	1048.3	1047.8	1047.2	1046.7
130°	1111.8	1111.1	1110.3	1109.3	1108.0	1106.7	1105.3	1104.0
132.5°	1169.0	1168.3	1167.6	1167.0	1166.5	1166.0	1165.4	1164.9
135°	1254.9	1254.3	1253.5	1252.6	1251.6	1250.6	1249.6	1248.6
137.5°	1338.0	1337.1	1336.2	1335.8	1336.1	1336.3	1336.5	1336.7
140°	1392.6	1392.3	1391.9	1391.6	1391.3	1390.9	1390.6	1390.3
142.5°	1444.3	1444.2	1444.2	1444.1	1444.0	1444.0	1443.9	1443.8
145°	1522.1	1521.7	1521.4	1520.7	1519.6	1518.6	1517.6	1516.6
147.5°	1592.6	1592.3	1592.0	1591.6	1591.3	1591.0	1590.6	1590.3
150°	1636.9	1636.9	1636.9	1636.8	1636.4	1636.1	1635.8	1635.4
152.5°	1678.7	1679.5	1680.3	1680.3	1679.4	1678.6	1677.7	1676.8
155°	1737.1	1738.4	1739.8	1739.8	1738.4	1737.1	1735.8	1734.3
157.5°	1788.5	1789.5	1790.5	1790.4	1789.3	1788.2	1787.0	1785.8
160°	1820.2	1821.2	1822.2	1821.8	1820.2	1818.5	1816.7	1815.0
162.5°	1848.6	1850.4	1852.2	1852.3	1850.6	1849.0	1847.2	1845.5
165°	1886.1	1888.1	1890.2	1890.6	1889.2	1887.8	1886.4	1885.1
167.5°	1917.8	1919.9	1921.9	1921.9	1919.8	1917.6	1915.5	1913.4
170°	1934.9	1936.9	1938.9	1938.7	1936.4	1934.0	1931.7	1929.2
172.5°	1947.6	1949.8	1952.2	1952.2	1949.7	1947.4	1945.0	1942.7
175°	1961.5	1963.8	1966.2	1966.2	1963.8	1961.5	1959.0	1956.7
177.5°	1969.0	1970.9	1972.8	1972.7	1970.4	1968.3	1966.2	1964.0
180°	1968.8	1968.8	1968.8	1968.8	1968.8	1968.8	1968.8	1968.8

(END OF REPORT)