

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333059-840

Luminaire Tested: **S124RDIW-S795D770U840-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333059-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIW-S795D770U840-4F0-1E-UDD-A
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 770 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6472.7 lumens
Efficiency: N/A
Efficacy: 143.8 lumens/watt
Spacing Criteria (0/90/45): 1.28 / 1.23 / 1.39
Luminous Opening: Rectangular (W 4' x L: 0.33' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 45
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333059-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-A

Luminous Intensity Polar Plot

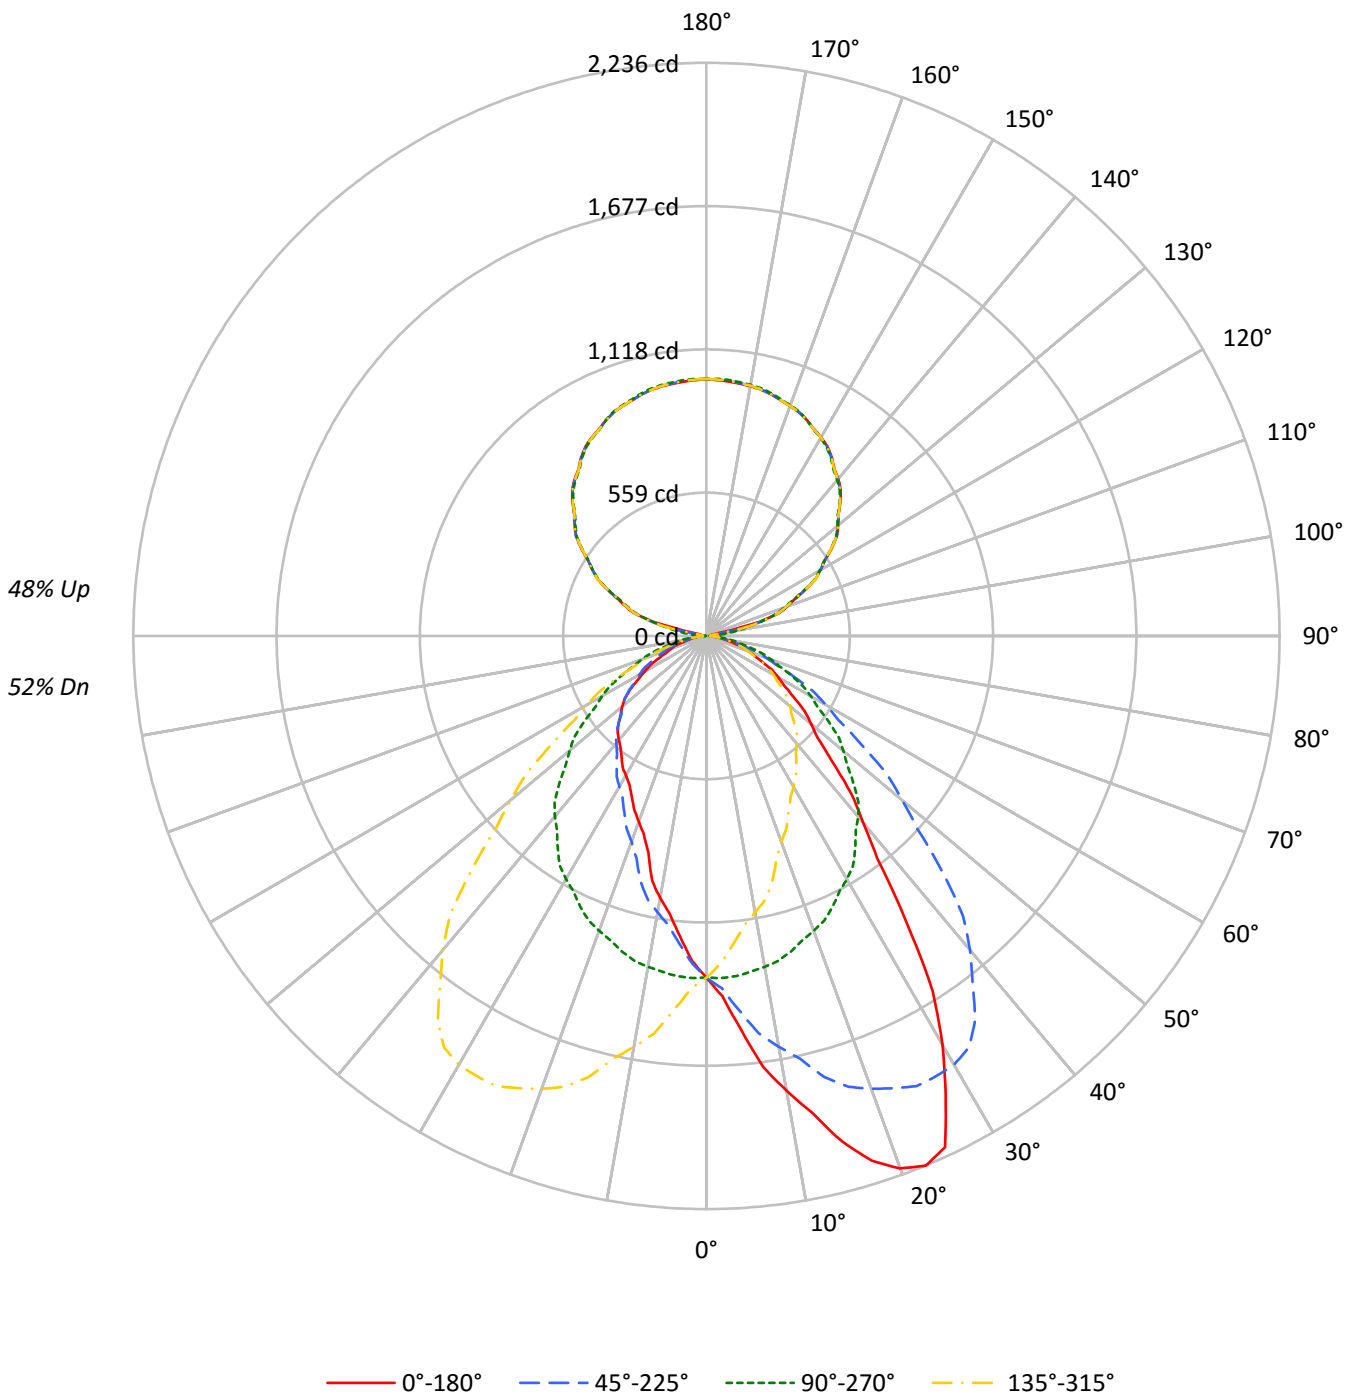



TEST NUMBER: P333059-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	58	58	58	52
1	99	95	91	88	91	88	85	82	75	73	70	63	61	60	52	51	50	45
2	90	83	77	72	83	77	72	68	66	62	59	56	53	51	46	44	43	38
3	83	73	66	61	76	68	62	57	59	54	50	50	46	43	42	39	37	33
4	76	65	58	52	70	61	54	49	52	47	43	45	41	38	37	35	32	29
5	70	58	50	45	64	54	47	42	47	42	37	40	36	33	34	31	28	25
6	64	53	45	39	59	49	42	37	43	37	33	37	32	29	31	28	25	22
7	60	48	40	34	55	44	37	33	39	33	29	33	29	26	28	25	22	20
8	55	43	36	30	51	41	34	29	35	30	26	31	26	23	26	23	20	18
9	52	40	32	27	48	37	30	26	32	27	23	28	24	21	24	21	18	16
10	48	36	29	24	45	34	28	23	30	25	21	26	22	19	22	19	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	10761	10761	10761	10761
5°	12482	10794	9541	10794
10°	14767	10747	8515	10747
15°	17057	10647	7317	10647
20°	18991	10511	6617	10511
25°	19605	10377	6143	10377
30°	17162	10213	5857	10213
35°	13360	9973	5685	9973
40°	10019	9695	5593	9695
45°	7911	9252	5543	9252
50°	6678	8743	5383	8743
55°	5820	8179	5095	8179
60°	5238	7597	4510	7597
65°	4617	6967	3878	6967
70°	4157	6314	3498	6314
75°	3484	5596	2982	5596
80°	2947	4770	2799	4770
85°	2492	3733	2492	3733



TEST NUMBER: P333059-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	129.2	2.0
10°-20°	389.6	6.0
20°-30°	609.4	9.4
30°-40°	677.4	10.5
40°-50°	601.0	9.3
50°-60°	468.4	7.2
60°-70°	306.6	4.7
70°-80°	150.8	2.3
80°-90°	40.1	0.6
90°-100°	34.3	0.5
100°-110°	218.6	3.4
110°-120°	418.1	6.5
120°-130°	530.7	8.2
130°-140°	567.9	8.8
140°-150°	531.0	8.2
150°-160°	428.2	6.6
160°-170°	276.2	4.3
170°-180°	95.2	1.5
0°-30°	1128.1	17.4
0°-40°	1805.6	27.9
0°-60°	2875.0	44.4
0°-90°	3372.5	52.1
90°-120°	670.9	10.4
90°-150°	2300.6	35.5
90°-180°	3100.0	47.9
0°-180°	6472.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1333	1333	1333	1333	1333	
5°	1540	1332	1177	1332	1540	156
15°	2041	1274	876	1274	2041	580
25°	2201	1165	690	1165	2201	976
35°	1356	1012	577	1012	1356	850
45°	693	810	486	810	693	549
55°	414	581	362	581	414	376
65°	242	365	203	365	242	243
75°	112	179	96	179	112	123
85°	27	40	27	40	27	31
90°	22	2	22	2	22	11
95°	22	41	22	41	22	17
105°	214	226	214	226	214	186
115°	424	421	424	421	424	420
125°	597	592	597	592	597	531
135°	740	735	740	735	740	569
145°	852	847	852	847	852	532
155°	928	929	928	929	928	428
165°	975	980	975	980	975	275
175°	996	1002	996	1002	996	95
180°	1002	1002	1002	1002	1002	



TEST NUMBER: P333059-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0
2.5°	1406.0	1410.0	1406.0	1405.6	1401.4	1400.1	1398.4	1392.8	1382.4	1376.4	1377.8
5°	1540.3	1553.8	1546.3	1545.2	1533.4	1521.6	1514.0	1496.8	1478.5	1466.2	1456.0
7.5°	1695.7	1703.4	1698.7	1691.1	1672.0	1661.2	1643.8	1621.1	1588.4	1563.4	1540.4
10°	1801.4	1807.9	1805.6	1791.7	1777.8	1749.3	1733.1	1701.5	1660.1	1627.4	1596.8
12.5°	1905.3	1912.3	1893.3	1894.0	1867.5	1845.1	1819.6	1779.7	1731.9	1689.7	1651.3
15°	2040.9	2032.4	2032.4	2021.5	1992.1	1960.9	1934.6	1892.7	1832.5	1782.0	1728.9
17.5°	2147.1	2150.0	2145.7	2120.3	2097.1	2064.9	2016.6	1967.7	1911.9	1844.1	1789.8
20°	2210.6	2210.6	2205.8	2188.6	2158.6	2124.2	2072.0	2018.9	1948.0	1879.8	1818.6
22.5°	2236.4	2238.2	2232.4	2218.3	2191.2	2157.7	2113.3	2059.3	1986.2	1909.5	1833.6
25°	2201.0	2211.2	2212.2	2208.5	2200.4	2180.0	2141.9	2086.6	2021.0	1937.8	1856.1
27.5°	2020.7	2033.6	2044.9	2063.5	2088.2	2101.0	2102.7	2074.7	2017.5	1937.3	1855.2
30°	1841.1	1851.9	1886.7	1932.4	1967.9	2000.1	2028.0	2035.6	2003.4	1931.4	1844.9
32.5°	1641.7	1656.4	1691.3	1740.4	1799.5	1854.0	1916.7	1948.7	1947.9	1904.7	1824.7
35°	1355.6	1366.3	1398.6	1450.2	1521.1	1602.2	1701.5	1778.8	1831.5	1827.7	1778.8
37.5°	1093.3	1105.4	1138.0	1180.7	1249.5	1349.9	1446.0	1552.6	1649.9	1704.6	1688.3
40°	950.7	951.2	982.9	1026.9	1091.4	1178.9	1283.6	1401.8	1510.3	1598.9	1616.1
42.5°	838.1	838.2	859.1	906.6	953.0	1035.4	1135.4	1252.7	1379.7	1482.1	1527.6
45°	692.9	697.7	714.9	743.4	779.8	849.7	929.7	1038.7	1181.0	1302.4	1378.2
47.5°	586.7	593.8	604.7	627.9	657.0	703.6	769.7	867.7	983.5	1117.0	1224.8
50°	531.7	532.8	546.7	559.7	584.9	622.0	679.9	761.5	867.9	996.3	1116.1
52.5°	484.4	484.2	492.6	509.0	529.5	558.4	605.2	679.5	773.9	888.9	1012.5
55°	413.5	416.3	422.7	435.6	451.1	471.6	508.6	564.5	638.6	736.9	849.1
57.5°	359.6	361.0	366.1	371.5	385.9	400.7	428.5	467.3	529.8	610.3	714.9
60°	324.4	325.0	326.6	334.6	345.9	359.8	378.6	411.4	464.0	537.7	620.4
62.5°	290.0	290.9	293.5	299.3	308.1	317.7	337.4	363.8	407.3	470.2	544.7
65°	241.7	242.3	246.0	248.1	255.1	263.7	278.2	295.9	326.0	378.6	435.0
67.5°	202.0	202.0	202.2	205.1	209.8	215.6	224.3	238.4	261.2	293.5	343.2
70°	176.1	176.1	177.2	178.8	181.6	186.3	191.2	202.0	218.6	244.9	283.1
72.5°	152.1	152.5	153.6	153.9	155.3	159.3	162.9	169.8	182.1	202.0	232.8
75°	111.7	113.3	116.0	118.2	120.9	120.3	124.1	128.4	132.1	143.9	161.7
77.5°	83.1	82.3	82.6	84.4	84.7	85.3	88.0	91.3	94.1	99.7	106.0
80°	63.4	63.4	65.0	65.5	65.0	65.5	68.2	69.8	70.9	73.0	79.0
82.5°	47.9	48.8	48.3	48.8	49.1	49.6	51.9	52.2	53.3	54.1	56.7
85°	26.9	27.4	28.0	26.9	26.9	26.9	28.0	28.5	29.6	29.0	30.1
87.5°	13.9	13.4	13.8	13.7	14.1	13.5	13.7	14.4	13.3	13.6	13.3
90°	22.5	22.1	21.8	21.5	21.1	20.5	19.5	18.5	17.5	16.5	15.1
92.5°	20.7	20.6	20.6	20.5	20.4	19.9	18.9	17.9	16.9	15.9	14.5
95°	21.7	21.6	21.4	21.2	21.1	20.5	19.5	18.5	17.5	16.5	16.4
97.5°	21.0	20.8	20.7	20.5	20.3	20.2	20.1	20.0	19.9	19.8	38.4
100°	21.0	20.8	20.7	20.5	20.3	21.6	24.4	27.4	30.2	33.0	55.9
102.5°	21.6	21.5	21.5	21.5	21.4	36.8	67.3	97.9	128.4	159.0	161.9
105°	213.7	219.6	225.6	231.7	237.6	239.8	238.3	236.9	235.4	233.9	233.1
107.5°	297.7	297.1	296.5	295.9	295.2	294.6	293.8	293.1	292.4	291.5	290.4
110°	334.4	333.9	333.4	332.9	332.3	331.9	331.5	331.2	330.9	330.5	329.6



TEST NUMBER: P333059-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	370.9	370.3	369.6	369.0	368.4	368.1	368.2	368.2	368.3	368.4	367.9
115°	424.2	424.2	424.2	424.2	424.2	424.1	423.7	423.4	423.1	422.7	422.9
117.5°	478.6	478.6	478.7	478.8	478.8	478.9	479.0	479.0	479.1	479.2	478.8
120°	512.7	513.1	513.4	513.7	514.0	514.0	513.7	513.4	513.1	512.7	512.9
122.5°	546.3	546.6	546.9	547.3	547.6	547.8	547.5	547.3	547.1	546.9	546.6
125°	596.7	596.5	596.3	596.2	596.0	595.7	595.2	594.7	594.2	593.7	594.0
127.5°	641.0	641.1	641.2	641.4	641.5	641.6	641.7	641.8	641.9	642.0	641.2
130°	670.9	670.9	670.9	670.9	670.9	670.9	670.7	670.4	670.3	670.1	669.6
132.5°	698.5	698.6	698.7	698.9	699.0	699.0	698.8	698.6	698.5	698.3	697.7
135°	739.8	739.5	739.2	738.8	738.5	738.2	737.9	737.5	737.2	736.9	736.2
137.5°	775.3	775.4	775.5	775.6	775.7	775.5	775.2	774.8	774.4	774.1	773.4
140°	799.8	799.7	799.5	799.3	799.2	798.8	798.3	797.8	797.3	796.9	796.5
142.5°	820.2	820.2	820.1	820.1	820.1	819.9	819.5	819.2	818.8	818.4	818.2
145°	851.5	851.2	850.9	850.5	850.2	850.0	849.8	849.6	849.5	849.3	849.3
147.5°	877.5	877.4	877.2	877.0	876.9	876.7	876.6	876.4	876.3	876.2	876.3
150°	894.2	894.1	893.9	893.8	893.6	893.5	893.5	893.5	893.5	893.5	893.7
152.5°	908.7	908.8	908.9	909.0	909.1	909.0	908.7	908.5	908.2	908.0	908.3
155°	928.1	928.5	929.0	929.5	930.0	929.9	929.3	928.6	928.0	927.3	927.8
157.5°	944.2	945.0	945.9	946.8	947.7	947.7	946.8	945.9	945.0	944.2	944.7
160°	955.0	956.0	957.0	958.0	959.0	959.0	958.0	957.0	956.0	955.0	955.1
162.5°	963.4	964.5	965.6	966.8	968.0	968.0	966.9	966.0	965.0	964.0	964.1
165°	975.2	976.7	978.3	979.8	981.3	981.3	980.0	978.7	977.3	976.0	976.0
167.5°	984.1	985.7	987.4	989.1	990.8	990.9	989.4	988.0	986.4	985.0	985.1
170°	989.5	991.2	992.8	994.5	996.1	996.3	995.0	993.6	992.3	991.0	990.8
172.5°	992.5	994.3	996.1	997.8	999.7	999.9	998.6	997.2	995.9	994.6	994.4
175°	996.2	998.3	1000.3	1002.2	1004.2	1004.5	1003.0	1001.5	1000.0	998.5	998.4
177.5°	998.7	1000.3	1001.8	1003.4	1005.0	1005.3	1004.2	1003.2	1002.1	1001.0	1000.8
180°	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2



TEST NUMBER: P333059-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0
2.5°	1373.4	1367.5	1364.4	1357.6	1349.4	1345.0	1341.2	1335.6	1328.3	1320.6	1314.9
5°	1443.1	1430.3	1414.1	1394.8	1377.7	1361.0	1346.5	1332.0	1315.3	1298.1	1280.9
7.5°	1514.7	1489.3	1462.0	1430.3	1399.5	1371.4	1345.6	1320.9	1292.9	1268.0	1245.2
10°	1564.5	1530.1	1492.0	1451.8	1411.5	1376.5	1342.2	1311.0	1276.7	1246.1	1220.2
12.5°	1604.9	1564.5	1518.6	1468.4	1420.1	1377.9	1338.3	1297.7	1258.6	1225.4	1191.0
15°	1671.9	1616.6	1554.9	1494.7	1431.9	1374.4	1321.2	1273.9	1229.4	1182.7	1149.9
17.5°	1718.0	1652.3	1577.3	1505.0	1430.8	1363.0	1301.7	1245.4	1194.0	1146.2	1107.2
20°	1745.6	1673.0	1589.7	1507.6	1424.3	1351.8	1285.8	1223.5	1170.3	1118.7	1078.4
22.5°	1761.0	1680.7	1589.7	1503.7	1417.4	1339.0	1266.5	1201.5	1143.7	1092.1	1047.5
25°	1766.0	1680.0	1587.1	1488.2	1393.7	1310.5	1235.3	1165.0	1100.4	1048.9	1001.7
27.5°	1759.1	1657.9	1562.7	1461.3	1363.7	1276.0	1197.1	1123.2	1058.6	1003.3	954.8
30°	1748.8	1640.2	1538.2	1432.9	1334.1	1249.8	1166.5	1095.6	1028.5	971.1	922.2
32.5°	1726.4	1618.8	1508.9	1401.2	1301.0	1214.2	1135.2	1063.9	998.0	939.3	887.4
35°	1682.1	1573.2	1453.9	1343.2	1245.0	1154.7	1080.7	1011.9	949.1	886.2	831.4
37.5°	1623.9	1512.5	1393.8	1272.6	1174.3	1089.1	1021.1	956.5	895.2	837.9	777.2
40°	1568.8	1467.3	1344.8	1224.6	1123.6	1041.4	978.6	920.0	858.3	801.3	740.6
42.5°	1502.2	1415.7	1292.0	1171.2	1071.6	992.4	933.9	876.7	820.4	765.3	702.0
45°	1391.1	1325.5	1209.5	1093.5	993.1	914.6	860.9	810.4	761.0	708.4	648.8
47.5°	1263.6	1219.3	1119.1	1000.4	907.5	836.9	785.0	743.8	702.0	649.3	597.0
50°	1175.2	1146.7	1050.0	941.5	852.9	787.9	734.8	696.1	661.2	610.7	563.9
52.5°	1080.7	1065.5	983.8	880.1	794.5	730.7	685.3	650.6	615.2	573.3	529.6
55°	936.6	944.7	875.5	785.8	705.2	651.5	610.2	581.1	551.1	515.6	481.8
57.5°	789.5	818.9	772.4	693.7	618.1	568.6	537.5	513.0	487.8	458.4	429.5
60°	701.5	726.1	699.8	630.6	564.5	518.3	489.3	470.5	445.2	418.4	396.4
62.5°	615.5	642.0	626.3	570.4	509.1	469.3	443.7	426.3	407.5	384.1	361.1
65°	507.6	524.7	517.3	478.6	435.0	401.2	377.6	364.7	347.5	330.3	309.9
67.5°	388.7	421.9	417.6	397.0	359.4	333.0	317.5	306.1	290.4	277.7	263.8
70°	319.5	350.2	349.6	333.0	312.6	287.9	277.1	267.5	253.5	241.2	229.8
72.5°	261.6	289.6	293.8	281.0	267.0	248.3	238.0	231.4	217.8	209.3	200.3
75°	183.2	203.6	208.9	208.9	202.5	192.8	183.7	179.4	169.8	162.2	156.8
77.5°	120.1	133.0	141.4	143.3	144.3	141.1	133.5	130.5	123.1	120.4	115.2
80°	84.8	93.4	103.1	106.3	109.1	108.0	104.7	102.6	95.6	92.9	90.8
82.5°	58.7	63.4	71.3	78.4	77.7	80.5	77.7	75.9	70.7	69.7	67.6
85°	30.6	31.1	32.2	37.1	39.8	40.8	41.4	40.3	38.7	38.7	34.9
87.5°	13.0	12.4	12.9	12.6	12.7	14.0	14.9	15.0	14.1	13.2	12.3
90°	13.8	12.5	11.2	9.6	7.8	6.0	4.0	2.2	4.0	6.0	7.8
92.5°	13.2	11.9	10.6	9.8	9.7	9.7	9.6	9.5	9.6	9.7	9.7
95°	16.2	16.0	15.9	18.6	24.2	29.9	35.5	41.2	35.5	29.9	24.2
97.5°	57.0	75.5	94.1	101.7	98.2	94.6	91.1	87.6	91.1	94.6	98.2
100°	79.0	102.0	124.9	134.9	131.9	129.0	125.9	122.9	125.9	129.0	131.9
102.5°	164.9	167.9	170.9	171.3	169.2	166.9	164.7	162.5	164.7	166.9	169.2
105°	232.2	231.4	230.6	229.6	228.6	227.6	226.6	225.6	226.6	227.6	228.6
107.5°	289.3	288.2	287.1	286.3	285.8	285.3	284.8	284.3	284.8	285.3	285.8
110°	328.6	327.6	326.6	325.8	325.4	324.9	324.4	323.9	324.4	324.9	325.4



TEST NUMBER: P333059-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	367.4	367.0	366.5	365.8	364.9	364.1	363.1	362.2	363.1	364.1	364.9
115°	423.1	423.2	423.4	423.2	422.7	422.3	421.8	421.3	421.8	422.3	422.7
117.5°	478.4	478.1	477.7	477.2	476.5	475.8	475.1	474.5	475.1	475.8	476.5
120°	513.1	513.2	513.4	513.1	512.5	511.8	511.2	510.5	511.2	511.8	512.5
122.5°	546.4	546.2	545.9	545.6	545.2	544.8	544.4	544.1	544.4	544.8	545.2
125°	594.4	594.7	595.0	594.8	594.2	593.5	592.9	592.2	592.9	593.5	594.2
127.5°	640.5	639.6	638.9	638.4	638.2	638.1	637.9	637.7	637.9	638.1	638.2
130°	669.1	668.6	668.1	667.8	667.6	667.5	667.3	667.1	667.3	667.5	667.6
132.5°	697.1	696.4	695.8	695.3	695.0	694.8	694.5	694.2	694.5	694.8	695.0
135°	735.5	734.9	734.2	734.0	734.1	734.3	734.5	734.6	734.5	734.3	734.1
137.5°	772.5	771.8	771.1	770.7	770.6	770.6	770.5	770.4	770.5	770.6	770.6
140°	796.2	795.9	795.5	795.2	794.9	794.5	794.2	793.9	794.2	794.5	794.9
142.5°	818.0	817.8	817.6	817.2	816.6	816.1	815.5	814.9	815.5	816.1	816.6
145°	849.3	849.3	849.3	849.1	848.6	848.1	847.6	847.1	847.6	848.1	848.6
147.5°	876.5	876.7	876.8	876.5	875.5	874.5	873.6	872.7	873.6	874.5	875.5
150°	893.8	894.0	894.2	893.9	893.3	892.6	891.9	891.3	891.9	892.6	893.3
152.5°	908.6	908.8	909.1	909.0	908.5	908.0	907.4	906.9	907.4	908.0	908.5
155°	928.3	928.8	929.3	929.5	929.3	929.1	929.0	928.8	929.0	929.1	929.3
157.5°	945.3	945.9	946.4	946.8	947.0	947.1	947.2	947.3	947.2	947.1	947.0
160°	955.3	955.5	955.6	956.0	956.5	957.0	957.5	958.0	957.5	957.0	956.5
162.5°	964.3	964.5	964.6	965.0	965.7	966.3	966.9	967.6	966.9	966.3	965.7
165°	976.0	976.0	976.0	976.4	977.2	978.1	978.9	979.8	978.9	978.1	977.2
167.5°	985.2	985.3	985.4	985.8	986.7	987.6	988.5	989.4	988.5	987.6	986.7
170°	990.7	990.5	990.3	990.8	991.7	992.7	993.7	994.7	993.7	992.7	991.7
172.5°	994.2	994.1	993.9	994.3	995.3	996.3	997.3	998.4	997.3	996.3	995.3
175°	998.2	997.9	997.8	998.3	999.3	1000.3	1001.2	1002.2	1001.2	1000.3	999.3
177.5°	1000.5	1000.3	1000.0	1000.3	1001.2	1002.2	1003.1	1004.0	1003.1	1002.2	1001.2
180°	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2



TEST NUMBER: P333059-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0
2.5°	1309.0	1304.6	1299.1	1292.6	1285.0	1278.1	1275.1	1277.6	1278.9	1275.5	1275.1
5°	1269.1	1255.7	1245.0	1228.8	1216.0	1205.2	1197.7	1194.5	1195.6	1187.0	1184.8
7.5°	1224.4	1208.4	1190.8	1171.7	1153.9	1138.1	1129.8	1125.3	1116.2	1112.3	1105.7
10°	1195.6	1174.1	1156.9	1134.3	1113.9	1095.1	1086.0	1078.4	1069.3	1065.0	1055.9
12.5°	1165.9	1140.9	1122.1	1098.6	1077.8	1055.1	1046.4	1032.5	1018.2	1009.2	997.4
15°	1124.1	1094.1	1071.0	1043.0	1018.3	992.5	969.5	943.6	934.0	913.6	901.8
17.5°	1075.2	1044.7	1016.1	978.7	940.6	908.6	883.9	859.2	844.4	831.4	825.4
20°	1043.0	1015.1	975.3	931.8	889.4	853.9	834.0	818.0	801.8	792.7	786.3
22.5°	1012.5	976.8	930.7	883.7	841.3	813.5	796.7	780.1	767.1	758.4	749.7
25°	961.4	914.6	865.8	812.0	783.0	758.9	740.6	727.2	719.1	707.9	703.6
27.5°	908.9	852.2	798.3	762.2	732.1	709.9	694.0	683.9	673.7	666.5	661.0
30°	868.5	811.0	762.7	728.3	697.7	679.4	666.5	654.7	646.6	640.8	636.4
32.5°	828.5	771.0	730.4	693.5	669.3	651.5	637.7	628.9	622.6	615.0	612.4
35°	770.7	719.7	684.3	651.0	626.2	610.2	599.4	590.3	584.9	582.7	581.1
37.5°	715.2	673.4	635.3	607.9	585.9	573.3	560.6	556.1	552.4	548.6	550.3
40°	679.9	640.8	606.9	577.9	560.2	546.2	538.7	533.3	530.1	530.1	530.1
42.5°	649.4	611.1	578.1	552.1	534.4	522.6	514.2	509.7	508.6	508.2	510.8
45°	602.1	566.6	533.3	511.8	496.8	484.9	480.2	476.4	476.4	478.6	479.1
47.5°	555.1	521.9	495.2	471.1	457.4	450.0	445.8	443.8	444.0	446.3	448.7
50°	526.3	493.6	467.3	445.8	432.9	425.9	422.1	421.1	422.1	422.1	425.9
52.5°	494.9	465.6	439.8	421.7	407.1	400.5	398.5	397.0	397.7	399.4	401.0
55°	449.0	422.7	398.0	380.8	370.0	365.8	360.9	361.4	360.4	361.4	361.4
57.5°	402.9	379.3	356.3	342.6	333.3	327.0	321.7	323.3	321.6	321.4	320.5
60°	373.2	347.5	329.2	316.9	306.1	300.7	295.9	297.0	295.4	294.3	292.2
62.5°	341.0	319.5	302.2	290.2	281.7	275.4	270.5	269.5	265.8	262.1	257.4
65°	294.3	276.6	261.1	249.7	241.7	236.8	233.1	229.8	221.8	213.2	208.9
67.5°	248.9	236.1	221.6	212.1	205.5	199.1	192.0	186.5	178.9	174.2	171.6
70°	219.6	207.3	195.0	185.8	178.8	173.0	164.9	161.2	155.7	153.6	150.9
72.5°	191.8	180.3	168.7	160.5	153.1	148.5	142.1	138.4	136.0	135.1	132.5
75°	149.4	140.2	131.6	124.1	118.2	114.9	112.3	109.6	108.5	103.6	101.0
77.5°	109.0	102.9	97.6	92.2	88.0	85.8	80.7	77.6	75.7	73.5	72.9
80°	84.8	80.6	75.2	72.0	66.0	63.9	61.8	61.2	60.7	60.2	59.6
82.5°	63.8	59.5	54.1	52.2	50.6	49.3	48.0	47.5	47.0	47.3	47.2
85°	32.2	30.1	30.1	29.6	29.0	28.5	28.0	28.0	27.4	28.0	27.4
87.5°	12.6	12.5	12.8	12.2	12.9	13.2	12.9	13.1	13.7	13.1	13.2
90°	9.6	11.2	12.5	13.8	15.1	16.5	17.5	18.5	19.5	20.5	21.1
92.5°	9.8	10.6	11.9	13.2	14.5	15.9	16.9	17.9	18.9	19.9	20.4
95°	18.6	15.9	16.0	16.2	16.4	16.5	17.5	18.5	19.5	20.5	21.1
97.5°	101.7	94.1	75.5	57.0	38.4	19.8	19.9	20.0	20.1	20.2	20.3
100°	134.9	124.9	102.0	79.0	55.9	33.0	30.2	27.4	24.4	21.6	20.3
102.5°	171.3	170.9	167.9	164.9	161.9	159.0	128.4	97.9	67.3	36.8	21.4
105°	229.6	230.6	231.4	232.2	233.1	233.9	235.4	236.9	238.3	239.8	237.6
107.5°	286.3	287.1	288.2	289.3	290.4	291.5	292.4	293.1	293.8	294.6	295.2
110°	325.8	326.6	327.6	328.6	329.6	330.5	330.9	331.2	331.5	331.9	332.3



TEST NUMBER: P333059-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	365.8	366.5	367.0	367.4	367.9	368.4	368.3	368.2	368.2	368.1	368.4
115°	423.2	423.4	423.2	423.1	422.9	422.7	423.1	423.4	423.7	424.1	424.2
117.5°	477.2	477.7	478.1	478.4	478.8	479.2	479.1	479.0	479.0	478.9	478.8
120°	513.1	513.4	513.2	513.1	512.9	512.7	513.1	513.4	513.7	514.0	514.0
122.5°	545.6	545.9	546.2	546.4	546.6	546.9	547.1	547.3	547.5	547.8	547.6
125°	594.8	595.0	594.7	594.4	594.0	593.7	594.2	594.7	595.2	595.7	596.0
127.5°	638.4	638.9	639.6	640.5	641.2	642.0	641.9	641.8	641.7	641.6	641.5
130°	667.8	668.1	668.6	669.1	669.6	670.1	670.3	670.4	670.7	670.9	670.9
132.5°	695.3	695.8	696.4	697.1	697.7	698.3	698.5	698.6	698.8	699.0	699.0
135°	734.0	734.2	734.9	735.5	736.2	736.9	737.2	737.5	737.9	738.2	738.5
137.5°	770.7	771.1	771.8	772.5	773.4	774.1	774.4	774.8	775.2	775.5	775.7
140°	795.2	795.5	795.9	796.2	796.5	796.9	797.3	797.8	798.3	798.8	799.2
142.5°	817.2	817.6	817.8	818.0	818.2	818.4	818.8	819.2	819.5	819.9	820.1
145°	849.1	849.3	849.3	849.3	849.3	849.3	849.5	849.6	849.8	850.0	850.2
147.5°	876.5	876.8	876.7	876.5	876.3	876.2	876.3	876.4	876.6	876.7	876.9
150°	893.9	894.2	894.0	893.8	893.7	893.5	893.5	893.5	893.5	893.5	893.6
152.5°	909.0	909.1	908.8	908.6	908.3	908.0	908.2	908.5	908.7	909.0	909.1
155°	929.5	929.3	928.8	928.3	927.8	927.3	928.0	928.6	929.3	929.9	930.0
157.5°	946.8	946.4	945.9	945.3	944.7	944.2	945.0	945.9	946.8	947.7	947.7
160°	956.0	955.6	955.5	955.3	955.1	955.0	956.0	957.0	958.0	959.0	959.0
162.5°	965.0	964.6	964.5	964.3	964.1	964.0	965.0	966.0	966.9	968.0	968.0
165°	976.4	976.0	976.0	976.0	976.0	976.0	977.3	978.7	980.0	981.3	981.3
167.5°	985.8	985.4	985.3	985.2	985.1	985.0	986.4	988.0	989.4	990.9	990.8
170°	990.8	990.3	990.5	990.7	990.8	991.0	992.3	993.6	995.0	996.3	996.1
172.5°	994.3	993.9	994.1	994.2	994.4	994.6	995.9	997.2	998.6	999.9	999.7
175°	998.3	997.8	997.9	998.2	998.4	998.5	1000.0	1001.5	1003.0	1004.5	1004.2
177.5°	1000.3	1000.0	1000.3	1000.5	1000.8	1001.0	1002.1	1003.2	1004.2	1005.3	1005.0
180°	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2



TEST NUMBER: P333059-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0
2.5°	1272.4	1273.3	1270.3	1269.4	1270.3	1273.3	1272.4	1275.1	1275.5	1278.9	1277.6
5°	1180.5	1179.4	1176.8	1177.3	1176.8	1179.4	1180.5	1184.8	1187.0	1195.6	1194.5
7.5°	1101.9	1097.7	1098.8	1094.6	1098.8	1097.7	1101.9	1105.7	1112.3	1116.2	1125.3
10°	1053.8	1047.8	1043.0	1038.7	1043.0	1047.8	1053.8	1055.9	1065.0	1069.3	1078.4
12.5°	988.1	983.0	976.4	977.8	976.4	983.0	988.1	997.4	1009.2	1018.2	1032.5
15°	894.7	886.8	873.8	875.5	873.8	886.8	894.7	901.8	913.6	934.0	943.6
17.5°	815.9	816.0	810.0	811.4	810.0	816.0	815.9	825.4	831.4	844.4	859.2
20°	775.0	771.2	771.7	770.2	771.7	771.2	775.0	786.3	792.7	801.8	818.0
22.5°	746.7	742.0	738.3	735.0	738.3	742.0	746.7	749.7	758.4	767.1	780.1
25°	698.7	695.5	690.6	689.6	690.6	695.5	698.7	703.6	707.9	719.1	727.2
27.5°	656.6	656.0	654.1	651.6	654.1	656.0	656.6	661.0	666.5	673.7	683.9
30°	632.2	631.1	630.0	628.3	630.0	631.1	632.2	636.4	640.8	646.6	654.7
32.5°	610.3	609.6	608.5	608.6	608.5	609.6	610.3	612.4	615.0	622.6	628.9
35°	579.0	578.5	577.3	576.8	577.3	578.5	579.0	581.1	582.7	584.9	590.3
37.5°	549.8	551.2	550.5	550.4	550.5	551.2	549.8	550.3	548.6	552.4	556.1
40°	529.6	530.1	531.2	530.7	531.2	530.1	529.6	530.1	530.1	530.1	533.3
42.5°	512.8	512.9	514.4	512.6	514.4	512.9	512.8	510.8	508.2	508.6	509.7
45°	482.8	486.0	485.5	485.5	485.5	486.0	482.8	479.1	478.6	476.4	476.4
47.5°	450.1	452.8	453.6	453.5	453.6	452.8	450.1	448.7	446.3	444.0	443.8
50°	428.6	427.5	429.1	428.6	429.1	427.5	428.6	425.9	422.1	422.1	421.1
52.5°	402.4	402.6	402.5	401.9	402.5	402.6	402.4	401.0	399.4	397.7	397.0
55°	362.0	362.5	361.4	362.0	361.4	362.5	362.0	361.4	361.4	360.4	361.4
57.5°	318.2	315.6	316.7	315.4	316.7	315.6	318.2	320.5	321.4	321.6	323.3
60°	286.8	282.5	281.4	279.3	281.4	282.5	286.8	292.2	294.3	295.4	297.0
62.5°	251.6	248.5	244.9	246.6	244.9	248.5	251.6	257.4	262.1	265.8	269.5
65°	204.6	202.5	200.9	203.0	200.9	202.5	204.6	208.9	213.2	221.8	229.8
67.5°	169.4	168.2	168.2	167.1	168.2	168.2	169.4	171.6	174.2	178.9	186.5
70°	150.9	149.4	149.4	148.2	149.4	149.4	150.9	150.9	153.6	155.7	161.2
72.5°	132.0	130.4	130.9	130.2	130.9	130.4	132.0	132.5	135.1	136.0	138.4
75°	97.8	95.0	95.0	95.6	95.0	95.0	97.8	101.0	103.6	108.5	109.6
77.5°	72.9	72.4	73.1	72.2	73.1	72.4	72.9	72.9	73.5	75.7	77.6
80°	59.6	59.1	58.6	60.2	58.6	59.1	59.6	59.6	60.2	60.7	61.2
82.5°	46.3	46.2	46.0	48.2	46.0	46.2	46.3	47.2	47.3	47.0	47.5
85°	28.0	26.9	28.0	26.9	28.0	26.9	28.0	27.4	28.0	27.4	28.0
87.5°	14.1	13.8	13.4	13.9	13.4	13.8	14.1	13.2	13.1	13.7	13.1
90°	21.5	21.8	22.1	22.5	22.1	21.8	21.5	21.1	20.5	19.5	18.5
92.5°	20.5	20.6	20.6	20.7	20.6	20.6	20.5	20.4	19.9	18.9	17.9
95°	21.2	21.4	21.6	21.7	21.6	21.4	21.2	21.1	20.5	19.5	18.5
97.5°	20.5	20.7	20.8	21.0	20.8	20.7	20.5	20.3	20.2	20.1	20.0
100°	20.5	20.7	20.8	21.0	20.8	20.7	20.5	20.3	21.6	24.4	27.4
102.5°	21.5	21.5	21.5	21.6	21.5	21.5	21.5	21.4	36.8	67.3	97.9
105°	231.7	225.6	219.6	213.7	219.6	225.6	231.7	237.6	239.8	238.3	236.9
107.5°	295.9	296.5	297.1	297.7	297.1	296.5	295.9	295.2	294.6	293.8	293.1
110°	332.9	333.4	333.9	334.4	333.9	333.4	332.9	332.3	331.9	331.5	331.2



TEST NUMBER: P333059-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	369.0	369.6	370.3	370.9	370.3	369.6	369.0	368.4	368.1	368.2	368.2
115°	424.2	424.2	424.2	424.2	424.2	424.2	424.2	424.2	424.1	423.7	423.4
117.5°	478.8	478.7	478.6	478.6	478.6	478.7	478.8	478.8	478.9	479.0	479.0
120°	513.7	513.4	513.1	512.7	513.1	513.4	513.7	514.0	514.0	513.7	513.4
122.5°	547.3	546.9	546.6	546.3	546.6	546.9	547.3	547.6	547.8	547.5	547.3
125°	596.2	596.3	596.5	596.7	596.5	596.3	596.2	596.0	595.7	595.2	594.7
127.5°	641.4	641.2	641.1	641.0	641.1	641.2	641.4	641.5	641.6	641.7	641.8
130°	670.9	670.9	670.9	670.9	670.9	670.9	670.9	670.9	670.9	670.7	670.4
132.5°	698.9	698.7	698.6	698.5	698.6	698.7	698.9	699.0	699.0	698.8	698.6
135°	738.8	739.2	739.5	739.8	739.5	739.2	738.8	738.5	738.2	737.9	737.5
137.5°	775.6	775.5	775.4	775.3	775.4	775.5	775.6	775.7	775.5	775.2	774.8
140°	799.3	799.5	799.7	799.8	799.7	799.5	799.3	799.2	798.8	798.3	797.8
142.5°	820.1	820.1	820.2	820.2	820.2	820.1	820.1	820.1	819.9	819.5	819.2
145°	850.5	850.9	851.2	851.5	851.2	850.9	850.5	850.2	850.0	849.8	849.6
147.5°	877.0	877.2	877.4	877.5	877.4	877.2	877.0	876.9	876.7	876.6	876.4
150°	893.8	893.9	894.1	894.2	894.1	893.9	893.8	893.6	893.5	893.5	893.5
152.5°	909.0	908.9	908.8	908.7	908.8	908.9	909.0	909.1	909.0	908.7	908.5
155°	929.5	929.0	928.5	928.1	928.5	929.0	929.5	930.0	929.9	929.3	928.6
157.5°	946.8	945.9	945.0	944.2	945.0	945.9	946.8	947.7	947.7	946.8	945.9
160°	958.0	957.0	956.0	955.0	956.0	957.0	958.0	959.0	959.0	958.0	957.0
162.5°	966.8	965.6	964.5	963.4	964.5	965.6	966.8	968.0	968.0	966.9	966.0
165°	979.8	978.3	976.7	975.2	976.7	978.3	979.8	981.3	981.3	980.0	978.7
167.5°	989.1	987.4	985.7	984.1	985.7	987.4	989.1	990.8	990.9	989.4	988.0
170°	994.5	992.8	991.2	989.5	991.2	992.8	994.5	996.1	996.3	995.0	993.6
172.5°	997.8	996.1	994.3	992.5	994.3	996.1	997.8	999.7	999.9	998.6	997.2
175°	1002.2	1000.3	998.3	996.2	998.3	1000.3	1002.2	1004.2	1004.5	1003.0	1001.5
177.5°	1003.4	1001.8	1000.3	998.7	1000.3	1001.8	1003.4	1005.0	1005.3	1004.2	1003.2
180°	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2



TEST NUMBER: P333059-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0
2.5°	1275.1	1278.1	1285.0	1292.6	1299.1	1304.6	1309.0	1314.9	1320.6	1328.3	1335.6
5°	1197.7	1205.2	1216.0	1228.8	1245.0	1255.7	1269.1	1280.9	1298.1	1315.3	1332.0
7.5°	1129.8	1138.1	1153.9	1171.7	1190.8	1208.4	1224.4	1245.2	1268.0	1292.9	1320.9
10°	1086.0	1095.1	1113.9	1134.3	1156.9	1174.1	1195.6	1220.2	1246.1	1276.7	1311.0
12.5°	1046.4	1055.1	1077.8	1098.6	1122.1	1140.9	1165.9	1191.0	1225.4	1258.6	1297.7
15°	969.5	992.5	1018.3	1043.0	1071.0	1094.1	1124.1	1149.9	1182.7	1229.4	1273.9
17.5°	883.9	908.6	940.6	978.7	1016.1	1044.7	1075.2	1107.2	1146.2	1194.0	1245.4
20°	834.0	853.9	889.4	931.8	975.3	1015.1	1043.0	1078.4	1118.7	1170.3	1223.5
22.5°	796.7	813.5	841.3	883.7	930.7	976.8	1012.5	1047.5	1092.1	1143.7	1201.5
25°	740.6	758.9	783.0	812.0	865.8	914.6	961.4	1001.7	1048.9	1100.4	1165.0
27.5°	694.0	709.9	732.1	762.2	798.3	852.2	908.9	954.8	1003.3	1058.6	1123.2
30°	666.5	679.4	697.7	728.3	762.7	811.0	868.5	922.2	971.1	1028.5	1095.6
32.5°	637.7	651.5	669.3	693.5	730.4	771.0	828.5	887.4	939.3	998.0	1063.9
35°	599.4	610.2	626.2	651.0	684.3	719.7	770.7	831.4	886.2	949.1	1011.9
37.5°	560.6	573.3	585.9	607.9	635.3	673.4	715.2	777.2	837.9	895.2	956.5
40°	538.7	546.2	560.2	577.9	606.9	640.8	679.9	740.6	801.3	858.3	920.0
42.5°	514.2	522.6	534.4	552.1	578.1	611.1	649.4	702.0	765.3	820.4	876.7
45°	480.2	484.9	496.8	511.8	533.3	566.6	602.1	648.8	708.4	761.0	810.4
47.5°	445.8	450.0	457.4	471.1	495.2	521.9	555.1	597.0	649.3	702.0	743.8
50°	422.1	425.9	432.9	445.8	467.3	493.6	526.3	563.9	610.7	661.2	696.1
52.5°	398.5	400.5	407.1	421.7	439.8	465.6	494.9	529.6	573.3	615.2	650.6
55°	360.9	365.8	370.0	380.8	398.0	422.7	449.0	481.8	515.6	551.1	581.1
57.5°	321.7	327.0	333.3	342.6	356.3	379.3	402.9	429.5	458.4	487.8	513.0
60°	295.9	300.7	306.1	316.9	329.2	347.5	373.2	396.4	418.4	445.2	470.5
62.5°	270.5	275.4	281.7	290.2	302.2	319.5	341.0	361.1	384.1	407.5	426.3
65°	233.1	236.8	241.7	249.7	261.1	276.6	294.3	309.9	330.3	347.5	364.7
67.5°	192.0	199.1	205.5	212.1	221.6	236.1	248.9	263.8	277.7	290.4	306.1
70°	164.9	173.0	178.8	185.8	195.0	207.3	219.6	229.8	241.2	253.5	267.5
72.5°	142.1	148.5	153.1	160.5	168.7	180.3	191.8	200.3	209.3	217.8	231.4
75°	112.3	114.9	118.2	124.1	131.6	140.2	149.4	156.8	162.2	169.8	179.4
77.5°	80.7	85.8	88.0	92.2	97.6	102.9	109.0	115.2	120.4	123.1	130.5
80°	61.8	63.9	66.0	72.0	75.2	80.6	84.8	90.8	92.9	95.6	102.6
82.5°	48.0	49.3	50.6	52.2	54.1	59.5	63.8	67.6	69.7	70.7	75.9
85°	28.0	28.5	29.0	29.6	30.1	30.1	32.2	34.9	38.7	38.7	40.3
87.5°	12.9	13.2	12.9	12.2	12.8	12.5	12.6	12.3	13.2	14.1	15.0
90°	17.5	16.5	15.1	13.8	12.5	11.2	9.6	7.8	6.0	4.0	2.2
92.5°	16.9	15.9	14.5	13.2	11.9	10.6	9.8	9.7	9.7	9.6	9.5
95°	17.5	16.5	16.4	16.2	16.0	15.9	18.6	24.2	29.9	35.5	41.2
97.5°	19.9	19.8	38.4	57.0	75.5	94.1	101.7	98.2	94.6	91.1	87.6
100°	30.2	33.0	55.9	79.0	102.0	124.9	134.9	131.9	129.0	125.9	122.9
102.5°	128.4	159.0	161.9	164.9	167.9	170.9	171.3	169.2	166.9	164.7	162.5
105°	235.4	233.9	233.1	232.2	231.4	230.6	229.6	228.6	227.6	226.6	225.6
107.5°	292.4	291.5	290.4	289.3	288.2	287.1	286.3	285.8	285.3	284.8	284.3
110°	330.9	330.5	329.6	328.6	327.6	326.6	325.8	325.4	324.9	324.4	323.9



TEST NUMBER: P333059-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	368.3	368.4	367.9	367.4	367.0	366.5	365.8	364.9	364.1	363.1	362.2
115°	423.1	422.7	422.9	423.1	423.2	423.4	423.2	422.7	422.3	421.8	421.3
117.5°	479.1	479.2	478.8	478.4	478.1	477.7	477.2	476.5	475.8	475.1	474.5
120°	513.1	512.7	512.9	513.1	513.2	513.4	513.1	512.5	511.8	511.2	510.5
122.5°	547.1	546.9	546.6	546.4	546.2	545.9	545.6	545.2	544.8	544.4	544.1
125°	594.2	593.7	594.0	594.4	594.7	595.0	594.8	594.2	593.5	592.9	592.2
127.5°	641.9	642.0	641.2	640.5	639.6	638.9	638.4	638.2	638.1	637.9	637.7
130°	670.3	670.1	669.6	669.1	668.6	668.1	667.8	667.6	667.5	667.3	667.1
132.5°	698.5	698.3	697.7	697.1	696.4	695.8	695.3	695.0	694.8	694.5	694.2
135°	737.2	736.9	736.2	735.5	734.9	734.2	734.0	734.1	734.3	734.5	734.6
137.5°	774.4	774.1	773.4	772.5	771.8	771.1	770.7	770.6	770.6	770.5	770.4
140°	797.3	796.9	796.5	796.2	795.9	795.5	795.2	794.9	794.5	794.2	793.9
142.5°	818.8	818.4	818.2	818.0	817.8	817.6	817.2	816.6	816.1	815.5	814.9
145°	849.5	849.3	849.3	849.3	849.3	849.3	849.1	848.6	848.1	847.6	847.1
147.5°	876.3	876.2	876.3	876.5	876.7	876.8	876.5	875.5	874.5	873.6	872.7
150°	893.5	893.5	893.7	893.8	894.0	894.2	893.9	893.3	892.6	891.9	891.3
152.5°	908.2	908.0	908.3	908.6	908.8	909.1	909.0	908.5	908.0	907.4	906.9
155°	928.0	927.3	927.8	928.3	928.8	929.3	929.5	929.3	929.1	929.0	928.8
157.5°	945.0	944.2	944.7	945.3	945.9	946.4	946.8	947.0	947.1	947.2	947.3
160°	956.0	955.0	955.1	955.3	955.5	955.6	956.0	956.5	957.0	957.5	958.0
162.5°	965.0	964.0	964.1	964.3	964.5	964.6	965.0	965.7	966.3	966.9	967.6
165°	977.3	976.0	976.0	976.0	976.0	976.0	976.4	977.2	978.1	978.9	979.8
167.5°	986.4	985.0	985.1	985.2	985.3	985.4	985.8	986.7	987.6	988.5	989.4
170°	992.3	991.0	990.8	990.7	990.5	990.3	990.8	991.7	992.7	993.7	994.7
172.5°	995.9	994.6	994.4	994.2	994.1	993.9	994.3	995.3	996.3	997.3	998.4
175°	1000.0	998.5	998.4	998.2	997.9	997.8	998.3	999.3	1000.3	1001.2	1002.2
177.5°	1002.1	1001.0	1000.8	1000.5	1000.3	1000.0	1000.3	1001.2	1002.2	1003.1	1004.0
180°	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2



TEST NUMBER: P333059-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0
2.5°	1341.2	1345.0	1349.4	1357.6	1364.4	1367.5	1373.4	1377.8	1376.4	1382.4	1392.8
5°	1346.5	1361.0	1377.7	1394.8	1414.1	1430.3	1443.1	1456.0	1466.2	1478.5	1496.8
7.5°	1345.6	1371.4	1399.5	1430.3	1462.0	1489.3	1514.7	1540.4	1563.4	1588.4	1621.1
10°	1342.2	1376.5	1411.5	1451.8	1492.0	1530.1	1564.5	1596.8	1627.4	1660.1	1701.5
12.5°	1338.3	1377.9	1420.1	1468.4	1518.6	1564.5	1604.9	1651.3	1689.7	1731.9	1779.7
15°	1321.2	1374.4	1431.9	1494.7	1554.9	1616.6	1671.9	1728.9	1782.0	1832.5	1892.7
17.5°	1301.7	1363.0	1430.8	1505.0	1577.3	1652.3	1718.0	1789.8	1844.1	1911.9	1967.7
20°	1285.8	1351.8	1424.3	1507.6	1589.7	1673.0	1745.6	1818.6	1879.8	1948.0	2018.9
22.5°	1266.5	1339.0	1417.4	1503.7	1589.7	1680.7	1761.0	1833.6	1909.5	1986.2	2059.3
25°	1235.3	1310.5	1393.7	1488.2	1587.1	1680.0	1766.0	1856.1	1937.8	2021.0	2086.6
27.5°	1197.1	1276.0	1363.7	1461.3	1562.7	1657.9	1759.1	1855.2	1937.3	2017.5	2074.7
30°	1166.5	1249.8	1334.1	1432.9	1538.2	1640.2	1748.8	1844.9	1931.4	2003.4	2035.6
32.5°	1135.2	1214.2	1301.0	1401.2	1508.9	1618.8	1726.4	1824.7	1904.7	1947.9	1948.7
35°	1080.7	1154.7	1245.0	1343.2	1453.9	1573.2	1682.1	1778.8	1827.7	1831.5	1778.8
37.5°	1021.1	1089.1	1174.3	1272.6	1393.8	1512.5	1623.9	1688.3	1704.6	1649.9	1552.6
40°	978.6	1041.4	1123.6	1224.6	1344.8	1467.3	1568.8	1616.1	1598.9	1510.3	1401.8
42.5°	933.9	992.4	1071.6	1171.2	1292.0	1415.7	1502.2	1527.6	1482.1	1379.7	1252.7
45°	860.9	914.6	993.1	1093.5	1209.5	1325.5	1391.1	1378.2	1302.4	1181.0	1038.7
47.5°	785.0	836.9	907.5	1000.4	1119.1	1219.3	1263.6	1224.8	1117.0	983.5	867.7
50°	734.8	787.9	852.9	941.5	1050.0	1146.7	1175.2	1116.1	996.3	867.9	761.5
52.5°	685.3	730.7	794.5	880.1	983.8	1065.5	1080.7	1012.5	888.9	773.9	679.5
55°	610.2	651.5	705.2	785.8	875.5	944.7	936.6	849.1	736.9	638.6	564.5
57.5°	537.5	568.6	618.1	693.7	772.4	818.9	789.5	714.9	610.3	529.8	467.3
60°	489.3	518.3	564.5	630.6	699.8	726.1	701.5	620.4	537.7	464.0	411.4
62.5°	443.7	469.3	509.1	570.4	626.3	642.0	615.5	544.7	470.2	407.3	363.8
65°	377.6	401.2	435.0	478.6	517.3	524.7	507.6	435.0	378.6	326.0	295.9
67.5°	317.5	333.0	359.4	397.0	417.6	421.9	388.7	343.2	293.5	261.2	238.4
70°	277.1	287.9	312.6	333.0	349.6	350.2	319.5	283.1	244.9	218.6	202.0
72.5°	238.0	248.3	267.0	281.0	293.8	289.6	261.6	232.8	202.0	182.1	169.8
75°	183.7	192.8	202.5	208.9	208.9	203.6	183.2	161.7	143.9	132.1	128.4
77.5°	133.5	141.1	144.3	143.3	141.4	133.0	120.1	106.0	99.7	94.1	91.3
80°	104.7	108.0	109.1	106.3	103.1	93.4	84.8	79.0	73.0	70.9	69.8
82.5°	77.7	80.5	77.7	78.4	71.3	63.4	58.7	56.7	54.1	53.3	52.2
85°	41.4	40.8	39.8	37.1	32.2	31.1	30.6	30.1	29.0	29.6	28.5
87.5°	14.9	14.0	12.7	12.6	12.9	12.4	13.0	13.3	13.6	13.3	14.4
90°	4.0	6.0	7.8	9.6	11.2	12.5	13.8	15.1	16.5	17.5	18.5
92.5°	9.6	9.7	9.7	9.8	10.6	11.9	13.2	14.5	15.9	16.9	17.9
95°	35.5	29.9	24.2	18.6	15.9	16.0	16.2	16.4	16.5	17.5	18.5
97.5°	91.1	94.6	98.2	101.7	94.1	75.5	57.0	38.4	19.8	19.9	20.0
100°	125.9	129.0	131.9	134.9	124.9	102.0	79.0	55.9	33.0	30.2	27.4
102.5°	164.7	166.9	169.2	171.3	170.9	167.9	164.9	161.9	159.0	128.4	97.9
105°	226.6	227.6	228.6	229.6	230.6	231.4	232.2	233.1	233.9	235.4	236.9
107.5°	284.8	285.3	285.8	286.3	287.1	288.2	289.3	290.4	291.5	292.4	293.1
110°	324.4	324.9	325.4	325.8	326.6	327.6	328.6	329.6	330.5	330.9	331.2



TEST NUMBER: P333059-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	363.1	364.1	364.9	365.8	366.5	367.0	367.4	367.9	368.4	368.3	368.2
115°	421.8	422.3	422.7	423.2	423.4	423.2	423.1	422.9	422.7	423.1	423.4
117.5°	475.1	475.8	476.5	477.2	477.7	478.1	478.4	478.8	479.2	479.1	479.0
120°	511.2	511.8	512.5	513.1	513.4	513.2	513.1	512.9	512.7	513.1	513.4
122.5°	544.4	544.8	545.2	545.6	545.9	546.2	546.4	546.6	546.9	547.1	547.3
125°	592.9	593.5	594.2	594.8	595.0	594.7	594.4	594.0	593.7	594.2	594.7
127.5°	637.9	638.1	638.2	638.4	638.9	639.6	640.5	641.2	642.0	641.9	641.8
130°	667.3	667.5	667.6	667.8	668.1	668.6	669.1	669.6	670.1	670.3	670.4
132.5°	694.5	694.8	695.0	695.3	695.8	696.4	697.1	697.7	698.3	698.5	698.6
135°	734.5	734.3	734.1	734.0	734.2	734.9	735.5	736.2	736.9	737.2	737.5
137.5°	770.5	770.6	770.6	770.7	771.1	771.8	772.5	773.4	774.1	774.4	774.8
140°	794.2	794.5	794.9	795.2	795.5	795.9	796.2	796.5	796.9	797.3	797.8
142.5°	815.5	816.1	816.6	817.2	817.6	817.8	818.0	818.2	818.4	818.8	819.2
145°	847.6	848.1	848.6	849.1	849.3	849.3	849.3	849.3	849.3	849.5	849.6
147.5°	873.6	874.5	875.5	876.5	876.8	876.7	876.5	876.3	876.2	876.3	876.4
150°	891.9	892.6	893.3	893.9	894.2	894.0	893.8	893.7	893.5	893.5	893.5
152.5°	907.4	908.0	908.5	909.0	909.1	908.8	908.6	908.3	908.0	908.2	908.5
155°	929.0	929.1	929.3	929.5	929.3	928.8	928.3	927.8	927.3	928.0	928.6
157.5°	947.2	947.1	947.0	946.8	946.4	945.9	945.3	944.7	944.2	945.0	945.9
160°	957.5	957.0	956.5	956.0	955.6	955.5	955.3	955.1	955.0	956.0	957.0
162.5°	966.9	966.3	965.7	965.0	964.6	964.5	964.3	964.1	964.0	965.0	966.0
165°	978.9	978.1	977.2	976.4	976.0	976.0	976.0	976.0	976.0	977.3	978.7
167.5°	988.5	987.6	986.7	985.8	985.4	985.3	985.2	985.1	985.0	986.4	988.0
170°	993.7	992.7	991.7	990.8	990.3	990.5	990.7	990.8	991.0	992.3	993.6
172.5°	997.3	996.3	995.3	994.3	993.9	994.1	994.2	994.4	994.6	995.9	997.2
175°	1001.2	1000.3	999.3	998.3	997.8	997.9	998.2	998.4	998.5	1000.0	1001.5
177.5°	1003.1	1002.2	1001.2	1000.3	1000.0	1000.3	1000.5	1000.8	1001.0	1002.1	1003.2
180°	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2



TEST NUMBER: P333059-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0	1333.0
2.5°	1398.4	1400.1	1401.4	1405.6	1406.0	1410.0	1406.0
5°	1514.0	1521.6	1533.4	1545.2	1546.3	1553.8	1540.3
7.5°	1643.8	1661.2	1672.0	1691.1	1698.7	1703.4	1695.7
10°	1733.1	1749.3	1777.8	1791.7	1805.6	1807.9	1801.4
12.5°	1819.6	1845.1	1867.5	1894.0	1893.3	1912.3	1905.3
15°	1934.6	1960.9	1992.1	2021.5	2032.4	2032.4	2040.9
17.5°	2016.6	2064.9	2097.1	2120.3	2145.7	2150.0	2147.1
20°	2072.0	2124.2	2158.6	2188.6	2205.8	2210.6	2210.6
22.5°	2113.3	2157.7	2191.2	2218.3	2232.4	2238.2	2236.4
25°	2141.9	2180.0	2200.4	2208.5	2212.2	2211.2	2201.0
27.5°	2102.7	2101.0	2088.2	2063.5	2044.9	2033.6	2020.7
30°	2028.0	2000.1	1967.9	1932.4	1886.7	1851.9	1841.1
32.5°	1916.7	1854.0	1799.5	1740.4	1691.3	1656.4	1641.7
35°	1701.5	1602.2	1521.1	1450.2	1398.6	1366.3	1355.6
37.5°	1446.0	1349.9	1249.5	1180.7	1138.0	1105.4	1093.3
40°	1283.6	1178.9	1091.4	1026.9	982.9	951.2	950.7
42.5°	1135.4	1035.4	953.0	906.6	859.1	838.2	838.1
45°	929.7	849.7	779.8	743.4	714.9	697.7	692.9
47.5°	769.7	703.6	657.0	627.9	604.7	593.8	586.7
50°	679.9	622.0	584.9	559.7	546.7	532.8	531.7
52.5°	605.2	558.4	529.5	509.0	492.6	484.2	484.4
55°	508.6	471.6	451.1	435.6	422.7	416.3	413.5
57.5°	428.5	400.7	385.9	371.5	366.1	361.0	359.6
60°	378.6	359.8	345.9	334.6	326.6	325.0	324.4
62.5°	337.4	317.7	308.1	299.3	293.5	290.9	290.0
65°	278.2	263.7	255.1	248.1	246.0	242.3	241.7
67.5°	224.3	215.6	209.8	205.1	202.2	202.0	202.0
70°	191.2	186.3	181.6	178.8	177.2	176.1	176.1
72.5°	162.9	159.3	155.3	153.9	153.6	152.5	152.1
75°	124.1	120.3	120.9	118.2	116.0	113.3	111.7
77.5°	88.0	85.3	84.7	84.4	82.6	82.3	83.1
80°	68.2	65.5	65.0	65.5	65.0	63.4	63.4
82.5°	51.9	49.6	49.1	48.8	48.3	48.8	47.9
85°	28.0	26.9	26.9	26.9	28.0	27.4	26.9
87.5°	13.7	13.5	14.1	13.7	13.8	13.4	13.9
90°	19.5	20.5	21.1	21.5	21.8	22.1	22.5
92.5°	18.9	19.9	20.4	20.5	20.6	20.6	20.7
95°	19.5	20.5	21.1	21.2	21.4	21.6	21.7
97.5°	20.1	20.2	20.3	20.5	20.7	20.8	21.0
100°	24.4	21.6	20.3	20.5	20.7	20.8	21.0
102.5°	67.3	36.8	21.4	21.5	21.5	21.5	21.6
105°	238.3	239.8	237.6	231.7	225.6	219.6	213.7
107.5°	293.8	294.6	295.2	295.9	296.5	297.1	297.7
110°	331.5	331.9	332.3	332.9	333.4	333.9	334.4



TEST NUMBER: P333059-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	368.2	368.1	368.4	369.0	369.6	370.3	370.9
115°	423.7	424.1	424.2	424.2	424.2	424.2	424.2
117.5°	479.0	478.9	478.8	478.8	478.7	478.6	478.6
120°	513.7	514.0	514.0	513.7	513.4	513.1	512.7
122.5°	547.5	547.8	547.6	547.3	546.9	546.6	546.3
125°	595.2	595.7	596.0	596.2	596.3	596.5	596.7
127.5°	641.7	641.6	641.5	641.4	641.2	641.1	641.0
130°	670.7	670.9	670.9	670.9	670.9	670.9	670.9
132.5°	698.8	699.0	699.0	698.9	698.7	698.6	698.5
135°	737.9	738.2	738.5	738.8	739.2	739.5	739.8
137.5°	775.2	775.5	775.7	775.6	775.5	775.4	775.3
140°	798.3	798.8	799.2	799.3	799.5	799.7	799.8
142.5°	819.5	819.9	820.1	820.1	820.1	820.2	820.2
145°	849.8	850.0	850.2	850.5	850.9	851.2	851.5
147.5°	876.6	876.7	876.9	877.0	877.2	877.4	877.5
150°	893.5	893.5	893.6	893.8	893.9	894.1	894.2
152.5°	908.7	909.0	909.1	909.0	908.9	908.8	908.7
155°	929.3	929.9	930.0	929.5	929.0	928.5	928.1
157.5°	946.8	947.7	947.7	946.8	945.9	945.0	944.2
160°	958.0	959.0	959.0	958.0	957.0	956.0	955.0
162.5°	966.9	968.0	968.0	966.8	965.6	964.5	963.4
165°	980.0	981.3	981.3	979.8	978.3	976.7	975.2
167.5°	989.4	990.9	990.8	989.1	987.4	985.7	984.1
170°	995.0	996.3	996.1	994.5	992.8	991.2	989.5
172.5°	998.6	999.9	999.7	997.8	996.1	994.3	992.5
175°	1003.0	1004.5	1004.2	1002.2	1000.3	998.3	996.2
177.5°	1004.2	1005.3	1005.0	1003.4	1001.8	1000.3	998.7
180°	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2	1002.2

(END OF REPORT)