

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333062-840

Luminaire Tested: **S124RDIW-S795D770U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333062-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124RDIW-S795D770U840-4F0-1E-UDD-F1  
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 770 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5932.8 lumens  
Efficiency: N/A  
Efficacy: 131.8 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 45  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333062-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

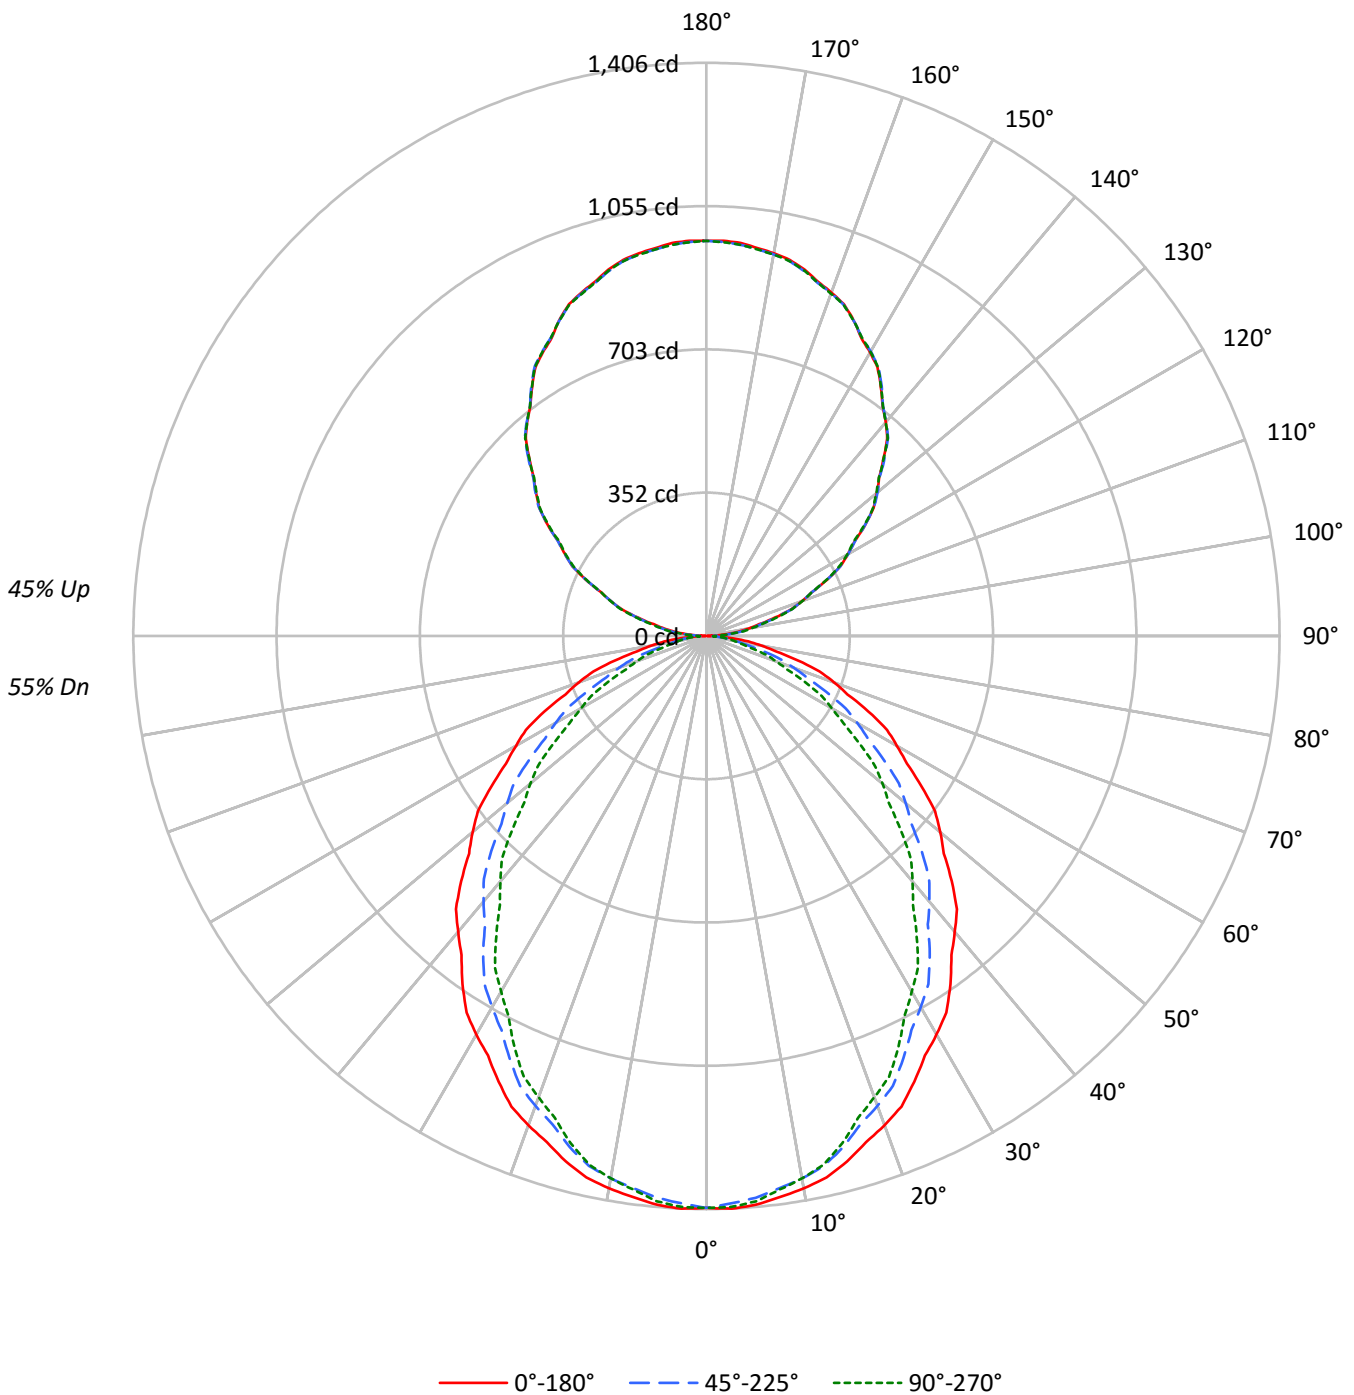



TEST NUMBER: P333062-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	86	86	86	73	73	73	60	60	60	55
1	99	95	91	88	92	88	85	82	76	73	71	64	63	61	54	53	52	47
2	90	83	77	72	84	77	72	68	67	63	59	57	54	51	48	46	44	40
3	83	73	66	60	77	68	62	57	59	54	50	51	47	44	43	40	38	34
4	76	65	57	51	70	61	54	49	53	47	43	45	41	38	38	35	33	29
5	70	58	50	44	65	54	47	42	47	42	37	41	36	33	35	31	29	26
6	64	52	44	38	60	49	42	37	43	37	33	37	32	29	31	28	25	23
7	60	47	39	34	55	44	37	32	39	33	29	34	29	26	29	25	23	20
8	55	43	35	30	51	40	33	29	35	30	26	31	26	23	26	23	20	18
9	52	39	32	27	48	37	30	26	33	27	23	28	24	21	24	21	18	16
10	48	36	29	24	45	34	28	23	30	25	21	26	22	19	23	19	17	15

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	11326	11326	11326
5°	11351	11212	11281
10°	11280	11077	11077
15°	11150	10845	10764
20°	10972	10539	10345
25°	10745	10180	9922
30°	10523	9803	9392
35°	10279	9411	8861
40°	9985	8965	8286
45°	9712	8524	7702
50°	9403	8013	7082
55°	9071	7484	6410
60°	8707	6902	5724
65°	8373	6178	5049
70°	7886	5375	4286
75°	7271	4457	3484
80°	6341	3394	3199
85°	5372	3084	2881



TEST NUMBER: P333062-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	131.8	2.2
10°-20°	367.5	6.2
20°-30°	530.6	8.9
30°-40°	601.5	10.1
40°-50°	580.8	9.8
50°-60°	483.0	8.1
60°-70°	333.5	5.6
70°-80°	169.1	2.8
80°-90°	46.3	0.8
90°-100°	63.9	1.1
100°-110°	189.3	3.2
110°-120°	321.4	5.4
120°-130°	423.8	7.1
130°-140°	475.9	8.0
140°-150°	467.7	7.9
150°-160°	393.4	6.6
160°-170°	261.7	4.4
170°-180°	91.6	1.5
0°-30°	1029.9	17.4
0°-40°	1631.4	27.5
0°-60°	2695.2	45.4
0°-90°	3244.1	54.7
90°-120°	574.6	9.7
90°-150°	1942.0	32.7
90°-180°	2689.0	45.3
0°-180°	5932.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1403	1403	1403	1403	1403	
5°	1401	1396	1384	1394	1392	133
15°	1334	1324	1298	1295	1288	376
25°	1206	1186	1143	1125	1114	556
35°	1043	1008	955	919	899	651
45°	851	810	747	696	675	656
55°	644	600	532	478	455	576
65°	438	391	323	279	264	433
75°	233	193	143	119	112	246
85°	58	38	33	31	31	65
90°	2	10	16	21	22	6
95°	45	52	57	59	59	50
105°	175	176	178	181	183	185
115°	327	327	325	325	324	322
125°	476	476	475	474	472	424
135°	614	618	618	617	615	475
145°	746	749	750	749	746	467
155°	854	854	854	856	854	393
165°	930	928	926	930	928	262
175°	968	964	963	968	963	92
180°	969	969	969	969	969	



TEST NUMBER: P333062-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1402.9	1402.9	1402.9	1402.9	1402.9	1402.9	1402.9	1402.9	1402.9	1402.9	1402.9
2.5°	1406.3	1405.5	1404.7	1404.0	1403.2	1401.8	1399.7	1397.7	1395.5	1393.4	1395.5
5°	1400.7	1399.8	1398.8	1397.9	1396.8	1395.0	1392.1	1389.3	1386.3	1383.5	1385.9
7.5°	1388.1	1387.0	1386.0	1385.0	1384.0	1381.7	1378.0	1374.2	1370.5	1366.8	1368.3
10°	1376.0	1374.8	1373.6	1372.4	1371.2	1368.5	1364.2	1359.9	1355.6	1351.3	1352.2
12.5°	1360.5	1359.2	1357.8	1356.3	1355.0	1351.8	1346.8	1341.6	1336.6	1331.5	1332.1
15°	1334.1	1332.0	1329.8	1327.7	1325.5	1321.5	1315.5	1309.5	1303.5	1297.6	1297.1
17.5°	1302.1	1299.0	1295.9	1292.8	1289.7	1284.5	1277.4	1270.2	1263.0	1255.9	1254.6
20°	1277.2	1274.0	1271.0	1267.9	1264.8	1259.2	1251.0	1242.9	1234.8	1226.7	1224.8
22.5°	1249.7	1246.2	1242.7	1239.2	1235.8	1229.6	1220.9	1212.2	1203.6	1194.9	1192.0
25°	1206.3	1201.9	1197.7	1193.4	1189.1	1182.0	1172.3	1162.5	1152.7	1142.9	1138.8
27.5°	1160.7	1155.4	1149.9	1144.6	1139.1	1131.3	1120.7	1110.3	1099.8	1089.4	1084.4
30°	1128.9	1123.0	1117.0	1111.1	1105.1	1096.5	1085.3	1074.1	1062.8	1051.6	1045.6
32.5°	1095.4	1088.7	1082.0	1075.2	1068.5	1059.3	1047.7	1036.1	1024.5	1012.9	1006.0
35°	1043.0	1035.4	1027.7	1020.1	1012.5	1002.7	990.8	978.8	966.8	954.9	946.8
37.5°	986.9	979.1	971.2	963.3	955.4	944.9	931.7	918.5	905.2	892.0	882.9
40°	947.5	939.6	931.7	923.8	915.9	905.1	891.5	878.0	864.3	850.7	840.7
42.5°	909.6	901.3	893.1	884.8	876.6	865.4	851.2	837.0	822.8	808.6	798.4
45°	850.7	841.9	833.0	824.3	815.4	803.9	789.5	775.2	760.8	746.6	734.9
47.5°	789.9	780.8	771.7	762.5	753.5	741.4	726.6	711.7	696.8	681.9	669.7
50°	748.7	739.4	730.0	720.7	711.4	699.1	683.9	668.6	653.3	638.0	626.1
52.5°	706.6	697.5	688.3	679.2	670.1	657.7	642.1	626.4	610.8	595.1	583.0
55°	644.5	634.9	625.4	615.8	606.3	593.8	578.2	562.7	547.2	531.7	519.3
57.5°	583.1	573.1	563.2	553.3	543.3	530.7	515.4	500.2	484.9	469.6	457.1
60°	539.3	529.7	520.2	510.6	501.0	488.7	473.3	458.1	442.8	427.5	415.1
62.5°	499.7	489.8	479.9	469.9	460.0	447.2	431.5	415.9	400.2	384.6	373.0
65°	438.3	428.0	417.7	407.5	397.2	384.5	369.1	353.9	338.6	323.4	313.1
67.5°	374.5	364.7	354.8	345.0	335.1	323.2	308.9	294.8	280.5	266.4	257.5
70°	334.1	324.1	314.0	304.0	294.0	282.2	268.5	254.9	241.4	227.7	219.8
72.5°	291.1	282.1	273.0	263.9	254.8	243.9	231.1	218.1	205.3	192.5	185.7
75°	233.1	224.3	215.4	206.6	197.7	187.7	176.5	165.3	154.1	142.9	137.3
77.5°	174.2	166.7	159.3	151.8	144.2	135.9	126.9	117.9	108.8	99.7	96.4
80°	136.4	129.5	122.6	115.6	108.8	101.7	94.5	87.4	80.2	73.0	72.3
82.5°	103.8	97.5	91.1	84.7	78.4	73.1	69.1	64.9	60.8	56.8	56.1
85°	58.0	53.2	48.5	43.7	38.9	36.2	35.4	34.7	34.0	33.3	32.8
87.5°	20.2	19.1	17.9	16.8	15.6	15.0	15.1	15.1	15.2	15.3	15.3
90°	2.2	4.0	6.0	7.8	9.6	11.2	12.5	13.8	15.1	16.5	17.5
92.5°	16.1	18.2	20.2	22.3	24.4	26.0	26.9	27.8	28.8	29.7	30.3
95°	44.9	46.5	48.0	49.5	51.0	52.3	53.4	54.6	55.8	57.0	57.5
97.5°	78.6	79.8	81.0	82.1	83.3	84.6	86.0	87.4	88.8	90.1	90.7
100°	104.9	105.6	106.2	106.9	107.6	108.7	110.2	111.7	113.2	114.7	115.0
102.5°	132.5	132.8	133.0	133.3	133.6	134.4	135.7	137.1	138.5	139.9	140.4
105°	174.6	174.8	175.0	175.1	175.3	175.7	176.4	177.0	177.7	178.3	178.8
107.5°	218.8	219.0	219.2	219.4	219.6	219.8	219.9	220.0	220.2	220.3	220.7
110°	248.8	249.1	249.5	249.8	250.1	250.2	250.0	249.9	249.7	249.5	249.2



TEST NUMBER: P333062-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	280.0	280.0	280.1	280.2	280.2	280.1	279.8	279.5	279.2	278.9	278.9
115°	326.8	326.8	326.8	326.8	326.8	326.6	326.3	326.0	325.6	325.3	325.1
117.5°	370.8	371.0	371.1	371.2	371.4	371.3	371.1	370.9	370.6	370.4	369.8
120°	400.2	400.9	401.5	402.2	402.9	402.9	402.5	402.0	401.5	401.0	400.1
122.5°	430.8	431.1	431.3	431.6	431.9	431.9	431.7	431.4	431.2	431.0	430.4
125°	475.9	475.9	475.9	475.9	475.9	475.8	475.6	475.5	475.3	475.1	474.8
127.5°	516.8	517.4	517.9	518.4	518.9	519.0	518.7	518.5	518.2	518.0	517.6
130°	545.6	546.1	546.6	547.1	547.6	547.9	547.9	547.9	547.9	547.9	547.5
132.5°	575.0	575.4	575.7	576.1	576.5	576.6	576.4	576.3	576.2	576.0	575.7
135°	613.9	614.8	615.8	616.8	617.8	618.3	618.3	618.3	618.3	618.3	618.0
137.5°	656.1	656.6	657.0	657.5	658.0	658.3	658.6	658.8	659.1	659.4	658.9
140°	684.3	684.6	685.0	685.3	685.6	685.8	685.8	685.8	685.8	685.8	685.6
142.5°	710.0	710.4	710.7	711.0	711.4	711.6	711.3	711.2	711.1	710.9	710.9
145°	745.8	746.4	747.1	747.8	748.4	748.8	749.0	749.2	749.3	749.5	749.3
147.5°	781.1	781.9	782.7	783.6	784.4	784.7	784.6	784.4	784.3	784.2	784.0
150°	802.7	803.3	804.1	804.8	805.4	805.8	805.8	805.8	805.8	805.8	805.8
152.5°	823.1	823.5	823.9	824.4	824.8	825.0	825.1	825.3	825.4	825.5	825.9
155°	854.4	854.4	854.4	854.4	854.4	854.3	854.1	854.0	853.8	853.7	854.3
157.5°	880.8	880.5	880.2	879.9	879.6	879.5	879.4	879.4	879.4	879.3	879.8
160°	896.5	896.3	896.1	896.0	895.8	895.5	895.4	895.2	895.0	894.9	895.4
162.5°	910.8	910.4	909.9	909.5	909.1	908.8	908.6	908.5	908.3	908.1	909.0
165°	930.2	929.7	929.2	928.7	928.2	927.8	927.4	927.1	926.8	926.3	927.4
167.5°	944.9	944.3	943.6	942.9	942.2	941.8	941.9	941.9	941.9	942.0	943.0
170°	953.4	952.5	951.7	950.9	950.1	949.7	949.9	950.1	950.2	950.4	951.4
172.5°	959.4	958.7	958.0	957.3	956.5	956.2	956.2	956.3	956.3	956.3	957.6
175°	967.7	966.7	965.9	965.1	964.3	963.8	963.6	963.4	963.3	963.1	964.3
177.5°	970.3	969.7	969.0	968.4	967.7	967.3	967.3	967.3	967.3	967.3	968.3
180°	969.1	969.1	969.1	969.1	969.1	969.1	969.1	969.1	969.1	969.1	969.1



TEST NUMBER: P333062-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1402.9	1402.9	1402.9	1402.9	1402.9	1402.9	1402.9	1402.9
2.5°	1397.7	1399.7	1401.8	1402.8	1402.6	1402.4	1402.2	1402.0
5°	1388.3	1390.7	1393.1	1394.0	1393.5	1393.1	1392.6	1392.1
7.5°	1369.8	1371.4	1372.9	1373.2	1372.5	1371.7	1371.0	1370.2
10°	1353.2	1354.1	1355.1	1355.1	1354.1	1353.2	1352.2	1351.3
12.5°	1332.7	1333.2	1333.8	1333.4	1332.1	1330.8	1329.4	1328.1
15°	1296.7	1296.2	1295.7	1294.6	1292.9	1291.2	1289.6	1287.9
17.5°	1253.2	1251.9	1250.5	1248.6	1246.1	1243.5	1241.0	1238.5
20°	1222.8	1220.9	1219.0	1216.6	1213.5	1210.3	1207.2	1204.2
22.5°	1189.2	1186.3	1183.5	1180.7	1178.2	1175.7	1173.2	1170.6
25°	1134.8	1130.7	1126.7	1123.5	1121.1	1118.7	1116.3	1113.9
27.5°	1079.3	1074.4	1069.3	1065.1	1061.7	1058.2	1054.8	1051.4
30°	1039.7	1033.7	1027.7	1022.8	1019.1	1015.2	1011.4	1007.5
32.5°	999.1	992.2	985.2	980.0	976.3	972.7	969.1	965.4
35°	938.7	930.6	922.5	916.3	912.0	907.7	903.3	899.1
37.5°	873.8	864.7	855.7	849.0	844.8	840.4	836.2	831.8
40°	830.7	820.6	810.6	803.4	799.2	794.9	790.6	786.3
42.5°	788.2	778.0	767.8	760.4	755.9	751.4	747.0	742.5
45°	723.2	711.4	699.7	691.8	687.4	683.2	678.8	674.6
47.5°	657.6	645.5	633.4	624.9	620.3	615.5	610.8	606.0
50°	614.2	602.3	590.3	582.1	577.5	573.0	568.5	563.9
52.5°	570.9	558.8	546.5	538.2	533.4	528.7	524.0	519.3
55°	506.9	494.4	482.1	473.6	469.1	464.5	460.0	455.4
57.5°	444.4	431.8	419.2	411.2	407.8	404.3	400.9	397.5
60°	402.7	390.3	377.9	369.7	366.0	362.1	358.3	354.5
62.5°	361.6	350.2	338.7	331.4	328.4	325.4	322.2	319.2
65°	302.8	292.6	282.3	275.7	272.9	269.9	267.1	264.3
67.5°	248.7	239.9	231.1	225.1	222.0	218.7	215.6	212.5
70°	212.0	204.1	196.2	191.1	188.7	186.3	183.9	181.6
72.5°	179.0	172.3	165.5	161.1	159.0	156.7	154.5	152.3
75°	131.9	126.4	120.9	117.4	116.0	114.6	113.1	111.7
77.5°	93.3	90.1	86.8	85.0	84.6	84.2	83.8	83.3
80°	71.6	70.9	70.2	69.7	69.5	69.2	69.0	68.8
82.5°	55.6	55.1	54.6	54.2	54.0	53.7	53.5	53.3
85°	32.3	31.9	31.4	31.1	31.1	31.1	31.1	31.1
87.5°	15.3	15.3	15.3	15.5	15.8	16.1	16.3	16.6
90°	18.5	19.5	20.5	21.1	21.5	21.8	22.1	22.5
92.5°	30.9	31.5	32.1	32.5	32.7	32.9	33.1	33.3
95°	58.0	58.5	59.0	59.2	59.2	59.2	59.2	59.2
97.5°	91.3	91.9	92.5	92.8	92.8	92.8	92.8	92.8
100°	115.3	115.6	116.0	116.1	116.1	116.1	116.1	116.1
102.5°	140.8	141.3	141.7	142.0	142.2	142.3	142.4	142.6
105°	179.4	179.9	180.4	180.9	181.4	181.9	182.4	182.9
107.5°	221.2	221.6	222.1	222.3	222.3	222.3	222.2	222.2
110°	248.9	248.6	248.2	248.3	248.8	249.3	249.8	250.3





TEST NUMBER: P333062-840

CATALOG NUMBER: S124RDIW-S795D770U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	278.8	278.7	278.7	278.7	278.8	278.9	279.0	279.1
115°	325.0	324.8	324.6	324.5	324.3	324.2	324.0	323.8
117.5°	369.3	368.7	368.1	367.7	367.4	367.0	366.7	366.4
120°	399.3	398.5	397.7	397.4	397.8	398.1	398.4	398.7
122.5°	429.8	429.3	428.7	428.1	427.5	426.9	426.4	425.8
125°	474.5	474.2	473.8	473.5	473.2	472.8	472.5	472.2
127.5°	517.3	516.9	516.5	516.2	516.0	515.7	515.4	515.2
130°	547.2	546.8	546.5	546.0	545.4	544.7	544.0	543.4
132.5°	575.4	575.1	574.7	574.4	574.2	573.9	573.6	573.4
135°	617.6	617.3	617.0	616.6	616.1	615.6	615.1	614.6
137.5°	658.5	658.1	657.7	657.5	657.6	657.7	657.8	657.9
140°	685.5	685.3	685.1	685.0	684.8	684.6	684.5	684.3
142.5°	710.9	710.8	710.8	710.8	710.7	710.7	710.7	710.6
145°	749.2	749.0	748.8	748.5	748.0	747.5	747.0	746.5
147.5°	783.9	783.8	783.6	783.5	783.3	783.2	782.9	782.7
150°	805.8	805.8	805.8	805.7	805.5	805.3	805.2	805.0
152.5°	826.3	826.7	827.1	827.1	826.7	826.3	825.8	825.4
155°	855.1	855.7	856.4	856.4	855.7	855.1	854.3	853.7
157.5°	880.3	880.8	881.3	881.3	880.7	880.2	879.6	879.0
160°	896.0	896.5	897.0	896.8	896.0	895.0	894.2	893.4
162.5°	909.9	910.8	911.7	911.7	910.9	910.1	909.3	908.4
165°	928.4	929.4	930.4	930.6	929.9	929.2	928.6	927.9
167.5°	944.0	944.9	945.9	945.9	944.9	943.9	942.9	941.8
170°	952.4	953.4	954.4	954.3	953.1	952.0	950.8	949.7
172.5°	958.7	959.8	960.9	960.9	959.7	958.6	957.4	956.2
175°	965.4	966.6	967.8	967.8	966.6	965.4	964.3	963.1
177.5°	969.2	970.1	971.1	971.0	969.9	968.9	967.8	966.7
180°	969.1	969.1	969.1	969.1	969.1	969.1	969.1	969.1

(END OF REPORT)