

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332809-940

Luminaire Tested: **S124DIW-S1020D470U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332809-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S1020D470U940-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1020 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 470 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5621.3 lumens
Efficiency: N/A
Efficacy: 121.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 46.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332809-940

CATALOG NUMBER: S124DIW-S1020D470U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

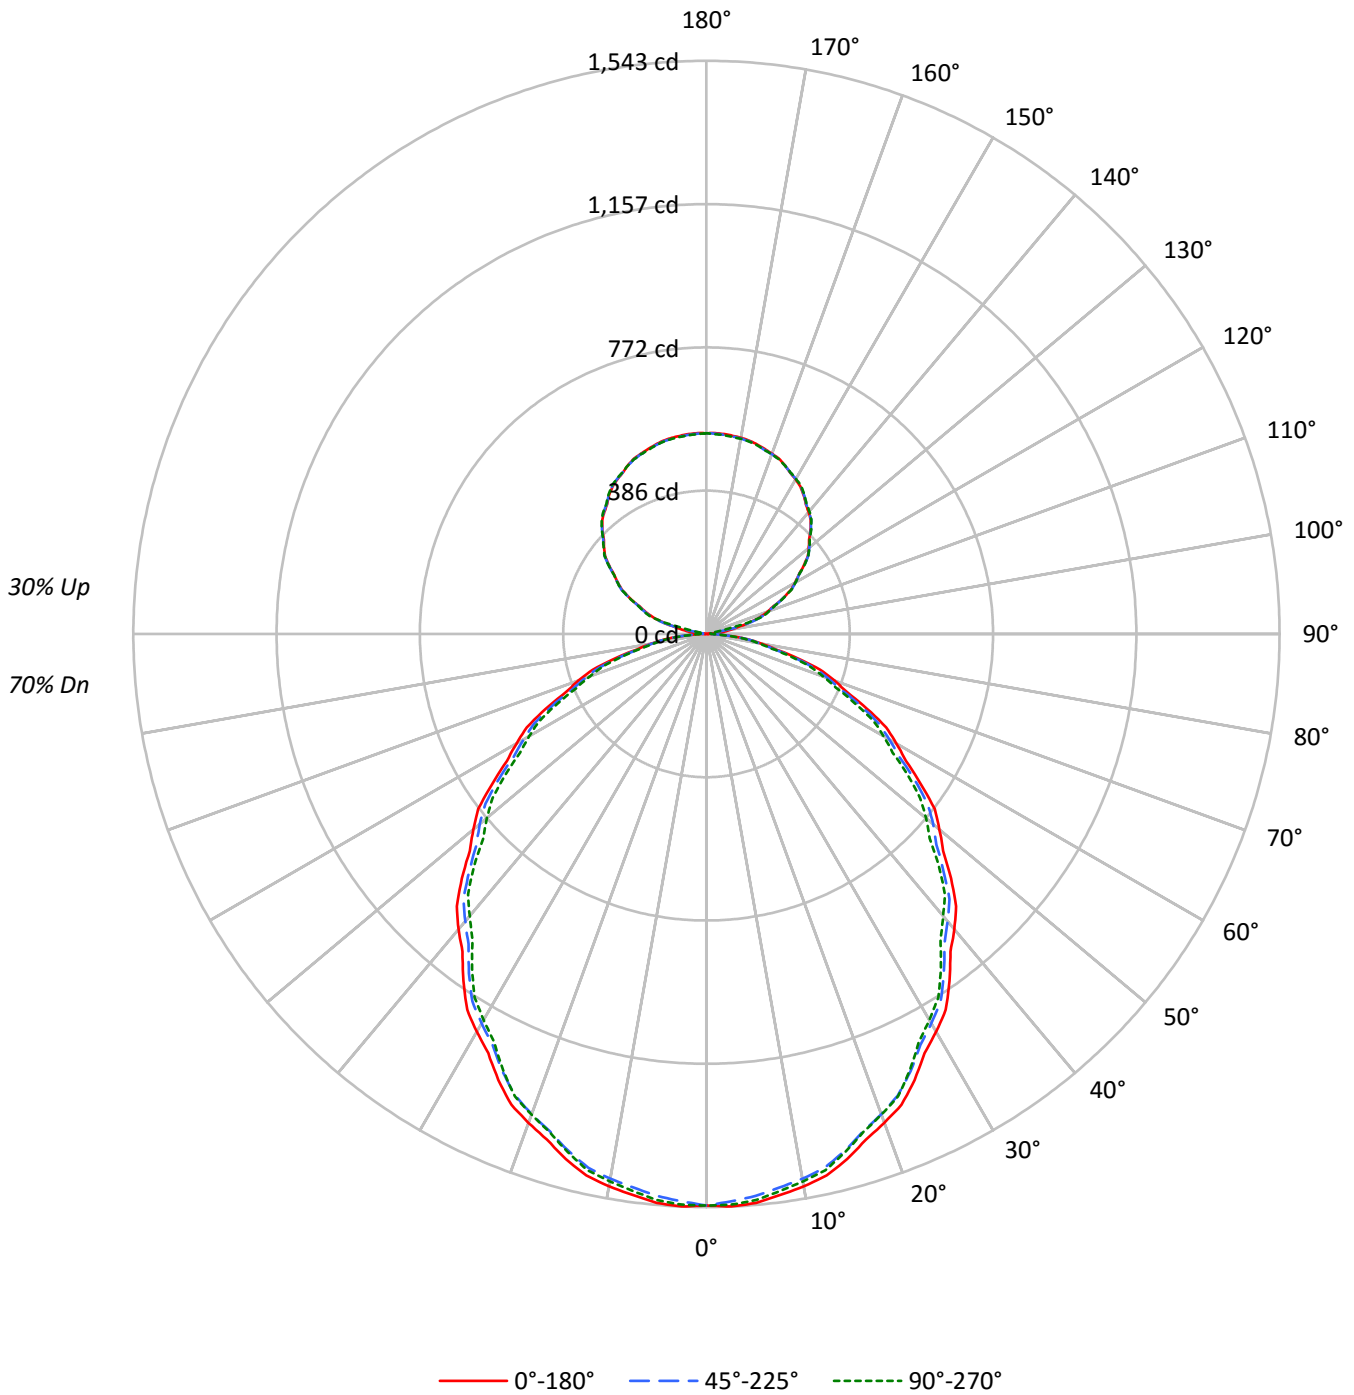



TEST NUMBER: P332809-940

CATALOG NUMBER: S124DIW-S1020D470U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	106	106	106	106	95	95	95	84	84	84	75	75	75	70
1	102	98	94	90	97	93	89	86	83	80	78	74	72	70	66	64	63	59
2	93	85	79	74	88	81	75	70	73	68	64	65	62	59	58	55	53	49
3	85	75	67	61	80	71	64	59	64	59	54	58	53	50	51	48	45	42
4	78	67	58	52	73	63	56	50	57	51	46	51	47	43	46	42	39	36
5	72	59	51	45	67	57	49	43	51	45	40	46	41	37	41	37	34	31
6	66	53	45	39	62	51	43	38	46	40	35	42	37	32	38	33	30	27
7	61	48	40	34	58	46	39	33	42	36	31	38	33	29	34	30	27	24
8	57	44	36	31	54	42	35	30	38	32	28	35	30	26	32	27	24	22
9	53	40	33	27	50	39	31	27	35	29	25	32	27	23	29	25	22	20
10	50	37	30	25	47	36	29	24	33	27	23	30	25	21	27	23	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	12421	12421	12421
5°	12459	12309	12399
10°	12381	12209	12269
15°	12232	12035	12066
20°	12032	11820	11832
25°	11805	11575	11541
30°	11527	11286	11182
35°	11239	10984	10838
40°	10940	10642	10446
45°	10628	10304	10106
50°	10282	10003	9693
55°	9909	9614	9301
60°	9536	9177	8898
65°	9116	8760	8407
70°	8641	8207	7886
75°	7923	7539	7346
80°	7053	6760	6592
85°	6169	5937	5826



TEST NUMBER: P332809-940

CATALOG NUMBER: S124DIW-S1020D470U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	144.9	2.6
10°-20°	408.3	7.3
20°-30°	600.9	10.7
30°-40°	698.6	12.4
40°-50°	698.6	12.4
50°-60°	611.1	10.9
60°-70°	453.8	8.1
70°-80°	257.8	4.6
80°-90°	76.0	1.4
90°-100°	18.5	0.3
100°-110°	117.8	2.1
110°-120°	225.4	4.0
120°-130°	286.1	5.1
130°-140°	306.1	5.4
140°-150°	286.3	5.1
150°-160°	230.9	4.1
160°-170°	148.9	2.6
170°-180°	51.3	0.9
0°-30°	1154.1	20.5
0°-40°	1852.6	33.0
0°-60°	3162.3	56.3
0°-90°	3950.0	70.3
90°-120°	361.7	6.4
90°-150°	1240.3	22.1
90°-180°	1671.0	29.7
0°-180°	5621.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1539	1539	1539	1539	1539	
5°	1537	1532	1519	1532	1530	146
15°	1464	1458	1440	1447	1444	412
25°	1325	1316	1300	1300	1296	609
35°	1140	1131	1114	1106	1100	713
45°	931	922	902	889	885	717
55°	704	700	683	669	661	630
65°	477	471	459	447	440	472
75°	254	248	242	237	236	270
85°	67	66	64	64	63	73
90°	1	6	9	11	12	5
95°	22	9	9	11	12	29
105°	122	124	126	129	115	127
115°	227	228	228	229	229	223
125°	319	321	320	321	322	285
135°	396	396	397	398	399	305
145°	457	458	458	458	459	285
155°	501	501	500	501	500	231
165°	528	526	526	529	526	149
175°	540	538	538	541	537	51
180°	540	540	540	540	540	



TEST NUMBER: P332809-940

CATALOG NUMBER: S124DIW-S1020D470U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1538.6	1538.6	1538.6	1538.6	1538.6	1538.6	1538.6	1538.6	1538.6	1538.6	1538.6
2.5°	1542.6	1541.9	1541.2	1540.6	1540.0	1538.4	1536.0	1533.6	1531.2	1528.7	1531.0
5°	1537.4	1536.3	1535.3	1534.1	1533.0	1531.0	1527.9	1524.9	1522.0	1518.9	1522.0
7.5°	1523.1	1522.0	1520.9	1519.8	1518.8	1516.5	1513.1	1509.8	1506.5	1503.2	1505.6
10°	1510.3	1509.2	1508.1	1507.0	1505.9	1503.6	1500.0	1496.5	1492.9	1489.3	1491.5
12.5°	1493.5	1492.5	1491.3	1490.2	1489.2	1486.7	1482.9	1479.2	1475.3	1471.6	1474.0
15°	1463.5	1462.3	1461.2	1460.2	1459.0	1456.4	1452.3	1448.2	1444.1	1440.0	1441.6
17.5°	1427.2	1425.8	1424.4	1423.1	1421.7	1419.1	1415.1	1411.3	1407.4	1403.6	1404.5
20°	1400.5	1399.2	1397.8	1396.4	1395.1	1392.3	1388.2	1384.1	1380.0	1375.9	1376.7
22.5°	1372.0	1370.1	1368.3	1366.5	1364.8	1361.7	1357.6	1353.5	1349.4	1345.3	1346.8
25°	1325.3	1323.5	1321.5	1319.6	1317.7	1314.8	1311.0	1307.2	1303.3	1299.5	1299.8
27.5°	1272.1	1270.2	1268.1	1266.1	1264.2	1261.4	1257.8	1254.3	1250.7	1247.1	1246.5
30°	1236.6	1234.4	1232.2	1230.0	1227.8	1224.9	1221.4	1217.8	1214.2	1210.7	1209.6
32.5°	1199.1	1197.1	1195.2	1193.2	1191.2	1188.3	1184.5	1180.8	1177.0	1173.2	1171.9
35°	1140.4	1138.5	1136.6	1134.7	1132.7	1129.9	1126.1	1122.2	1118.4	1114.5	1112.6
37.5°	1078.5	1076.7	1075.0	1073.3	1071.5	1068.6	1064.4	1060.3	1056.2	1052.1	1050.1
40°	1038.1	1035.9	1033.7	1031.5	1029.3	1026.2	1022.1	1018.0	1013.9	1009.8	1007.0
42.5°	994.7	993.4	992.0	990.8	989.4	986.5	982.0	977.4	972.9	968.3	965.1
45°	930.9	928.9	927.0	925.1	923.2	920.0	915.6	911.2	906.9	902.5	899.5
47.5°	864.0	862.7	861.4	860.1	858.7	856.0	852.0	847.9	843.9	839.8	836.4
50°	818.7	817.5	816.5	815.4	814.2	811.8	808.0	804.1	800.3	796.5	792.6
52.5°	774.3	772.9	771.6	770.3	769.0	766.3	762.2	758.2	754.1	750.1	746.7
55°	704.0	703.1	702.3	701.5	700.7	698.4	694.6	690.7	686.9	683.1	679.8
57.5°	636.9	636.0	635.1	634.1	633.2	630.8	627.1	623.3	619.5	615.7	612.6
60°	590.6	589.2	587.8	586.5	585.1	582.6	579.1	575.5	571.9	568.4	565.9
62.5°	545.2	544.0	542.9	541.7	540.6	538.1	534.3	530.6	526.7	523.0	520.8
65°	477.2	475.7	474.4	473.1	471.6	469.6	466.8	464.1	461.4	458.6	455.9
67.5°	408.6	407.3	406.1	404.8	403.5	401.6	399.0	396.4	393.7	391.1	388.4
70°	366.1	364.3	362.3	360.4	358.5	356.4	354.3	352.0	349.9	347.7	345.4
72.5°	320.8	318.9	317.0	315.0	313.2	311.3	309.5	307.8	306.0	304.3	302.6
75°	254.0	252.6	251.2	249.9	248.5	247.1	245.8	244.4	243.0	241.7	240.6
77.5°	190.1	189.5	188.9	188.3	187.7	186.8	185.6	184.4	183.2	182.0	181.6
80°	151.7	150.8	150.0	149.2	148.4	147.7	147.1	146.6	146.1	145.4	144.9
82.5°	114.1	113.8	113.4	113.0	112.6	112.4	112.3	112.2	112.1	111.9	111.6
85°	66.6	66.6	66.6	66.6	66.6	66.3	65.7	65.2	64.6	64.1	64.1
87.5°	25.9	25.9	25.9	25.9	25.8	25.8	25.7	25.6	25.5	25.4	25.6
90°	1.2	2.2	3.2	4.2	5.2	6.0	6.8	7.5	8.2	8.9	9.5
92.5°	5.1	5.2	5.2	5.3	5.4	5.7	6.4	7.1	7.8	8.6	9.1
95°	22.2	19.2	16.1	13.1	10.0	8.6	8.6	8.7	8.8	8.9	9.5
97.5°	47.2	49.1	51.0	52.9	54.8	50.7	40.8	30.7	20.7	10.7	10.7
100°	66.3	67.9	69.6	71.2	72.8	67.3	54.9	42.5	30.1	17.7	16.2
102.5°	87.7	88.8	90.0	91.1	92.4	92.1	90.5	88.9	87.3	85.7	69.2
105°	121.6	122.2	122.7	123.2	123.8	124.3	124.8	125.2	125.6	126.1	126.9
107.5°	153.3	153.6	153.8	154.1	154.4	154.8	155.3	156.0	156.6	157.2	157.6
110°	174.6	174.9	175.1	175.4	175.7	176.0	176.6	177.2	177.7	178.3	178.4



TEST NUMBER: P332809-940

CATALOG NUMBER: S124DIW-S1020D470U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	195.3	195.7	196.3	196.7	197.2	197.6	197.9	198.0	198.3	198.6	198.6
115°	227.1	227.4	227.7	227.9	228.2	228.3	228.2	228.1	228.0	227.9	228.1
117.5°	255.8	256.2	256.5	256.9	257.3	257.5	257.7	257.9	258.2	258.3	258.2
120°	275.2	275.5	275.9	276.3	276.6	276.8	276.7	276.6	276.5	276.4	276.6
122.5°	293.3	293.6	293.7	294.0	294.2	294.4	294.4	294.6	294.7	294.9	295.0
125°	319.2	319.6	319.9	320.3	320.7	320.7	320.6	320.4	320.2	320.0	320.3
127.5°	343.8	343.9	344.0	344.1	344.2	344.5	344.8	345.3	345.7	346.1	346.1
130°	359.6	359.7	359.9	360.0	360.1	360.3	360.5	360.8	361.1	361.3	361.4
132.5°	374.3	374.3	374.5	374.7	374.9	375.1	375.5	375.8	376.1	376.5	376.6
135°	396.0	395.9	395.8	395.7	395.7	395.8	396.2	396.5	396.9	397.3	397.4
137.5°	415.4	415.4	415.4	415.4	415.5	415.7	416.1	416.5	416.9	417.3	417.5
140°	427.9	428.1	428.3	428.5	428.6	428.8	429.0	429.3	429.4	429.6	429.9
142.5°	439.3	439.6	440.0	440.2	440.6	440.8	440.9	441.0	441.1	441.2	441.4
145°	456.6	456.9	457.2	457.4	457.7	457.9	457.9	457.9	457.9	457.9	458.0
147.5°	470.5	471.0	471.4	472.0	472.5	472.7	472.6	472.5	472.4	472.3	472.4
150°	480.5	480.9	481.3	481.6	482.0	482.1	482.0	481.9	481.8	481.7	481.7
152.5°	488.9	489.2	489.5	489.7	490.1	490.1	490.0	489.8	489.6	489.5	489.6
155°	500.7	500.8	500.9	501.0	501.1	501.0	500.7	500.4	500.2	499.9	500.2
157.5°	510.7	510.6	510.5	510.5	510.4	510.2	510.0	509.6	509.3	509.1	509.5
160°	516.5	516.2	515.9	515.7	515.4	515.2	515.1	515.1	515.0	514.9	515.4
162.5°	521.7	521.3	520.9	520.6	520.3	520.0	520.0	519.9	519.8	519.7	520.2
165°	528.2	527.7	527.3	526.8	526.4	526.2	526.2	526.2	526.2	526.2	526.9
167.5°	533.3	532.9	532.4	532.0	531.5	531.2	531.2	531.1	531.1	531.0	531.8
170°	536.3	535.7	535.2	534.7	534.1	533.9	534.0	534.0	534.1	534.2	534.9
172.5°	538.2	537.7	537.2	536.6	536.1	535.8	535.9	536.0	536.1	536.2	536.9
175°	540.3	539.8	539.2	538.7	538.1	538.0	538.1	538.1	538.2	538.3	539.1
177.5°	541.3	540.8	540.3	539.8	539.3	539.1	539.2	539.4	539.5	539.7	540.2
180°	540.3	540.3	540.3	540.3	540.3	540.3	540.3	540.3	540.3	540.3	540.3



TEST NUMBER: P332809-940

CATALOG NUMBER: S124DIW-S1020D470U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1538.6	1538.6	1538.6	1538.6	1538.6	1538.6	1538.6	1538.6
2.5°	1533.1	1535.3	1537.6	1538.6	1538.3	1538.1	1537.8	1537.7
5°	1524.9	1527.9	1531.0	1532.2	1531.7	1531.1	1530.5	1530.0
7.5°	1508.0	1510.4	1512.8	1513.9	1513.5	1513.1	1512.8	1512.5
10°	1493.7	1495.9	1498.1	1498.9	1498.3	1497.8	1497.3	1496.7
12.5°	1476.4	1478.8	1481.2	1482.0	1481.3	1480.5	1479.7	1479.0
15°	1443.3	1444.9	1446.6	1447.0	1446.2	1445.4	1444.6	1443.7
17.5°	1405.6	1406.7	1407.7	1407.9	1407.4	1406.9	1406.3	1405.7
20°	1377.5	1378.4	1379.2	1379.3	1378.8	1378.2	1377.7	1377.2
22.5°	1348.3	1349.8	1351.2	1351.5	1350.5	1349.5	1348.5	1347.6
25°	1300.0	1300.3	1300.6	1300.1	1299.0	1298.0	1296.8	1295.7
27.5°	1245.9	1245.2	1244.6	1243.6	1242.2	1240.8	1239.4	1238.1
30°	1208.5	1207.4	1206.3	1205.1	1203.7	1202.3	1201.0	1199.6
32.5°	1170.5	1169.3	1168.0	1166.6	1165.2	1163.9	1162.5	1161.1
35°	1110.7	1108.8	1106.9	1105.2	1103.8	1102.5	1101.1	1099.7
37.5°	1047.9	1045.9	1043.8	1041.9	1040.1	1038.2	1036.4	1034.7
40°	1004.2	1001.5	998.8	996.8	995.3	994.0	992.7	991.2
42.5°	962.0	958.8	955.6	953.5	952.6	951.6	950.7	949.9
45°	896.4	893.4	890.4	888.5	887.7	886.9	886.0	885.2
47.5°	833.0	829.6	826.3	823.5	821.4	819.3	817.3	815.2
50°	788.8	785.0	781.1	778.4	776.7	775.1	773.5	771.8
52.5°	743.3	739.9	736.5	733.8	731.6	729.6	727.5	725.4
55°	676.5	673.2	669.9	667.4	665.8	664.1	662.5	660.8
57.5°	609.5	606.4	603.2	600.8	599.2	597.7	596.1	594.5
60°	563.5	561.0	558.5	556.6	555.2	553.8	552.5	551.1
62.5°	518.5	516.2	514.0	512.2	510.9	509.4	508.1	506.8
65°	453.2	450.4	447.6	445.6	444.3	442.9	441.5	440.1
67.5°	385.8	383.2	380.6	379.1	378.6	378.3	377.9	377.6
70°	343.3	341.1	338.9	337.4	336.6	335.7	334.9	334.1
72.5°	300.8	299.0	297.3	296.0	295.2	294.4	293.6	292.7
75°	239.4	238.4	237.3	236.6	236.3	236.0	235.8	235.5
77.5°	181.3	181.0	180.7	180.1	179.4	178.7	178.0	177.3
80°	144.4	143.8	143.3	142.9	142.6	142.3	142.0	141.8
82.5°	111.3	110.9	110.7	110.3	110.0	109.8	109.5	109.2
85°	64.1	64.1	64.1	63.9	63.7	63.4	63.1	62.9
87.5°	25.7	25.8	25.9	25.9	25.9	26.0	26.0	26.1
90°	10.0	10.5	11.1	11.4	11.6	11.8	11.9	12.1
92.5°	9.6	10.2	10.7	11.0	11.1	11.1	11.1	11.1
95°	10.0	10.5	11.1	11.3	11.4	11.5	11.6	11.7
97.5°	10.8	10.8	10.9	11.0	11.1	11.1	11.2	11.3
100°	14.7	13.2	11.7	11.0	11.1	11.1	11.2	11.3
102.5°	52.7	36.3	19.8	11.6	11.6	11.6	11.6	11.7
105°	127.7	128.5	129.3	128.1	124.8	121.6	118.4	115.2
107.5°	158.0	158.4	158.8	159.2	159.5	159.8	160.2	160.5
110°	178.6	178.8	179.0	179.1	179.4	179.7	179.9	180.2



TEST NUMBER: P332809-940

CATALOG NUMBER: S124DIW-S1020D470U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	198.5	198.5	198.4	198.6	198.9	199.3	199.7	199.9
115°	228.3	228.5	228.6	228.7	228.7	228.7	228.7	228.7
117.5°	258.2	258.2	258.2	258.2	258.1	258.1	258.1	258.0
120°	276.8	277.0	277.1	277.1	277.0	276.8	276.6	276.4
122.5°	295.1	295.2	295.2	295.2	295.1	294.9	294.7	294.5
125°	320.6	320.8	321.1	321.3	321.4	321.5	321.6	321.6
127.5°	346.0	345.9	345.9	345.8	345.7	345.6	345.6	345.5
130°	361.5	361.6	361.7	361.7	361.7	361.7	361.7	361.7
132.5°	376.7	376.7	376.8	376.8	376.7	376.7	376.7	376.6
135°	397.6	397.8	398.0	398.1	398.3	398.5	398.7	398.9
137.5°	417.7	417.9	418.1	418.1	418.1	418.0	418.0	417.9
140°	430.2	430.4	430.7	430.9	431.0	431.1	431.1	431.2
142.5°	441.6	441.8	442.0	442.1	442.1	442.2	442.2	442.2
145°	458.1	458.2	458.3	458.3	458.5	458.7	458.9	459.1
147.5°	472.5	472.5	472.6	472.7	472.8	472.9	473.0	473.1
150°	481.7	481.7	481.7	481.8	481.9	482.0	482.1	482.1
152.5°	489.7	489.9	490.1	490.1	490.1	490.0	489.9	489.9
155°	500.6	501.0	501.3	501.4	501.1	500.9	500.6	500.3
157.5°	510.0	510.4	510.9	510.9	510.4	510.0	509.5	509.1
160°	515.9	516.5	517.0	517.0	516.5	515.9	515.4	514.9
162.5°	520.8	521.3	521.8	521.8	521.2	520.6	520.0	519.4
165°	527.6	528.3	529.1	529.0	528.2	527.4	526.6	525.8
167.5°	532.6	533.4	534.2	534.1	533.2	532.4	531.5	530.6
170°	535.7	536.4	537.2	537.1	536.1	535.2	534.3	533.4
172.5°	537.6	538.3	539.0	539.0	538.0	537.0	536.0	535.0
175°	539.9	540.7	541.5	541.4	540.3	539.2	538.1	537.1
177.5°	540.8	541.4	542.0	541.8	541.0	540.1	539.2	538.4
180°	540.3	540.3	540.3	540.3	540.3	540.3	540.3	540.3

(END OF REPORT)