

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332857-940

Luminaire Tested: **S124DIW-S1195D1340U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332857-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S1195D1340U940-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1340 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9348.0 lumens
Efficiency: N/A
Efficacy: 122.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 76.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332857-940

CATALOG NUMBER: S124DIW-S1195D1340U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

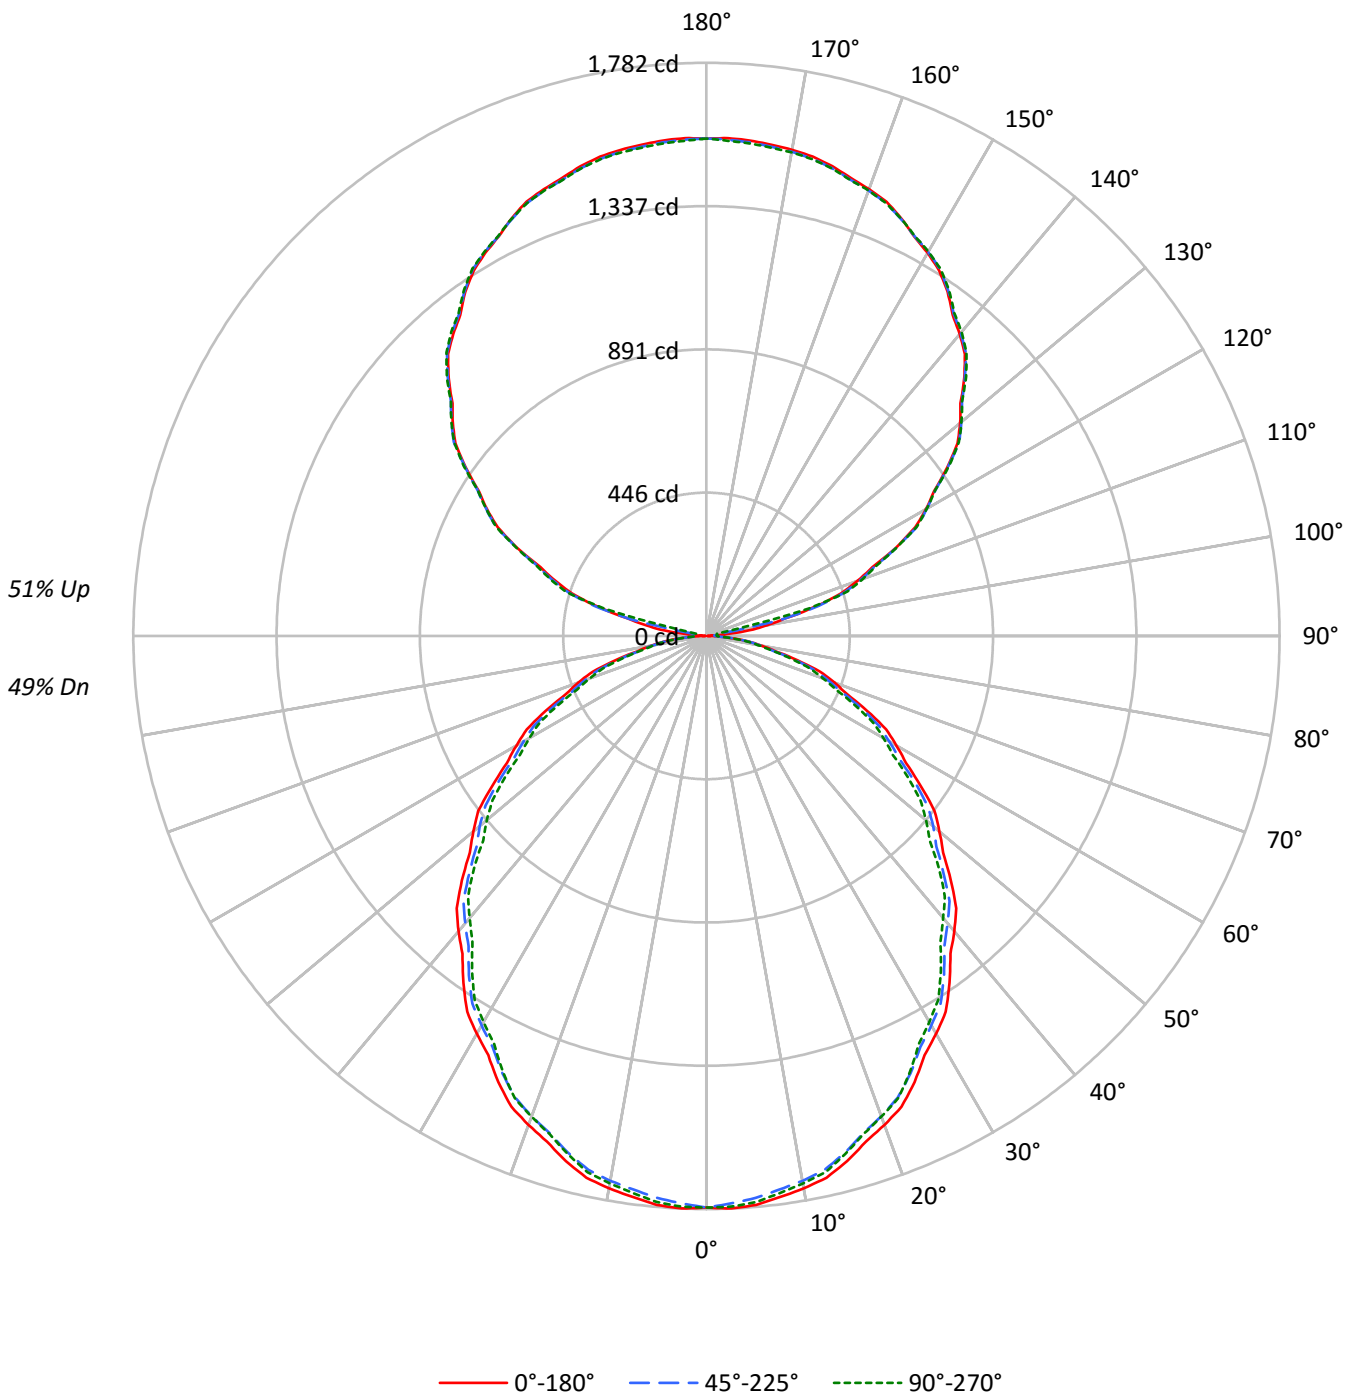



TEST NUMBER: P332857-940

CATALOG NUMBER: S124DIW-S1195D1340U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	107	107	107	107	98	98	98	98	83	83	83	68	68	68	55	55	55	49				
1	97	93	89	86	90	86	83	80	72	70	68	60	58	57	49	47	46	41				
2	89	81	75	70	81	75	70	65	63	60	56	53	50	47	43	41	39	34				
3	81	71	64	58	74	66	60	55	56	51	47	47	43	40	38	35	33	29				
4	74	63	55	49	68	59	52	46	50	44	40	41	38	34	34	31	29	25				
5	68	56	48	42	62	52	45	40	44	39	35	37	33	30	30	27	25	22				
6	63	51	42	37	57	47	40	34	40	34	30	34	29	26	28	24	22	19				
7	58	46	38	32	53	42	35	30	36	31	27	31	26	23	25	22	20	17				
8	54	41	34	28	49	39	32	27	33	28	24	28	24	21	23	20	17	15				
9	50	38	30	25	46	35	28	24	30	25	21	26	22	18	21	18	16	14				
10	47	35	27	23	43	32	26	21	28	23	19	24	20	17	20	17	14	12				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14346	14346	14346
5°	14389	14216	14319
10°	14299	14100	14170
15°	14125	13900	13936
20°	13897	13651	13664
25°	13635	13367	13331
30°	13313	13035	12915
35°	12980	12686	12518
40°	12635	12290	12064
45°	12273	11900	11671
50°	11875	11552	11195
55°	11444	11102	10742
60°	11013	10598	10277
65°	10527	10118	9712
70°	9982	9477	9106
75°	9148	8706	8484
80°	8140	7810	7610
85°	7123	6854	6725



TEST NUMBER: P332857-940

CATALOG NUMBER: S124DIW-S1195D1340U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	167.3	1.8
10°-20°	471.5	5.0
20°-30°	694.0	7.4
30°-40°	806.8	8.6
40°-50°	806.8	8.6
50°-60°	705.8	7.5
60°-70°	524.1	5.6
70°-80°	297.8	3.2
80°-90°	90.4	1.0
90°-100°	52.9	0.6
100°-110°	337.2	3.6
110°-120°	645.1	6.9
120°-130°	818.9	8.8
130°-140°	876.2	9.4
140°-150°	819.3	8.8
150°-160°	660.7	7.1
160°-170°	426.2	4.6
170°-180°	146.9	1.6
0°-30°	1332.9	14.3
0°-40°	2139.7	22.9
0°-60°	3652.3	39.1
0°-90°	4564.6	48.8
90°-120°	1035.2	11.1
90°-150°	3549.6	38.0
90°-180°	4783.0	51.2
0°-180°	9348.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1777	1777	1777	1777	1777	
5°	1776	1769	1754	1769	1767	168
15°	1690	1684	1663	1671	1667	476
25°	1531	1520	1501	1502	1497	704
35°	1317	1307	1287	1277	1270	823
45°	1075	1064	1042	1027	1022	828
55°	813	808	789	772	763	728
65°	551	544	530	516	508	545
75°	293	286	279	274	272	312
85°	77	77	74	74	73	85
90°	4	16	25	32	35	7
95°	64	26	25	32	34	82
105°	348	355	361	368	330	364
115°	650	653	652	654	655	639
125°	914	918	916	919	921	815
135°	1134	1133	1137	1139	1142	873
145°	1307	1310	1310	1312	1314	816
155°	1433	1434	1431	1435	1432	660
165°	1512	1506	1506	1514	1505	427
175°	1546	1540	1541	1550	1537	147
180°	1546	1546	1546	1546	1546	



TEST NUMBER: P332857-940

CATALOG NUMBER: S124DIW-S1195D1340U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0
2.5°	1781.5	1780.8	1780.0	1779.3	1778.5	1776.7	1774.0	1771.2	1768.4	1765.7	1768.2
5°	1775.6	1774.3	1773.1	1771.8	1770.6	1768.2	1764.7	1761.2	1757.7	1754.3	1757.7
7.5°	1759.1	1757.8	1756.6	1755.2	1754.0	1751.5	1747.6	1743.7	1739.9	1736.0	1738.8
10°	1744.3	1743.0	1741.8	1740.4	1739.2	1736.5	1732.4	1728.3	1724.2	1720.1	1722.6
12.5°	1724.9	1723.7	1722.3	1721.1	1719.8	1717.0	1712.7	1708.3	1704.0	1699.6	1702.4
15°	1690.1	1688.9	1687.7	1686.4	1685.1	1682.1	1677.3	1672.6	1667.9	1663.1	1665.0
17.5°	1648.3	1646.7	1645.1	1643.6	1642.0	1639.0	1634.4	1630.0	1625.5	1621.0	1622.2
20°	1617.6	1616.0	1614.4	1612.8	1611.2	1608.0	1603.3	1598.6	1593.8	1589.0	1590.0
22.5°	1584.5	1582.4	1580.4	1578.2	1576.2	1572.7	1568.0	1563.3	1558.5	1553.7	1555.5
25°	1530.7	1528.5	1526.3	1524.0	1521.8	1518.5	1514.0	1509.7	1505.2	1500.7	1501.1
27.5°	1469.2	1466.9	1464.6	1462.3	1460.1	1456.9	1452.8	1448.7	1444.6	1440.4	1439.7
30°	1428.2	1425.7	1423.1	1420.6	1418.1	1414.7	1410.6	1406.5	1402.4	1398.3	1397.0
32.5°	1384.9	1382.6	1380.4	1378.0	1375.7	1372.4	1368.1	1363.7	1359.3	1355.0	1353.4
35°	1317.1	1314.9	1312.7	1310.5	1308.2	1304.9	1300.5	1296.1	1291.6	1287.2	1285.0
37.5°	1245.6	1243.6	1241.6	1239.6	1237.5	1234.1	1229.4	1224.7	1219.9	1215.1	1212.7
40°	1198.9	1196.4	1193.8	1191.3	1188.8	1185.2	1180.4	1175.6	1170.9	1166.2	1163.0
42.5°	1148.8	1147.3	1145.8	1144.2	1142.7	1139.3	1134.1	1128.8	1123.6	1118.3	1114.6
45°	1075.0	1072.8	1070.6	1068.4	1066.2	1062.6	1057.5	1052.4	1047.3	1042.3	1038.8
47.5°	997.8	996.3	994.8	993.3	991.8	988.7	984.0	979.4	974.6	970.0	966.1
50°	945.5	944.2	942.9	941.6	940.4	937.5	933.1	928.7	924.3	919.8	915.4
52.5°	894.2	892.7	891.2	889.7	888.1	885.0	880.4	875.7	871.0	866.3	862.4
55°	813.1	812.1	811.2	810.2	809.2	806.6	802.1	797.7	793.3	788.8	785.1
57.5°	735.6	734.5	733.4	732.4	731.3	728.5	724.2	719.8	715.4	711.1	707.5
60°	682.1	680.5	678.9	677.3	675.7	672.9	668.8	664.7	660.5	656.4	653.5
62.5°	629.6	628.3	627.0	625.6	624.4	621.5	617.2	612.8	608.4	604.0	601.5
65°	551.1	549.5	547.9	546.3	544.7	542.3	539.2	536.0	532.9	529.7	526.6
67.5°	471.9	470.5	469.0	467.5	466.1	463.8	460.7	457.7	454.7	451.7	448.6
70°	422.9	420.7	418.5	416.3	414.0	411.7	409.1	406.6	404.0	401.5	399.0
72.5°	370.5	368.3	366.0	363.8	361.7	359.5	357.5	355.4	353.5	351.4	349.4
75°	293.3	291.8	290.2	288.6	287.0	285.4	283.8	282.2	280.7	279.1	277.9
77.5°	219.5	218.8	218.2	217.5	216.8	215.7	214.4	212.9	211.6	210.2	209.8
80°	175.1	174.2	173.3	172.3	171.4	170.6	170.0	169.2	168.6	168.0	167.4
82.5°	131.9	131.4	131.0	130.5	130.1	129.8	129.7	129.6	129.4	129.3	128.9
85°	76.9	76.9	76.9	76.9	76.9	76.6	76.0	75.3	74.6	74.0	74.0
87.5°	30.3	30.6	30.9	31.2	31.6	31.8	31.9	32.1	32.3	32.5	32.7
90°	3.5	6.3	9.1	11.9	14.8	17.2	19.3	21.3	23.4	25.4	27.0
92.5°	14.5	14.7	14.9	15.1	15.2	16.3	18.4	20.4	22.5	24.5	26.0
95°	63.6	54.8	46.1	37.4	28.6	24.4	24.7	25.0	25.1	25.4	27.0
97.5°	135.1	140.5	146.0	151.4	156.9	145.3	116.5	87.9	59.2	30.5	30.7
100°	189.7	194.3	198.9	203.6	208.2	192.8	157.3	121.8	86.3	50.9	46.5
102.5°	250.7	254.1	257.5	260.9	264.3	263.7	259.0	254.5	249.9	245.2	198.0
105°	348.1	349.6	351.2	352.8	354.3	355.7	357.0	358.3	359.5	360.9	363.2
107.5°	438.5	439.3	440.1	440.9	441.7	442.9	444.7	446.4	448.2	450.0	451.0
110°	499.6	500.4	501.2	501.9	502.7	503.9	505.4	506.9	508.5	510.1	510.6



TEST NUMBER: P332857-940

CATALOG NUMBER: S124DIW-S1195D1340U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	558.8	560.3	561.7	563.0	564.5	565.4	566.2	566.9	567.7	568.4	568.3
115°	650.0	650.8	651.6	652.3	653.1	653.4	653.1	652.8	652.6	652.3	652.8
117.5°	732.1	733.2	734.1	735.2	736.2	737.0	737.6	738.2	738.7	739.3	739.2
120°	787.6	788.6	789.7	790.8	791.8	792.1	791.9	791.7	791.4	791.1	791.7
122.5°	839.5	840.1	840.7	841.3	842.0	842.4	842.8	843.1	843.5	843.8	844.2
125°	913.7	914.7	915.8	916.8	917.8	918.1	917.6	917.0	916.5	916.1	916.8
127.5°	984.0	984.3	984.5	984.8	985.1	985.8	986.9	988.1	989.4	990.5	990.3
130°	1029.4	1029.7	1029.9	1030.1	1030.4	1030.9	1031.7	1032.4	1033.2	1034.0	1034.3
132.5°	1071.0	1071.5	1071.9	1072.4	1072.8	1073.6	1074.6	1075.5	1076.5	1077.5	1077.7
135°	1133.5	1133.2	1132.9	1132.7	1132.5	1132.8	1133.8	1134.9	1136.0	1136.9	1137.5
137.5°	1188.7	1188.8	1188.9	1189.1	1189.2	1189.8	1190.9	1192.0	1193.2	1194.3	1194.9
140°	1224.9	1225.4	1225.8	1226.4	1226.9	1227.4	1227.9	1228.4	1229.0	1229.5	1230.2
142.5°	1257.2	1258.1	1259.1	1260.0	1261.0	1261.5	1261.9	1262.1	1262.5	1262.8	1263.4
145°	1307.0	1307.7	1308.5	1309.3	1310.0	1310.5	1310.5	1310.5	1310.5	1310.5	1310.7
147.5°	1346.5	1347.9	1349.4	1350.9	1352.3	1352.9	1352.6	1352.4	1352.1	1351.8	1352.0
150°	1375.2	1376.3	1377.2	1378.3	1379.3	1379.7	1379.5	1379.2	1378.9	1378.7	1378.7
152.5°	1399.3	1400.1	1400.9	1401.7	1402.6	1402.8	1402.3	1401.8	1401.3	1400.9	1401.3
155°	1433.1	1433.2	1433.5	1433.8	1434.0	1433.8	1433.1	1432.3	1431.5	1430.7	1431.7
157.5°	1461.5	1461.3	1461.2	1461.0	1460.9	1460.4	1459.5	1458.6	1457.8	1456.9	1458.2
160°	1478.1	1477.4	1476.6	1475.8	1475.1	1474.5	1474.3	1474.0	1473.7	1473.6	1475.1
162.5°	1492.9	1491.9	1491.0	1490.0	1489.1	1488.4	1488.2	1487.9	1487.6	1487.4	1488.9
165°	1511.7	1510.4	1509.1	1507.8	1506.5	1505.9	1505.9	1505.9	1505.9	1505.9	1508.0
167.5°	1526.5	1525.2	1523.8	1522.5	1521.2	1520.4	1520.3	1520.1	1519.9	1519.7	1522.1
170°	1534.8	1533.3	1531.7	1530.2	1528.7	1528.0	1528.2	1528.5	1528.7	1529.0	1531.1
172.5°	1540.3	1538.8	1537.3	1535.7	1534.2	1533.6	1533.8	1534.1	1534.3	1534.5	1536.6
175°	1546.4	1544.8	1543.3	1541.8	1540.2	1539.5	1539.8	1540.1	1540.3	1540.6	1542.9
177.5°	1549.2	1547.7	1546.2	1544.8	1543.4	1542.8	1543.3	1543.7	1544.1	1544.5	1546.1
180°	1546.4	1546.4	1546.4	1546.4	1546.4	1546.4	1546.4	1546.4	1546.4	1546.4	1546.4



TEST NUMBER: P332857-940

CATALOG NUMBER: S124DIW-S1195D1340U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0
2.5°	1770.7	1773.3	1775.8	1776.9	1776.6	1776.4	1776.1	1775.8
5°	1761.2	1764.7	1768.2	1769.6	1769.0	1768.4	1767.7	1767.0
7.5°	1741.6	1744.4	1747.1	1748.4	1748.0	1747.6	1747.2	1746.9
10°	1725.1	1727.7	1730.2	1731.2	1730.5	1729.9	1729.2	1728.6
12.5°	1705.1	1707.9	1710.7	1711.6	1710.7	1709.9	1709.0	1708.1
15°	1666.9	1668.8	1670.7	1671.2	1670.3	1669.3	1668.3	1667.4
17.5°	1623.4	1624.6	1625.8	1626.0	1625.4	1624.8	1624.2	1623.5
20°	1591.0	1591.9	1592.9	1593.0	1592.4	1591.8	1591.2	1590.5
22.5°	1557.2	1558.9	1560.6	1560.9	1559.8	1558.6	1557.5	1556.3
25°	1501.5	1501.7	1502.1	1501.6	1500.3	1499.1	1497.8	1496.6
27.5°	1438.9	1438.2	1437.3	1436.2	1434.6	1433.1	1431.5	1429.9
30°	1395.7	1394.5	1393.2	1391.8	1390.2	1388.7	1387.1	1385.5
32.5°	1351.9	1350.4	1348.9	1347.4	1345.8	1344.2	1342.6	1341.0
35°	1282.8	1280.6	1278.4	1276.5	1274.9	1273.3	1271.7	1270.2
37.5°	1210.3	1207.9	1205.5	1203.3	1201.2	1199.1	1197.0	1194.9
40°	1159.8	1156.6	1153.5	1151.1	1149.6	1148.0	1146.4	1144.8
42.5°	1111.0	1107.3	1103.7	1101.3	1100.2	1099.1	1098.1	1097.0
45°	1035.4	1031.9	1028.4	1026.2	1025.2	1024.2	1023.3	1022.3
47.5°	962.2	958.2	954.3	951.1	948.7	946.3	943.9	941.5
50°	911.0	906.5	902.1	898.9	897.1	895.2	893.2	891.4
52.5°	858.4	854.5	850.6	847.5	845.1	842.7	840.3	837.9
55°	781.2	777.5	773.6	770.8	768.9	767.0	765.1	763.2
57.5°	703.9	700.3	696.7	693.9	692.1	690.3	688.4	686.6
60°	650.7	647.9	645.1	642.8	641.2	639.6	638.1	636.5
62.5°	598.8	596.2	593.6	591.6	590.0	588.4	586.8	585.2
65°	523.3	520.2	517.0	514.7	513.1	511.5	509.9	508.4
67.5°	445.6	442.6	439.5	437.7	437.3	436.8	436.4	436.0
70°	396.5	394.0	391.4	389.7	388.7	387.8	386.8	385.8
72.5°	347.4	345.4	343.3	341.8	340.9	339.9	338.9	338.0
75°	276.5	275.3	274.0	273.2	273.0	272.6	272.2	272.0
77.5°	209.4	209.0	208.7	208.0	207.2	206.4	205.5	204.7
80°	166.7	166.1	165.5	165.1	164.7	164.3	164.1	163.7
82.5°	128.5	128.1	127.8	127.4	127.1	126.8	126.4	126.2
85°	74.0	74.0	74.0	73.9	73.6	73.2	72.9	72.6
87.5°	33.1	33.3	33.6	33.9	34.0	34.1	34.2	34.2
90°	28.5	30.1	31.7	32.6	33.2	33.7	34.2	34.7
92.5°	27.6	29.2	30.7	31.5	31.7	31.7	31.8	31.9
95°	28.5	30.1	31.7	32.5	32.7	33.0	33.3	33.5
97.5°	30.9	31.0	31.1	31.4	31.7	31.8	32.1	32.4
100°	42.2	37.8	33.4	31.4	31.7	31.8	32.1	32.4
102.5°	151.0	103.8	56.6	33.1	33.2	33.2	33.3	33.3
105°	365.5	367.8	370.1	366.7	357.4	348.1	338.9	329.7
107.5°	452.2	453.3	454.4	455.5	456.5	457.4	458.4	459.4
110°	511.1	511.6	512.1	512.7	513.5	514.3	515.1	515.9



TEST NUMBER: P332857-940

CATALOG NUMBER: S124DIW-S1195D1340U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	568.1	568.0	567.9	568.4	569.4	570.3	571.3	572.3
115°	653.4	653.9	654.3	654.6	654.6	654.6	654.6	654.6
117.5°	739.0	739.0	738.9	738.8	738.7	738.6	738.5	738.3
120°	792.1	792.6	793.2	793.2	792.6	792.1	791.7	791.1
122.5°	844.5	844.8	845.1	845.0	844.5	843.9	843.5	842.9
125°	917.6	918.4	919.1	919.6	919.9	920.2	920.4	920.7
127.5°	990.2	990.1	989.9	989.7	989.5	989.3	989.1	988.9
130°	1034.5	1034.7	1035.0	1035.2	1035.2	1035.2	1035.2	1035.2
132.5°	1078.0	1078.3	1078.5	1078.5	1078.3	1078.2	1077.9	1077.7
135°	1138.0	1138.4	1139.0	1139.5	1140.1	1140.5	1141.0	1141.6
137.5°	1195.4	1196.0	1196.6	1196.8	1196.6	1196.5	1196.3	1196.1
140°	1231.0	1231.8	1232.5	1233.1	1233.3	1233.6	1233.9	1234.1
142.5°	1263.9	1264.4	1265.1	1265.3	1265.4	1265.4	1265.5	1265.5
145°	1310.9	1311.2	1311.4	1311.9	1312.3	1312.9	1313.4	1313.9
147.5°	1352.3	1352.5	1352.6	1352.9	1353.2	1353.4	1353.6	1353.9
150°	1378.7	1378.7	1378.7	1378.8	1379.0	1379.3	1379.6	1379.8
152.5°	1401.7	1402.1	1402.5	1402.7	1402.5	1402.3	1402.2	1402.0
155°	1432.8	1433.8	1434.9	1434.9	1434.2	1433.4	1432.6	1431.9
157.5°	1459.6	1460.9	1462.2	1462.2	1460.9	1459.6	1458.2	1456.9
160°	1476.6	1478.1	1479.7	1479.7	1478.1	1476.6	1475.1	1473.6
162.5°	1490.5	1492.0	1493.5	1493.4	1491.7	1490.0	1488.2	1486.5
165°	1510.0	1512.1	1514.1	1513.9	1511.7	1509.4	1507.1	1504.8
167.5°	1524.3	1526.5	1528.8	1528.7	1526.1	1523.5	1521.0	1518.4
170°	1533.1	1535.2	1537.2	1537.0	1534.5	1531.9	1529.3	1526.7
172.5°	1538.6	1540.8	1542.8	1542.5	1539.6	1536.9	1534.1	1531.3
175°	1545.2	1547.6	1549.9	1549.4	1546.4	1543.3	1540.2	1537.1
177.5°	1547.8	1549.4	1551.1	1550.7	1548.2	1545.8	1543.3	1540.8
180°	1546.4	1546.4	1546.4	1546.4	1546.4	1546.4	1546.4	1546.4

(END OF REPORT)