

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332846-940

Luminaire Tested: **S124DIW-S1195D770U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332846-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S1195D770U940-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 770 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6936.8 lumens
Efficiency: N/A
Efficacy: 116.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 59.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332846-940

CATALOG NUMBER: S124DIW-S1195D770U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

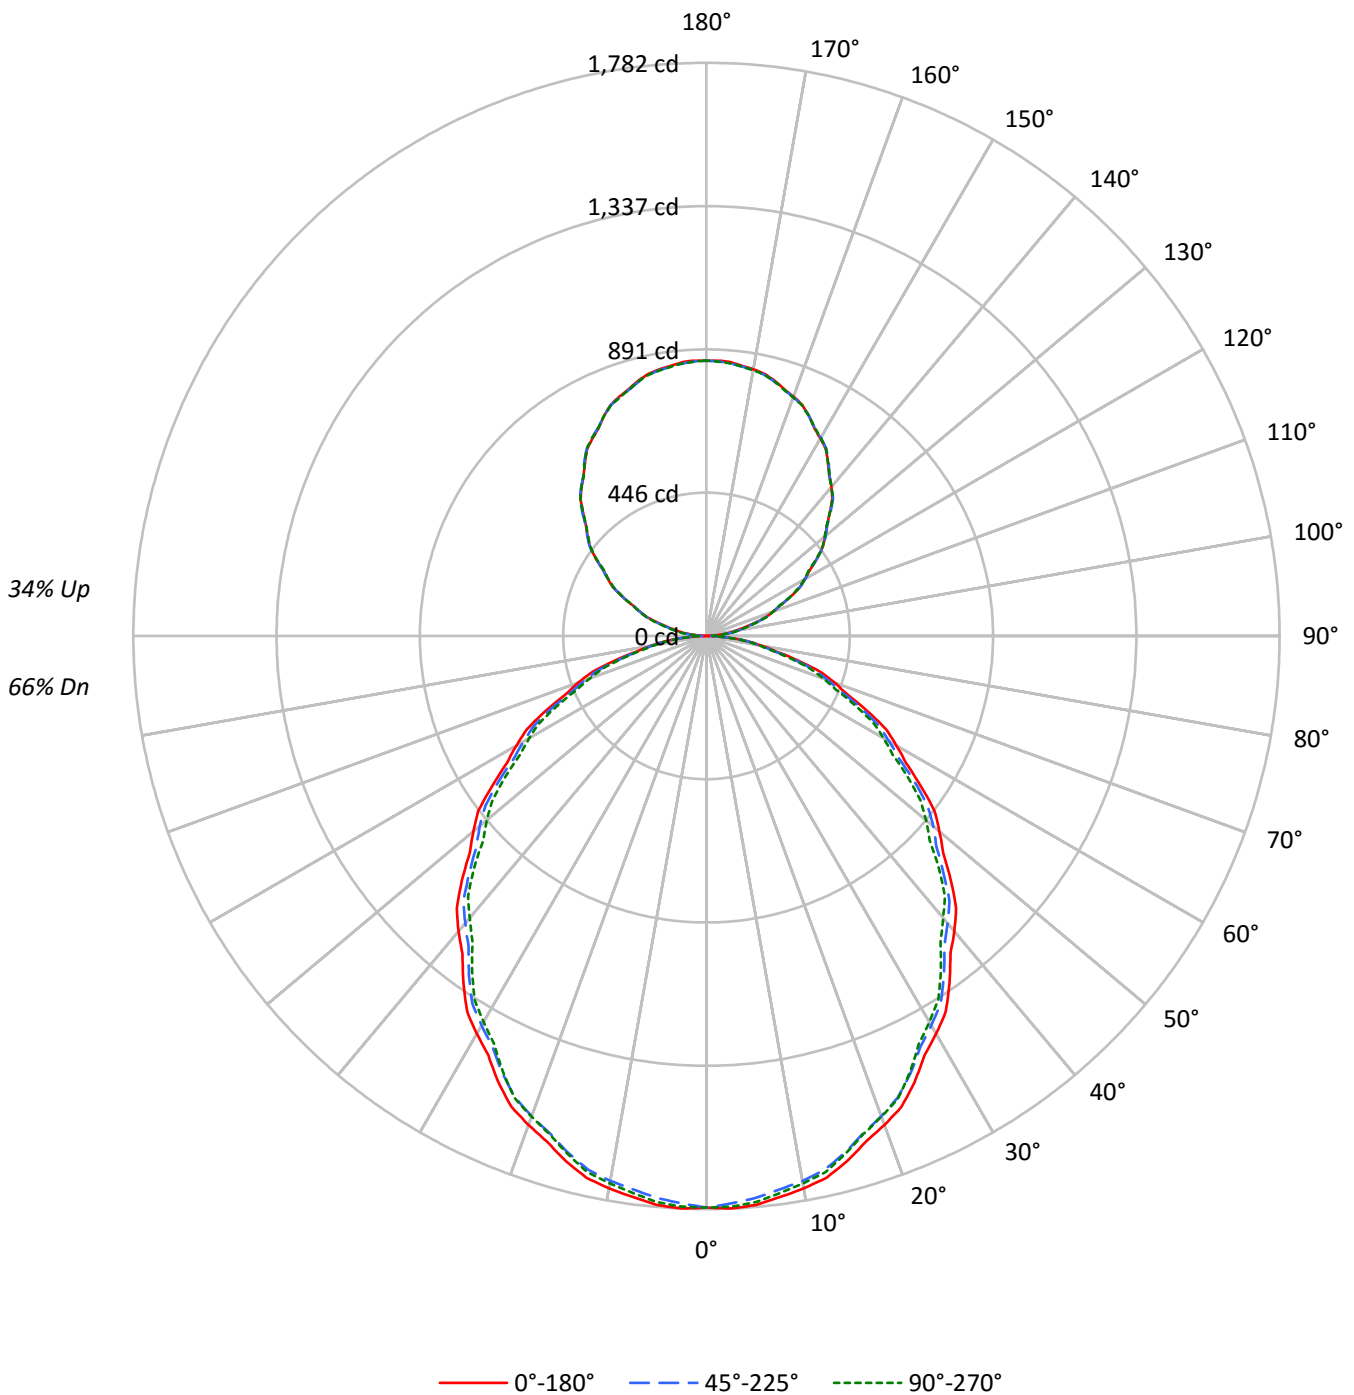



TEST NUMBER: P332846-940

CATALOG NUMBER: S124DIW-S1195D770U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	104	104	104	104	92	92	92	81	81	81	71	71	71	66
1	101	97	93	89	95	91	88	85	81	78	76	71	69	67	62	61	60	55
2	92	85	78	73	86	80	74	69	71	66	63	63	59	56	55	52	50	46
3	84	74	67	61	79	70	63	58	62	57	53	55	51	48	49	45	43	39
4	77	66	58	51	72	62	55	49	56	50	45	49	45	41	43	40	37	34
5	71	59	50	44	66	56	48	42	50	44	39	44	39	35	39	35	32	29
6	65	53	45	39	61	50	43	37	45	39	34	40	35	31	36	31	28	26
7	60	48	40	34	57	45	38	33	41	35	30	37	31	28	33	28	25	23
8	56	44	36	30	53	41	34	29	37	31	27	33	28	25	30	26	23	20
9	52	40	32	27	49	38	31	26	34	28	24	31	26	22	28	23	20	18
10	49	37	29	24	46	35	28	23	32	26	22	29	24	20	26	22	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14346	14346	14346
5°	14389	14216	14319
10°	14299	14100	14170
15°	14125	13900	13936
20°	13897	13651	13664
25°	13635	13367	13331
30°	13313	13035	12915
35°	12980	12686	12518
40°	12635	12290	12064
45°	12273	11900	11671
50°	11875	11552	11195
55°	11444	11102	10742
60°	11013	10598	10277
65°	10527	10118	9712
70°	9982	9477	9106
75°	9148	8706	8484
80°	8140	7810	7610
85°	7123	6854	6725



TEST NUMBER: P332846-940

CATALOG NUMBER: S124DIW-S1195D770U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	167.3	2.4
10°-20°	471.5	6.8
20°-30°	694.0	10.0
30°-40°	806.8	11.6
40°-50°	806.8	11.6
50°-60°	705.8	10.2
60°-70°	524.1	7.6
70°-80°	297.8	4.3
80°-90°	88.5	1.3
90°-100°	56.4	0.8
100°-110°	167.2	2.4
110°-120°	283.8	4.1
120°-130°	374.2	5.4
130°-140°	420.2	6.1
140°-150°	413.0	6.0
150°-160°	347.3	5.0
160°-170°	231.1	3.3
170°-180°	80.9	1.2
0°-30°	1332.9	19.2
0°-40°	2139.7	30.8
0°-60°	3652.3	52.7
0°-90°	4562.7	65.8
90°-120°	507.4	7.3
90°-150°	1714.8	24.7
90°-180°	2374.0	34.2
0°-180°	6936.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1777	1777	1777	1777	1777	
5°	1776	1769	1754	1769	1767	168
15°	1690	1684	1663	1671	1667	476
25°	1531	1520	1501	1502	1497	704
35°	1317	1307	1287	1277	1270	823
45°	1075	1064	1042	1027	1022	828
55°	813	808	789	772	763	728
65°	551	544	530	516	508	545
75°	293	286	279	274	272	312
85°	77	77	74	74	73	85
90°	2	9	14	18	20	7
95°	40	46	50	52	52	44
105°	154	155	158	160	162	164
115°	289	288	287	287	286	284
125°	420	420	420	418	417	374
135°	542	546	546	545	543	419
145°	658	661	662	661	659	412
155°	754	754	754	756	754	347
165°	821	819	818	822	819	231
175°	854	851	850	854	850	81
180°	856	856	856	856	856	



TEST NUMBER: P332846-940

CATALOG NUMBER: S124DIW-S1195D770U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0
2.5°	1781.5	1780.8	1780.0	1779.3	1778.5	1776.7	1774.0	1771.2	1768.4	1765.7	1768.2
5°	1775.6	1774.3	1773.1	1771.8	1770.6	1768.2	1764.7	1761.2	1757.7	1754.3	1757.7
7.5°	1759.1	1757.8	1756.6	1755.2	1754.0	1751.5	1747.6	1743.7	1739.9	1736.0	1738.8
10°	1744.3	1743.0	1741.8	1740.4	1739.2	1736.5	1732.4	1728.3	1724.2	1720.1	1722.6
12.5°	1724.9	1723.7	1722.3	1721.1	1719.8	1717.0	1712.7	1708.3	1704.0	1699.6	1702.4
15°	1690.1	1688.9	1687.7	1686.4	1685.1	1682.1	1677.3	1672.6	1667.9	1663.1	1665.0
17.5°	1648.3	1646.7	1645.1	1643.6	1642.0	1639.0	1634.4	1630.0	1625.5	1621.0	1622.2
20°	1617.6	1616.0	1614.4	1612.8	1611.2	1608.0	1603.3	1598.6	1593.8	1589.0	1590.0
22.5°	1584.5	1582.4	1580.4	1578.2	1576.2	1572.7	1568.0	1563.3	1558.5	1553.7	1555.5
25°	1530.7	1528.5	1526.3	1524.0	1521.8	1518.5	1514.0	1509.7	1505.2	1500.7	1501.1
27.5°	1469.2	1466.9	1464.6	1462.3	1460.1	1456.9	1452.8	1448.7	1444.6	1440.4	1439.7
30°	1428.2	1425.7	1423.1	1420.6	1418.1	1414.7	1410.6	1406.5	1402.4	1398.3	1397.0
32.5°	1384.9	1382.6	1380.4	1378.0	1375.7	1372.4	1368.1	1363.7	1359.3	1355.0	1353.4
35°	1317.1	1314.9	1312.7	1310.5	1308.2	1304.9	1300.5	1296.1	1291.6	1287.2	1285.0
37.5°	1245.6	1243.6	1241.6	1239.6	1237.5	1234.1	1229.4	1224.7	1219.9	1215.1	1212.7
40°	1198.9	1196.4	1193.8	1191.3	1188.8	1185.2	1180.4	1175.6	1170.9	1166.2	1163.0
42.5°	1148.8	1147.3	1145.8	1144.2	1142.7	1139.3	1134.1	1128.8	1123.6	1118.3	1114.6
45°	1075.0	1072.8	1070.6	1068.4	1066.2	1062.6	1057.5	1052.4	1047.3	1042.3	1038.8
47.5°	997.8	996.3	994.8	993.3	991.8	988.7	984.0	979.4	974.6	970.0	966.1
50°	945.5	944.2	942.9	941.6	940.4	937.5	933.1	928.7	924.3	919.8	915.4
52.5°	894.2	892.7	891.2	889.7	888.1	885.0	880.4	875.7	871.0	866.3	862.4
55°	813.1	812.1	811.2	810.2	809.2	806.6	802.1	797.7	793.3	788.8	785.1
57.5°	735.6	734.5	733.4	732.4	731.3	728.5	724.2	719.8	715.4	711.1	707.5
60°	682.1	680.5	678.9	677.3	675.7	672.9	668.8	664.7	660.5	656.4	653.5
62.5°	629.6	628.3	627.0	625.6	624.4	621.5	617.2	612.8	608.4	604.0	601.5
65°	551.1	549.5	547.9	546.3	544.7	542.3	539.2	536.0	532.9	529.7	526.6
67.5°	471.9	470.5	469.0	467.5	466.1	463.8	460.7	457.7	454.7	451.7	448.6
70°	422.9	420.7	418.5	416.3	414.0	411.7	409.1	406.6	404.0	401.5	399.0
72.5°	370.5	368.3	366.0	363.8	361.7	359.5	357.5	355.4	353.5	351.4	349.4
75°	293.3	291.8	290.2	288.6	287.0	285.4	283.8	282.2	280.7	279.1	277.9
77.5°	219.5	218.8	218.2	217.5	216.8	215.7	214.4	212.9	211.6	210.2	209.8
80°	175.1	174.2	173.3	172.3	171.4	170.6	170.0	169.2	168.6	168.0	167.4
82.5°	131.9	131.4	131.0	130.5	130.1	129.8	129.7	129.6	129.4	129.3	128.9
85°	76.9	76.9	76.9	76.9	76.9	76.6	76.0	75.3	74.6	74.0	74.0
87.5°	30.1	30.1	30.1	30.2	30.3	30.3	30.3	30.3	30.2	30.2	30.4
90°	2.0	3.6	5.3	6.9	8.5	9.9	11.1	12.2	13.4	14.5	15.4
92.5°	14.2	16.1	17.8	19.7	21.6	22.9	23.7	24.5	25.4	26.2	26.8
95°	39.7	41.0	42.4	43.7	45.0	46.2	47.2	48.2	49.3	50.3	50.7
97.5°	69.4	70.4	71.5	72.5	73.6	74.7	76.0	77.1	78.4	79.5	80.1
100°	92.6	93.3	93.8	94.4	95.0	95.9	97.3	98.6	100.0	101.3	101.6
102.5°	117.0	117.3	117.4	117.7	118.0	118.7	119.8	121.1	122.3	123.5	123.9
105°	154.2	154.4	154.5	154.6	154.8	155.2	155.8	156.3	156.9	157.5	157.9
107.5°	193.2	193.4	193.6	193.8	193.9	194.1	194.2	194.3	194.4	194.5	194.8
110°	219.7	220.0	220.3	220.6	220.9	221.0	220.8	220.7	220.5	220.3	220.1



TEST NUMBER: P332846-940

CATALOG NUMBER: S124DIW-S1195D770U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	247.3	247.3	247.4	247.4	247.4	247.4	247.1	246.8	246.6	246.3	246.3
115°	288.6	288.6	288.6	288.6	288.6	288.4	288.1	287.8	287.5	287.2	287.0
117.5°	327.4	327.6	327.7	327.8	328.0	327.9	327.7	327.5	327.3	327.1	326.5
120°	353.4	354.0	354.5	355.2	355.8	355.8	355.4	355.0	354.5	354.1	353.3
122.5°	380.4	380.7	380.8	381.1	381.4	381.4	381.2	380.9	380.8	380.6	380.0
125°	420.3	420.3	420.3	420.3	420.3	420.2	420.0	419.9	419.7	419.5	419.3
127.5°	456.4	456.8	457.3	457.7	458.2	458.3	458.0	457.8	457.5	457.4	457.0
130°	481.8	482.2	482.7	483.1	483.6	483.8	483.8	483.8	483.8	483.8	483.5
132.5°	507.7	508.1	508.4	508.7	509.1	509.2	509.0	508.9	508.8	508.6	508.4
135°	542.1	542.9	543.8	544.7	545.5	546.0	546.0	546.0	546.0	546.0	545.7
137.5°	579.3	579.8	580.1	580.6	581.0	581.3	581.6	581.8	582.0	582.3	581.8
140°	604.2	604.5	604.8	605.1	605.4	605.6	605.6	605.6	605.6	605.6	605.4
142.5°	627.0	627.3	627.6	627.9	628.2	628.3	628.1	628.0	627.9	627.8	627.8
145°	658.5	659.1	659.7	660.3	660.8	661.2	661.4	661.6	661.6	661.8	661.6
147.5°	689.7	690.5	691.2	691.9	692.6	692.9	692.8	692.6	692.5	692.4	692.2
150°	708.8	709.4	710.0	710.6	711.1	711.5	711.5	711.5	711.5	711.5	711.5
152.5°	726.8	727.2	727.5	727.9	728.3	728.4	728.5	728.7	728.8	728.9	729.2
155°	754.5	754.5	754.5	754.5	754.5	754.4	754.2	754.1	753.9	753.9	754.4
157.5°	777.8	777.5	777.2	776.9	776.7	776.6	776.5	776.5	776.5	776.4	776.9
160°	791.6	791.4	791.2	791.1	790.9	790.8	790.7	790.5	790.3	790.2	790.7
162.5°	804.2	803.9	803.4	803.1	802.7	802.5	802.3	802.2	802.0	801.8	802.6
165°	821.4	820.9	820.5	820.0	819.6	819.2	818.9	818.6	818.3	818.0	818.9
167.5°	834.4	833.8	833.2	832.6	832.0	831.6	831.7	831.7	831.7	831.8	832.7
170°	841.9	841.1	840.3	839.6	838.9	838.6	838.7	838.9	839.0	839.2	840.1
172.5°	847.1	846.5	845.9	845.3	844.6	844.4	844.4	844.5	844.5	844.5	845.5
175°	854.4	853.6	852.9	852.2	851.5	851.0	850.9	850.7	850.6	850.4	851.5
177.5°	856.8	856.2	855.6	855.1	854.4	854.2	854.2	854.2	854.2	854.2	855.0
180°	855.7	855.7	855.7	855.7	855.7	855.7	855.7	855.7	855.7	855.7	855.7



TEST NUMBER: P332846-940

CATALOG NUMBER: S124DIW-S1195D770U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0	1777.0
2.5°	1770.7	1773.3	1775.8	1776.9	1776.6	1776.4	1776.1	1775.8
5°	1761.2	1764.7	1768.2	1769.6	1769.0	1768.4	1767.7	1767.0
7.5°	1741.6	1744.4	1747.1	1748.4	1748.0	1747.6	1747.2	1746.9
10°	1725.1	1727.7	1730.2	1731.2	1730.5	1729.9	1729.2	1728.6
12.5°	1705.1	1707.9	1710.7	1711.6	1710.7	1709.9	1709.0	1708.1
15°	1666.9	1668.8	1670.7	1671.2	1670.3	1669.3	1668.3	1667.4
17.5°	1623.4	1624.6	1625.8	1626.0	1625.4	1624.8	1624.2	1623.5
20°	1591.0	1591.9	1592.9	1593.0	1592.4	1591.8	1591.2	1590.5
22.5°	1557.2	1558.9	1560.6	1560.9	1559.8	1558.6	1557.5	1556.3
25°	1501.5	1501.7	1502.1	1501.6	1500.3	1499.1	1497.8	1496.6
27.5°	1438.9	1438.2	1437.3	1436.2	1434.6	1433.1	1431.5	1429.9
30°	1395.7	1394.5	1393.2	1391.8	1390.2	1388.7	1387.1	1385.5
32.5°	1351.9	1350.4	1348.9	1347.4	1345.8	1344.2	1342.6	1341.0
35°	1282.8	1280.6	1278.4	1276.5	1274.9	1273.3	1271.7	1270.2
37.5°	1210.3	1207.9	1205.5	1203.3	1201.2	1199.1	1197.0	1194.9
40°	1159.8	1156.6	1153.5	1151.1	1149.6	1148.0	1146.4	1144.8
42.5°	1111.0	1107.3	1103.7	1101.3	1100.2	1099.1	1098.1	1097.0
45°	1035.4	1031.9	1028.4	1026.2	1025.2	1024.2	1023.3	1022.3
47.5°	962.2	958.2	954.3	951.1	948.7	946.3	943.9	941.5
50°	911.0	906.5	902.1	898.9	897.1	895.2	893.2	891.4
52.5°	858.4	854.5	850.6	847.5	845.1	842.7	840.3	837.9
55°	781.2	777.5	773.6	770.8	768.9	767.0	765.1	763.2
57.5°	703.9	700.3	696.7	693.9	692.1	690.3	688.4	686.6
60°	650.7	647.9	645.1	642.8	641.2	639.6	638.1	636.5
62.5°	598.8	596.2	593.6	591.6	590.0	588.4	586.8	585.2
65°	523.3	520.2	517.0	514.7	513.1	511.5	509.9	508.4
67.5°	445.6	442.6	439.5	437.7	437.3	436.8	436.4	436.0
70°	396.5	394.0	391.4	389.7	388.7	387.8	386.8	385.8
72.5°	347.4	345.4	343.3	341.8	340.9	339.9	338.9	338.0
75°	276.5	275.3	274.0	273.2	273.0	272.6	272.2	272.0
77.5°	209.4	209.0	208.7	208.0	207.2	206.4	205.5	204.7
80°	166.7	166.1	165.5	165.1	164.7	164.3	164.1	163.7
82.5°	128.5	128.1	127.8	127.4	127.1	126.8	126.4	126.2
85°	74.0	74.0	74.0	73.9	73.6	73.2	72.9	72.6
87.5°	30.6	30.8	30.9	31.0	31.1	31.2	31.2	31.3
90°	16.3	17.2	18.1	18.6	19.0	19.3	19.5	19.9
92.5°	27.3	27.8	28.4	28.7	28.9	29.1	29.2	29.4
95°	51.2	51.6	52.1	52.3	52.3	52.3	52.3	52.3
97.5°	80.6	81.1	81.7	81.9	81.9	81.9	81.9	81.9
100°	101.8	102.1	102.5	102.5	102.5	102.5	102.5	102.5
102.5°	124.3	124.8	125.1	125.4	125.6	125.6	125.7	125.9
105°	158.4	158.8	159.3	159.7	160.2	160.6	161.0	161.5
107.5°	195.3	195.6	196.1	196.3	196.3	196.3	196.2	196.2
110°	219.8	219.5	219.2	219.3	219.7	220.2	220.6	221.1



TEST NUMBER: P332846-940

CATALOG NUMBER: S124DIW-S1195D770U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	246.2	246.1	246.1	246.1	246.2	246.3	246.4	246.5
115°	287.0	286.8	286.6	286.5	286.3	286.2	286.1	285.9
117.5°	326.1	325.6	325.0	324.7	324.4	324.0	323.8	323.5
120°	352.6	351.9	351.2	350.9	351.2	351.5	351.8	352.0
122.5°	379.5	379.1	378.5	378.0	377.5	376.9	376.5	375.9
125°	419.0	418.7	418.4	418.1	417.9	417.5	417.2	417.0
127.5°	456.7	456.5	456.1	455.8	455.7	455.4	455.1	455.0
130°	483.2	482.9	482.6	482.1	481.6	481.0	480.4	479.8
132.5°	508.1	507.8	507.5	507.2	507.0	506.8	506.5	506.3
135°	545.4	545.1	544.8	544.5	544.0	543.6	543.1	542.7
137.5°	581.5	581.1	580.8	580.6	580.7	580.8	580.9	580.9
140°	605.3	605.1	604.9	604.8	604.7	604.5	604.4	604.2
142.5°	627.8	627.7	627.7	627.7	627.6	627.6	627.6	627.5
145°	661.6	661.4	661.2	660.9	660.5	660.0	659.6	659.2
147.5°	692.1	692.1	691.9	691.8	691.6	691.5	691.3	691.2
150°	711.5	711.5	711.5	711.4	711.2	711.1	711.0	710.8
152.5°	729.6	730.0	730.3	730.3	730.0	729.6	729.2	728.8
155°	755.0	755.5	756.2	756.2	755.5	755.0	754.4	753.9
157.5°	777.3	777.8	778.2	778.2	777.7	777.2	776.7	776.1
160°	791.1	791.6	792.0	791.8	791.1	790.3	789.6	788.9
162.5°	803.4	804.2	805.0	805.0	804.3	803.6	802.9	802.1
165°	819.7	820.6	821.5	821.7	821.1	820.5	819.9	819.3
167.5°	833.6	834.4	835.3	835.3	834.4	833.5	832.6	831.6
170°	841.0	841.9	842.8	842.7	841.6	840.6	839.5	838.6
172.5°	846.5	847.5	848.5	848.5	847.4	846.4	845.3	844.4
175°	852.5	853.5	854.5	854.5	853.5	852.5	851.5	850.4
177.5°	855.8	856.6	857.5	857.4	856.4	855.5	854.5	853.6
180°	855.7	855.7	855.7	855.7	855.7	855.7	855.7	855.7

(END OF REPORT)