

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332738-940

Luminaire Tested: **S124DIW-S350D1340U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332738-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S350D1340U940-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5504.7 lumens
Efficiency: N/A
Efficacy: 118.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 46.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332738-940

CATALOG NUMBER: S124DIW-S350D1340U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

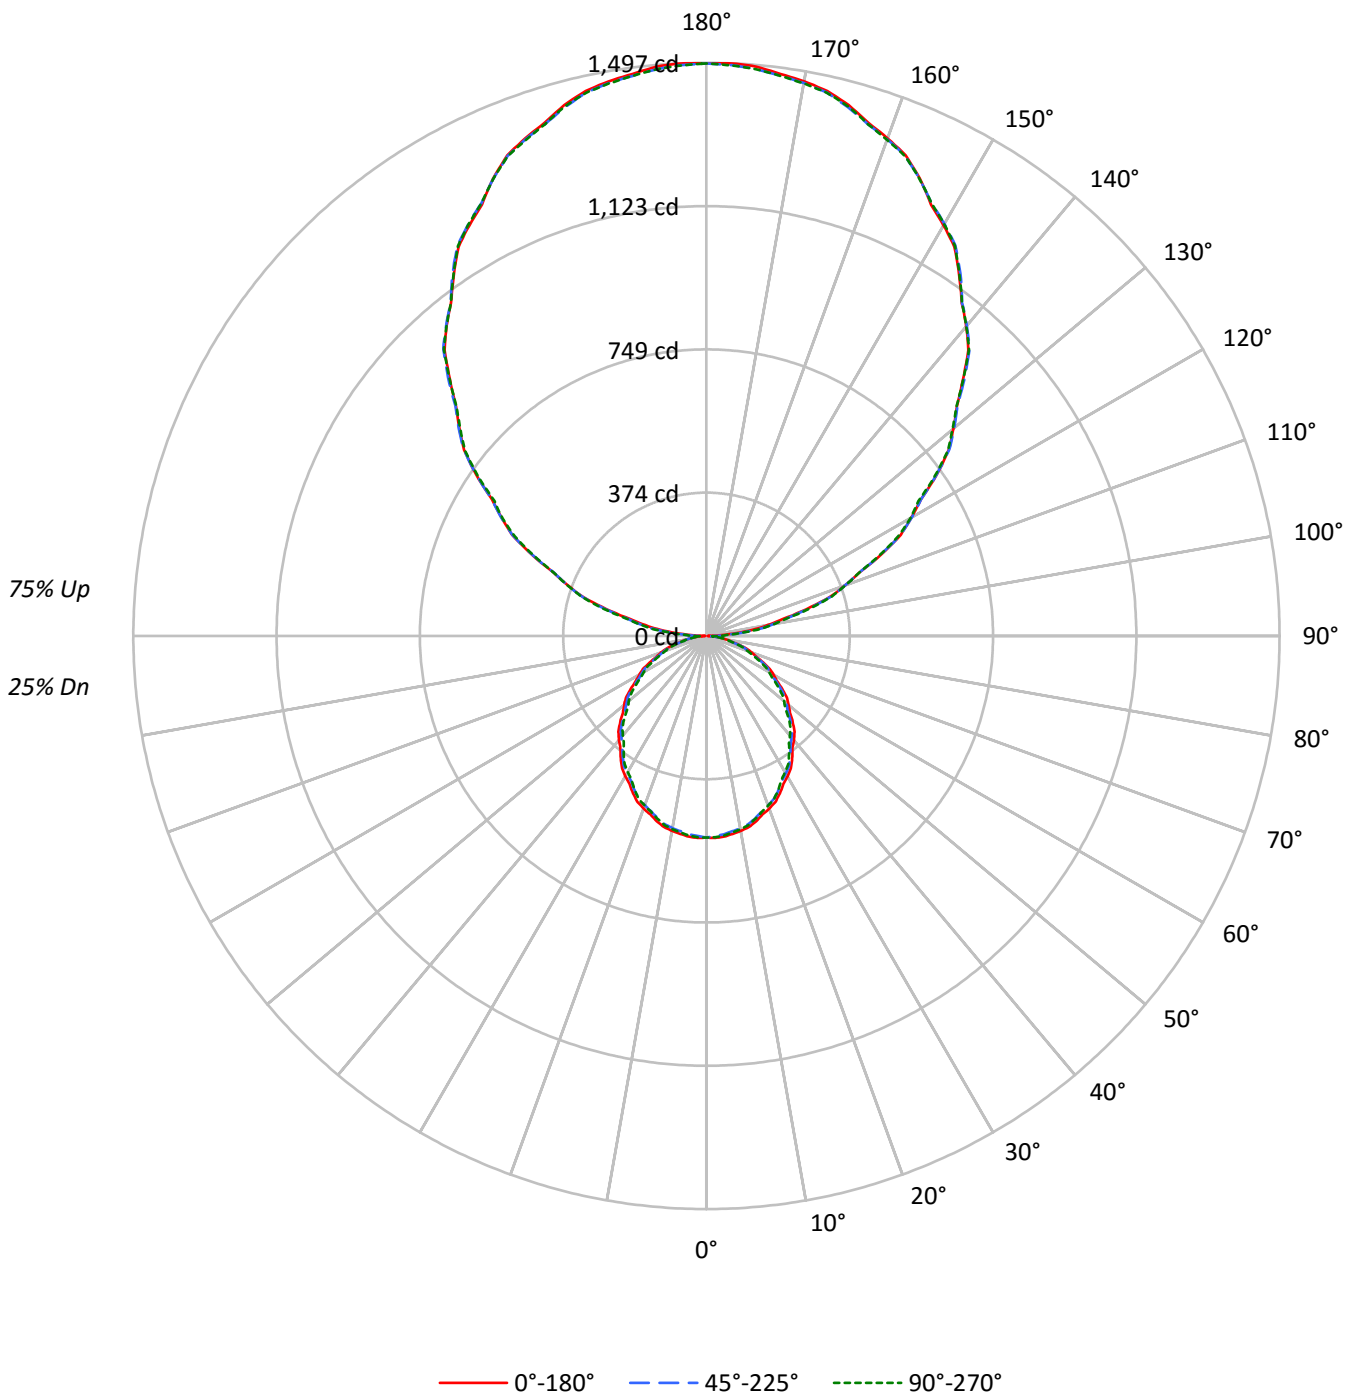



TEST NUMBER: P332738-940

CATALOG NUMBER: S124DIW-S350D1340U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	33	33	33	25
1	92	88	84	81	82	78	75	72	60	58	57	44	43	42	29	28	28	21
2	84	77	71	66	74	68	63	59	53	50	47	39	37	35	25	24	23	17
3	76	67	60	55	68	60	54	49	47	43	39	34	31	29	22	21	20	15
4	70	59	52	46	62	53	47	42	41	37	33	30	27	25	20	18	17	13
5	64	53	45	39	57	47	41	36	37	32	29	27	24	22	18	16	15	11
6	59	47	39	34	52	42	36	31	33	28	25	24	21	19	16	14	13	10
7	54	42	35	29	48	38	32	27	30	25	22	22	19	16	15	13	11	9
8	50	38	31	26	45	34	28	24	27	22	19	20	17	15	14	12	10	8
9	47	35	28	23	41	31	25	21	25	20	17	18	15	13	13	11	9	7
10	43	32	25	20	39	29	23	19	23	18	15	17	14	12	12	10	8	6

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4252	4252	4252
5°	4265	4214	4245
10°	4238	4180	4200
15°	4187	4120	4131
20°	4119	4046	4050
25°	4041	3963	3951
30°	3947	3864	3828
35°	3847	3761	3710
40°	3744	3643	3577
45°	3639	3528	3460
50°	3520	3425	3318
55°	3392	3291	3184
60°	3265	3142	3047
65°	3121	2999	2879
70°	2960	2809	2700
75°	2711	2583	2514
80°	2413	2315	2255
85°	2112	2029	1991



TEST NUMBER: P332738-940

CATALOG NUMBER: S124DIW-S350D1340U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	49.6	0.9
10°-20°	139.8	2.5
20°-30°	205.7	3.7
30°-40°	239.2	4.3
40°-50°	239.2	4.3
50°-60°	209.2	3.8
60°-70°	155.4	2.8
70°-80°	88.3	1.6
80°-90°	29.9	0.5
90°-100°	98.6	1.8
100°-110°	292.2	5.3
110°-120°	495.9	9.0
120°-130°	653.9	11.9
130°-140°	734.3	13.3
140°-150°	721.6	13.1
150°-160°	606.9	11.0
160°-170°	403.8	7.3
170°-180°	141.4	2.6
0°-30°	395.1	7.2
0°-40°	634.2	11.5
0°-60°	1082.6	19.7
0°-90°	1356.2	24.6
90°-120°	886.7	16.1
90°-150°	2996.4	54.4
90°-180°	4149.0	75.4
0°-180°	5504.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	527	527	527	527	527	
5°	526	524	520	524	524	50
15°	501	499	493	495	494	141
25°	454	451	445	445	444	209
35°	390	387	382	379	376	244
45°	319	316	309	305	303	246
55°	241	240	234	229	226	216
65°	163	161	157	153	151	162
75°	87	85	83	81	81	92
85°	23	23	22	22	22	25
90°	4	16	25	32	35	6
95°	69	80	88	91	91	77
105°	270	271	275	279	282	286
115°	504	504	502	501	500	497
125°	734	734	733	731	728	654
135°	947	954	954	952	948	732
145°	1151	1155	1156	1155	1152	720
155°	1318	1318	1317	1321	1317	606
165°	1435	1432	1429	1436	1432	404
175°	1493	1487	1486	1493	1486	142
180°	1495	1495	1495	1495	1495	



TEST NUMBER: P332738-940

CATALOG NUMBER: S124DIW-S350D1340U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7
2.5°	528.1	527.9	527.6	527.4	527.2	526.6	525.8	525.0	524.2	523.3	524.1
5°	526.3	525.9	525.6	525.2	524.9	524.1	523.1	522.1	521.0	520.0	521.0
7.5°	521.5	521.0	520.7	520.3	520.0	519.2	518.0	516.9	515.8	514.6	515.4
10°	517.0	516.7	516.3	515.9	515.6	514.8	513.5	512.3	511.1	509.9	510.6
12.5°	511.3	511.0	510.6	510.1	509.8	509.0	507.7	506.4	505.1	503.8	504.6
15°	501.0	500.6	500.2	499.9	499.5	498.6	497.2	495.8	494.4	493.0	493.6
17.5°	488.6	488.1	487.7	487.2	486.7	485.8	484.5	483.1	481.8	480.5	480.8
20°	479.5	479.0	478.6	478.0	477.6	476.7	475.3	473.9	472.4	471.0	471.4
22.5°	469.7	469.0	468.4	467.8	467.2	466.2	464.8	463.4	462.0	460.6	461.1
25°	453.7	453.1	452.5	451.7	451.1	450.1	448.8	447.5	446.2	444.9	445.0
27.5°	435.5	434.8	434.2	433.5	432.8	431.9	430.6	429.4	428.2	427.0	426.8
30°	423.4	422.6	421.9	421.1	420.4	419.4	418.1	416.9	415.7	414.5	414.1
32.5°	410.5	409.8	409.1	408.5	407.8	406.8	405.6	404.2	403.0	401.6	401.2
35°	390.4	389.8	389.1	388.4	387.8	386.8	385.5	384.1	382.9	381.6	380.9
37.5°	369.3	368.6	368.0	367.5	366.8	365.9	364.4	363.0	361.6	360.2	359.4
40°	355.3	354.6	353.9	353.1	352.4	351.3	349.9	348.5	347.1	345.7	344.7
42.5°	340.5	340.1	339.7	339.2	338.8	337.7	336.2	334.6	333.1	331.5	330.4
45°	318.7	318.0	317.4	316.7	316.0	315.0	313.4	311.9	310.5	309.0	307.9
47.5°	295.8	295.3	294.9	294.4	294.0	293.1	291.7	290.3	288.9	287.5	286.3
50°	280.3	279.9	279.6	279.1	278.7	277.9	276.6	275.3	273.9	272.7	271.3
52.5°	265.1	264.6	264.1	263.7	263.2	262.3	260.9	259.6	258.2	256.8	255.7
55°	241.0	240.8	240.4	240.1	239.9	239.1	237.7	236.5	235.1	233.8	232.7
57.5°	218.0	217.8	217.4	217.1	216.8	216.0	214.6	213.4	212.0	210.8	209.7
60°	202.2	201.7	201.3	200.7	200.3	199.5	198.2	197.0	195.8	194.6	193.8
62.5°	186.6	186.3	185.8	185.5	185.0	184.2	182.9	181.6	180.3	179.1	178.3
65°	163.4	162.9	162.4	161.9	161.5	160.8	159.8	158.9	157.9	157.0	156.0
67.5°	139.9	139.5	139.0	138.6	138.1	137.5	136.6	135.7	134.8	133.8	133.0
70°	125.4	124.7	124.0	123.4	122.7	122.0	121.3	120.6	119.8	119.0	118.2
72.5°	109.9	109.1	108.5	107.9	107.2	106.6	105.9	105.4	104.8	104.2	103.5
75°	86.9	86.5	86.1	85.5	85.1	84.6	84.2	83.6	83.2	82.8	82.4
77.5°	65.1	64.9	64.6	64.5	64.3	63.9	63.6	63.1	62.7	62.3	62.2
80°	51.9	51.6	51.4	51.1	50.8	50.6	50.4	50.2	50.0	49.8	49.6
82.5°	39.1	39.0	38.8	38.7	38.5	38.4	38.4	38.4	38.3	38.3	38.3
85°	22.8	22.8	22.8	22.8	22.8	22.7	22.5	22.3	22.1	21.9	21.9
87.5°	9.5	10.0	10.4	11.0	11.4	11.9	12.2	12.5	12.8	13.2	13.5
90°	3.5	6.3	9.1	11.9	14.8	17.2	19.3	21.3	23.4	25.4	27.0
92.5°	24.8	28.0	31.2	34.4	37.7	40.0	41.5	42.9	44.3	45.8	46.7
95°	69.4	71.7	74.0	76.3	78.6	80.7	82.5	84.3	86.1	87.9	88.6
97.5°	121.2	123.1	124.9	126.7	128.6	130.5	132.7	134.8	136.9	139.0	139.9
100°	161.9	162.9	164.0	165.0	166.0	167.6	170.0	172.3	174.6	176.9	177.5
102.5°	204.5	204.9	205.3	205.7	206.1	207.3	209.5	211.6	213.7	215.8	216.5
105°	269.5	269.7	270.0	270.2	270.5	271.1	272.2	273.2	274.2	275.3	276.0
107.5°	337.7	338.0	338.3	338.6	338.9	339.1	339.3	339.5	339.7	339.7	340.5
110°	384.0	384.4	385.0	385.5	386.0	386.1	385.8	385.6	385.4	385.1	384.6



TEST NUMBER: P332738-940

CATALOG NUMBER: S124DIW-S350D1340U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	432.0	432.1	432.2	432.4	432.5	432.3	431.9	431.3	430.9	430.4	430.3
115°	504.2	504.2	504.2	504.2	504.2	504.0	503.5	502.9	502.4	501.9	501.7
117.5°	572.2	572.4	572.7	572.8	573.0	572.9	572.6	572.2	571.9	571.5	570.6
120°	617.5	618.6	619.6	620.6	621.6	621.8	621.0	620.3	619.5	618.7	617.4
122.5°	664.7	665.1	665.6	665.9	666.4	666.4	666.0	665.7	665.3	664.9	664.1
125°	734.3	734.3	734.3	734.3	734.3	734.2	734.0	733.7	733.4	733.2	732.6
127.5°	797.5	798.3	799.1	799.8	800.6	800.8	800.3	800.0	799.5	799.1	798.6
130°	841.9	842.7	843.5	844.2	845.0	845.3	845.3	845.3	845.3	845.3	844.8
132.5°	887.3	887.8	888.3	888.9	889.5	889.7	889.5	889.2	889.0	888.9	888.3
135°	947.1	948.7	950.2	951.7	953.3	954.0	954.0	954.0	954.0	954.0	953.6
137.5°	1012.4	1013.1	1013.8	1014.5	1015.2	1015.8	1016.2	1016.6	1017.0	1017.4	1016.7
140°	1055.9	1056.3	1056.9	1057.4	1057.9	1058.1	1058.1	1058.1	1058.1	1058.1	1057.9
142.5°	1095.6	1096.1	1096.6	1097.2	1097.7	1097.8	1097.6	1097.4	1097.3	1097.0	1097.0
145°	1150.7	1151.7	1152.7	1153.8	1154.8	1155.4	1155.7	1155.9	1156.2	1156.5	1156.2
147.5°	1205.2	1206.5	1207.7	1209.0	1210.1	1210.7	1210.5	1210.3	1210.1	1209.9	1209.7
150°	1238.6	1239.6	1240.6	1241.6	1242.7	1243.1	1243.1	1243.1	1243.1	1243.1	1243.1
152.5°	1270.0	1270.6	1271.2	1271.8	1272.5	1272.9	1273.1	1273.3	1273.5	1273.7	1274.3
155°	1318.3	1318.3	1318.3	1318.3	1318.3	1318.2	1317.9	1317.7	1317.4	1317.2	1318.2
157.5°	1359.1	1358.6	1358.2	1357.6	1357.2	1356.9	1356.9	1356.8	1356.8	1356.7	1357.5
160°	1383.1	1382.9	1382.6	1382.3	1382.1	1381.8	1381.5	1381.3	1381.1	1380.8	1381.5
162.5°	1405.3	1404.6	1404.0	1403.3	1402.7	1402.2	1401.9	1401.7	1401.4	1401.1	1402.6
165°	1435.1	1434.4	1433.6	1432.8	1432.1	1431.5	1430.9	1430.4	1429.9	1429.3	1430.9
167.5°	1458.0	1457.0	1455.9	1454.8	1453.8	1453.2	1453.3	1453.3	1453.4	1453.4	1455.0
170°	1471.0	1469.7	1468.5	1467.1	1465.9	1465.3	1465.6	1465.9	1466.2	1466.3	1467.9
172.5°	1480.2	1479.2	1478.1	1477.0	1476.0	1475.4	1475.5	1475.5	1475.6	1475.6	1477.4
175°	1493.0	1491.7	1490.4	1489.2	1487.8	1487.0	1486.8	1486.6	1486.3	1486.0	1487.8
177.5°	1497.1	1496.1	1495.0	1494.1	1493.0	1492.5	1492.5	1492.5	1492.5	1492.5	1494.0
180°	1495.3	1495.3	1495.3	1495.3	1495.3	1495.3	1495.3	1495.3	1495.3	1495.3	1495.3



TEST NUMBER: P332738-940

CATALOG NUMBER: S124DIW-S350D1340U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7
2.5°	524.9	525.7	526.4	526.7	526.6	526.6	526.5	526.4
5°	522.1	523.1	524.1	524.5	524.3	524.1	524.0	523.8
7.5°	516.2	517.1	517.9	518.3	518.2	518.0	517.9	517.8
10°	511.4	512.1	512.9	513.2	513.0	512.7	512.6	512.4
12.5°	505.4	506.2	507.1	507.4	507.1	506.8	506.6	506.3
15°	494.1	494.6	495.3	495.3	495.1	494.8	494.5	494.3
17.5°	481.2	481.5	481.9	482.0	481.8	481.6	481.4	481.3
20°	471.6	471.9	472.2	472.3	472.0	471.8	471.6	471.4
22.5°	461.5	462.1	462.6	462.7	462.4	462.0	461.6	461.4
25°	445.1	445.1	445.2	445.1	444.7	444.3	444.0	443.6
27.5°	426.5	426.3	426.1	425.7	425.3	424.8	424.3	423.8
30°	413.8	413.4	413.0	412.6	412.1	411.6	411.2	410.7
32.5°	400.7	400.3	399.8	399.4	399.0	398.4	398.0	397.5
35°	380.2	379.6	378.9	378.4	377.9	377.5	376.9	376.5
37.5°	358.7	358.0	357.3	356.7	356.1	355.4	354.8	354.2
40°	343.8	342.9	342.0	341.3	340.7	340.3	339.8	339.4
42.5°	329.3	328.2	327.2	326.5	326.1	325.8	325.5	325.2
45°	306.9	305.9	304.9	304.2	303.9	303.6	303.4	303.1
47.5°	285.2	284.0	282.9	282.0	281.2	280.5	279.8	279.1
50°	270.0	268.8	267.4	266.4	265.9	265.4	264.7	264.2
52.5°	254.5	253.3	252.2	251.2	250.5	249.8	249.1	248.3
55°	231.6	230.4	229.3	228.5	227.9	227.4	226.8	226.2
57.5°	208.7	207.6	206.5	205.7	205.2	204.6	204.1	203.5
60°	192.9	192.1	191.2	190.6	190.1	189.6	189.1	188.7
62.5°	177.5	176.7	175.9	175.3	174.9	174.4	174.0	173.4
65°	155.2	154.2	153.3	152.6	152.1	151.6	151.1	150.7
67.5°	132.1	131.2	130.3	129.7	129.7	129.5	129.4	129.2
70°	117.5	116.8	116.0	115.5	115.2	114.9	114.7	114.4
72.5°	103.0	102.4	101.7	101.3	101.0	100.8	100.5	100.2
75°	81.9	81.6	81.2	81.0	80.9	80.8	80.7	80.6
77.5°	62.1	62.0	61.9	61.7	61.4	61.2	60.9	60.7
80°	49.4	49.2	49.0	49.0	48.8	48.7	48.6	48.5
82.5°	38.1	38.0	37.9	37.8	37.7	37.5	37.5	37.4
85°	21.9	21.9	21.9	21.9	21.8	21.8	21.6	21.5
87.5°	13.8	14.1	14.4	14.6	14.7	14.8	15.0	15.1
90°	28.5	30.1	31.6	32.6	33.2	33.7	34.2	34.7
92.5°	47.6	48.6	49.5	50.1	50.4	50.7	51.0	51.4
95°	89.4	90.2	91.0	91.4	91.4	91.4	91.4	91.4
97.5°	140.9	141.8	142.7	143.2	143.2	143.2	143.2	143.2
100°	178.0	178.5	179.0	179.2	179.2	179.2	179.2	179.2
102.5°	217.2	217.9	218.6	219.1	219.4	219.5	219.7	220.0
105°	276.8	277.6	278.3	279.1	279.8	280.6	281.4	282.1
107.5°	341.2	341.9	342.7	343.0	343.0	342.9	342.9	342.8
110°	384.1	383.5	383.1	383.2	384.0	384.7	385.5	386.3



TEST NUMBER: P332738-940

CATALOG NUMBER: S124DIW-S350D1340U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	430.3	430.2	430.0	430.1	430.2	430.3	430.5	430.7
115°	501.4	501.1	500.9	500.6	500.3	500.1	499.8	499.6
117.5°	569.8	568.9	568.0	567.3	566.8	566.3	565.8	565.3
120°	616.2	614.8	613.6	613.1	613.7	614.2	614.7	615.2
122.5°	663.2	662.4	661.5	660.6	659.6	658.7	657.8	656.8
125°	732.2	731.6	731.1	730.6	730.1	729.6	729.1	728.5
127.5°	798.1	797.5	797.0	796.6	796.2	795.8	795.3	795.0
130°	844.4	843.8	843.3	842.6	841.5	840.4	839.5	838.4
132.5°	887.8	887.3	886.8	886.4	885.9	885.5	885.1	884.7
135°	953.1	952.5	952.0	951.4	950.6	949.9	949.0	948.2
137.5°	1016.1	1015.5	1014.8	1014.5	1014.7	1014.9	1014.9	1015.1
140°	1057.7	1057.4	1057.1	1056.9	1056.6	1056.3	1056.1	1055.9
142.5°	1096.9	1096.9	1096.8	1096.7	1096.7	1096.6	1096.6	1096.5
145°	1155.9	1155.7	1155.4	1154.9	1154.1	1153.3	1152.6	1151.8
147.5°	1209.4	1209.2	1209.1	1208.8	1208.5	1208.3	1208.1	1207.8
150°	1243.1	1243.1	1243.1	1243.0	1242.8	1242.5	1242.2	1242.1
152.5°	1275.0	1275.6	1276.2	1276.1	1275.5	1274.8	1274.2	1273.5
155°	1319.3	1320.3	1321.3	1321.3	1320.3	1319.3	1318.2	1317.2
157.5°	1358.3	1359.1	1359.9	1359.8	1358.9	1358.0	1357.2	1356.3
160°	1382.3	1383.1	1383.8	1383.6	1382.3	1381.1	1379.7	1378.5
162.5°	1403.9	1405.3	1406.7	1406.8	1405.4	1404.2	1402.9	1401.6
165°	1432.4	1434.0	1435.6	1435.8	1434.8	1433.7	1432.7	1431.6
167.5°	1456.5	1458.0	1459.6	1459.6	1457.9	1456.3	1454.8	1453.2
170°	1469.5	1471.0	1472.6	1472.4	1470.6	1468.8	1467.0	1465.3
172.5°	1479.1	1480.9	1482.6	1482.6	1480.8	1479.0	1477.2	1475.4
175°	1489.6	1491.4	1493.3	1493.3	1491.4	1489.6	1487.8	1486.0
177.5°	1495.4	1496.8	1498.3	1498.2	1496.6	1494.9	1493.3	1491.6
180°	1495.3	1495.3	1495.3	1495.3	1495.3	1495.3	1495.3	1495.3

(END OF REPORT)