

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332743-940

Luminaire Tested: **S124DIW-S350D1560U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332743-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S350D1560U940-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1560 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6918.4 lumens
Efficiency: N/A
Efficacy: 129.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 53.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332743-940

CATALOG NUMBER: S124DIW-S350D1560U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

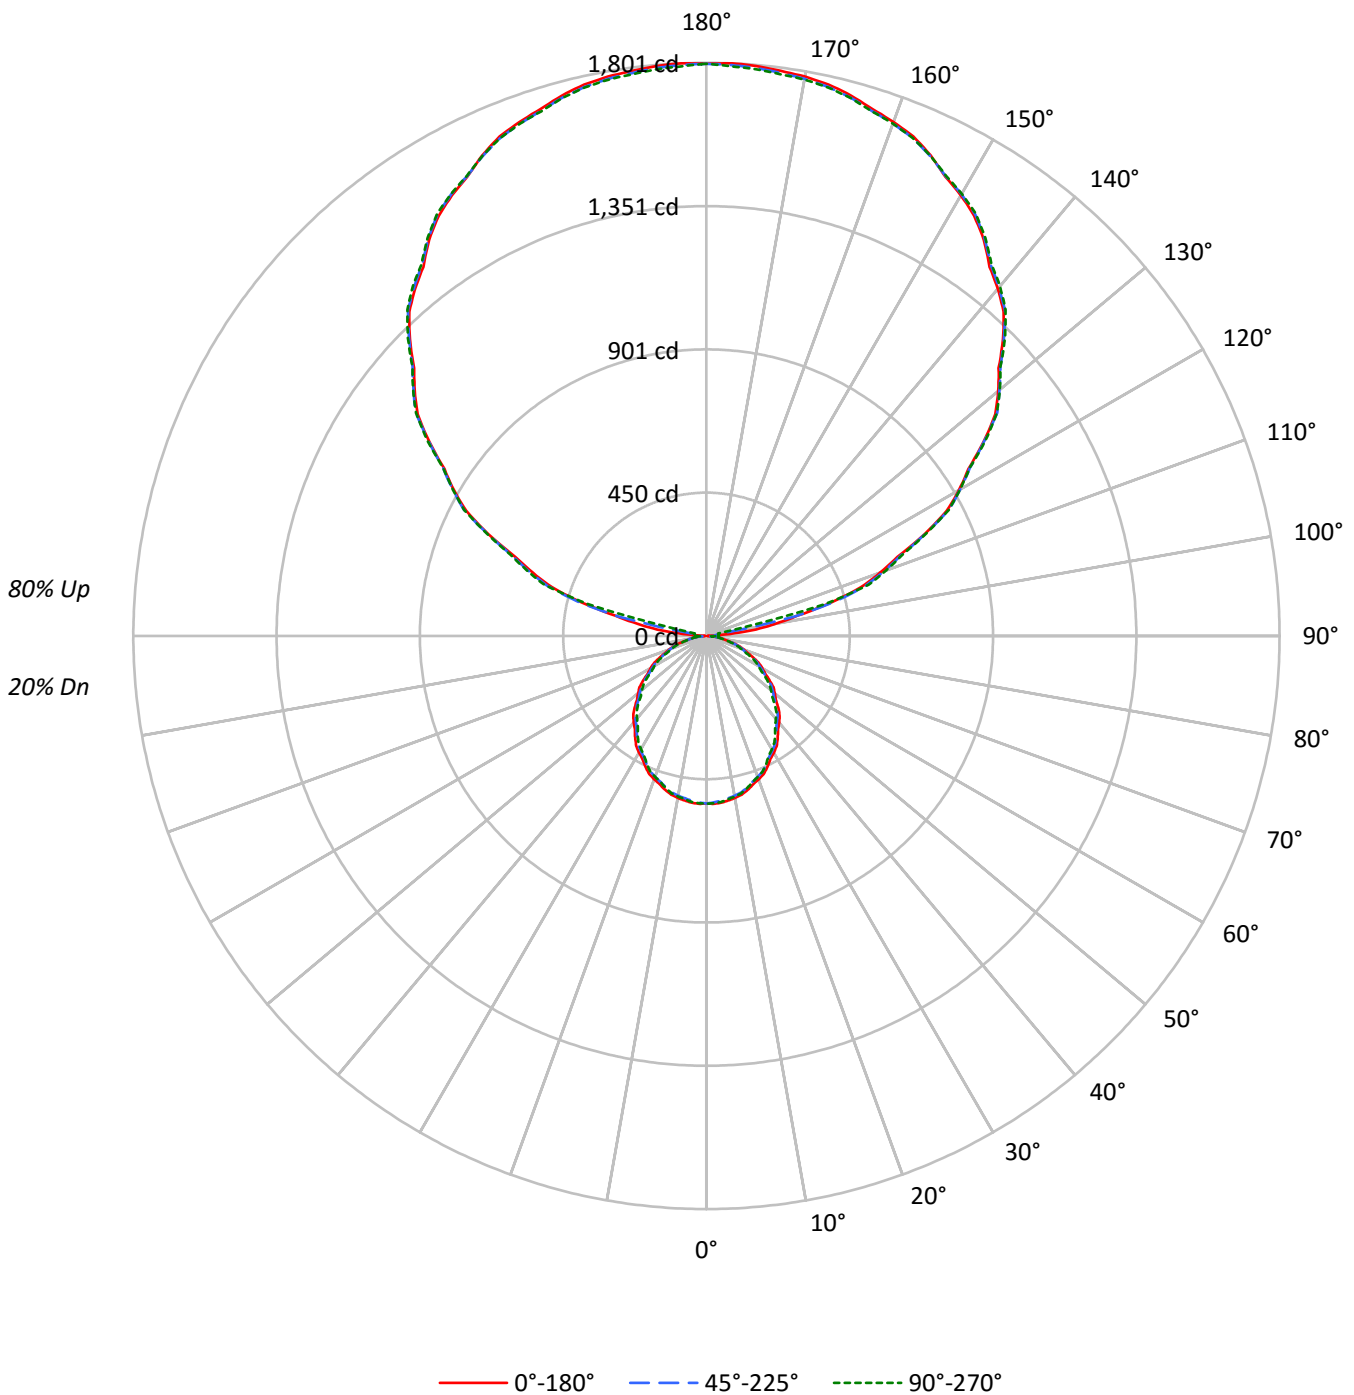



TEST NUMBER: P332743-940

CATALOG NUMBER: S124DIW-S350D1560U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	100	100	100	100	88	88	88	88	66	66	66	47	47	47	28	28	28	20
1	91	87	83	80	80	77	74	71	58	56	54	41	40	38	25	24	24	16
2	83	76	70	65	73	67	62	58	51	48	45	36	34	32	22	21	20	14
3	75	66	60	54	66	59	53	48	45	41	38	32	29	27	19	18	17	12
4	69	59	51	45	61	52	46	41	40	35	32	28	25	23	17	16	15	10
5	63	52	44	39	55	46	40	35	35	31	27	25	22	20	15	14	13	9
6	58	46	39	33	51	41	35	30	32	27	24	23	20	17	14	12	11	8
7	53	42	34	29	47	37	31	26	29	24	21	20	17	15	13	11	10	7
8	49	38	30	25	44	34	27	23	26	21	18	19	16	13	12	10	9	6
9	46	34	27	22	40	31	24	20	24	19	16	17	14	12	11	9	8	5
10	43	31	24	20	38	28	22	18	22	17	14	16	13	11	10	8	7	5

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4252	4252	4252
5°	4265	4214	4245
10°	4238	4180	4200
15°	4187	4120	4131
20°	4119	4046	4050
25°	4041	3963	3951
30°	3947	3864	3828
35°	3847	3761	3710
40°	3744	3643	3577
45°	3639	3528	3460
50°	3520	3425	3318
55°	3392	3291	3184
60°	3265	3142	3047
65°	3121	2999	2879
70°	2960	2809	2700
75°	2711	2583	2514
80°	2413	2315	2255
85°	2112	2029	1991



TEST NUMBER: P332743-940

CATALOG NUMBER: S124DIW-S350D1560U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	49.6	0.7
10°-20°	139.8	2.0
20°-30°	205.7	3.0
30°-40°	239.2	3.5
40°-50°	239.2	3.5
50°-60°	209.2	3.0
60°-70°	155.4	2.2
70°-80°	88.3	1.3
80°-90°	30.7	0.4
90°-100°	61.5	0.9
100°-110°	392.1	5.7
110°-120°	750.0	10.8
120°-130°	952.1	13.8
130°-140°	1018.7	14.7
140°-150°	952.6	13.8
150°-160°	768.2	11.1
160°-170°	495.5	7.2
170°-180°	170.8	2.5
0°-30°	395.1	5.7
0°-40°	634.2	9.2
0°-60°	1082.6	15.6
0°-90°	1356.9	19.6
90°-120°	1203.6	17.4
90°-150°	4127.0	59.7
90°-180°	5561.0	80.4
0°-180°	6918.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	527	527	527	527	527	
5°	526	524	520	524	524	50
15°	501	499	493	495	494	141
25°	454	451	445	445	444	209
35°	390	387	382	379	376	244
45°	319	316	309	305	303	246
55°	241	240	234	229	226	216
65°	163	161	157	153	151	162
75°	87	85	83	81	81	92
85°	23	23	22	22	22	25
90°	4	19	30	37	40	5
95°	74	31	30	37	39	95
105°	405	413	420	428	383	423
115°	756	759	758	761	761	743
125°	1062	1067	1065	1069	1070	948
135°	1318	1317	1322	1325	1327	1015
145°	1520	1523	1524	1525	1528	949
155°	1666	1667	1663	1668	1665	768
165°	1758	1751	1751	1760	1750	496
175°	1798	1790	1791	1802	1787	171
180°	1798	1798	1798	1798	1798	



TEST NUMBER: P332743-940

CATALOG NUMBER: S124DIW-S350D1560U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7
2.5°	528.1	527.9	527.6	527.4	527.2	526.6	525.8	525.0	524.2	523.3	524.1
5°	526.3	525.9	525.6	525.2	524.9	524.1	523.1	522.1	521.0	520.0	521.0
7.5°	521.5	521.0	520.7	520.3	520.0	519.2	518.0	516.9	515.8	514.6	515.4
10°	517.0	516.7	516.3	515.9	515.6	514.8	513.5	512.3	511.1	509.9	510.6
12.5°	511.3	511.0	510.6	510.1	509.8	509.0	507.7	506.4	505.1	503.8	504.6
15°	501.0	500.6	500.2	499.9	499.5	498.6	497.2	495.8	494.4	493.0	493.6
17.5°	488.6	488.1	487.7	487.2	486.7	485.8	484.5	483.1	481.8	480.5	480.8
20°	479.5	479.0	478.6	478.0	477.6	476.7	475.3	473.9	472.4	471.0	471.4
22.5°	469.7	469.0	468.4	467.8	467.2	466.2	464.8	463.4	462.0	460.6	461.1
25°	453.7	453.1	452.5	451.7	451.1	450.1	448.8	447.5	446.2	444.9	445.0
27.5°	435.5	434.8	434.2	433.5	432.8	431.9	430.6	429.4	428.2	427.0	426.8
30°	423.4	422.6	421.9	421.1	420.4	419.4	418.1	416.9	415.7	414.5	414.1
32.5°	410.5	409.8	409.1	408.5	407.8	406.8	405.6	404.2	403.0	401.6	401.2
35°	390.4	389.8	389.1	388.4	387.8	386.8	385.5	384.1	382.9	381.6	380.9
37.5°	369.3	368.6	368.0	367.5	366.8	365.9	364.4	363.0	361.6	360.2	359.4
40°	355.3	354.6	353.9	353.1	352.4	351.3	349.9	348.5	347.1	345.7	344.7
42.5°	340.5	340.1	339.7	339.2	338.8	337.7	336.2	334.6	333.1	331.5	330.4
45°	318.7	318.0	317.4	316.7	316.0	315.0	313.4	311.9	310.5	309.0	307.9
47.5°	295.8	295.3	294.9	294.4	294.0	293.1	291.7	290.3	288.9	287.5	286.3
50°	280.3	279.9	279.6	279.1	278.7	277.9	276.6	275.3	273.9	272.7	271.3
52.5°	265.1	264.6	264.1	263.7	263.2	262.3	260.9	259.6	258.2	256.8	255.7
55°	241.0	240.8	240.4	240.1	239.9	239.1	237.7	236.5	235.1	233.8	232.7
57.5°	218.0	217.8	217.4	217.1	216.8	216.0	214.6	213.4	212.0	210.8	209.7
60°	202.2	201.7	201.3	200.7	200.3	199.5	198.2	197.0	195.8	194.6	193.8
62.5°	186.6	186.3	185.8	185.5	185.0	184.2	182.9	181.6	180.3	179.1	178.3
65°	163.4	162.9	162.4	161.9	161.5	160.8	159.8	158.9	157.9	157.0	156.0
67.5°	139.9	139.5	139.0	138.6	138.1	137.5	136.6	135.7	134.8	133.8	133.0
70°	125.4	124.7	124.0	123.4	122.7	122.0	121.3	120.6	119.8	119.0	118.2
72.5°	109.9	109.1	108.5	107.9	107.2	106.6	105.9	105.4	104.8	104.2	103.5
75°	86.9	86.5	86.1	85.5	85.1	84.6	84.2	83.6	83.2	82.8	82.4
77.5°	65.1	64.9	64.6	64.5	64.3	63.9	63.6	63.1	62.7	62.3	62.2
80°	51.9	51.6	51.4	51.1	50.8	50.6	50.4	50.2	50.0	49.8	49.6
82.5°	39.1	39.0	38.8	38.7	38.5	38.4	38.4	38.4	38.3	38.3	38.3
85°	22.8	22.8	22.8	22.8	22.8	22.7	22.5	22.3	22.1	21.9	21.9
87.5°	9.6	10.2	10.8	11.3	11.9	12.4	12.8	13.2	13.6	14.0	14.4
90°	4.0	7.3	10.6	13.9	17.2	20.1	22.4	24.8	27.2	29.6	31.4
92.5°	16.9	17.1	17.3	17.5	17.7	18.9	21.3	23.7	26.1	28.5	30.3
95°	73.9	63.8	53.7	43.5	33.3	28.4	28.7	29.0	29.2	29.6	31.4
97.5°	157.0	163.4	169.7	176.1	182.4	168.9	135.5	102.2	68.8	35.5	35.7
100°	220.5	226.0	231.3	236.7	242.0	224.1	182.9	141.6	100.4	59.2	54.1
102.5°	291.5	295.5	299.4	303.4	307.3	306.6	301.2	295.9	290.4	285.1	230.2
105°	404.7	406.5	408.3	410.2	412.0	413.6	415.1	416.6	418.0	419.5	422.2
107.5°	509.9	510.9	511.8	512.6	513.5	515.0	517.0	519.1	521.0	523.1	524.4
110°	580.9	581.8	582.7	583.6	584.5	585.9	587.6	589.4	591.2	593.0	593.6



TEST NUMBER: P332743-940

CATALOG NUMBER: S124DIW-S350D1560U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	649.8	651.4	653.0	654.6	656.2	657.5	658.3	659.2	660.0	660.8	660.7
115°	755.7	756.6	757.5	758.4	759.3	759.6	759.3	759.0	758.8	758.4	759.0
117.5°	851.2	852.4	853.6	854.8	856.0	856.9	857.6	858.3	858.9	859.5	859.4
120°	915.8	916.9	918.2	919.4	920.5	921.0	920.7	920.4	920.1	919.8	920.4
122.5°	976.0	976.7	977.4	978.1	978.9	979.5	979.9	980.3	980.7	981.1	981.5
125°	1062.4	1063.5	1064.7	1066.0	1067.1	1067.4	1066.8	1066.2	1065.6	1065.1	1066.0
127.5°	1144.1	1144.4	1144.7	1145.0	1145.3	1146.1	1147.5	1148.9	1150.2	1151.6	1151.5
130°	1196.9	1197.1	1197.4	1197.7	1198.0	1198.6	1199.5	1200.4	1201.3	1202.2	1202.5
132.5°	1245.2	1245.7	1246.3	1246.9	1247.4	1248.2	1249.4	1250.4	1251.6	1252.8	1253.0
135°	1317.9	1317.5	1317.2	1317.0	1316.6	1317.1	1318.3	1319.5	1320.7	1321.9	1322.5
137.5°	1382.2	1382.2	1382.3	1382.5	1382.6	1383.3	1384.6	1386.0	1387.2	1388.6	1389.2
140°	1424.1	1424.7	1425.3	1425.8	1426.5	1427.1	1427.6	1428.3	1428.9	1429.4	1430.4
142.5°	1461.7	1462.8	1463.9	1465.0	1466.1	1466.8	1467.1	1467.5	1467.8	1468.2	1468.8
145°	1519.6	1520.5	1521.3	1522.2	1523.1	1523.6	1523.6	1523.6	1523.6	1523.6	1523.8
147.5°	1565.6	1567.2	1568.9	1570.6	1572.3	1572.9	1572.6	1572.4	1572.0	1571.7	1572.0
150°	1598.9	1600.1	1601.2	1602.5	1603.7	1604.1	1603.8	1603.6	1603.2	1602.9	1602.9
152.5°	1626.8	1627.8	1628.8	1629.7	1630.7	1630.9	1630.3	1629.8	1629.2	1628.7	1629.2
155°	1666.2	1666.4	1666.7	1667.1	1667.3	1667.1	1666.2	1665.3	1664.4	1663.4	1664.6
157.5°	1699.2	1699.1	1698.9	1698.7	1698.5	1697.9	1696.8	1695.9	1694.9	1693.8	1695.4
160°	1718.6	1717.7	1716.8	1715.9	1715.0	1714.4	1714.0	1713.8	1713.5	1713.2	1715.0
162.5°	1735.8	1734.6	1733.5	1732.4	1731.3	1730.5	1730.2	1729.9	1729.7	1729.3	1731.1
165°	1757.6	1756.0	1754.6	1753.1	1751.6	1750.9	1750.9	1750.9	1750.9	1750.9	1753.2
167.5°	1774.8	1773.3	1771.7	1770.1	1768.5	1767.7	1767.5	1767.4	1767.2	1767.0	1769.6
170°	1784.5	1782.7	1780.8	1779.1	1777.3	1776.6	1776.8	1777.2	1777.4	1777.7	1780.1
172.5°	1790.9	1789.1	1787.3	1785.6	1783.8	1783.0	1783.3	1783.6	1783.9	1784.2	1786.5
175°	1797.9	1796.1	1794.3	1792.5	1790.7	1790.0	1790.3	1790.6	1790.9	1791.2	1793.9
177.5°	1801.2	1799.5	1797.8	1796.1	1794.5	1793.9	1794.3	1794.8	1795.3	1795.7	1797.7
180°	1797.9	1797.9	1797.9	1797.9	1797.9	1797.9	1797.9	1797.9	1797.9	1797.9	1797.9



TEST NUMBER: P332743-940

CATALOG NUMBER: S124DIW-S350D1560U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	526.7	526.7	526.7	526.7	526.7	526.7	526.7	526.7
2.5°	524.9	525.7	526.4	526.7	526.6	526.6	526.5	526.4
5°	522.1	523.1	524.1	524.5	524.3	524.1	524.0	523.8
7.5°	516.2	517.1	517.9	518.3	518.2	518.0	517.9	517.8
10°	511.4	512.1	512.9	513.2	513.0	512.7	512.6	512.4
12.5°	505.4	506.2	507.1	507.4	507.1	506.8	506.6	506.3
15°	494.1	494.6	495.3	495.3	495.1	494.8	494.5	494.3
17.5°	481.2	481.5	481.9	482.0	481.8	481.6	481.4	481.3
20°	471.6	471.9	472.2	472.3	472.0	471.8	471.6	471.4
22.5°	461.5	462.1	462.6	462.7	462.4	462.0	461.6	461.4
25°	445.1	445.1	445.2	445.1	444.7	444.3	444.0	443.6
27.5°	426.5	426.3	426.1	425.7	425.3	424.8	424.3	423.8
30°	413.8	413.4	413.0	412.6	412.1	411.6	411.2	410.7
32.5°	400.7	400.3	399.8	399.4	399.0	398.4	398.0	397.5
35°	380.2	379.6	378.9	378.4	377.9	377.5	376.9	376.5
37.5°	358.7	358.0	357.3	356.7	356.1	355.4	354.8	354.2
40°	343.8	342.9	342.0	341.3	340.7	340.3	339.8	339.4
42.5°	329.3	328.2	327.2	326.5	326.1	325.8	325.5	325.2
45°	306.9	305.9	304.9	304.2	303.9	303.6	303.4	303.1
47.5°	285.2	284.0	282.9	282.0	281.2	280.5	279.8	279.1
50°	270.0	268.8	267.4	266.4	265.9	265.4	264.7	264.2
52.5°	254.5	253.3	252.2	251.2	250.5	249.8	249.1	248.3
55°	231.6	230.4	229.3	228.5	227.9	227.4	226.8	226.2
57.5°	208.7	207.6	206.5	205.7	205.2	204.6	204.1	203.5
60°	192.9	192.1	191.2	190.6	190.1	189.6	189.1	188.7
62.5°	177.5	176.7	175.9	175.3	174.9	174.4	174.0	173.4
65°	155.2	154.2	153.3	152.6	152.1	151.6	151.1	150.7
67.5°	132.1	131.2	130.3	129.7	129.7	129.5	129.4	129.2
70°	117.5	116.8	116.0	115.5	115.2	114.9	114.7	114.4
72.5°	103.0	102.4	101.7	101.3	101.0	100.8	100.5	100.2
75°	81.9	81.6	81.2	81.0	80.9	80.8	80.7	80.6
77.5°	62.1	62.0	61.9	61.7	61.4	61.2	60.9	60.7
80°	49.4	49.2	49.0	49.0	48.8	48.7	48.6	48.5
82.5°	38.1	38.0	37.9	37.8	37.7	37.5	37.5	37.4
85°	21.9	21.9	21.9	21.9	21.8	21.8	21.6	21.5
87.5°	14.7	15.1	15.4	15.7	15.8	16.0	16.1	16.1
90°	33.2	35.0	36.7	38.0	38.5	39.1	39.8	40.3
92.5°	32.1	33.9	35.7	36.6	36.7	36.9	37.0	37.1
95°	33.2	35.0	36.7	37.8	38.1	38.4	38.7	39.0
97.5°	35.8	36.0	36.2	36.5	36.7	37.1	37.4	37.6
100°	49.0	44.0	38.9	36.5	36.7	37.1	37.4	37.6
102.5°	175.5	120.6	65.9	38.5	38.5	38.6	38.7	38.7
105°	424.9	427.7	430.3	426.2	415.5	404.7	394.0	383.3
107.5°	525.8	527.1	528.3	529.6	530.7	531.8	533.0	534.1
110°	594.2	594.9	595.4	596.2	597.1	598.0	598.9	599.8



TEST NUMBER: P332743-940

CATALOG NUMBER: S124DIW-S350D1560U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	660.6	660.4	660.3	660.8	662.0	663.1	664.2	665.4
115°	759.6	760.2	760.8	761.2	761.2	761.2	761.2	761.2
117.5°	859.3	859.2	859.1	859.0	858.8	858.7	858.6	858.4
120°	921.0	921.6	922.2	922.2	921.6	921.0	920.4	919.8
122.5°	981.9	982.2	982.6	982.4	981.9	981.2	980.6	980.1
125°	1066.8	1067.7	1068.6	1069.3	1069.5	1069.8	1070.1	1070.4
127.5°	1151.3	1151.1	1150.9	1150.7	1150.5	1150.2	1150.0	1149.8
130°	1202.8	1203.1	1203.4	1203.5	1203.5	1203.5	1203.5	1203.5
132.5°	1253.4	1253.7	1253.9	1254.0	1253.7	1253.5	1253.3	1253.0
135°	1323.0	1323.7	1324.3	1324.9	1325.4	1326.1	1326.7	1327.2
137.5°	1389.9	1390.5	1391.2	1391.4	1391.2	1391.1	1390.9	1390.7
140°	1431.3	1432.2	1433.1	1433.6	1434.0	1434.2	1434.5	1434.9
142.5°	1469.5	1470.2	1470.8	1471.1	1471.2	1471.3	1471.3	1471.4
145°	1524.2	1524.5	1524.7	1525.3	1525.8	1526.4	1527.1	1527.6
147.5°	1572.2	1572.4	1572.7	1573.0	1573.2	1573.5	1573.9	1574.1
150°	1602.9	1602.9	1602.9	1603.1	1603.4	1603.7	1604.0	1604.3
152.5°	1629.7	1630.1	1630.7	1630.8	1630.6	1630.4	1630.2	1630.0
155°	1665.8	1667.1	1668.2	1668.4	1667.5	1666.6	1665.7	1664.8
157.5°	1696.9	1698.5	1700.0	1700.0	1698.5	1696.9	1695.4	1693.8
160°	1716.8	1718.6	1720.4	1720.4	1718.6	1716.8	1715.0	1713.2
162.5°	1733.0	1734.7	1736.5	1736.3	1734.4	1732.3	1730.3	1728.2
165°	1755.6	1758.0	1760.4	1760.2	1757.6	1754.9	1752.2	1749.5
167.5°	1772.3	1774.9	1777.5	1777.4	1774.3	1771.4	1768.4	1765.4
170°	1782.5	1784.9	1787.3	1787.0	1784.0	1781.0	1778.1	1775.0
172.5°	1789.0	1791.4	1793.8	1793.3	1790.1	1786.9	1783.7	1780.4
175°	1796.5	1799.3	1802.0	1801.5	1797.9	1794.3	1790.7	1787.2
177.5°	1799.6	1801.5	1803.4	1803.0	1800.1	1797.2	1794.3	1791.4
180°	1797.9	1797.9	1797.9	1797.9	1797.9	1797.9	1797.9	1797.9

(END OF REPORT)