

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332773-940

Luminaire Tested: **S124DIW-S575D1560U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332773-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S575D1560U940-4F0-1E-UDD-F
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 575 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1560 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7788.9 lumens
Efficiency: N/A
Efficacy: 128.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 60.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332773-940

CATALOG NUMBER: S124DIW-S575D1560U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

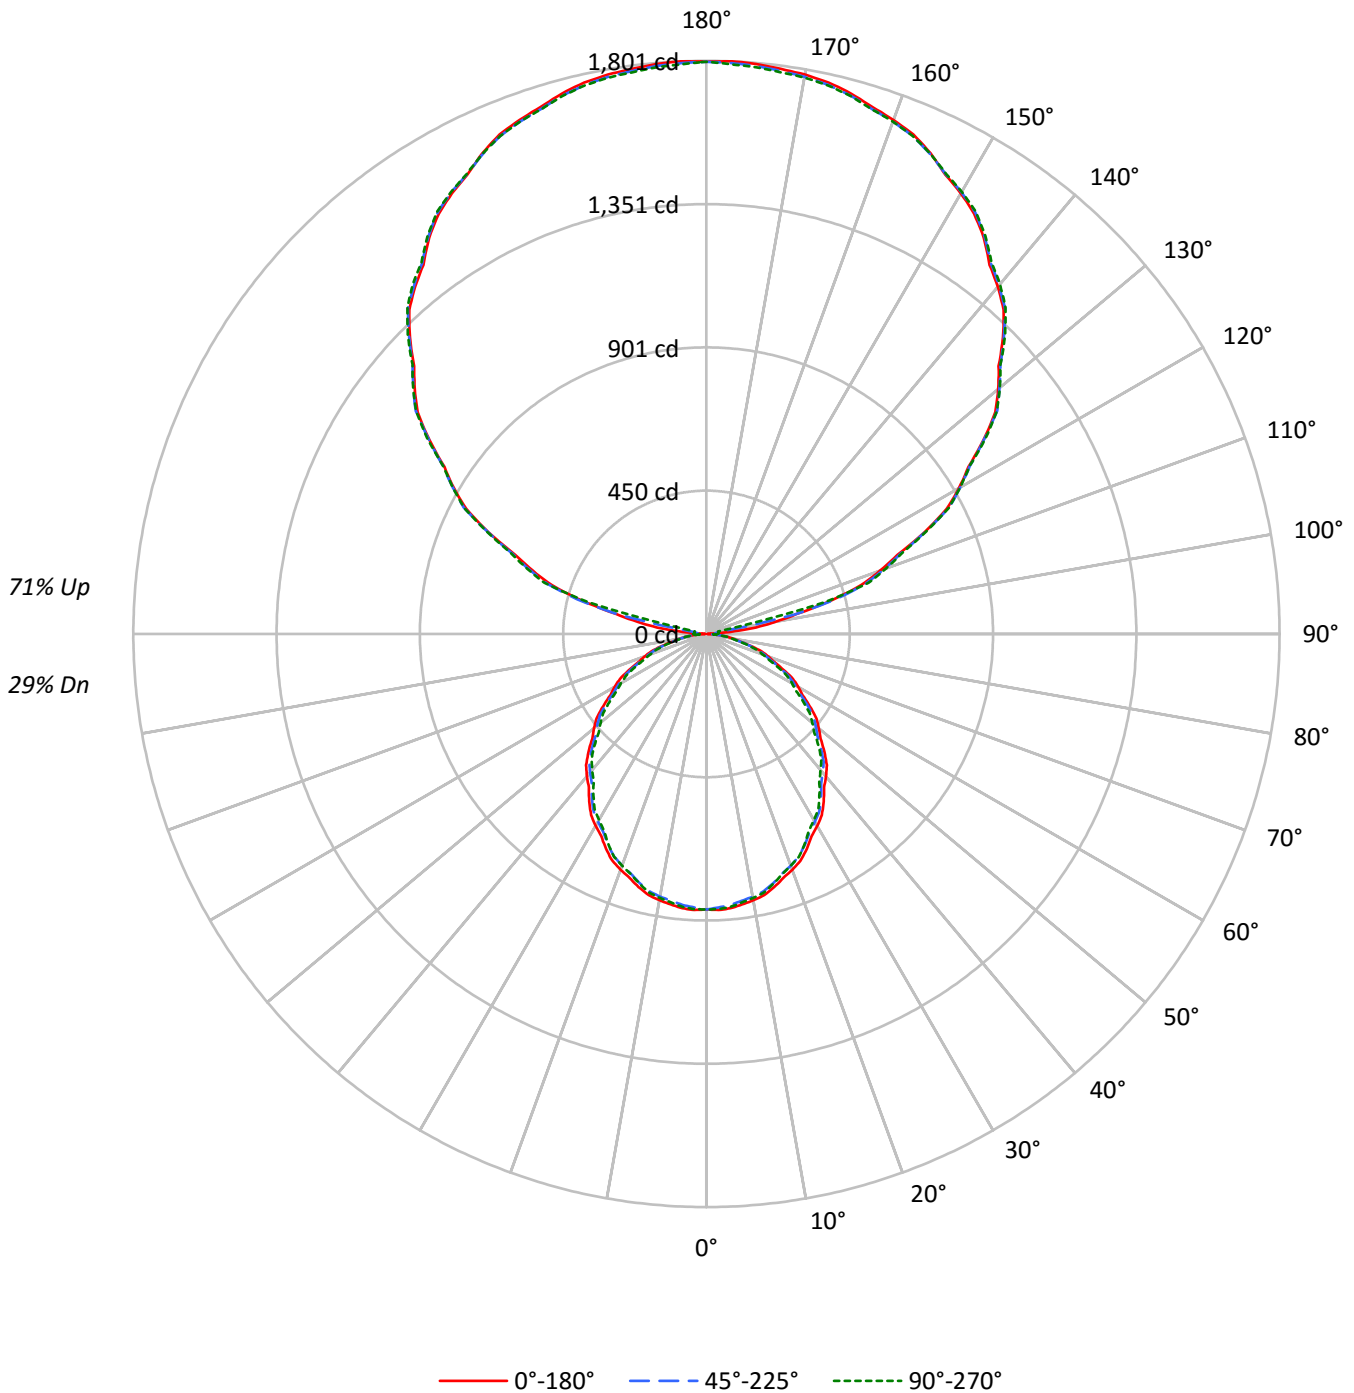



TEST NUMBER: P332773-940

CATALOG NUMBER: S124DIW-S575D1560U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36	29
1	93	89	85	82	83	80	76	74	62	60	58	47	45	44	32	31	31	24
2	85	77	72	67	75	70	65	60	55	51	48	41	39	37	28	27	26	20
3	77	68	61	55	69	61	55	50	48	44	40	36	33	31	25	23	22	17
4	70	60	52	47	63	54	48	43	43	38	34	32	29	27	22	20	19	15
5	65	53	46	40	58	48	41	36	38	33	30	29	25	23	20	18	16	13
6	59	48	40	34	53	43	36	31	34	29	26	26	23	20	18	16	14	11
7	55	43	35	30	49	39	32	27	31	26	22	24	20	18	17	14	13	10
8	51	39	31	26	45	35	29	24	28	23	20	21	18	16	15	13	11	9
9	47	35	28	23	42	32	26	21	26	21	18	20	16	14	14	12	10	8
10	44	32	25	21	39	29	23	19	24	19	16	18	15	13	13	11	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6990	6990	6990
5°	7012	6928	6978
10°	6968	6871	6906
15°	6884	6774	6791
20°	6772	6653	6659
25°	6644	6515	6495
30°	6488	6352	6293
35°	6326	6182	6099
40°	6157	5989	5879
45°	5981	5799	5688
50°	5786	5630	5456
55°	5576	5410	5234
60°	5365	5165	5007
65°	5129	4932	4732
70°	4865	4617	4440
75°	4457	4242	4133
80°	3966	3808	3710
85°	3473	3344	3279



TEST NUMBER: P332773-940

CATALOG NUMBER: S124DIW-S575D1560U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.6	1.0
10°-20°	229.8	3.0
20°-30°	338.2	4.3
30°-40°	393.2	5.0
40°-50°	393.2	5.0
50°-60°	343.9	4.4
60°-70°	255.4	3.3
70°-80°	145.1	1.9
80°-90°	47.1	0.6
90°-100°	61.5	0.8
100°-110°	392.1	5.0
110°-120°	750.0	9.6
120°-130°	952.1	12.2
130°-140°	1018.7	13.1
140°-150°	952.6	12.2
150°-160°	768.2	9.9
160°-170°	495.5	6.4
170°-180°	170.8	2.2
0°-30°	649.5	8.3
0°-40°	1042.7	13.4
0°-60°	1779.8	22.9
0°-90°	2227.4	28.6
90°-120°	1203.6	15.5
90°-150°	4127.0	53.0
90°-180°	5561.0	71.4
0°-180°	7788.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	866	866	866	866	866	
5°	865	862	855	862	861	82
15°	824	820	810	814	812	232
25°	746	741	731	732	729	343
35°	642	637	627	622	619	401
45°	524	519	508	501	498	404
55°	396	394	384	376	372	355
65°	268	265	258	251	248	266
75°	143	139	136	133	132	152
85°	38	37	36	36	35	41
90°	4	19	30	37	40	5
95°	74	31	30	37	39	95
105°	405	413	420	428	383	423
115°	756	759	758	761	761	743
125°	1062	1067	1065	1069	1070	948
135°	1318	1317	1322	1325	1327	1015
145°	1520	1523	1524	1525	1528	949
155°	1666	1667	1663	1668	1665	768
165°	1758	1751	1751	1760	1750	496
175°	1798	1790	1791	1802	1787	171
180°	1798	1798	1798	1798	1798	



TEST NUMBER: P332773-940

CATALOG NUMBER: S124DIW-S575D1560U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	865.9	865.9	865.9	865.9	865.9	865.9	865.9	865.9	865.9	865.9	865.9
2.5°	868.2	867.8	867.5	867.1	866.7	865.9	864.5	863.2	861.7	860.4	861.7
5°	865.3	864.7	864.1	863.4	862.8	861.7	860.0	858.3	856.6	854.9	856.6
7.5°	857.2	856.6	856.0	855.4	854.8	853.5	851.7	849.8	847.8	846.0	847.4
10°	850.0	849.4	848.8	848.2	847.6	846.2	844.3	842.2	840.3	838.2	839.5
12.5°	840.6	840.0	839.4	838.7	838.1	836.8	834.6	832.5	830.4	828.2	829.6
15°	823.7	823.0	822.4	821.8	821.2	819.7	817.4	815.1	812.8	810.5	811.4
17.5°	803.3	802.5	801.7	800.9	800.1	798.7	796.5	794.3	792.1	790.0	790.5
20°	788.3	787.5	786.8	786.0	785.2	783.6	781.3	779.0	776.7	774.4	774.8
22.5°	772.1	771.2	770.2	769.1	768.1	766.4	764.1	761.8	759.5	757.2	758.0
25°	745.9	744.8	743.8	742.7	741.6	740.0	737.8	735.7	733.5	731.4	731.6
27.5°	716.0	714.9	713.7	712.7	711.5	710.0	707.9	706.0	703.9	702.0	701.6
30°	696.0	694.7	693.5	692.2	691.1	689.4	687.4	685.4	683.4	681.4	680.8
32.5°	674.8	673.8	672.6	671.5	670.5	668.8	666.7	664.6	662.5	660.3	659.6
35°	641.9	640.8	639.7	638.6	637.6	635.9	633.7	631.6	629.5	627.3	626.2
37.5°	607.0	606.0	605.0	604.0	603.1	601.5	599.1	596.8	594.5	592.2	591.0
40°	584.2	583.0	581.8	580.6	579.3	577.6	575.2	572.9	570.6	568.3	566.8
42.5°	559.8	559.1	558.4	557.6	556.9	555.2	552.7	550.1	547.5	545.0	543.2
45°	523.9	522.8	521.7	520.7	519.6	517.8	515.3	512.8	510.4	507.9	506.2
47.5°	486.2	485.5	484.8	484.0	483.3	481.8	479.6	477.2	474.9	472.7	470.7
50°	460.7	460.1	459.5	458.9	458.3	456.9	454.8	452.5	450.4	448.3	446.1
52.5°	435.8	435.1	434.3	433.5	432.8	431.3	429.0	426.8	424.5	422.1	420.3
55°	396.2	395.7	395.3	394.8	394.4	393.1	390.9	388.7	386.6	384.4	382.5
57.5°	358.5	357.9	357.4	356.9	356.3	355.1	352.9	350.8	348.7	346.5	344.7
60°	332.3	331.6	330.8	330.0	329.3	327.9	325.9	323.9	321.9	319.9	318.5
62.5°	306.8	306.2	305.5	304.9	304.3	302.8	300.8	298.6	296.5	294.4	293.1
65°	268.5	267.8	267.0	266.3	265.5	264.3	262.8	261.2	259.7	258.2	256.5
67.5°	230.0	229.3	228.5	227.8	227.1	226.0	224.5	223.1	221.6	220.1	218.6
70°	206.1	205.0	203.9	202.9	201.8	200.6	199.4	198.1	196.9	195.6	194.5
72.5°	180.6	179.5	178.4	177.3	176.2	175.2	174.2	173.3	172.3	171.2	170.2
75°	142.9	142.1	141.4	140.6	139.8	139.1	138.3	137.5	136.8	136.0	135.4
77.5°	107.0	106.6	106.3	106.0	105.7	105.1	104.4	103.8	103.1	102.5	102.2
80°	85.3	84.9	84.4	84.0	83.5	83.1	82.8	82.5	82.2	81.9	81.6
82.5°	64.3	64.0	63.8	63.6	63.4	63.2	63.2	63.1	63.0	63.0	62.8
85°	37.5	37.5	37.5	37.5	37.5	37.3	37.0	36.7	36.4	36.1	36.1
87.5°	15.2	15.8	16.3	16.9	17.4	17.8	18.2	18.5	18.9	19.3	19.6
90°	4.0	7.3	10.6	13.9	17.2	20.1	22.4	24.8	27.2	29.6	31.4
92.5°	16.9	17.1	17.3	17.5	17.7	18.9	21.3	23.7	26.1	28.5	30.3
95°	73.9	63.8	53.7	43.5	33.3	28.4	28.7	29.0	29.2	29.6	31.4
97.5°	157.0	163.4	169.7	176.1	182.4	168.9	135.5	102.2	68.8	35.5	35.7
100°	220.5	226.0	231.3	236.7	242.0	224.1	182.9	141.6	100.4	59.2	54.1
102.5°	291.5	295.5	299.4	303.4	307.3	306.6	301.2	295.9	290.4	285.1	230.2
105°	404.7	406.5	408.3	410.2	412.0	413.6	415.1	416.6	418.0	419.5	422.2
107.5°	509.9	510.9	511.8	512.6	513.5	515.0	517.0	519.1	521.0	523.1	524.4
110°	580.9	581.8	582.7	583.6	584.5	585.9	587.6	589.4	591.2	593.0	593.6



TEST NUMBER: P332773-940

CATALOG NUMBER: S124DIW-S575D1560U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	649.8	651.4	653.0	654.6	656.2	657.5	658.3	659.2	660.0	660.8	660.7
115°	755.7	756.6	757.5	758.4	759.3	759.6	759.3	759.0	758.8	758.4	759.0
117.5°	851.2	852.4	853.6	854.8	856.0	856.9	857.6	858.3	858.9	859.5	859.4
120°	915.8	916.9	918.2	919.4	920.5	921.0	920.7	920.4	920.1	919.8	920.4
122.5°	976.0	976.7	977.4	978.1	978.9	979.5	979.9	980.3	980.7	981.1	981.5
125°	1062.4	1063.5	1064.7	1066.0	1067.1	1067.4	1066.8	1066.2	1065.6	1065.1	1066.0
127.5°	1144.1	1144.4	1144.7	1145.0	1145.3	1146.1	1147.5	1148.9	1150.2	1151.6	1151.5
130°	1196.9	1197.1	1197.4	1197.7	1198.0	1198.6	1199.5	1200.4	1201.3	1202.2	1202.5
132.5°	1245.2	1245.7	1246.3	1246.9	1247.4	1248.2	1249.4	1250.4	1251.6	1252.8	1253.0
135°	1317.9	1317.5	1317.2	1317.0	1316.6	1317.1	1318.3	1319.5	1320.7	1321.9	1322.5
137.5°	1382.2	1382.2	1382.3	1382.5	1382.6	1383.3	1384.6	1386.0	1387.2	1388.6	1389.2
140°	1424.1	1424.7	1425.3	1425.8	1426.5	1427.1	1427.6	1428.3	1428.9	1429.4	1430.4
142.5°	1461.7	1462.8	1463.9	1465.0	1466.1	1466.8	1467.1	1467.5	1467.8	1468.2	1468.8
145°	1519.6	1520.5	1521.3	1522.2	1523.1	1523.6	1523.6	1523.6	1523.6	1523.6	1523.8
147.5°	1565.6	1567.2	1568.9	1570.6	1572.3	1572.9	1572.6	1572.4	1572.0	1571.7	1572.0
150°	1598.9	1600.1	1601.2	1602.5	1603.7	1604.1	1603.8	1603.6	1603.2	1602.9	1602.9
152.5°	1626.8	1627.8	1628.8	1629.7	1630.7	1630.9	1630.3	1629.8	1629.2	1628.7	1629.2
155°	1666.2	1666.4	1666.7	1667.1	1667.3	1667.1	1666.2	1665.3	1664.4	1663.4	1664.6
157.5°	1699.2	1699.1	1698.9	1698.7	1698.5	1697.9	1696.8	1695.9	1694.9	1693.8	1695.4
160°	1718.6	1717.7	1716.8	1715.9	1715.0	1714.4	1714.0	1713.8	1713.5	1713.2	1715.0
162.5°	1735.8	1734.6	1733.5	1732.4	1731.3	1730.5	1730.2	1729.9	1729.7	1729.3	1731.1
165°	1757.6	1756.0	1754.6	1753.1	1751.6	1750.9	1750.9	1750.9	1750.9	1750.9	1753.2
167.5°	1774.8	1773.3	1771.7	1770.1	1768.5	1767.7	1767.5	1767.4	1767.2	1767.0	1769.6
170°	1784.5	1782.7	1780.8	1779.1	1777.3	1776.6	1776.8	1777.2	1777.4	1777.7	1780.1
172.5°	1790.9	1789.1	1787.3	1785.6	1783.8	1783.0	1783.3	1783.6	1783.9	1784.2	1786.5
175°	1797.9	1796.1	1794.3	1792.5	1790.7	1790.0	1790.3	1790.6	1790.9	1791.2	1793.9
177.5°	1801.2	1799.5	1797.8	1796.1	1794.5	1793.9	1794.3	1794.8	1795.3	1795.7	1797.7
180°	1797.9	1797.9	1797.9	1797.9	1797.9	1797.9	1797.9	1797.9	1797.9	1797.9	1797.9



TEST NUMBER: P332773-940

CATALOG NUMBER: S124DIW-S575D1560U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	865.9	865.9	865.9	865.9	865.9	865.9	865.9	865.9
2.5°	862.9	864.2	865.4	865.9	865.8	865.7	865.6	865.4
5°	858.3	860.0	861.7	862.4	862.0	861.7	861.4	861.1
7.5°	848.7	850.1	851.4	852.0	851.9	851.7	851.5	851.2
10°	840.7	842.0	843.2	843.6	843.3	843.0	842.7	842.4
12.5°	831.0	832.3	833.7	834.1	833.7	833.2	832.9	832.4
15°	812.3	813.2	814.1	814.4	814.0	813.5	813.0	812.5
17.5°	791.1	791.7	792.3	792.4	792.1	791.8	791.5	791.2
20°	775.3	775.8	776.2	776.3	776.0	775.7	775.4	775.1
22.5°	758.8	759.6	760.5	760.6	760.1	759.6	759.0	758.4
25°	731.6	731.8	732.0	731.7	731.1	730.5	729.9	729.2
27.5°	701.2	700.8	700.4	699.9	699.1	698.4	697.6	696.8
30°	680.2	679.6	678.9	678.2	677.4	676.7	675.9	675.1
32.5°	658.8	658.1	657.4	656.6	655.9	655.1	654.2	653.5
35°	625.1	624.0	622.9	622.1	621.3	620.5	619.7	618.9
37.5°	589.9	588.6	587.5	586.4	585.4	584.3	583.4	582.3
40°	565.3	563.7	562.1	561.0	560.2	559.5	558.7	557.9
42.5°	541.4	539.6	537.8	536.6	536.2	535.7	535.1	534.6
45°	504.5	502.8	501.1	500.1	499.6	499.2	498.6	498.2
47.5°	468.9	466.9	465.0	463.5	462.4	461.1	459.9	458.8
50°	443.9	441.8	439.6	438.1	437.1	436.2	435.3	434.4
52.5°	418.3	416.4	414.6	413.0	411.8	410.6	409.5	408.3
55°	380.8	378.9	377.0	375.6	374.7	373.8	372.8	371.9
57.5°	343.0	341.3	339.5	338.1	337.2	336.4	335.5	334.6
60°	317.1	315.8	314.3	313.3	312.5	311.7	310.9	310.1
62.5°	291.9	290.5	289.3	288.3	287.5	286.8	286.0	285.2
65°	255.0	253.5	252.0	250.8	250.0	249.2	248.5	247.7
67.5°	217.1	215.7	214.2	213.3	213.1	212.9	212.7	212.5
70°	193.2	192.0	190.7	189.9	189.4	189.0	188.5	188.1
72.5°	169.2	168.3	167.3	166.6	166.1	165.7	165.2	164.7
75°	134.7	134.1	133.6	133.1	133.0	132.9	132.7	132.5
77.5°	102.0	101.8	101.7	101.4	100.9	100.6	100.1	99.8
80°	81.2	81.0	80.6	80.4	80.3	80.1	80.0	79.8
82.5°	62.6	62.4	62.2	62.1	62.0	61.8	61.6	61.4
85°	36.1	36.1	36.1	36.0	35.8	35.7	35.6	35.4
87.5°	20.0	20.3	20.7	21.0	21.0	21.1	21.3	21.4
90°	33.2	35.0	36.7	38.0	38.5	39.1	39.8	40.3
92.5°	32.1	33.9	35.7	36.6	36.7	36.9	37.0	37.1
95°	33.2	35.0	36.7	37.8	38.1	38.4	38.7	39.0
97.5°	35.8	36.0	36.2	36.5	36.7	37.1	37.4	37.6
100°	49.0	44.0	38.9	36.5	36.7	37.1	37.4	37.6
102.5°	175.5	120.6	65.9	38.5	38.5	38.6	38.7	38.7
105°	424.9	427.7	430.3	426.2	415.5	404.7	394.0	383.3
107.5°	525.8	527.1	528.3	529.6	530.7	531.8	533.0	534.1
110°	594.2	594.9	595.4	596.2	597.1	598.0	598.9	599.8



TEST NUMBER: P332773-940

CATALOG NUMBER: S124DIW-S575D1560U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	660.6	660.4	660.3	660.8	662.0	663.1	664.2	665.4
115°	759.6	760.2	760.8	761.2	761.2	761.2	761.2	761.2
117.5°	859.3	859.2	859.1	859.0	858.8	858.7	858.6	858.4
120°	921.0	921.6	922.2	922.2	921.6	921.0	920.4	919.8
122.5°	981.9	982.2	982.6	982.4	981.9	981.2	980.6	980.1
125°	1066.8	1067.7	1068.6	1069.3	1069.5	1069.8	1070.1	1070.4
127.5°	1151.3	1151.1	1150.9	1150.7	1150.5	1150.2	1150.0	1149.8
130°	1202.8	1203.1	1203.4	1203.5	1203.5	1203.5	1203.5	1203.5
132.5°	1253.4	1253.7	1253.9	1254.0	1253.7	1253.5	1253.3	1253.0
135°	1323.0	1323.7	1324.3	1324.9	1325.4	1326.1	1326.7	1327.2
137.5°	1389.9	1390.5	1391.2	1391.4	1391.2	1391.1	1390.9	1390.7
140°	1431.3	1432.2	1433.1	1433.6	1434.0	1434.2	1434.5	1434.9
142.5°	1469.5	1470.2	1470.8	1471.1	1471.2	1471.3	1471.3	1471.4
145°	1524.2	1524.5	1524.7	1525.3	1525.8	1526.4	1527.1	1527.6
147.5°	1572.2	1572.4	1572.7	1573.0	1573.2	1573.5	1573.9	1574.1
150°	1602.9	1602.9	1602.9	1603.1	1603.4	1603.7	1604.0	1604.3
152.5°	1629.7	1630.1	1630.7	1630.8	1630.6	1630.4	1630.2	1630.0
155°	1665.8	1667.1	1668.2	1668.4	1667.5	1666.6	1665.7	1664.8
157.5°	1696.9	1698.5	1700.0	1700.0	1698.5	1696.9	1695.4	1693.8
160°	1716.8	1718.6	1720.4	1720.4	1718.6	1716.8	1715.0	1713.2
162.5°	1733.0	1734.7	1736.5	1736.3	1734.4	1732.3	1730.3	1728.2
165°	1755.6	1758.0	1760.4	1760.2	1757.6	1754.9	1752.2	1749.5
167.5°	1772.3	1774.9	1777.5	1777.4	1774.3	1771.4	1768.4	1765.4
170°	1782.5	1784.9	1787.3	1787.0	1784.0	1781.0	1778.1	1775.0
172.5°	1789.0	1791.4	1793.8	1793.3	1790.1	1786.9	1783.7	1780.4
175°	1796.5	1799.3	1802.0	1801.5	1797.9	1794.3	1790.7	1787.2
177.5°	1799.6	1801.5	1803.4	1803.0	1800.1	1797.2	1794.3	1791.4
180°	1797.9	1797.9	1797.9	1797.9	1797.9	1797.9	1797.9	1797.9

(END OF REPORT)