

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332774-940

Luminaire Tested: **S124DIW-S575D1560U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332774-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124DIW-S575D1560U940-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 575 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7050.8 lumens
Efficiency: N/A
Efficacy: 116.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 60.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332774-940

CATALOG NUMBER: S124DIW-S575D1560U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

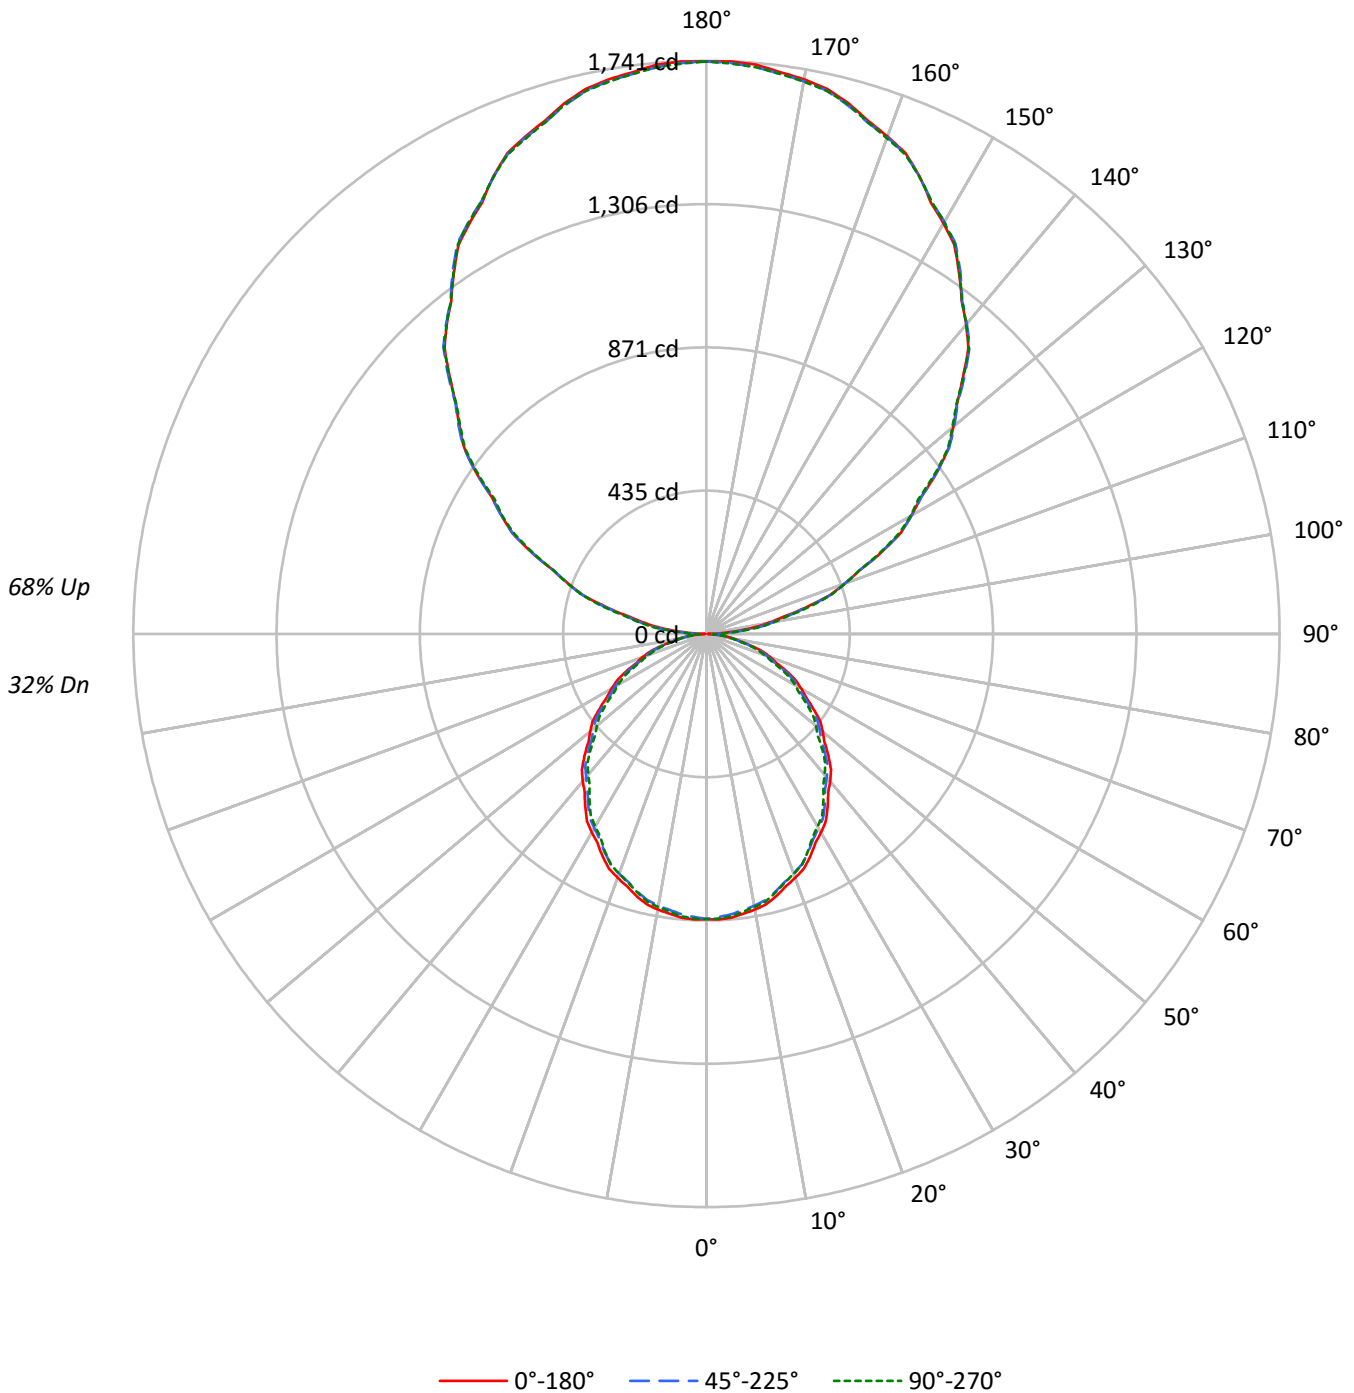



TEST NUMBER: P332774-940

CATALOG NUMBER: S124DIW-S575D1560U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	92	92	92	92	73	73	73	55	55	55	39	39	39	32
1	94	89	86	82	84	81	77	74	64	62	60	49	47	46	35	34	33	27
2	85	78	72	67	76	70	65	61	56	52	49	43	40	38	30	29	28	22
3	78	69	61	56	70	62	56	51	49	45	41	38	35	32	27	25	24	19
4	71	61	53	47	64	55	48	43	44	39	35	34	30	28	24	22	20	16
5	65	54	46	40	58	49	42	37	39	34	30	30	27	24	22	19	18	14
6	60	48	40	35	54	44	37	32	35	30	26	27	24	21	20	17	16	12
7	55	43	36	30	50	39	33	28	32	27	23	25	21	18	18	16	14	11
8	51	39	32	27	46	36	29	24	29	24	20	22	19	16	16	14	12	10
9	48	36	28	24	43	32	26	22	26	22	18	21	17	15	15	13	11	9
10	44	33	26	21	40	30	24	19	24	19	16	19	16	13	14	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6990	6990	6990
5°	7012	6928	6978
10°	6968	6871	6906
15°	6884	6774	6791
20°	6772	6653	6659
25°	6644	6515	6495
30°	6488	6352	6293
35°	6326	6182	6099
40°	6157	5989	5879
45°	5981	5799	5688
50°	5786	5630	5456
55°	5576	5410	5234
60°	5365	5165	5007
65°	5129	4932	4732
70°	4865	4617	4440
75°	4457	4242	4133
80°	3966	3808	3710
85°	3473	3344	3279



TEST NUMBER: P332774-940

CATALOG NUMBER: S124DIW-S575D1560U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.6	1.2
10°-20°	229.8	3.3
20°-30°	338.2	4.8
30°-40°	393.2	5.6
40°-50°	393.2	5.6
50°-60°	343.9	4.9
60°-70°	255.4	3.6
70°-80°	145.1	2.1
80°-90°	47.1	0.7
90°-100°	114.7	1.6
100°-110°	339.7	4.8
110°-120°	576.5	8.2
120°-130°	760.2	10.8
130°-140°	853.8	12.1
140°-150°	839.0	11.9
150°-160°	705.6	10.0
160°-170°	469.5	6.7
170°-180°	164.4	2.3
0°-30°	649.5	9.2
0°-40°	1042.7	14.8
0°-60°	1779.8	25.2
0°-90°	2227.4	31.6
90°-120°	1030.9	14.6
90°-150°	3483.9	49.4
90°-180°	4823.0	68.4
0°-180°	7050.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	866	866	866	866	866	
5°	865	862	855	862	861	82
15°	824	820	810	814	812	232
25°	746	741	731	732	729	343
35°	642	637	627	622	619	401
45°	524	519	508	501	498	404
55°	396	394	384	376	372	355
65°	268	265	258	251	248	266
75°	143	139	136	133	132	152
85°	38	37	36	36	35	41
90°	4	19	30	37	40	7
95°	81	93	102	106	106	90
105°	313	315	320	324	328	332
115°	586	586	584	582	581	578
125°	854	854	852	850	847	761
135°	1101	1109	1109	1106	1102	852
145°	1338	1343	1344	1343	1339	837
155°	1533	1533	1531	1536	1531	705
165°	1669	1665	1662	1669	1665	470
175°	1736	1729	1728	1736	1728	165
180°	1738	1738	1738	1738	1738	



TEST NUMBER: P332774-940

CATALOG NUMBER: S124DIW-S575D1560U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	865.9	865.9	865.9	865.9	865.9	865.9	865.9	865.9	865.9	865.9	865.9
2.5°	868.2	867.8	867.5	867.1	866.7	865.9	864.5	863.2	861.7	860.4	861.7
5°	865.3	864.7	864.1	863.4	862.8	861.7	860.0	858.3	856.6	854.9	856.6
7.5°	857.2	856.6	856.0	855.4	854.8	853.5	851.7	849.8	847.8	846.0	847.4
10°	850.0	849.4	848.8	848.2	847.6	846.2	844.3	842.2	840.3	838.2	839.5
12.5°	840.6	840.0	839.4	838.7	838.1	836.8	834.6	832.5	830.4	828.2	829.6
15°	823.7	823.0	822.4	821.8	821.2	819.7	817.4	815.1	812.8	810.5	811.4
17.5°	803.3	802.5	801.7	800.9	800.1	798.7	796.5	794.3	792.1	790.0	790.5
20°	788.3	787.5	786.8	786.0	785.2	783.6	781.3	779.0	776.7	774.4	774.8
22.5°	772.1	771.2	770.2	769.1	768.1	766.4	764.1	761.8	759.5	757.2	758.0
25°	745.9	744.8	743.8	742.7	741.6	740.0	737.8	735.7	733.5	731.4	731.6
27.5°	716.0	714.9	713.7	712.7	711.5	710.0	707.9	706.0	703.9	702.0	701.6
30°	696.0	694.7	693.5	692.2	691.1	689.4	687.4	685.4	683.4	681.4	680.8
32.5°	674.8	673.8	672.6	671.5	670.5	668.8	666.7	664.6	662.5	660.3	659.6
35°	641.9	640.8	639.7	638.6	637.6	635.9	633.7	631.6	629.5	627.3	626.2
37.5°	607.0	606.0	605.0	604.0	603.1	601.5	599.1	596.8	594.5	592.2	591.0
40°	584.2	583.0	581.8	580.6	579.3	577.6	575.2	572.9	570.6	568.3	566.8
42.5°	559.8	559.1	558.4	557.6	556.9	555.2	552.7	550.1	547.5	545.0	543.2
45°	523.9	522.8	521.7	520.7	519.6	517.8	515.3	512.8	510.4	507.9	506.2
47.5°	486.2	485.5	484.8	484.0	483.3	481.8	479.6	477.2	474.9	472.7	470.7
50°	460.7	460.1	459.5	458.9	458.3	456.9	454.8	452.5	450.4	448.3	446.1
52.5°	435.8	435.1	434.3	433.5	432.8	431.3	429.0	426.8	424.5	422.1	420.3
55°	396.2	395.7	395.3	394.8	394.4	393.1	390.9	388.7	386.6	384.4	382.5
57.5°	358.5	357.9	357.4	356.9	356.3	355.1	352.9	350.8	348.7	346.5	344.7
60°	332.3	331.6	330.8	330.0	329.3	327.9	325.9	323.9	321.9	319.9	318.5
62.5°	306.8	306.2	305.5	304.9	304.3	302.8	300.8	298.6	296.5	294.4	293.1
65°	268.5	267.8	267.0	266.3	265.5	264.3	262.8	261.2	259.7	258.2	256.5
67.5°	230.0	229.3	228.5	227.8	227.1	226.0	224.5	223.1	221.6	220.1	218.6
70°	206.1	205.0	203.9	202.9	201.8	200.6	199.4	198.1	196.9	195.6	194.5
72.5°	180.6	179.5	178.4	177.3	176.2	175.2	174.2	173.3	172.3	171.2	170.2
75°	142.9	142.1	141.4	140.6	139.8	139.1	138.3	137.5	136.8	136.0	135.4
77.5°	107.0	106.6	106.3	106.0	105.7	105.1	104.4	103.8	103.1	102.5	102.2
80°	85.3	84.9	84.4	84.0	83.5	83.1	82.8	82.5	82.2	81.9	81.6
82.5°	64.3	64.0	63.8	63.6	63.4	63.2	63.2	63.1	63.0	63.0	62.8
85°	37.5	37.5	37.5	37.5	37.5	37.3	37.0	36.7	36.4	36.1	36.1
87.5°	15.2	15.8	16.3	16.9	17.4	17.8	18.2	18.5	18.9	19.3	19.6
90°	4.0	7.3	10.6	13.9	17.2	20.1	22.4	24.8	27.2	29.6	31.4
92.5°	28.8	32.5	36.3	40.0	43.9	46.5	48.2	49.9	51.5	53.2	54.3
95°	80.7	83.4	86.1	88.7	91.4	93.8	95.9	98.0	100.1	102.2	103.1
97.5°	140.9	143.0	145.2	147.4	149.5	151.9	154.3	156.7	159.2	161.6	162.6
100°	188.2	189.4	190.6	191.8	193.1	194.9	197.7	200.4	203.0	205.7	206.3
102.5°	237.7	238.2	238.7	239.2	239.6	241.1	243.5	246.0	248.4	250.9	251.7
105°	313.3	313.6	313.9	314.1	314.5	315.2	316.4	317.6	318.8	320.0	320.9
107.5°	392.6	393.0	393.3	393.7	394.0	394.3	394.5	394.7	394.8	395.0	395.8
110°	446.4	447.0	447.5	448.2	448.8	449.0	448.6	448.4	448.0	447.7	447.1



TEST NUMBER: P332774-940

CATALOG NUMBER: S124DIW-S575D1560U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	502.3	502.5	502.6	502.7	502.8	502.6	502.0	501.5	501.0	500.4	500.3
115°	586.2	586.2	586.2	586.2	586.2	585.9	585.3	584.7	584.2	583.5	583.3
117.5°	665.3	665.5	665.8	666.0	666.3	666.2	665.8	665.3	664.9	664.5	663.4
120°	718.0	719.2	720.4	721.6	722.7	722.9	722.0	721.1	720.2	719.3	717.8
122.5°	772.8	773.3	773.8	774.3	774.7	774.8	774.4	773.9	773.6	773.1	772.1
125°	853.8	853.8	853.8	853.8	853.8	853.6	853.4	853.0	852.7	852.5	851.9
127.5°	927.2	928.1	929.0	929.9	930.8	931.0	930.5	930.1	929.6	929.1	928.4
130°	978.8	979.7	980.6	981.5	982.4	982.8	982.8	982.8	982.8	982.8	982.3
132.5°	1031.5	1032.2	1032.9	1033.5	1034.2	1034.4	1034.1	1033.9	1033.7	1033.4	1032.9
135°	1101.2	1103.0	1104.7	1106.6	1108.4	1109.3	1109.3	1109.3	1109.3	1109.3	1108.7
137.5°	1177.1	1177.9	1178.7	1179.6	1180.4	1181.1	1181.5	1182.0	1182.5	1182.9	1182.1
140°	1227.6	1228.2	1228.8	1229.4	1229.9	1230.3	1230.3	1230.3	1230.3	1230.3	1229.9
142.5°	1273.8	1274.4	1275.1	1275.6	1276.2	1276.4	1276.1	1275.9	1275.7	1275.4	1275.4
145°	1337.8	1339.0	1340.2	1341.4	1342.6	1343.4	1343.6	1344.0	1344.3	1344.5	1344.3
147.5°	1401.3	1402.8	1404.2	1405.6	1407.0	1407.7	1407.4	1407.1	1406.9	1406.7	1406.4
150°	1440.0	1441.2	1442.4	1443.6	1444.8	1445.4	1445.4	1445.4	1445.4	1445.4	1445.4
152.5°	1476.6	1477.3	1478.0	1478.7	1479.4	1480.0	1480.2	1480.4	1480.7	1480.9	1481.6
155°	1532.8	1532.8	1532.8	1532.8	1532.8	1532.7	1532.3	1532.0	1531.8	1531.4	1532.7
157.5°	1580.1	1579.6	1579.0	1578.5	1578.0	1577.7	1577.6	1577.5	1577.5	1577.4	1578.3
160°	1608.1	1607.8	1607.5	1607.2	1606.9	1606.6	1606.3	1606.0	1605.7	1605.4	1606.3
162.5°	1633.9	1633.2	1632.4	1631.6	1630.8	1630.2	1630.0	1629.7	1629.3	1629.1	1630.7
165°	1668.6	1667.7	1666.8	1665.9	1665.0	1664.3	1663.7	1663.0	1662.5	1661.9	1663.7
167.5°	1695.2	1694.0	1692.7	1691.5	1690.2	1689.6	1689.7	1689.7	1689.8	1689.9	1691.7
170°	1710.3	1708.8	1707.3	1705.8	1704.3	1703.7	1704.0	1704.3	1704.6	1704.9	1706.6
172.5°	1721.0	1719.8	1718.5	1717.3	1716.0	1715.4	1715.5	1715.6	1715.6	1715.7	1717.7
175°	1735.8	1734.3	1732.9	1731.3	1729.8	1728.9	1728.7	1728.3	1728.0	1727.8	1729.8
177.5°	1740.6	1739.5	1738.3	1737.1	1735.9	1735.3	1735.3	1735.3	1735.3	1735.3	1737.0
180°	1738.5	1738.5	1738.5	1738.5	1738.5	1738.5	1738.5	1738.5	1738.5	1738.5	1738.5



TEST NUMBER: P332774-940

CATALOG NUMBER: S124DIW-S575D1560U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	865.9	865.9	865.9	865.9	865.9	865.9	865.9	865.9
2.5°	862.9	864.2	865.4	865.9	865.8	865.7	865.6	865.4
5°	858.3	860.0	861.7	862.4	862.0	861.7	861.4	861.1
7.5°	848.7	850.1	851.4	852.0	851.9	851.7	851.5	851.2
10°	840.7	842.0	843.2	843.6	843.3	843.0	842.7	842.4
12.5°	831.0	832.3	833.7	834.1	833.7	833.2	832.9	832.4
15°	812.3	813.2	814.1	814.4	814.0	813.5	813.0	812.5
17.5°	791.1	791.7	792.3	792.4	792.1	791.8	791.5	791.2
20°	775.3	775.8	776.2	776.3	776.0	775.7	775.4	775.1
22.5°	758.8	759.6	760.5	760.6	760.1	759.6	759.0	758.4
25°	731.6	731.8	732.0	731.7	731.1	730.5	729.9	729.2
27.5°	701.2	700.8	700.4	699.9	699.1	698.4	697.6	696.8
30°	680.2	679.6	678.9	678.2	677.4	676.7	675.9	675.1
32.5°	658.8	658.1	657.4	656.6	655.9	655.1	654.2	653.5
35°	625.1	624.0	622.9	622.1	621.3	620.5	619.7	618.9
37.5°	589.9	588.6	587.5	586.4	585.4	584.3	583.4	582.3
40°	565.3	563.7	562.1	561.0	560.2	559.5	558.7	557.9
42.5°	541.4	539.6	537.8	536.6	536.2	535.7	535.1	534.6
45°	504.5	502.8	501.1	500.1	499.6	499.2	498.6	498.2
47.5°	468.9	466.9	465.0	463.5	462.4	461.1	459.9	458.8
50°	443.9	441.8	439.6	438.1	437.1	436.2	435.3	434.4
52.5°	418.3	416.4	414.6	413.0	411.8	410.6	409.5	408.3
55°	380.8	378.9	377.0	375.6	374.7	373.8	372.8	371.9
57.5°	343.0	341.3	339.5	338.1	337.2	336.4	335.5	334.6
60°	317.1	315.8	314.3	313.3	312.5	311.7	310.9	310.1
62.5°	291.9	290.5	289.3	288.3	287.5	286.8	286.0	285.2
65°	255.0	253.5	252.0	250.8	250.0	249.2	248.5	247.7
67.5°	217.1	215.7	214.2	213.3	213.1	212.9	212.7	212.5
70°	193.2	192.0	190.7	189.9	189.4	189.0	188.5	188.1
72.5°	169.2	168.3	167.3	166.6	166.1	165.7	165.2	164.7
75°	134.7	134.1	133.6	133.1	133.0	132.9	132.7	132.5
77.5°	102.0	101.8	101.7	101.4	100.9	100.6	100.1	99.8
80°	81.2	81.0	80.6	80.4	80.3	80.1	80.0	79.8
82.5°	62.6	62.4	62.2	62.1	62.0	61.8	61.6	61.4
85°	36.1	36.1	36.1	36.0	35.8	35.7	35.6	35.4
87.5°	20.0	20.3	20.7	21.0	21.0	21.1	21.3	21.4
90°	33.2	35.0	36.7	38.0	38.5	39.1	39.8	40.3
92.5°	55.4	56.4	57.5	58.2	58.6	58.9	59.3	59.7
95°	104.0	104.9	105.8	106.2	106.2	106.2	106.2	106.2
97.5°	163.8	164.9	165.9	166.5	166.5	166.5	166.5	166.5
100°	206.9	207.5	208.1	208.4	208.4	208.4	208.4	208.4
102.5°	252.5	253.4	254.2	254.8	255.0	255.3	255.5	255.7
105°	321.8	322.7	323.6	324.5	325.4	326.3	327.2	328.1
107.5°	396.7	397.5	398.4	398.8	398.7	398.7	398.6	398.5
110°	446.6	445.9	445.3	445.5	446.4	447.3	448.2	449.1



TEST NUMBER: P332774-940

CATALOG NUMBER: S124DIW-S575D1560U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	500.2	500.1	500.0	500.0	500.2	500.3	500.5	500.7
115°	582.9	582.6	582.4	582.0	581.8	581.5	581.1	580.9
117.5°	662.5	661.5	660.4	659.6	659.0	658.4	657.8	657.2
120°	716.3	714.9	713.4	712.9	713.5	714.1	714.7	715.3
122.5°	771.1	770.1	769.1	768.0	767.0	765.9	764.8	763.8
125°	851.2	850.7	850.1	849.4	848.8	848.3	847.7	847.0
127.5°	927.9	927.3	926.7	926.1	925.7	925.2	924.7	924.3
130°	981.7	981.1	980.4	979.5	978.4	977.2	976.0	974.8
132.5°	1032.2	1031.6	1031.0	1030.5	1030.0	1029.6	1029.0	1028.6
135°	1108.0	1107.5	1106.9	1106.1	1105.2	1104.3	1103.4	1102.5
137.5°	1181.4	1180.6	1179.8	1179.6	1179.7	1179.9	1180.1	1180.3
140°	1229.7	1229.4	1229.0	1228.8	1228.5	1228.2	1227.9	1227.6
142.5°	1275.3	1275.2	1275.2	1275.1	1275.1	1275.1	1275.0	1274.9
145°	1344.0	1343.6	1343.4	1342.7	1341.8	1341.0	1340.1	1339.2
147.5°	1406.2	1406.0	1405.7	1405.4	1405.2	1404.9	1404.5	1404.3
150°	1445.4	1445.4	1445.4	1445.3	1444.9	1444.7	1444.4	1444.0
152.5°	1482.3	1483.0	1483.7	1483.7	1482.9	1482.2	1481.4	1480.6
155°	1533.8	1535.0	1536.2	1536.2	1535.0	1533.8	1532.7	1531.4
157.5°	1579.2	1580.1	1581.0	1580.9	1579.9	1579.0	1577.9	1576.9
160°	1607.2	1608.1	1609.0	1608.6	1607.2	1605.7	1604.2	1602.7
162.5°	1632.3	1633.9	1635.5	1635.6	1634.1	1632.6	1631.1	1629.6
165°	1665.4	1667.2	1669.0	1669.4	1668.1	1667.0	1665.7	1664.6
167.5°	1693.4	1695.2	1697.0	1697.0	1695.1	1693.3	1691.4	1689.5
170°	1708.5	1710.3	1712.1	1711.9	1709.9	1707.7	1705.7	1703.5
172.5°	1719.8	1721.7	1723.8	1723.8	1721.6	1719.6	1717.4	1715.4
175°	1732.0	1734.0	1736.2	1736.2	1734.0	1732.0	1729.8	1727.8
177.5°	1738.7	1740.3	1742.0	1741.9	1739.9	1738.0	1736.2	1734.2
180°	1738.5	1738.5	1738.5	1738.5	1738.5	1738.5	1738.5	1738.5

(END OF REPORT)