

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332755-940

Luminaire Tested: **S124DIW-S575D770U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332755-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124DIW-S575D770U940-4F0-1E-UDD-F  
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 575 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 770 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4962.3 lumens  
Efficiency: N/A  
Efficacy: 132.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.17 / 1.3  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 37.6  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332755-940

CATALOG NUMBER: S124DIW-S575D770U940-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

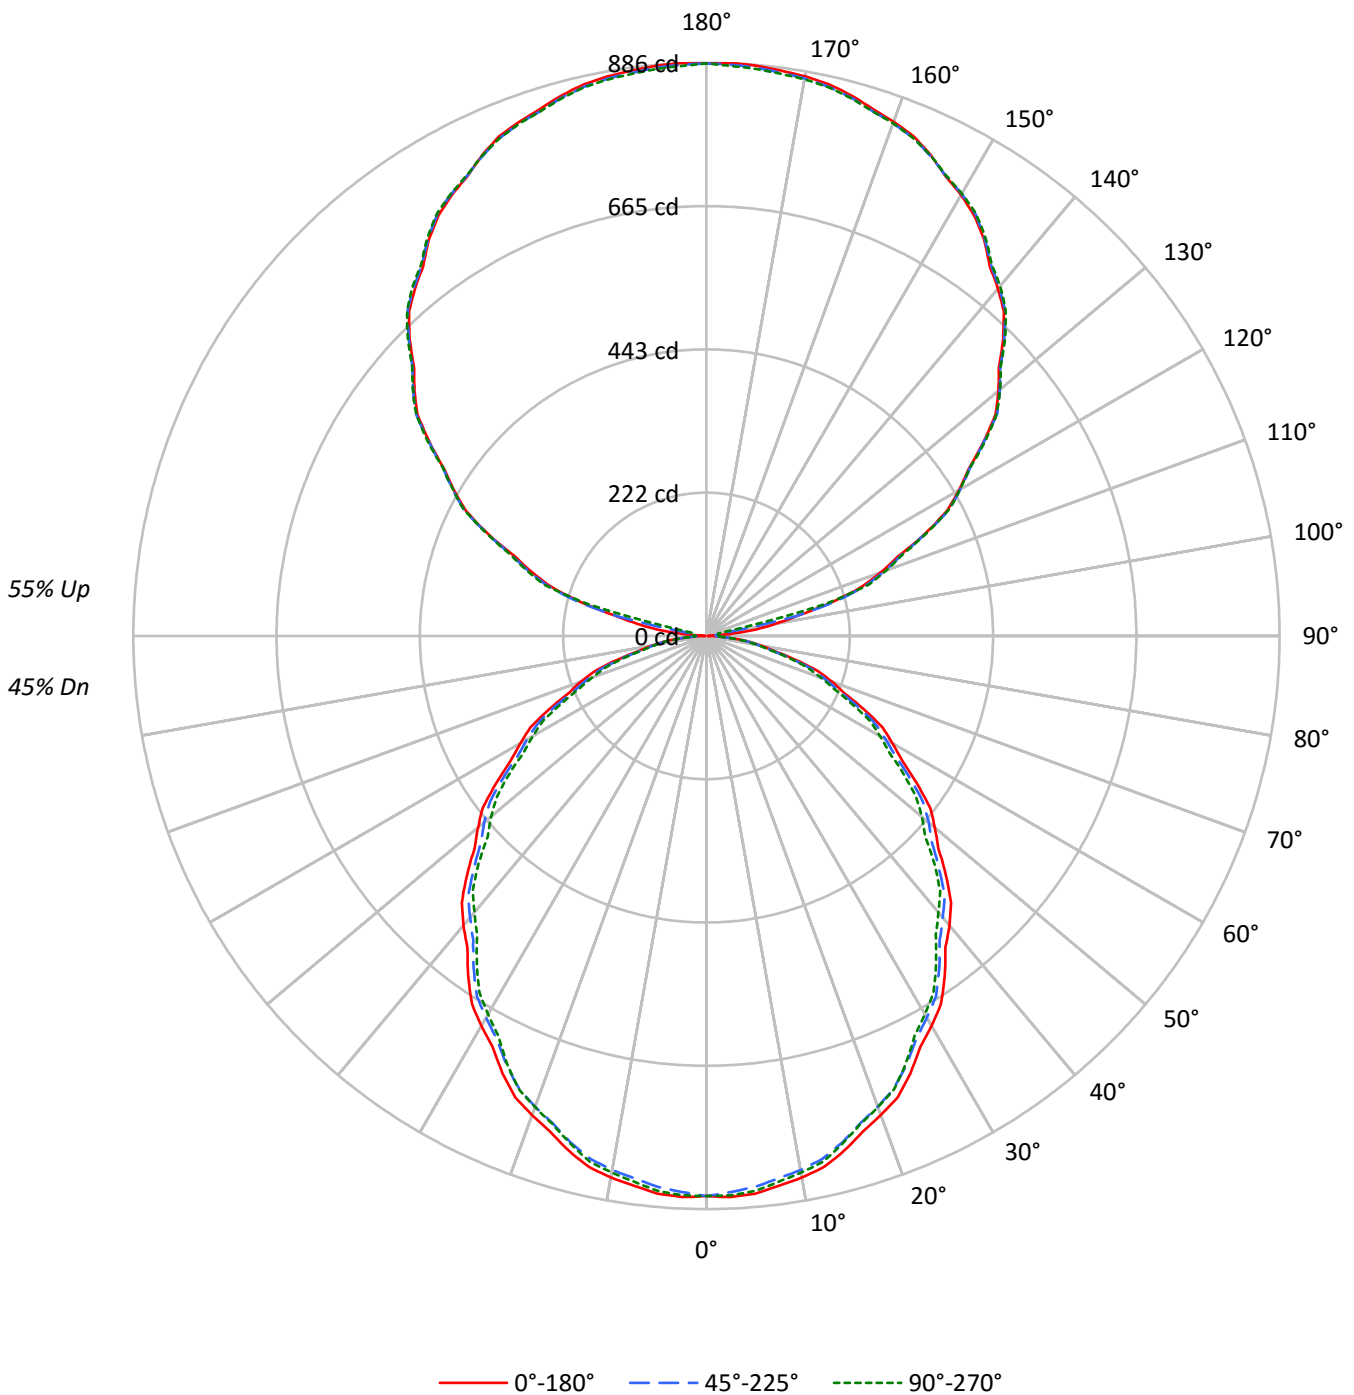



TEST NUMBER: P332755-940

CATALOG NUMBER: S124DIW-S575D770U940-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	45				45
1	97	92	88	85	88	85	81	78	70	68	66	57	56	54	45	44	43	38				38
2	88	81	74	69	80	74	69	64	62	58	55	50	48	45	40	38	36	32				32
3	80	71	64	58	73	65	59	54	54	50	46	45	41	38	35	33	31	27				27
4	73	63	55	49	67	58	51	45	48	43	39	40	36	33	32	29	27	23				23
5	67	56	48	42	61	51	44	39	43	38	34	36	32	28	28	26	23	20				20
6	62	50	42	36	57	46	39	34	39	33	29	32	28	25	26	23	20	17				17
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	24	21	18	16				16
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	16	14				14
9	49	37	30	25	45	35	28	23	29	24	20	25	20	18	20	17	15	13				13
10	46	34	27	22	42	32	25	21	27	22	18	23	19	16	19	16	13	11				11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	6990	6990	6990
5°	7012	6928	6978
10°	6968	6871	6906
15°	6884	6774	6791
20°	6772	6653	6659
25°	6644	6515	6495
30°	6488	6352	6293
35°	6326	6182	6099
40°	6157	5989	5879
45°	5981	5799	5688
50°	5786	5630	5456
55°	5576	5410	5234
60°	5365	5165	5007
65°	5129	4932	4732
70°	4865	4617	4440
75°	4457	4242	4133
80°	3966	3808	3710
85°	3473	3344	3279



TEST NUMBER: P332755-940

CATALOG NUMBER: S124DIW-S575D770U940-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	81.6	1.6
10°-20°	229.8	4.6
20°-30°	338.2	6.8
30°-40°	393.2	7.9
40°-50°	393.2	7.9
50°-60°	343.9	6.9
60°-70°	255.4	5.1
70°-80°	145.1	2.9
80°-90°	44.4	0.9
90°-100°	30.3	0.6
100°-110°	193.0	3.9
110°-120°	369.2	7.4
120°-130°	468.7	9.4
130°-140°	501.4	10.1
140°-150°	468.9	9.4
150°-160°	378.1	7.6
160°-170°	243.9	4.9
170°-180°	84.1	1.7
0°-30°	649.5	13.1
0°-40°	1042.7	21.0
0°-60°	1779.8	35.9
0°-90°	2224.8	44.8
90°-120°	592.4	11.9
90°-150°	2031.4	40.9
90°-180°	2737.0	55.2
0°-180°	4962.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	866	866	866	866	866	
5°	865	862	855	862	861	82
15°	824	820	810	814	812	232
25°	746	741	731	732	729	343
35°	642	637	627	622	619	401
45°	524	519	508	501	498	404
55°	396	394	384	376	372	355
65°	268	265	258	251	248	266
75°	143	139	136	133	132	152
85°	38	37	36	36	35	41
90°	2	9	14	18	20	4
95°	36	15	14	18	19	47
105°	199	203	206	211	189	208
115°	372	374	373	375	375	366
125°	523	525	524	526	527	467
135°	649	648	651	652	653	500
145°	748	750	750	751	752	467
155°	820	821	819	821	820	378
165°	865	862	862	866	861	244
175°	885	881	882	887	880	84
180°	885	885	885	885	885	



TEST NUMBER: P332755-940

CATALOG NUMBER: S124DIW-S575D770U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	865.9	865.9	865.9	865.9	865.9	865.9	865.9	865.9	865.9	865.9	865.9
2.5°	868.2	867.8	867.5	867.1	866.7	865.9	864.5	863.2	861.7	860.4	861.7
5°	865.3	864.7	864.1	863.4	862.8	861.7	860.0	858.3	856.6	854.9	856.6
7.5°	857.2	856.6	856.0	855.4	854.8	853.5	851.7	849.8	847.8	846.0	847.4
10°	850.0	849.4	848.8	848.2	847.6	846.2	844.3	842.2	840.3	838.2	839.5
12.5°	840.6	840.0	839.4	838.7	838.1	836.8	834.6	832.5	830.4	828.2	829.6
15°	823.7	823.0	822.4	821.8	821.2	819.7	817.4	815.1	812.8	810.5	811.4
17.5°	803.3	802.5	801.7	800.9	800.1	798.7	796.5	794.3	792.1	790.0	790.5
20°	788.3	787.5	786.8	786.0	785.2	783.6	781.3	779.0	776.7	774.4	774.8
22.5°	772.1	771.2	770.2	769.1	768.1	766.4	764.1	761.8	759.5	757.2	758.0
25°	745.9	744.8	743.8	742.7	741.6	740.0	737.8	735.7	733.5	731.4	731.6
27.5°	716.0	714.9	713.7	712.7	711.5	710.0	707.9	706.0	703.9	702.0	701.6
30°	696.0	694.7	693.5	692.2	691.1	689.4	687.4	685.4	683.4	681.4	680.8
32.5°	674.8	673.8	672.6	671.5	670.5	668.8	666.7	664.6	662.5	660.3	659.6
35°	641.9	640.8	639.7	638.6	637.6	635.9	633.7	631.6	629.5	627.3	626.2
37.5°	607.0	606.0	605.0	604.0	603.1	601.5	599.1	596.8	594.5	592.2	591.0
40°	584.2	583.0	581.8	580.6	579.3	577.6	575.2	572.9	570.6	568.3	566.8
42.5°	559.8	559.1	558.4	557.6	556.9	555.2	552.7	550.1	547.5	545.0	543.2
45°	523.9	522.8	521.7	520.7	519.6	517.8	515.3	512.8	510.4	507.9	506.2
47.5°	486.2	485.5	484.8	484.0	483.3	481.8	479.6	477.2	474.9	472.7	470.7
50°	460.7	460.1	459.5	458.9	458.3	456.9	454.8	452.5	450.4	448.3	446.1
52.5°	435.8	435.1	434.3	433.5	432.8	431.3	429.0	426.8	424.5	422.1	420.3
55°	396.2	395.7	395.3	394.8	394.4	393.1	390.9	388.7	386.6	384.4	382.5
57.5°	358.5	357.9	357.4	356.9	356.3	355.1	352.9	350.8	348.7	346.5	344.7
60°	332.3	331.6	330.8	330.0	329.3	327.9	325.9	323.9	321.9	319.9	318.5
62.5°	306.8	306.2	305.5	304.9	304.3	302.8	300.8	298.6	296.5	294.4	293.1
65°	268.5	267.8	267.0	266.3	265.5	264.3	262.8	261.2	259.7	258.2	256.5
67.5°	230.0	229.3	228.5	227.8	227.1	226.0	224.5	223.1	221.6	220.1	218.6
70°	206.1	205.0	203.9	202.9	201.8	200.6	199.4	198.1	196.9	195.6	194.5
72.5°	180.6	179.5	178.4	177.3	176.2	175.2	174.2	173.3	172.3	171.2	170.2
75°	142.9	142.1	141.4	140.6	139.8	139.1	138.3	137.5	136.8	136.0	135.4
77.5°	107.0	106.6	106.3	106.0	105.7	105.1	104.4	103.8	103.1	102.5	102.2
80°	85.3	84.9	84.4	84.0	83.5	83.1	82.8	82.5	82.2	81.9	81.6
82.5°	64.3	64.0	63.8	63.6	63.4	63.2	63.2	63.1	63.0	63.0	62.8
85°	37.5	37.5	37.5	37.5	37.5	37.3	37.0	36.7	36.4	36.1	36.1
87.5°	14.8	15.1	15.2	15.4	15.6	15.8	15.9	16.1	16.1	16.2	16.4
90°	2.0	3.6	5.3	6.9	8.5	9.9	11.1	12.2	13.4	14.5	15.4
92.5°	8.4	8.5	8.6	8.6	8.6	9.4	10.5	11.7	12.8	14.0	14.9
95°	36.4	31.4	26.4	21.4	16.4	14.0	14.1	14.3	14.4	14.5	15.4
97.5°	77.3	80.4	83.6	86.7	89.8	83.1	66.7	50.3	33.9	17.5	17.6
100°	108.5	111.2	113.9	116.5	119.1	110.3	90.1	69.7	49.4	29.2	26.7
102.5°	143.5	145.4	147.4	149.4	151.2	150.9	148.3	145.6	142.9	140.4	113.3
105°	199.2	200.1	201.0	201.9	202.8	203.6	204.3	205.0	205.8	206.5	207.9
107.5°	251.0	251.5	251.9	252.4	252.8	253.5	254.5	255.5	256.5	257.4	258.2
110°	286.0	286.4	286.9	287.3	287.7	288.4	289.3	290.2	291.1	291.9	292.2



TEST NUMBER: P332755-940

CATALOG NUMBER: S124DIW-S575D770U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	319.9	320.7	321.5	322.2	323.0	323.6	324.0	324.4	324.9	325.3	325.2
115°	372.0	372.5	372.9	373.3	373.7	373.9	373.7	373.6	373.4	373.3	373.6
117.5°	419.0	419.5	420.2	420.7	421.3	421.8	422.1	422.4	422.8	423.1	423.0
120°	450.8	451.4	451.9	452.5	453.1	453.3	453.2	453.1	452.9	452.7	453.1
122.5°	480.5	480.7	481.1	481.4	481.8	482.1	482.3	482.5	482.7	483.0	483.1
125°	522.9	523.5	524.1	524.7	525.2	525.4	525.1	524.9	524.5	524.2	524.7
127.5°	563.1	563.3	563.5	563.6	563.7	564.2	564.8	565.5	566.1	566.9	566.8
130°	589.1	589.2	589.4	589.5	589.7	590.0	590.4	590.8	591.3	591.7	591.9
132.5°	613.0	613.2	613.5	613.7	613.9	614.4	614.9	615.5	616.1	616.6	616.8
135°	648.6	648.5	648.4	648.2	648.1	648.3	648.9	649.4	650.1	650.7	650.9
137.5°	680.3	680.4	680.5	680.5	680.6	680.9	681.5	682.2	682.9	683.5	683.8
140°	701.0	701.2	701.5	701.9	702.1	702.4	702.8	703.0	703.3	703.6	704.0
142.5°	719.5	720.1	720.6	721.0	721.6	721.9	722.1	722.3	722.5	722.6	723.0
145°	748.0	748.4	748.9	749.3	749.8	749.9	749.9	749.9	749.9	749.9	750.1
147.5°	770.6	771.4	772.2	773.0	773.9	774.2	774.1	773.9	773.7	773.6	773.7
150°	787.0	787.6	788.2	788.8	789.3	789.6	789.4	789.3	789.2	789.0	789.0
152.5°	800.8	801.2	801.7	802.2	802.6	802.7	802.5	802.3	802.0	801.7	801.9
155°	820.1	820.3	820.4	820.6	820.7	820.6	820.1	819.7	819.2	818.8	819.4
157.5°	836.4	836.3	836.2	836.2	836.1	835.7	835.3	834.7	834.2	833.7	834.5
160°	845.9	845.4	845.1	844.6	844.2	843.8	843.7	843.6	843.4	843.3	844.2
162.5°	854.3	853.8	853.3	852.7	852.1	851.8	851.7	851.5	851.3	851.2	852.1
165°	865.1	864.3	863.6	862.9	862.2	861.8	861.8	861.8	861.8	861.8	863.0
167.5°	873.6	872.8	872.1	871.3	870.5	870.1	870.0	870.0	869.9	869.8	871.0
170°	878.3	877.4	876.6	875.7	874.9	874.4	874.6	874.8	874.9	875.0	876.2
172.5°	881.5	880.7	879.8	878.9	878.0	877.6	877.8	877.9	878.1	878.2	879.4
175°	884.9	884.0	883.2	882.3	881.5	881.1	881.2	881.4	881.5	881.6	883.0
177.5°	886.5	885.7	884.9	884.0	883.2	883.0	883.2	883.4	883.7	883.9	884.8
180°	884.9	884.9	884.9	884.9	884.9	884.9	884.9	884.9	884.9	884.9	884.9



TEST NUMBER: P332755-940

CATALOG NUMBER: S124DIW-S575D770U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	865.9	865.9	865.9	865.9	865.9	865.9	865.9	865.9
2.5°	862.9	864.2	865.4	865.9	865.8	865.7	865.6	865.4
5°	858.3	860.0	861.7	862.4	862.0	861.7	861.4	861.1
7.5°	848.7	850.1	851.4	852.0	851.9	851.7	851.5	851.2
10°	840.7	842.0	843.2	843.6	843.3	843.0	842.7	842.4
12.5°	831.0	832.3	833.7	834.1	833.7	833.2	832.9	832.4
15°	812.3	813.2	814.1	814.4	814.0	813.5	813.0	812.5
17.5°	791.1	791.7	792.3	792.4	792.1	791.8	791.5	791.2
20°	775.3	775.8	776.2	776.3	776.0	775.7	775.4	775.1
22.5°	758.8	759.6	760.5	760.6	760.1	759.6	759.0	758.4
25°	731.6	731.8	732.0	731.7	731.1	730.5	729.9	729.2
27.5°	701.2	700.8	700.4	699.9	699.1	698.4	697.6	696.8
30°	680.2	679.6	678.9	678.2	677.4	676.7	675.9	675.1
32.5°	658.8	658.1	657.4	656.6	655.9	655.1	654.2	653.5
35°	625.1	624.0	622.9	622.1	621.3	620.5	619.7	618.9
37.5°	589.9	588.6	587.5	586.4	585.4	584.3	583.4	582.3
40°	565.3	563.7	562.1	561.0	560.2	559.5	558.7	557.9
42.5°	541.4	539.6	537.8	536.6	536.2	535.7	535.1	534.6
45°	504.5	502.8	501.1	500.1	499.6	499.2	498.6	498.2
47.5°	468.9	466.9	465.0	463.5	462.4	461.1	459.9	458.8
50°	443.9	441.8	439.6	438.1	437.1	436.2	435.3	434.4
52.5°	418.3	416.4	414.6	413.0	411.8	410.6	409.5	408.3
55°	380.8	378.9	377.0	375.6	374.7	373.8	372.8	371.9
57.5°	343.0	341.3	339.5	338.1	337.2	336.4	335.5	334.6
60°	317.1	315.8	314.3	313.3	312.5	311.7	310.9	310.1
62.5°	291.9	290.5	289.3	288.3	287.5	286.8	286.0	285.2
65°	255.0	253.5	252.0	250.8	250.0	249.2	248.5	247.7
67.5°	217.1	215.7	214.2	213.3	213.1	212.9	212.7	212.5
70°	193.2	192.0	190.7	189.9	189.4	189.0	188.5	188.1
72.5°	169.2	168.3	167.3	166.6	166.1	165.7	165.2	164.7
75°	134.7	134.1	133.6	133.1	133.0	132.9	132.7	132.5
77.5°	102.0	101.8	101.7	101.4	100.9	100.6	100.1	99.8
80°	81.2	81.0	80.6	80.4	80.3	80.1	80.0	79.8
82.5°	62.6	62.4	62.2	62.1	62.0	61.8	61.6	61.4
85°	36.1	36.1	36.1	36.0	35.8	35.7	35.6	35.4
87.5°	16.6	16.8	16.9	17.0	17.1	17.2	17.2	17.3
90°	16.3	17.2	18.1	18.6	19.0	19.3	19.5	19.9
92.5°	15.8	16.7	17.6	18.0	18.1	18.2	18.2	18.3
95°	16.3	17.2	18.1	18.6	18.7	18.9	19.1	19.2
97.5°	17.7	17.7	17.8	17.9	18.1	18.3	18.4	18.5
100°	24.2	21.6	19.1	17.9	18.1	18.3	18.4	18.5
102.5°	86.4	59.4	32.5	18.9	19.0	19.0	19.0	19.1
105°	209.2	210.4	211.8	209.8	204.6	199.2	193.9	188.7
107.5°	258.8	259.4	260.1	260.6	261.3	261.8	262.3	262.9
110°	292.5	292.7	293.1	293.5	293.9	294.4	294.8	295.2





TEST NUMBER: P332755-940

CATALOG NUMBER: S124DIW-S575D770U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	325.1	325.1	325.0	325.3	325.8	326.4	327.0	327.5
115°	373.9	374.2	374.5	374.6	374.6	374.6	374.6	374.6
117.5°	422.9	422.9	422.8	422.8	422.8	422.7	422.6	422.6
120°	453.3	453.6	453.9	453.9	453.6	453.3	453.1	452.7
122.5°	483.3	483.5	483.7	483.6	483.3	483.0	482.7	482.4
125°	525.1	525.6	526.0	526.3	526.5	526.6	526.7	526.9
127.5°	566.7	566.6	566.5	566.4	566.3	566.1	566.1	566.0
130°	592.0	592.2	592.4	592.4	592.4	592.4	592.4	592.4
132.5°	616.9	617.1	617.2	617.2	617.2	617.0	616.9	616.8
135°	651.2	651.6	651.8	652.1	652.4	652.7	653.0	653.3
137.5°	684.1	684.5	684.7	684.9	684.8	684.7	684.7	684.6
140°	704.5	704.9	705.3	705.7	705.8	706.0	706.1	706.2
142.5°	723.4	723.6	724.0	724.2	724.2	724.2	724.2	724.2
145°	750.2	750.4	750.6	750.7	751.0	751.4	751.6	751.9
147.5°	773.8	774.0	774.1	774.3	774.4	774.5	774.7	774.8
150°	789.0	789.0	789.0	789.1	789.3	789.3	789.5	789.6
152.5°	802.2	802.4	802.6	802.7	802.6	802.5	802.5	802.4
155°	819.9	820.6	821.1	821.2	820.7	820.3	819.8	819.5
157.5°	835.3	836.1	836.8	836.8	836.1	835.3	834.5	833.7
160°	845.1	845.9	846.8	846.8	845.9	845.1	844.2	843.3
162.5°	853.0	853.8	854.7	854.7	853.7	852.7	851.7	850.7
165°	864.2	865.3	866.5	866.5	865.1	863.8	862.5	861.1
167.5°	872.4	873.6	874.9	874.9	873.3	871.9	870.4	869.0
170°	877.4	878.6	879.8	879.6	878.2	876.6	875.2	873.7
172.5°	880.6	881.7	882.9	882.7	881.1	879.6	878.0	876.4
175°	884.3	885.6	887.0	886.7	884.9	883.2	881.5	879.7
177.5°	885.8	886.7	887.7	887.4	886.0	884.6	883.2	881.8
180°	884.9	884.9	884.9	884.9	884.9	884.9	884.9	884.9

(END OF REPORT)