

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333101-940

Luminaire Tested: **S124RDIW-S1195D770U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333101-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-6,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S124RDIW-S1195D770U940-4F0-1E-UDD-F  
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 770 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7036.5 lumens  
Efficiency: N/A  
Efficacy: 117.7 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24  
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 59.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333101-940

CATALOG NUMBER: S124RDIW-S1195D770U940-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

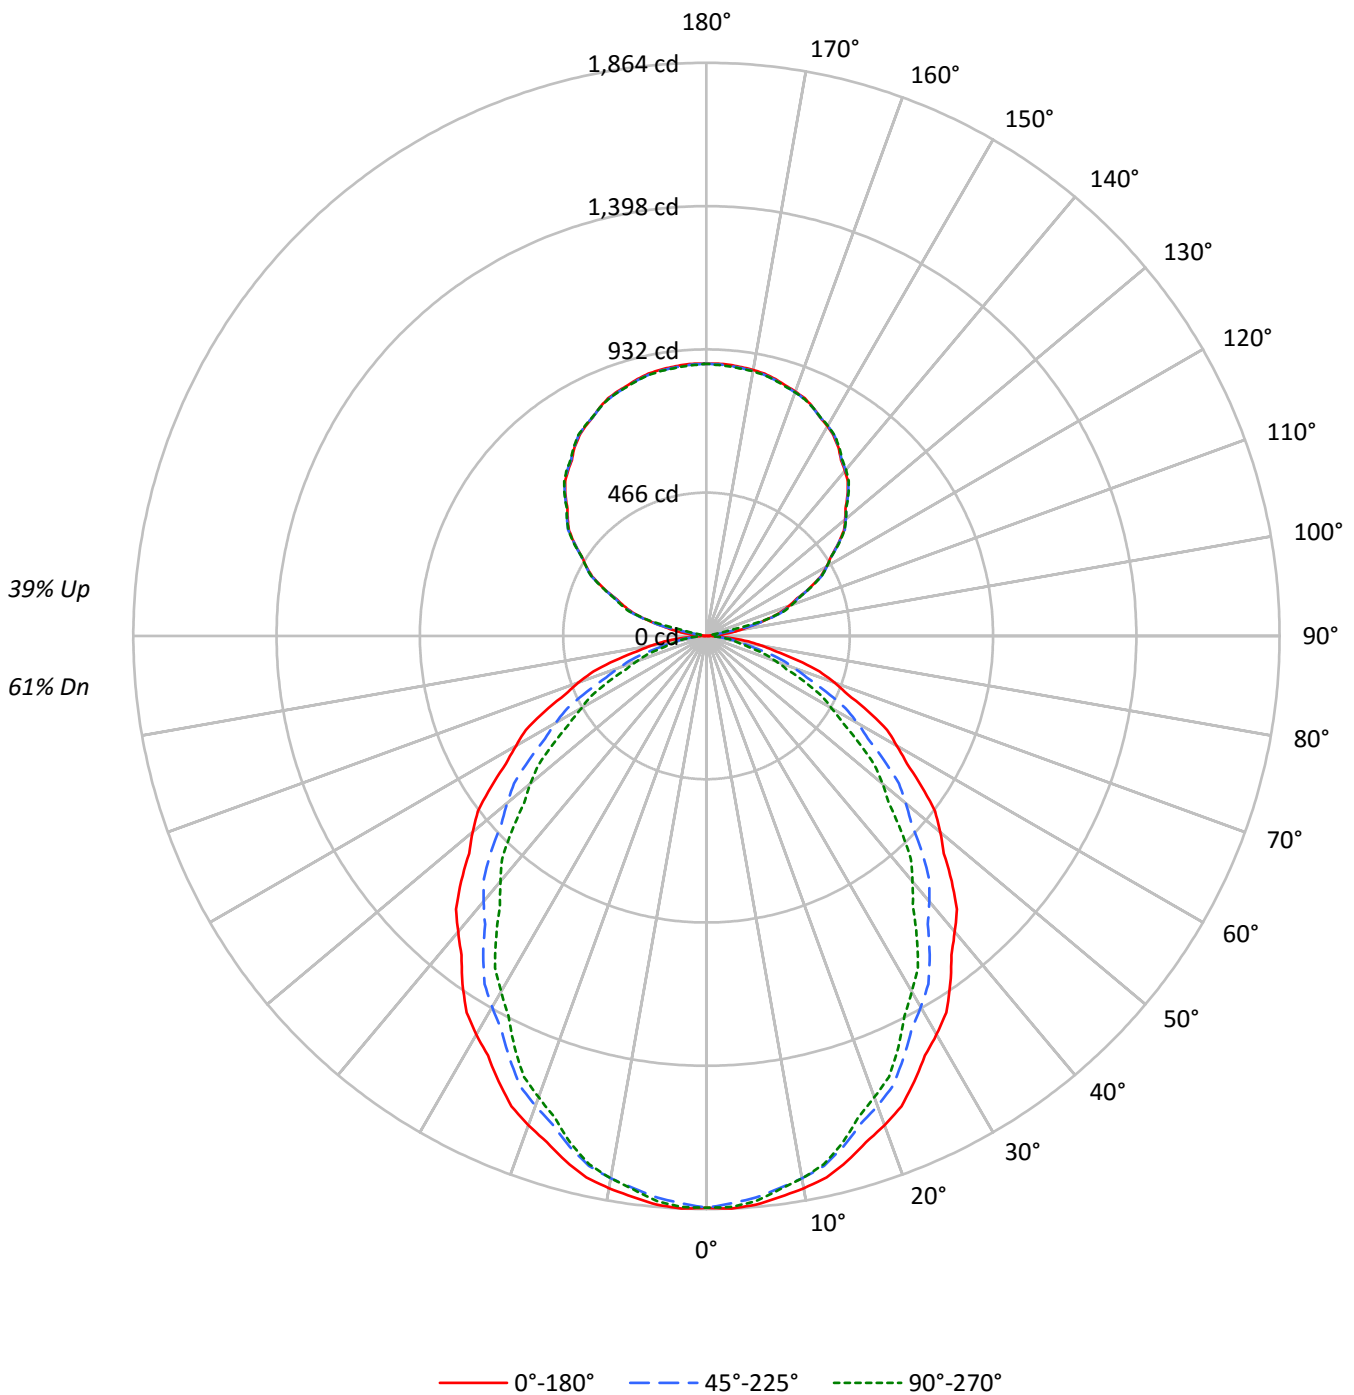



TEST NUMBER: P333101-940

CATALOG NUMBER: S124RDIW-S1195D770U940-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66
1	101	96	93	89	94	90	87	84	79	77	74	69	67	65	59	58	57
2	92	85	78	73	86	79	74	69	70	66	62	61	58	55	52	50	48
3	84	75	67	61	78	70	64	58	62	57	53	54	50	47	47	44	41
4	77	66	58	52	72	62	55	50	55	49	45	48	44	40	42	39	36
5	71	59	51	45	66	56	49	43	49	44	39	44	39	35	38	34	31
6	65	53	45	39	61	50	43	38	45	39	34	39	35	31	35	31	28
7	61	48	40	35	57	46	38	33	41	35	30	36	31	28	32	28	25
8	56	44	36	31	53	42	35	30	37	31	27	33	28	25	29	25	22
9	53	40	33	28	49	38	31	27	34	28	24	30	26	22	27	23	20
10	49	37	30	25	46	35	28	24	32	26	22	28	24	20	25	21	19

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	15012	15012	15012
5°	15046	14862	14955
10°	14952	14684	14684
15°	14780	14375	14269
20°	14545	13970	13713
25°	14243	13495	13153
30°	13951	12995	12450
35°	13626	12476	11745
40°	13235	11884	10984
45°	12875	11298	10209
50°	12465	10623	9388
55°	12024	9920	8497
60°	11541	9150	7585
65°	11096	8187	6692
70°	10452	7124	5681
75°	9638	5908	4619
80°	8405	4500	4235
85°	7123	4085	3825



TEST NUMBER: P333101-940

CATALOG NUMBER: S124RDIW-S1195D770U940-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	174.7	2.5
10°-20°	487.1	6.9
20°-30°	703.4	10.0
30°-40°	797.3	11.3
40°-50°	770.0	10.9
50°-60°	640.3	9.1
60°-70°	442.1	6.3
70°-80°	224.1	3.2
80°-90°	60.1	0.9
90°-100°	30.3	0.4
100°-110°	193.0	2.7
110°-120°	369.2	5.2
120°-130°	468.7	6.7
130°-140°	501.4	7.1
140°-150°	468.9	6.7
150°-160°	378.1	5.4
160°-170°	243.9	3.5
170°-180°	84.1	1.2
0°-30°	1365.2	19.4
0°-40°	2162.6	30.7
0°-60°	3572.8	50.8
0°-90°	4299.0	61.1
90°-120°	592.4	8.4
90°-150°	2031.4	28.9
90°-180°	2737.0	38.9
0°-180°	7036.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1860	1860	1860	1860	1860	
5°	1857	1850	1834	1847	1845	176
15°	1768	1754	1720	1717	1707	498
25°	1599	1572	1515	1491	1477	736
35°	1383	1336	1266	1219	1192	864
45°	1128	1073	990	922	894	869
55°	854	795	705	633	604	764
65°	581	518	429	370	350	573
75°	309	256	189	158	148	326
85°	77	50	44	41	41	87
90°	2	9	14	18	20	5
95°	36	15	14	18	19	47
105°	199	203	206	211	189	208
115°	372	374	373	375	375	366
125°	523	525	524	526	527	467
135°	649	648	651	652	653	500
145°	748	750	750	751	752	467
155°	820	821	819	821	820	378
165°	865	862	862	866	861	244
175°	885	881	882	887	880	84
180°	885	885	885	885	885	



TEST NUMBER: P333101-940

CATALOG NUMBER: S124RDIW-S1195D770U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1859.6	1859.6	1859.6	1859.6	1859.6	1859.6	1859.6	1859.6	1859.6	1859.6	1859.6
2.5°	1864.1	1863.1	1862.2	1861.1	1860.1	1858.2	1855.5	1852.6	1849.9	1847.1	1849.9
5°	1856.7	1855.5	1854.2	1853.0	1851.7	1849.1	1845.4	1841.6	1837.8	1834.0	1837.1
7.5°	1840.0	1838.6	1837.3	1835.9	1834.6	1831.5	1826.6	1821.7	1816.7	1811.8	1813.8
10°	1824.0	1822.4	1820.9	1819.3	1817.7	1814.0	1808.4	1802.7	1797.0	1791.3	1792.5
12.5°	1803.5	1801.7	1799.8	1798.0	1796.2	1791.9	1785.2	1778.5	1771.7	1765.1	1765.9
15°	1768.4	1765.6	1762.8	1760.0	1757.1	1751.7	1743.8	1735.9	1728.0	1720.0	1719.4
17.5°	1726.1	1721.9	1717.8	1713.7	1709.6	1702.8	1693.3	1683.8	1674.3	1664.8	1663.0
20°	1693.0	1688.9	1684.8	1680.7	1676.6	1669.1	1658.4	1647.6	1636.8	1626.1	1623.5
22.5°	1656.5	1652.0	1647.3	1642.7	1638.1	1630.0	1618.5	1607.0	1595.4	1583.9	1580.1
25°	1599.0	1593.3	1587.6	1582.0	1576.3	1566.9	1554.0	1541.0	1528.0	1515.0	1509.7
27.5°	1538.6	1531.5	1524.4	1517.2	1510.0	1499.6	1485.7	1471.9	1457.9	1444.1	1437.4
30°	1496.6	1488.6	1480.7	1472.7	1464.9	1453.5	1438.6	1423.7	1408.9	1394.0	1386.1
32.5°	1452.1	1443.1	1434.2	1425.3	1416.4	1404.3	1388.8	1373.5	1358.1	1342.7	1333.6
35°	1382.6	1372.4	1362.4	1352.2	1342.1	1329.1	1313.3	1297.5	1281.7	1265.9	1255.1
37.5°	1308.3	1297.8	1287.4	1276.9	1266.5	1252.5	1235.0	1217.5	1200.0	1182.4	1170.4
40°	1255.9	1245.5	1235.0	1224.6	1214.1	1199.9	1181.9	1163.8	1145.8	1127.7	1114.5
42.5°	1205.8	1194.8	1183.8	1172.9	1162.0	1147.1	1128.3	1109.5	1090.7	1071.9	1058.4
45°	1127.7	1116.0	1104.3	1092.6	1080.9	1065.5	1046.6	1027.6	1008.6	989.6	974.1
47.5°	1047.1	1035.0	1023.0	1010.8	998.8	982.8	963.1	943.3	923.6	903.9	887.8
50°	992.5	980.1	967.8	955.5	943.1	926.8	906.5	886.3	866.0	845.8	830.0
52.5°	936.7	924.5	912.5	900.4	888.3	871.8	851.1	830.4	809.6	788.8	772.8
55°	854.3	841.7	829.0	816.4	803.7	787.1	766.5	746.0	725.4	704.8	688.4
57.5°	772.8	759.7	746.5	733.4	720.2	703.6	683.3	663.0	642.7	622.5	605.8
60°	714.8	702.1	689.5	676.8	664.1	647.7	627.5	607.3	586.9	566.7	550.3
62.5°	662.4	649.3	636.1	622.9	609.8	592.8	572.0	551.3	530.5	509.8	494.5
65°	580.9	567.3	553.8	540.1	526.6	509.6	489.4	469.1	448.9	428.6	415.0
67.5°	496.3	483.3	470.3	457.3	444.3	428.3	409.5	390.7	371.9	353.1	341.4
70°	442.8	429.5	416.3	403.0	389.7	374.0	356.0	338.0	319.9	301.8	291.4
72.5°	385.8	373.9	361.9	349.8	337.8	323.2	306.2	289.2	272.2	255.1	246.2
75°	309.0	297.3	285.5	273.8	262.2	248.9	234.0	219.1	204.3	189.4	182.1
77.5°	231.0	221.1	211.1	201.2	191.2	180.2	168.2	156.2	144.2	132.2	127.9
80°	180.8	171.7	162.5	153.3	144.1	134.8	125.3	115.8	106.3	96.8	95.9
82.5°	137.6	129.1	120.7	112.3	103.9	96.9	91.5	86.1	80.6	75.2	74.5
85°	76.9	70.5	64.2	57.9	51.5	48.0	47.0	46.0	45.1	44.1	43.5
87.5°	26.6	24.9	23.2	21.5	19.8	18.9	18.9	18.9	18.9	18.9	18.8
90°	2.0	3.6	5.3	6.9	8.5	9.9	11.1	12.2	13.4	14.5	15.4
92.5°	8.4	8.5	8.6	8.6	8.6	9.4	10.5	11.7	12.8	14.0	14.9
95°	36.4	31.4	26.4	21.4	16.4	14.0	14.1	14.3	14.4	14.5	15.4
97.5°	77.3	80.4	83.6	86.7	89.8	83.1	66.7	50.3	33.9	17.5	17.6
100°	108.5	111.2	113.9	116.5	119.1	110.3	90.1	69.7	49.4	29.2	26.7
102.5°	143.5	145.4	147.4	149.4	151.2	150.9	148.3	145.6	142.9	140.4	113.3
105°	199.2	200.1	201.0	201.9	202.8	203.6	204.3	205.0	205.8	206.5	207.9
107.5°	251.0	251.5	251.9	252.4	252.8	253.5	254.5	255.5	256.5	257.4	258.2
110°	286.0	286.4	286.9	287.3	287.7	288.4	289.3	290.2	291.1	291.9	292.2



TEST NUMBER: P333101-940

CATALOG NUMBER: S124RDIW-S1195D770U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	319.9	320.7	321.5	322.2	323.0	323.6	324.0	324.4	324.9	325.3	325.2
115°	372.0	372.5	372.9	373.3	373.7	373.9	373.7	373.6	373.4	373.3	373.6
117.5°	419.0	419.5	420.2	420.7	421.3	421.8	422.1	422.4	422.8	423.1	423.0
120°	450.8	451.4	451.9	452.5	453.1	453.3	453.2	453.1	452.9	452.7	453.1
122.5°	480.5	480.7	481.1	481.4	481.8	482.1	482.3	482.5	482.7	483.0	483.1
125°	522.9	523.5	524.1	524.7	525.2	525.4	525.1	524.9	524.5	524.2	524.7
127.5°	563.1	563.3	563.5	563.6	563.7	564.2	564.8	565.5	566.1	566.9	566.8
130°	589.1	589.2	589.4	589.5	589.7	590.0	590.4	590.8	591.3	591.7	591.9
132.5°	613.0	613.2	613.5	613.7	613.9	614.4	614.9	615.5	616.1	616.6	616.8
135°	648.6	648.5	648.4	648.2	648.1	648.3	648.9	649.4	650.1	650.7	650.9
137.5°	680.3	680.4	680.5	680.5	680.6	680.9	681.5	682.2	682.9	683.5	683.8
140°	701.0	701.2	701.5	701.9	702.1	702.4	702.8	703.0	703.3	703.6	704.0
142.5°	719.5	720.1	720.6	721.0	721.6	721.9	722.1	722.3	722.5	722.6	723.0
145°	748.0	748.4	748.9	749.3	749.8	749.9	749.9	749.9	749.9	749.9	750.1
147.5°	770.6	771.4	772.2	773.0	773.9	774.2	774.1	773.9	773.7	773.6	773.7
150°	787.0	787.6	788.2	788.8	789.3	789.6	789.4	789.3	789.2	789.0	789.0
152.5°	800.8	801.2	801.7	802.2	802.6	802.7	802.5	802.3	802.0	801.7	801.9
155°	820.1	820.3	820.4	820.6	820.7	820.6	820.1	819.7	819.2	818.8	819.4
157.5°	836.4	836.3	836.2	836.2	836.1	835.7	835.3	834.7	834.2	833.7	834.5
160°	845.9	845.4	845.1	844.6	844.2	843.8	843.7	843.6	843.4	843.3	844.2
162.5°	854.3	853.8	853.3	852.7	852.1	851.8	851.7	851.5	851.3	851.2	852.1
165°	865.1	864.3	863.6	862.9	862.2	861.8	861.8	861.8	861.8	861.8	863.0
167.5°	873.6	872.8	872.1	871.3	870.5	870.1	870.0	870.0	869.9	869.8	871.0
170°	878.3	877.4	876.6	875.7	874.9	874.4	874.6	874.8	874.9	875.0	876.2
172.5°	881.5	880.7	879.8	878.9	878.0	877.6	877.8	877.9	878.1	878.2	879.4
175°	884.9	884.0	883.2	882.3	881.5	881.1	881.2	881.4	881.5	881.6	883.0
177.5°	886.5	885.7	884.9	884.0	883.2	883.0	883.2	883.4	883.7	883.9	884.8
180°	884.9	884.9	884.9	884.9	884.9	884.9	884.9	884.9	884.9	884.9	884.9



TEST NUMBER: P333101-940

CATALOG NUMBER: S124RDIW-S1195D770U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1859.6	1859.6	1859.6	1859.6	1859.6	1859.6	1859.6	1859.6
2.5°	1852.6	1855.5	1858.2	1859.5	1859.2	1858.9	1858.7	1858.5
5°	1840.3	1843.4	1846.6	1847.9	1847.3	1846.6	1846.0	1845.4
7.5°	1815.8	1817.8	1819.9	1820.3	1819.4	1818.4	1817.3	1816.3
10°	1793.8	1795.0	1796.4	1796.4	1795.0	1793.8	1792.5	1791.3
12.5°	1766.6	1767.4	1768.1	1767.5	1765.9	1764.1	1762.3	1760.5
15°	1718.8	1718.1	1717.5	1716.1	1713.9	1711.6	1709.5	1707.3
17.5°	1661.3	1659.5	1657.7	1655.2	1651.8	1648.4	1645.1	1641.7
20°	1621.0	1618.5	1616.0	1612.7	1608.6	1604.5	1600.3	1596.2
22.5°	1576.4	1572.5	1568.8	1565.2	1561.8	1558.4	1555.1	1551.8
25°	1504.2	1498.9	1493.5	1489.2	1486.0	1482.9	1479.7	1476.6
27.5°	1430.8	1424.2	1417.6	1411.9	1407.4	1402.8	1398.3	1393.7
30°	1378.1	1370.3	1362.4	1355.8	1350.8	1345.8	1340.7	1335.6
32.5°	1324.4	1315.2	1306.0	1299.0	1294.2	1289.4	1284.6	1279.8
35°	1244.3	1233.6	1222.8	1214.6	1208.9	1203.2	1197.5	1191.8
37.5°	1158.3	1146.3	1134.3	1125.4	1119.7	1114.0	1108.4	1102.7
40°	1101.2	1087.9	1074.6	1065.1	1059.4	1053.6	1048.0	1042.3
42.5°	1044.8	1031.3	1017.7	1008.0	1002.0	996.1	990.2	984.2
45°	958.6	943.1	927.6	916.9	911.3	905.6	899.9	894.2
47.5°	871.7	855.7	839.6	828.4	822.2	815.9	809.6	803.3
50°	814.1	798.3	782.5	771.6	765.6	759.6	753.6	747.5
52.5°	756.7	740.7	724.5	713.4	707.1	700.9	694.6	688.3
55°	671.9	655.5	639.0	627.8	621.8	615.7	609.8	603.7
57.5°	589.2	572.4	555.7	545.1	540.6	535.9	531.4	526.8
60°	533.8	517.4	500.9	490.2	485.1	480.0	474.9	469.8
62.5°	479.4	464.2	449.0	439.3	435.3	431.3	427.2	423.2
65°	401.4	387.8	374.2	365.4	361.7	357.8	354.1	350.3
67.5°	329.8	318.0	306.3	298.4	294.2	290.0	285.8	281.6
70°	281.0	270.5	260.1	253.3	250.1	247.0	243.8	240.7
72.5°	237.3	228.4	219.5	213.6	210.6	207.8	204.8	201.9
75°	174.9	167.6	160.2	155.7	153.8	151.9	150.0	148.1
77.5°	123.7	119.4	115.2	112.8	112.2	111.6	111.1	110.5
80°	95.0	94.0	93.0	92.4	92.1	91.8	91.5	91.1
82.5°	73.8	73.1	72.4	71.9	71.6	71.2	71.0	70.6
85°	42.9	42.3	41.6	41.3	41.3	41.3	41.3	41.3
87.5°	18.7	18.6	18.5	18.6	19.0	19.3	19.6	19.9
90°	16.3	17.2	18.1	18.6	19.0	19.3	19.5	19.9
92.5°	15.8	16.7	17.6	18.0	18.1	18.2	18.2	18.3
95°	16.3	17.2	18.1	18.6	18.7	18.9	19.1	19.2
97.5°	17.7	17.7	17.8	17.9	18.1	18.3	18.4	18.5
100°	24.2	21.6	19.1	17.9	18.1	18.3	18.4	18.5
102.5°	86.4	59.4	32.5	18.9	19.0	19.0	19.0	19.1
105°	209.2	210.4	211.8	209.8	204.6	199.2	193.9	188.7
107.5°	258.8	259.4	260.1	260.6	261.3	261.8	262.3	262.9
110°	292.5	292.7	293.1	293.5	293.9	294.4	294.8	295.2





TEST NUMBER: P333101-940

CATALOG NUMBER: S124RDIW-S1195D770U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	325.1	325.1	325.0	325.3	325.8	326.4	327.0	327.5
115°	373.9	374.2	374.5	374.6	374.6	374.6	374.6	374.6
117.5°	422.9	422.9	422.8	422.8	422.8	422.7	422.6	422.6
120°	453.3	453.6	453.9	453.9	453.6	453.3	453.1	452.7
122.5°	483.3	483.5	483.7	483.6	483.3	483.0	482.7	482.4
125°	525.1	525.6	526.0	526.3	526.5	526.6	526.7	526.9
127.5°	566.7	566.6	566.5	566.4	566.3	566.1	566.1	566.0
130°	592.0	592.2	592.4	592.4	592.4	592.4	592.4	592.4
132.5°	616.9	617.1	617.2	617.2	617.2	617.0	616.9	616.8
135°	651.2	651.6	651.8	652.1	652.4	652.7	653.0	653.3
137.5°	684.1	684.5	684.7	684.9	684.8	684.7	684.7	684.6
140°	704.5	704.9	705.3	705.7	705.8	706.0	706.1	706.2
142.5°	723.4	723.6	724.0	724.2	724.2	724.2	724.2	724.2
145°	750.2	750.4	750.6	750.7	751.0	751.4	751.6	751.9
147.5°	773.8	774.0	774.1	774.3	774.4	774.5	774.7	774.8
150°	789.0	789.0	789.0	789.1	789.3	789.3	789.5	789.6
152.5°	802.2	802.4	802.6	802.7	802.6	802.5	802.5	802.4
155°	819.9	820.6	821.1	821.2	820.7	820.3	819.8	819.5
157.5°	835.3	836.1	836.8	836.8	836.1	835.3	834.5	833.7
160°	845.1	845.9	846.8	846.8	845.9	845.1	844.2	843.3
162.5°	853.0	853.8	854.7	854.7	853.7	852.7	851.7	850.7
165°	864.2	865.3	866.5	866.5	865.1	863.8	862.5	861.1
167.5°	872.4	873.6	874.9	874.9	873.3	871.9	870.4	869.0
170°	877.4	878.6	879.8	879.6	878.2	876.6	875.2	873.7
172.5°	880.6	881.7	882.9	882.7	881.1	879.6	878.0	876.4
175°	884.3	885.6	887.0	886.7	884.9	883.2	881.5	879.7
177.5°	885.8	886.7	887.7	887.4	886.0	884.6	883.2	881.8
180°	884.9	884.9	884.9	884.9	884.9	884.9	884.9	884.9

(END OF REPORT)