

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333018-940

Luminaire Tested: **S124RDIW-S350D470U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333018-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIW-S350D470U940-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 350 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 470 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2724.7 lumens
Efficiency: N/A
Efficacy: 118.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 23
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333018-940

CATALOG NUMBER: S124RDIW-S350D470U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

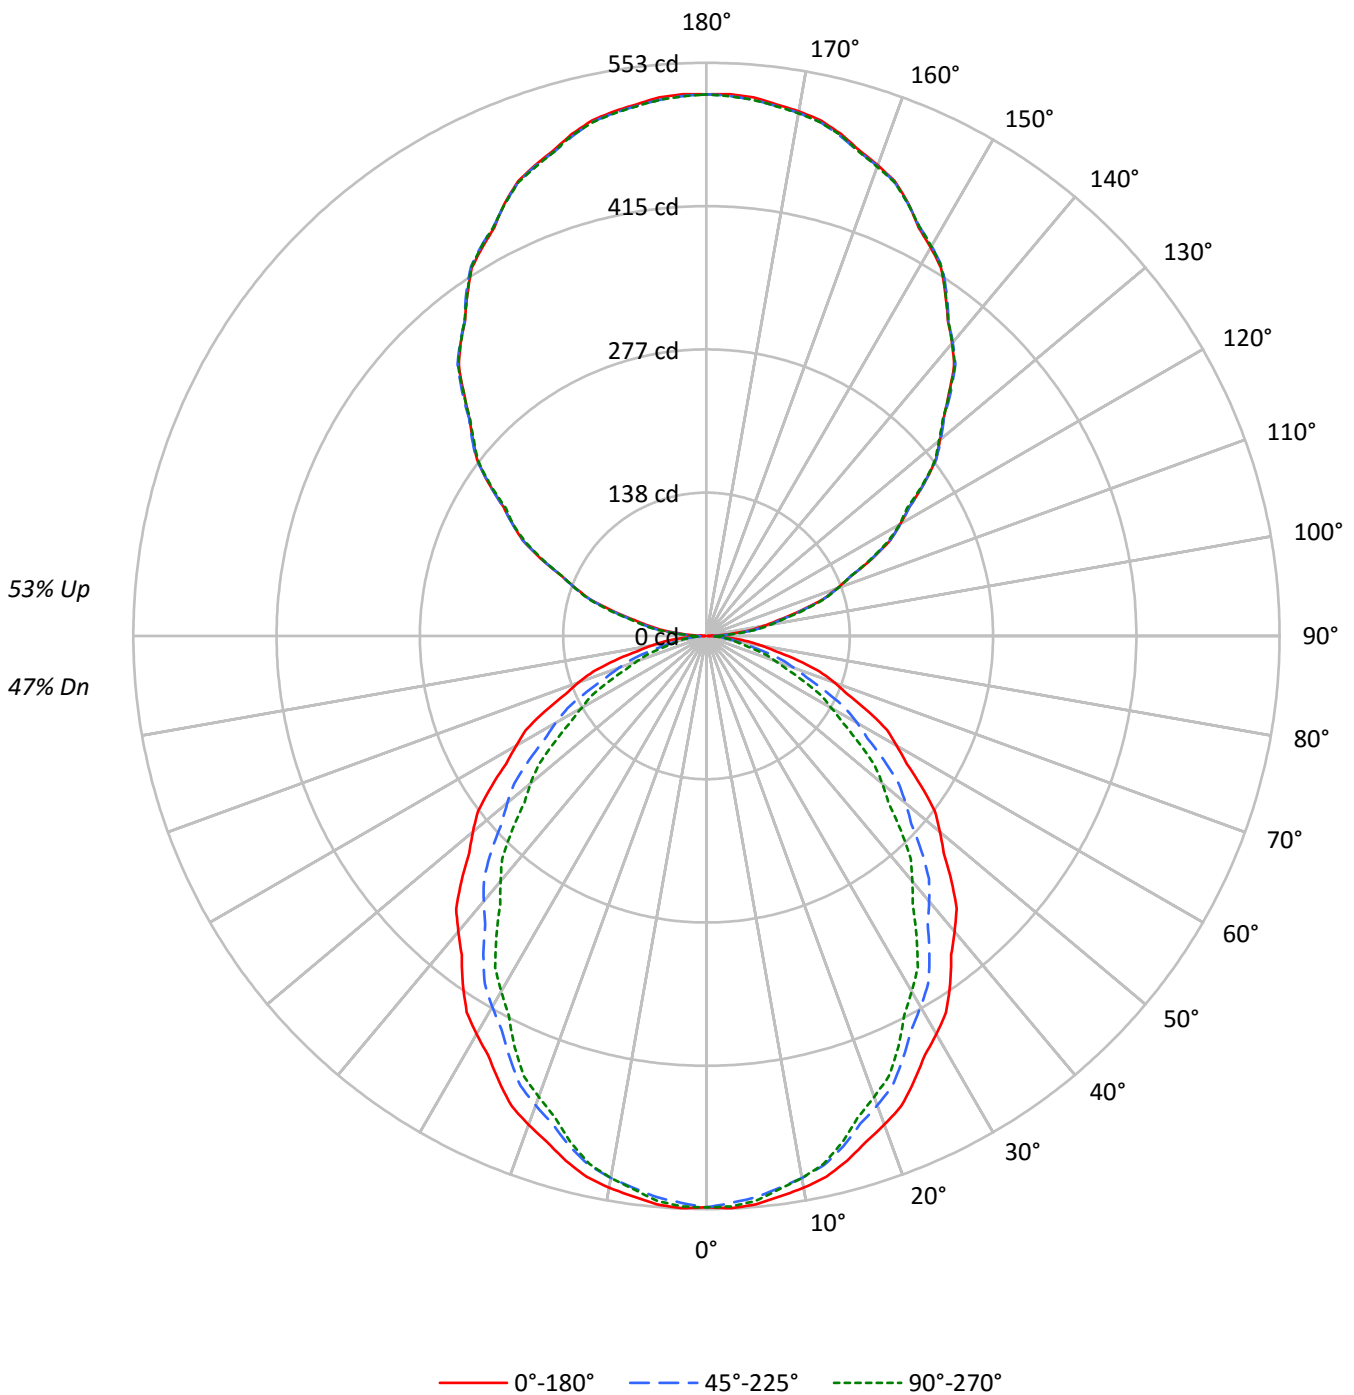



TEST NUMBER: P333018-940

CATALOG NUMBER: S124RDIW-S350D470U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	53	53	53	47
1	97	93	89	86	89	86	82	80	72	70	67	59	58	56	47	46	45	40
2	89	82	76	71	81	75	70	66	63	59	56	52	50	47	42	40	39	34
3	81	72	65	59	74	66	60	55	56	51	48	46	43	40	37	35	33	29
4	74	64	56	50	68	59	52	47	50	45	41	41	38	35	34	31	29	25
5	68	57	49	43	63	53	46	40	45	39	35	37	33	30	30	27	25	22
6	63	51	43	37	58	47	40	35	40	35	31	34	30	26	28	25	22	19
7	58	46	38	33	53	43	36	31	37	31	27	31	27	23	25	22	20	17
8	54	42	34	29	50	39	32	27	33	28	24	28	24	21	23	20	18	15
9	50	38	31	26	46	36	29	25	31	25	22	26	22	19	21	18	16	14
10	47	35	28	23	43	33	26	22	28	23	20	24	20	17	20	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4451	4451	4451
5°	4460	4406	4433
10°	4432	4353	4353
15°	4381	4262	4229
20°	4312	4141	4064
25°	4222	4000	3899
30°	4135	3852	3691
35°	4039	3698	3482
40°	3923	3523	3256
45°	3817	3350	3027
50°	3695	3149	2783
55°	3564	2940	2519
60°	3421	2713	2249
65°	3289	2428	1983
70°	3099	2110	1683
75°	2857	1753	1369
80°	2492	1334	1255
85°	2112	1213	1130



TEST NUMBER: P333018-940

CATALOG NUMBER: S124RDIW-S350D470U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	51.8	1.9
10°-20°	144.4	5.3
20°-30°	208.5	7.7
30°-40°	236.4	8.7
40°-50°	228.2	8.4
50°-60°	189.8	7.0
60°-70°	131.1	4.8
70°-80°	66.4	2.4
80°-90°	18.6	0.7
90°-100°	34.5	1.3
100°-110°	102.1	3.7
110°-120°	173.3	6.4
120°-130°	228.5	8.4
130°-140°	256.6	9.4
140°-150°	252.1	9.3
150°-160°	212.1	7.8
160°-170°	141.1	5.2
170°-180°	49.4	1.8
0°-30°	404.7	14.9
0°-40°	641.0	23.5
0°-60°	1059.1	38.9
0°-90°	1275.1	46.8
90°-120°	309.8	11.4
90°-150°	1047.0	38.4
90°-180°	1450.0	53.2
0°-180°	2724.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	551	551	551	551	551	
5°	550	548	544	548	547	52
15°	524	520	510	509	506	148
25°	474	466	449	442	438	218
35°	410	396	375	361	353	256
45°	334	318	293	273	265	258
55°	253	236	209	188	179	226
65°	172	154	127	110	104	170
75°	92	76	56	47	44	97
85°	23	15	13	12	12	26
90°	1	6	9	11	12	3
95°	24	28	31	32	32	27
105°	94	95	96	97	99	100
115°	176	176	175	175	175	174
125°	256	256	256	255	255	229
135°	331	333	333	332	331	256
145°	402	404	404	404	402	252
155°	461	461	460	462	460	212
165°	501	500	499	502	500	141
175°	522	520	519	522	519	49
180°	522	522	522	522	522	



TEST NUMBER: P333018-940

CATALOG NUMBER: S124RDIW-S350D470U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	551.3	551.3	551.3	551.3	551.3	551.3	551.3	551.3	551.3	551.3	551.3
2.5°	552.6	552.2	552.0	551.7	551.3	550.8	550.0	549.2	548.3	547.5	548.3
5°	550.4	550.0	549.7	549.3	548.8	548.1	547.0	545.9	544.7	543.7	544.6
7.5°	545.4	545.0	544.7	544.2	543.9	542.9	541.4	539.9	538.5	537.1	537.6
10°	540.6	540.2	539.8	539.3	538.8	537.7	536.0	534.3	532.6	531.0	531.4
12.5°	534.6	534.0	533.5	533.0	532.4	531.2	529.1	527.2	525.2	523.2	523.4
15°	524.2	523.3	522.5	521.7	520.8	519.2	516.9	514.5	512.2	509.9	509.7
17.5°	511.7	510.4	509.2	508.0	506.8	504.7	501.9	499.1	496.3	493.5	492.9
20°	501.9	500.6	499.4	498.2	497.0	494.8	491.6	488.4	485.2	482.0	481.3
22.5°	491.1	489.6	488.3	487.0	485.5	483.1	479.7	476.4	473.0	469.5	468.4
25°	474.0	472.3	470.6	469.0	467.3	464.5	460.7	456.8	452.9	449.1	447.5
27.5°	456.1	454.0	451.8	449.8	447.6	444.5	440.4	436.3	432.2	428.1	426.1
30°	443.6	441.2	438.9	436.6	434.3	430.9	426.4	422.0	417.6	413.2	410.9
32.5°	430.4	427.8	425.2	422.5	419.8	416.3	411.7	407.2	402.6	398.1	395.3
35°	409.8	406.8	403.9	400.8	397.8	394.0	389.3	384.6	380.0	375.2	372.0
37.5°	387.8	384.7	381.7	378.5	375.4	371.3	366.0	360.9	355.7	350.5	347.0
40°	372.3	369.2	366.0	363.0	359.9	355.7	350.4	345.0	339.7	334.3	330.4
42.5°	357.4	354.2	350.9	347.7	344.5	340.0	334.5	328.9	323.3	317.7	313.7
45°	334.3	330.8	327.3	323.9	320.4	315.8	310.2	304.6	299.0	293.4	288.7
47.5°	310.4	306.8	303.3	299.6	296.0	291.3	285.5	279.6	273.8	268.0	263.1
50°	294.2	290.5	286.9	283.2	279.6	274.7	268.8	262.7	256.7	250.7	246.0
52.5°	277.7	274.0	270.5	266.9	263.3	258.4	252.3	246.1	240.0	233.8	229.1
55°	253.2	249.5	245.8	242.0	238.3	233.3	227.2	221.1	215.0	208.9	204.0
57.5°	229.1	225.2	221.3	217.4	213.5	208.6	202.5	196.5	190.6	184.5	179.6
60°	211.9	208.1	204.4	200.6	196.9	192.0	186.0	179.9	174.0	168.0	163.1
62.5°	196.4	192.4	188.5	184.7	180.7	175.8	169.6	163.5	157.3	151.1	146.6
65°	172.2	168.2	164.2	160.2	156.0	151.1	145.1	139.0	133.0	127.1	123.1
67.5°	147.1	143.3	139.4	135.5	131.7	127.0	121.4	115.8	110.2	104.7	101.2
70°	131.3	127.3	123.4	119.5	115.5	110.8	105.5	100.1	94.8	89.4	86.4
72.5°	114.4	110.8	107.3	103.7	100.1	95.9	90.8	85.7	80.7	75.6	73.0
75°	91.6	88.1	84.6	81.1	77.7	73.7	69.4	64.9	60.5	56.2	53.9
77.5°	68.5	65.5	62.6	59.7	56.7	53.4	49.8	46.3	42.7	39.1	37.9
80°	53.6	50.9	48.2	45.5	42.7	39.9	37.2	34.3	31.5	28.7	28.4
82.5°	40.8	38.3	35.8	33.3	30.8	28.7	27.1	25.5	23.9	22.3	22.1
85°	22.8	21.0	19.1	17.1	15.2	14.2	13.9	13.6	13.4	13.1	12.9
87.5°	8.0	7.6	7.2	6.8	6.4	6.2	6.3	6.3	6.4	6.5	6.5
90°	1.2	2.2	3.2	4.2	5.2	6.0	6.8	7.5	8.2	8.9	9.5
92.5°	8.6	9.8	10.9	12.0	13.2	14.0	14.5	15.0	15.5	16.0	16.3
95°	24.3	25.1	25.9	26.7	27.5	28.2	28.8	29.4	30.1	30.7	30.9
97.5°	42.4	43.0	43.6	44.3	44.9	45.7	46.4	47.1	47.8	48.6	48.9
100°	56.5	56.9	57.2	57.6	58.1	58.6	59.4	60.2	61.0	61.8	62.0
102.5°	71.4	71.6	71.7	71.9	72.1	72.5	73.2	73.9	74.6	75.4	75.6
105°	94.2	94.3	94.3	94.4	94.5	94.7	95.1	95.4	95.8	96.1	96.4
107.5°	118.0	118.1	118.2	118.3	118.4	118.5	118.6	118.6	118.7	118.7	119.0
110°	134.1	134.3	134.5	134.6	134.8	134.9	134.8	134.7	134.6	134.6	134.4



TEST NUMBER: P333018-940

CATALOG NUMBER: S124RDIW-S350D470U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	151.0	151.0	151.1	151.1	151.1	151.1	150.9	150.7	150.5	150.4	150.3
115°	176.2	176.2	176.2	176.2	176.2	176.1	175.9	175.8	175.6	175.4	175.3
117.5°	199.9	200.0	200.1	200.2	200.2	200.2	200.1	199.9	199.8	199.7	199.4
120°	215.8	216.2	216.5	216.9	217.2	217.2	217.0	216.7	216.4	216.2	215.7
122.5°	232.3	232.4	232.6	232.6	232.8	232.8	232.7	232.6	232.5	232.4	232.0
125°	256.5	256.5	256.5	256.5	256.5	256.5	256.5	256.4	256.3	256.2	256.0
127.5°	278.7	278.9	279.2	279.5	279.7	279.8	279.6	279.5	279.4	279.2	279.0
130°	294.2	294.4	294.7	295.0	295.2	295.3	295.3	295.3	295.3	295.3	295.2
132.5°	310.0	310.2	310.4	310.6	310.8	310.9	310.8	310.7	310.7	310.6	310.4
135°	330.9	331.4	332.0	332.5	333.1	333.3	333.3	333.3	333.3	333.3	333.1
137.5°	353.7	354.0	354.2	354.5	354.7	354.9	355.1	355.3	355.3	355.5	355.3
140°	368.9	369.1	369.3	369.4	369.6	369.7	369.7	369.7	369.7	369.7	369.6
142.5°	382.8	383.0	383.2	383.3	383.5	383.6	383.5	383.4	383.3	383.3	383.3
145°	402.1	402.4	402.8	403.1	403.5	403.7	403.8	403.9	403.9	404.0	403.9
147.5°	421.2	421.5	422.0	422.4	422.8	423.0	422.9	422.8	422.8	422.8	422.7
150°	432.7	433.1	433.5	433.8	434.2	434.4	434.4	434.4	434.4	434.4	434.4
152.5°	443.7	444.0	444.2	444.4	444.6	444.8	444.8	444.9	445.0	445.1	445.2
155°	460.7	460.7	460.7	460.7	460.7	460.6	460.5	460.4	460.3	460.2	460.6
157.5°	474.8	474.7	474.6	474.4	474.2	474.1	474.1	474.1	474.0	474.0	474.3
160°	483.3	483.2	483.1	483.0	483.0	482.9	482.8	482.7	482.6	482.5	482.8
162.5°	491.1	490.8	490.5	490.4	490.1	489.9	489.8	489.7	489.6	489.5	490.1
165°	501.4	501.1	500.9	500.6	500.3	500.2	500.0	499.8	499.6	499.4	500.0
167.5°	509.4	509.1	508.7	508.4	507.9	507.7	507.7	507.8	507.8	507.8	508.4
170°	514.0	513.5	513.1	512.6	512.2	512.0	512.1	512.2	512.3	512.4	512.9
172.5°	517.2	516.8	516.5	516.1	515.7	515.5	515.5	515.6	515.6	515.6	516.2
175°	521.7	521.2	520.8	520.3	519.9	519.6	519.5	519.4	519.3	519.2	519.9
177.5°	523.1	522.7	522.4	522.0	521.7	521.5	521.5	521.5	521.5	521.5	522.0
180°	522.5	522.5	522.5	522.5	522.5	522.5	522.5	522.5	522.5	522.5	522.5



TEST NUMBER: P333018-940

CATALOG NUMBER: S124RDIW-S350D470U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	551.3	551.3	551.3	551.3	551.3	551.3	551.3	551.3
2.5°	549.2	550.0	550.8	551.2	551.1	551.1	551.0	550.9
5°	545.5	546.4	547.4	547.8	547.6	547.4	547.2	547.0
7.5°	538.2	538.9	539.5	539.6	539.3	539.0	538.7	538.4
10°	531.7	532.1	532.4	532.4	532.1	531.7	531.4	531.0
12.5°	523.6	523.9	524.1	524.0	523.4	522.9	522.4	521.8
15°	509.5	509.3	509.1	508.7	508.0	507.4	506.8	506.0
17.5°	492.4	492.0	491.4	490.6	489.6	488.7	487.7	486.7
20°	480.5	479.7	479.0	478.0	476.8	475.5	474.4	473.1
22.5°	467.3	466.1	465.0	464.0	463.0	462.0	461.0	459.9
25°	445.9	444.3	442.7	441.5	440.5	439.5	438.6	437.7
27.5°	424.1	422.1	420.2	418.6	417.1	415.8	414.5	413.1
30°	408.5	406.2	403.9	401.9	400.4	399.0	397.4	395.9
32.5°	392.6	389.9	387.2	385.0	383.6	382.2	380.8	379.3
35°	368.8	365.7	362.5	360.1	358.4	356.7	355.0	353.3
37.5°	343.4	339.8	336.3	333.6	331.9	330.2	328.5	326.8
40°	326.4	322.4	318.5	315.8	314.1	312.4	310.7	309.0
42.5°	309.7	305.7	301.7	298.8	297.0	295.2	293.5	291.8
45°	284.2	279.6	274.9	271.8	270.1	268.4	266.7	265.1
47.5°	258.4	253.6	248.9	245.6	243.7	241.8	240.0	238.2
50°	241.3	236.7	231.9	228.7	226.9	225.2	223.4	221.6
52.5°	224.3	219.5	214.8	211.4	209.6	207.8	205.9	204.0
55°	199.2	194.3	189.4	186.1	184.3	182.5	180.7	179.0
57.5°	174.6	169.7	164.7	161.6	160.2	158.9	157.5	156.1
60°	158.2	153.4	148.5	145.3	143.7	142.3	140.8	139.3
62.5°	142.1	137.6	133.1	130.3	129.0	127.9	126.6	125.5
65°	119.0	114.9	110.9	108.3	107.2	106.1	105.0	103.8
67.5°	97.7	94.3	90.8	88.5	87.2	86.0	84.7	83.5
70°	83.3	80.2	77.1	75.1	74.1	73.2	72.2	71.3
72.5°	70.4	67.7	65.1	63.3	62.4	61.6	60.7	59.8
75°	51.8	49.7	47.5	46.2	45.6	45.0	44.5	43.9
77.5°	36.6	35.4	34.2	33.4	33.3	33.1	32.9	32.7
80°	28.2	27.8	27.6	27.4	27.3	27.2	27.1	27.0
82.5°	21.8	21.7	21.5	21.3	21.2	21.1	21.0	21.0
85°	12.8	12.5	12.3	12.2	12.2	12.2	12.2	12.2
87.5°	6.6	6.6	6.6	6.7	6.8	7.0	7.0	7.1
90°	10.0	10.5	11.1	11.4	11.6	11.8	11.9	12.1
92.5°	16.7	16.9	17.3	17.5	17.7	17.7	17.8	17.9
95°	31.2	31.5	31.7	31.9	31.9	31.9	31.9	31.9
97.5°	49.2	49.6	49.8	50.0	50.0	50.0	50.0	50.0
100°	62.2	62.3	62.5	62.6	62.6	62.6	62.6	62.6
102.5°	75.9	76.2	76.4	76.6	76.6	76.7	76.8	76.9
105°	96.8	97.0	97.3	97.6	97.8	98.1	98.4	98.6
107.5°	119.2	119.5	119.8	119.8	119.8	119.8	119.8	119.8
110°	134.2	134.0	133.8	133.8	134.1	134.4	134.6	134.9



TEST NUMBER: P333018-940

CATALOG NUMBER: S124RDIW-S350D470U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	150.3	150.3	150.3	150.3	150.3	150.3	150.4	150.4
115°	175.2	175.1	175.0	175.0	174.9	174.8	174.7	174.6
117.5°	199.1	198.8	198.5	198.2	198.0	197.9	197.7	197.5
120°	215.3	214.8	214.4	214.3	214.5	214.6	214.8	215.0
122.5°	231.8	231.4	231.1	230.8	230.5	230.2	229.8	229.5
125°	255.8	255.7	255.5	255.3	255.1	254.9	254.8	254.6
127.5°	278.8	278.7	278.5	278.3	278.2	278.0	277.9	277.8
130°	295.0	294.8	294.6	294.4	294.0	293.6	293.3	292.9
132.5°	310.2	310.0	309.9	309.7	309.5	309.4	309.2	309.2
135°	333.0	332.8	332.6	332.4	332.2	331.9	331.6	331.4
137.5°	355.0	354.8	354.5	354.5	354.5	354.5	354.6	354.7
140°	369.5	369.4	369.3	369.3	369.2	369.1	369.0	368.9
142.5°	383.3	383.3	383.3	383.2	383.2	383.2	383.2	383.2
145°	403.9	403.8	403.7	403.5	403.2	403.0	402.7	402.4
147.5°	422.6	422.5	422.5	422.4	422.3	422.2	422.1	422.0
150°	434.4	434.4	434.4	434.4	434.3	434.2	434.1	434.0
152.5°	445.5	445.7	445.9	445.9	445.7	445.4	445.2	445.0
155°	460.9	461.3	461.6	461.6	461.3	460.9	460.6	460.2
157.5°	474.6	474.8	475.1	475.1	474.8	474.5	474.2	473.9
160°	483.0	483.3	483.6	483.5	483.0	482.6	482.1	481.6
162.5°	490.5	491.1	491.5	491.5	491.1	490.6	490.2	489.7
165°	500.5	501.1	501.6	501.7	501.3	501.0	500.6	500.2
167.5°	508.9	509.4	510.0	510.0	509.4	508.9	508.3	507.7
170°	513.4	514.0	514.5	514.4	513.8	513.2	512.6	511.9
172.5°	516.8	517.5	518.0	518.0	517.4	516.7	516.1	515.5
175°	520.5	521.1	521.7	521.7	521.1	520.5	519.9	519.2
177.5°	522.5	523.0	523.5	523.4	522.9	522.4	521.7	521.2
180°	522.5	522.5	522.5	522.5	522.5	522.5	522.5	522.5

(END OF REPORT)